

目录

[简介](#)

[问题](#)

[CLI](#)

[GUI](#)

[预期的输出](#)

[成功的提交](#)

[不成功提交](#)

简介

本文描述关于怎样的进程安装在思科

贡献用方便Putra， Cisco TAC工程师。

问题

如何安装在思科ESA、WSA和SMA的功能键

功能键从思科发送通过电子邮件对您的被提名的地址。电子邮件从“do-not-reply@cisco.com”被发送用包含安装的功能键的附件。

在下面附件的示例功能键：

通过命令行界面(CLI)或图形用户界面(GUI)安装在设备的功能键。请参阅下面进程：

CLI

```
CLI> featurekey
```


Enter feature key, or press Enter to go to the main prompt.

```
[ ]> <feature key - from the example above copy and paste the "key" section>
```

GUI

1. 在系统管理下 --->功能键，在‘功能激活’部分，输入功能键到‘功能键’领域。
2. 点击‘SUBMIT键’。

下面从GUI的屏幕画面上述说明的：

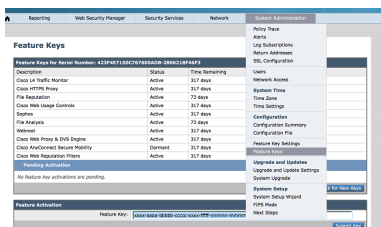

预期的输出

成功的提交

- 当关键提交是成功的，许可证协议页将出版，并且要求‘请接受’协议。
- 一旦接受，应该收到消息类似于如下：

Feature Keys

Success — Feature key accepted for host

Automatically checking for additional updates.
No new feature keys are available.

不成功提交

- 当关键提交不是成功的，错误消息将生成。
- 错误消息将变化取决于失败的原因(例如：功能键是畸形的，功能键已经使用了在主机)。
- 下面一示例：

The screenshot shows the Cisco Feature Keys management interface. At the top, there is a navigation bar with tabs for Reporting, Web Security Manager, Security Services, Network, and System Administration. The main content area is titled "Feature Keys" and displays an error message: "Error — Errors have occurred. Please see below for details." Below the error message, there is a table titled "Feature Keys for Serial Number: 423F4E7150C767600ADB-280621BF46F3". The table has four columns: Description, Status, Time Remaining, and Expiration Date. The table lists several feature keys, most of which are in a "Dormant" state with 227 days remaining, and one is in an "Active" state. Below the table, there is a note: "Note: The Cloud Web Security authorization key (or license key) is separate from the appliance feature keys. See Network > Cloud Connector to enter the authorization key." Underneath the note, there is a section for "Pending Activation" which states "No feature key activations are pending." and a "Check for New Keys" button. At the bottom, there is a "Feature Activation" section with a "Feature Key:" label and a text input field containing a malformed key: "xxxx-aaaaa-bbbbb-ccccc-xxxxx-fffff-nnnnnnn-mmmmm-qqqqqq-ddddd". Below the input field, there is an error message: "Feature key is malformed." and a "Submit Key" button. At the very bottom of the page, there is a copyright notice: "Copyright © 2003-2015 Cisco Systems, Inc. All rights reserved. | Privacy Statement".

Description	Status	Time Remaining	Expiration Date
Cisco L4 Traffic Monitor	Dormant	227 days	Sat Dec 10 13:59:59 2016
Cisco HTTPS Proxy	Dormant	227 days	Sat Dec 10 13:59:59 2016
Cisco Web Usage Controls	Dormant	227 days	Sat Dec 10 13:59:59 2016
Sophos	Dormant	227 days	Sat Dec 10 13:59:59 2016
Webroot	Dormant	227 days	Sat Dec 10 13:59:59 2016
Cisco Web Proxy & DVS Engine	Active	227 days	Sun Dec 11 11:29:20 2016
Cisco AnyConnect Secure Mobility	Dormant	227 days	Sat Dec 10 13:59:59 2016
Cisco Web Reputation Filters	Dormant	227 days	Sat Dec 10 13:59:59 2016

- 推荐与许可授权的团队联系在licensing@cisco.com或存放从www.cisco.com的支持案件得到进一步协助。