

# 管理在WAP121和WAP321接入点的用户帐户

## 客观

用户帐户允许广泛人民一次访问设备，但是仅admin能有所有权限例如读和写入许可，当所有其他用户只读了权限时。使用此，您能允许人查看设备的配置，不用未经同意的更改风险对实际设置的。读权限帮助如此了解在设备的配置它更加容易排除网络故障。此条款说明如何创建在WAP121和WAP321的多个用户帐户。

**Note:**要管理用户的密码复杂性，您能是指在Cisco WAP121和WAP321接入点的条款密码复杂性配置。

## 可适用的设备

- WAP121
- WAP321

## 软件版本

- 1.0.3.4

## 用户帐户的管理

步骤1.登陆到Web配置工具并且选择Administration >用户帐户。用户帐户页打开：

| User Accounts            |           |                   |              |                      |                         |
|--------------------------|-----------|-------------------|--------------|----------------------|-------------------------|
| User Account Table       |           |                   |              |                      |                         |
|                          | User Name | User Level        | New Password | Confirm New Password | Password Strength Meter |
| <input type="checkbox"/> | cisco     | Read/Write Access |              |                      |                         |

如果要创建新用户请去[添加新的用户帐户](#)。


如果要编辑或从用户帐户删除用户请去[编辑/删除用户帐户](#)。

### [添加新的用户帐户](#)

| User Accounts            |           |                   |              |                      |                         |
|--------------------------|-----------|-------------------|--------------|----------------------|-------------------------|
| User Account Table       |           |                   |              |                      |                         |
|                          | User Name | User Level        | New Password | Confirm New Password | Password Strength Meter |
| <input type="checkbox"/> | cisco     | Read/Write Access |              |                      |                         |

步骤1.点击**添加**创建一个新用户。


**Note:**“cisco”是预先配置的用户，并且访问写的读和。推荐更改默认用户名和密码。其他用户访问只读。

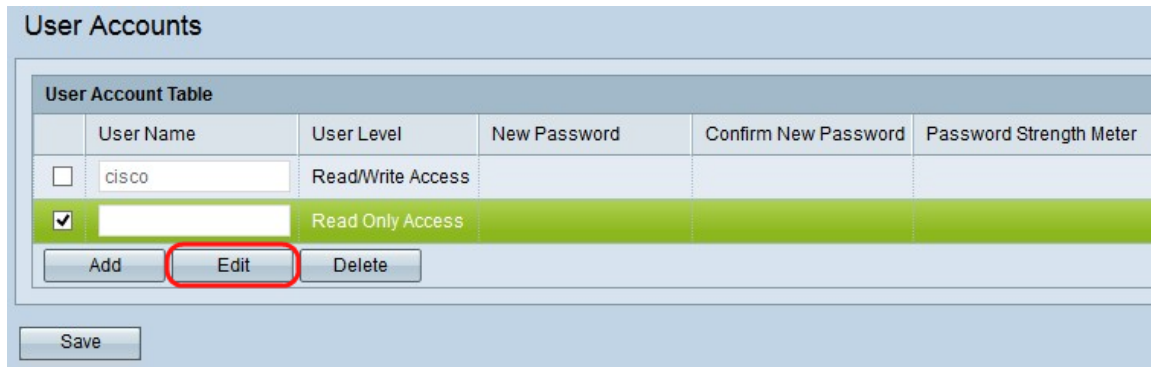

The screenshot shows the 'User Accounts' management interface. At the top, there is a 'User Account Table' with the following columns: 'User Name', 'User Level', 'New Password', 'Confirm New Password', and 'Password Strength Meter'. The table contains two rows: one for 'cisco' with 'Read/Write Access' and an unchecked checkbox, and one for a new user with 'Read Only Access' and a checked checkbox. Below the table are 'Add', 'Edit', and 'Delete' buttons. The 'Edit' button is highlighted with a red circle. At the bottom, there is a 'Save' button.

**Step 2.**如果要配置新用户帐户，请检查在用户名左边位于的复选框。

步骤3.点击**编辑**编辑新的被创建的用户属性。

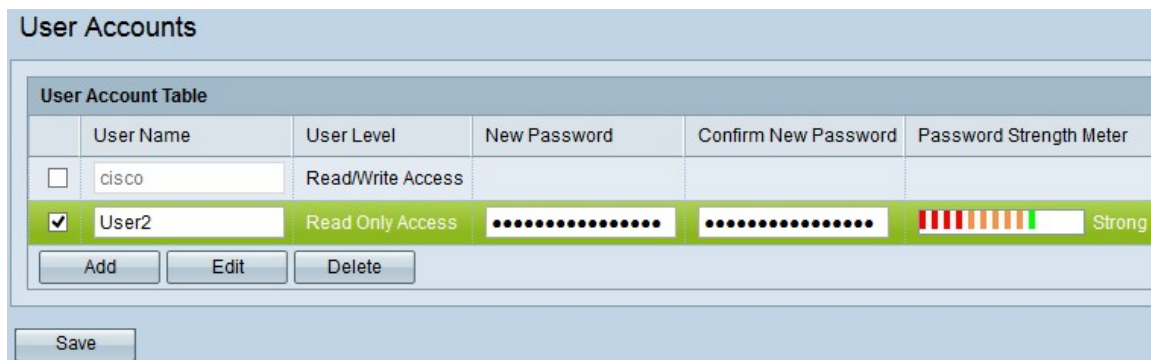

This screenshot shows the 'User Accounts' interface after a new user has been added. The 'User Account Table' now includes a row for 'User2' with 'Read Only Access', a checked checkbox, and filled-in password fields. The 'Password Strength Meter' for 'User2' is shown as a bar with red, yellow, and green segments, labeled 'Strong'. The 'Edit' button is now visible and active.


步骤4.输入新的用户名在用户名名称条目字段，与用户能登陆到设备的输入的用户名。这允许广泛人民一次访问设备。用户名必须是在1个到32个字母或数字字符之间，并且特殊字符不允许。

步骤5.输入新的密码并且证实在新的密码的新的密码并且确认各自新的密码条目字段。口令长度必须是超过8个字符和少于64个字符。

密码力量公尺提供关于严格如何的信息输入的密码。颜色指示密码力量。例如，如果它绿色，密码严格，但是红色意味着密码是弱的。严格和弱指示密码的复杂性。

步骤6.点击“**Save**”保存在用户帐户做的变动。

## [编辑/删除用户帐户](#)

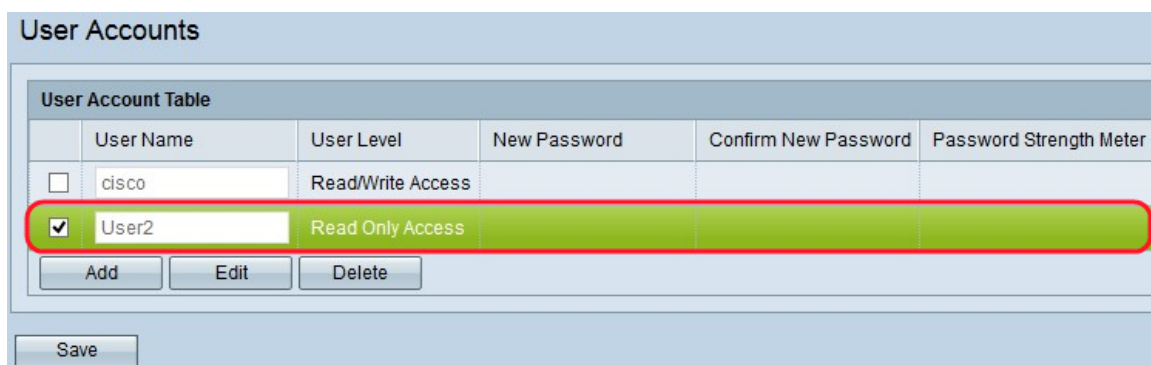


This screenshot shows the 'User Accounts' interface with the 'User2' entry selected in the 'User Account Table'. The 'Edit' button is highlighted with a red circle, indicating the next step in the process.

第 1 步：检查在您希望编辑或删除的用户左边位于的复选框。

如果要从用户帐户表删除用户帐户请跟随[删除用户帐户](#)部分。

## 编辑用户帐户

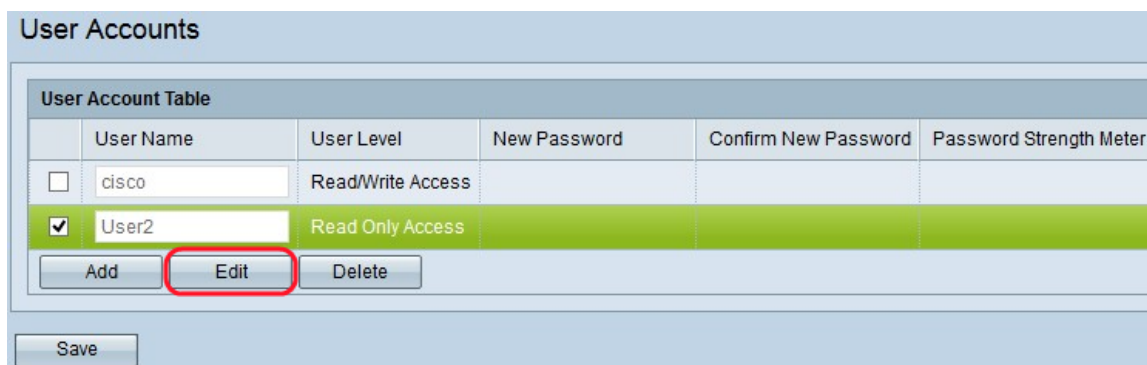


The screenshot shows the 'User Accounts' management interface. It features a table with columns for 'User Name', 'User Level', 'New Password', 'Confirm New Password', and 'Password Strength Meter'. Two rows are visible: one for 'cisco' with 'Read/Write Access' and one for 'User2' with 'Read Only Access'. The 'User2' row is highlighted in green. Below the table are three buttons: 'Add', 'Edit', and 'Delete'. The 'Edit' button is circled in red. A 'Save' button is located at the bottom left of the interface.

步骤1. 点击**编辑**编辑从用户帐户表的期望用户帐户。

步骤2. 输入在用户名上的期望变化，新的密码，并且确认各自用户的新的密码字段。

步骤3. 点击“**Save**”保存在用户帐户表做的所有变动。

## 删除用户帐户

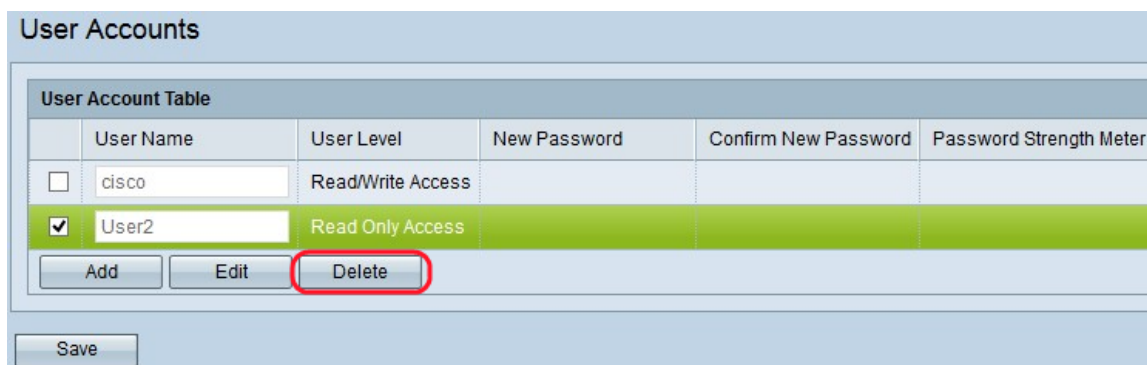

The screenshot shows the 'User Accounts' management interface, similar to the previous one. The 'User2' row is highlighted in green. Below the table are three buttons: 'Add', 'Edit', and 'Delete'. The 'Delete' button is circled in red. A 'Save' button is located at the bottom left of the interface.

步骤1. 点击**删除**删除期望用户帐户表用户帐户表。

步骤2. 点击“**Save**”保存在用户帐户表做的所有变动。