

配置WAP351和WAP371接入点的地点

客观

现场是被连接到一个俘虏门户实例的认证网页。关于如何设置您的设备的一个俘虏门户的信息，请参见[配置WAP351和WAP371接入点的条款俘虏门户](#)。

一旦设置您的WAP的一个俘虏门户，您能使用*Web门户定制页*创建不同的地点的唯一页您的网络的和定制文本和镜像在页。

本文此目标将解释如何加载和删除Web定制的二进制镜像镜像文件在WAP351和WAP371接入点和定制与原文和图象元素的认证页。

可适用的设备


- WAP351
- WAP371

软件版本

- WAP351 v1.0.0.39
- WAP371 v1.1.2.3

Web定制

步骤1. 登陆到Web配置工具并且选择**俘虏门户 > Web门户定制**。*Web门户定制页*打开：

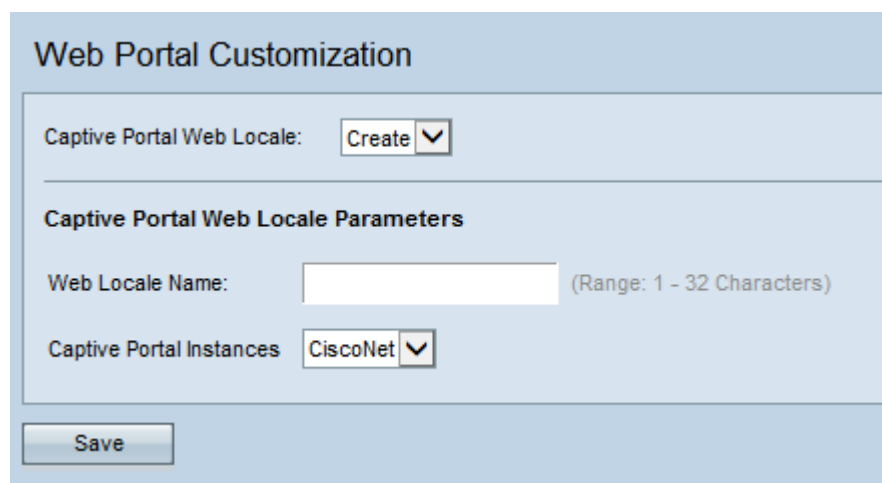

Web Portal Customization

Captive Portal Web Locale: ▼

Captive Portal Web Locale Parameters

Web Locale Name: (Range: 1 - 32 Characters)

Captive Portal Instances: ▼

步骤2. 选择从俘虏门户Web现场下拉列表**创建**创建俘虏门户的一现场。如果要编辑一先Web现场，从俘虏门户Web现场下拉列表请选择被创建的Web现场并且跳到第[6步](#)。

Web Portal Customization

Captive Portal Web Locale: Create ▾

Captive Portal Web Locale Parameters

Web Locale Name: (Range: 1 - 32 Characters)

Captive Portal Instances CiscoNet ▾

Save

步骤3.输入名字对于您的现场在Web现场名称字段。名字必须是1-32个字符和不包含空间。

Web Portal Customization

Captive Portal Web Locale: Create ▾

Captive Portal Web Locale Parameters

Web Locale Name: CiscoLocale (Range: 1 - 32 Characters)

Captive Portal Instances CiscoNet ▾

Save

步骤4.选择您希望连结现场与从俘虏门户实例下拉列表的俘虏门户实例。关于设置一个俘虏门户实例的信息，请参见[配置WAP351和WAP371接入点的俘虏门户](#)。

Web Portal Customization

Captive Portal Web Locale: Create ▾

Captive Portal Web Locale Parameters

Web Locale Name: CiscoLocale (Range: 1 - 32 Characters)

Captive Portal Instances CiscoNet ▾

Save

步骤5.点击“Save”保存被做的配置。

Web Portal Customization

Captive Portal Web Locale: ▼

Captive Portal Web Locale Parameters

Web Locale Name: (Range: 1 - 32 Characters)

Captive Portal Instances ▼

[俘虏门户Web现场参数范围显现其他信息：](#)

Web Portal Customization

Captive Portal Web Locale: ▼

Captive Portal Web Locale Parameters

Locale ID: 1

Instance Name: CiscoNet

Background Image Name: ▼

Logo Image Name: ▼

Foreground Color: (Range: 1 - 32 Characters, Default: #999999)

Background Color: (Range: 1 - 32 Characters, Default: #BFBFBF)

Separator: (Range: 1 - 32 Characters, Default: #BFBFBF)

Note:在俘虏门户Web现场参数范围中，以下字段自动地生成并且不可能从此页被编辑：

- 现场ID —显示现场的序号
- 实例名字—显示选择的实例的名字

[步骤6.](#)从后台镜像名字下拉列表选择您的俘虏门户背景的镜像。

Web Portal Customization

Captive Portal Web Locale: CiscoLocale ▼

Captive Portal Web Locale Parameters

Locale ID: 1

Instance Name: CiscoNet

Background Image Name: cisco_bkg.jpg ▼ Upload/Delete Custom Image

Logo Image Name: cisco_logo.png ▼ Upload/Delete Custom Image

Foreground Color: #999999 (Range: 1 - 32 Characters, Default: #999999)

Background Color: #BFBFBF (Range: 1 - 32 Characters, Default: #BFBFBF)

Separator: #BFBFBF (Range: 1 - 32 Characters, Default: #BFBFBF)

Note:如果要从列表上载或删除镜像，请点击**加载/删除自定义镜像**按钮。关于加载和删除的信息自定义镜像看到[加载/删除自定义镜像](#)。

Web Portal Customization

Captive Portal Web Locale: CiscoLocale ▼

Captive Portal Web Locale Parameters

Locale ID: 1

Instance Name: CiscoNet

Background Image Name: cisco_bkg.jpg ▼ Upload/Delete Custom Image

Logo Image Name: cisco_logo.png ▼ Upload/Delete Custom Image

Foreground Color: #999999 (Range: 1 - 32 Characters, Default: #999999)

Background Color: #BFBFBF (Range: 1 - 32 Characters, Default: #BFBFBF)

Separator: #BFBFBF (Range: 1 - 32 Characters, Default: #BFBFBF)

步骤7.从徽标镜像名称下拉列表选择徽标的一个镜像。

Web Portal Customization

Captive Portal Web Locale: CiscoLocale ▼

Captive Portal Web Locale Parameters

Locale ID: 1

Instance Name: CiscoNet

Background Image Name: cisco_bkg.jpg ▼ Upload/Delete Custom Image

Logo Image Name: cisco_logo.png ▼ Upload/Delete Custom Image

Foreground Color: #999999 (Range: 1 - 32 Characters, Default: #999999)

Background Color: #BFBFBF (Range: 1 - 32 Characters, Default: #BFBFBF)

Separator: #BFBFBF (Range: 1 - 32 Characters, Default: #BFBFBF)

Note:如果要从列表上载或删除镜像，则请点击**加载/删除自定义镜像**按钮。关于加载和删除的信息自定义镜像看到[加载/删除自定义镜像](#)。

Web Portal Customization

Captive Portal Web Locale: CiscoLocale ▼

Captive Portal Web Locale Parameters

Locale ID: 1

Instance Name: CiscoNet

Background Image Name: cisco_bkg.jpg ▼ Upload/Delete Custom Image

Logo Image Name: cisco_logo.png ▼ **Upload/Delete Custom Image**

Foreground Color: #999999 (Range: 1 - 32 Characters, Default: #999999)

Background Color: #BFBFBF (Range: 1 - 32 Characters, Default: #BFBFBF)

Separator: #BFBFBF (Range: 1 - 32 Characters, Default: #BFBFBF)

步骤8.输入前景颜色的HTML代码在**前景彩色场**。代码以6位十六进制格式。

Web Portal Customization

Captive Portal Web Locale: CiscoLocale

Captive Portal Web Locale Parameters

Locale ID: 1

Instance Name: CiscoNet

Background Image Name: cisco_bkg.jpg

Logo Image Name: cisco_logo.png

Foreground Color: #999999 (Range: 1 - 32 Characters, Default: #999999)

Background Color: #BFBFBF (Range: 1 - 32 Characters, Default: #BFBFBF)

Separator: #BFBFBF (Range: 1 - 32 Characters, Default: #BFBFBF)

Note:关于Web颜色的更多信息格式化，请参见[此页](#)。

Note:对于在生成十六进制HTML颜色代码的帮助使用调色板基于GUI您可以是指[此页](#)。

步骤9.输入背景颜色的HTML代码在背景彩色场。代码以6位十六进制格式。

Web Portal Customization

Captive Portal Web Locale: CiscoLocale

Captive Portal Web Locale Parameters

Locale ID: 1

Instance Name: CiscoNet

Background Image Name: cisco_bkg.jpg

Logo Image Name: cisco_logo.png

Foreground Color: #999999 (Range: 1 - 32 Characters, Default: #999999)

Background Color: #BFBFBF (Range: 1 - 32 Characters, Default: #BFBFBF)

Separator: #BFBFBF (Range: 1 - 32 Characters, Default: #BFBFBF)

步骤10.输入从正文页分离报头)分隔符(线路的颜色的HTML代码在分隔符领域。代码以6位十六进制格式。

Foreground Color:	<input type="text" value="#999999"/>	(Range: 1 - 32 Characters, Default: #999999)
Background Color:	<input type="text" value="#BFBFBF"/>	(Range: 1 - 32 Characters, Default: #BFBFBF)
Separator:	<input type="text" value="#BFBFBF"/>	(Range: 1 - 32 Characters, Default: #BFBFBF)
Locale Label:	<input type="text" value="English"/>	(Range: 1 - 32 Characters, Default: English)
Locale:	<input type="text" value="en"/>	(Range: 1 - 32 Characters, Default: en)
Account Image:	<input type="text" value="login_key.jpg"/> <input type="button" value="Upload/Delete Custom Image"/>	
Account Label:	<input type="text" value="Enter your Username"/>	(Range: 1 - 32 Characters)
User Label:	<input type="text" value="Username:"/>	(Range: 1 - 32 Characters)
Password Label:	<input type="text" value="Password:"/>	(Range: 1 - 64 Characters)

步骤11. 输入在 *现场* 标签字段描述现场的标签。默认值英语。

Foreground Color:	<input type="text" value="#999999"/>	(Range: 1 - 32 Characters, Default: #999999)
Background Color:	<input type="text" value="#BFBFBF"/>	(Range: 1 - 32 Characters, Default: #BFBFBF)
Separator:	<input type="text" value="#BFBFBF"/>	(Range: 1 - 32 Characters, Default: #BFBFBF)
Locale Label:	<input type="text" value="English"/>	(Range: 1 - 32 Characters, Default: English)
Locale:	<input type="text" value="en"/>	(Range: 1 - 32 Characters, Default: en)
Account Image:	<input type="text" value="login_key.jpg"/> <input type="button" value="Upload/Delete Custom Image"/>	
Account Label:	<input type="text" value="Enter your Username"/>	(Range: 1 - 32 Characters)
User Label:	<input type="text" value="Username:"/>	(Range: 1 - 32 Characters)
Password Label:	<input type="text" value="Password:"/>	(Range: 1 - 64 Characters)

步骤12. 输入对现场的一个简称在 *现场* 字段。默认值是en。

Foreground Color:	<input type="text" value="#999999"/>	(Range: 1 - 32 Characters, Default: #999999)
Background Color:	<input type="text" value="#BFBFBF"/>	(Range: 1 - 32 Characters, Default: #BFBFBF)
Separator:	<input type="text" value="#BFBFBF"/>	(Range: 1 - 32 Characters, Default: #BFBFBF)
Locale Label:	<input type="text" value="English"/>	(Range: 1 - 32 Characters, Default: English)
Locale:	<input type="text" value="en"/>	(Range: 1 - 32 Characters, Default: en)
Account Image:	<input type="text" value="login_key.jpg"/> <input type="button" value="Upload/Delete Custom Image"/>	
Account Label:	<input type="text" value="Enter your Username"/>	(Range: 1 - 32 Characters)
User Label:	<input type="text" value="Username:"/>	(Range: 1 - 32 Characters)
Password Label:	<input type="text" value="Password:"/>	(Range: 1 - 64 Characters)

第13步。从 *帐户镜像* 下拉列表，请选择镜像表示在登录字段上的验证的登录。

Foreground Color:	<input type="text" value="#999999"/>	(Range: 1 - 32 Characters, Default: #999999)
Background Color:	<input type="text" value="#BFBFBF"/>	(Range: 1 - 32 Characters, Default: #BFBFBF)
Separator:	<input type="text" value="#BFBFBF"/>	(Range: 1 - 32 Characters, Default: #BFBFBF)
Locale Label:	<input type="text" value="English"/>	(Range: 1 - 32 Characters, Default: English)
Locale:	<input type="text" value="en"/>	(Range: 1 - 32 Characters, Default: en)
Account Image:	<input type="text" value="login_key.jpg"/> <input type="button" value="Upload/Delete Custom Image"/>	
Account Label:	<input type="text" value="Enter your Username"/>	(Range: 1 - 32 Characters)
User Label:	<input type="text" value="Username:"/>	(Range: 1 - 32 Characters)
Password Label:	<input type="text" value="Password:"/>	(Range: 1 - 64 Characters)

Note:如果要从列表上载或删除镜像，则请点击[加载/删除自定义镜像](#)按钮。关于加载和删除的信息自定义镜像看到[加载/删除自定义镜像](#)。

Foreground Color:	<input type="text" value="#999999"/>	(Range: 1 - 32 Characters, Default: #999999)
Background Color:	<input type="text" value="#BFBFBF"/>	(Range: 1 - 32 Characters, Default: #BFBFBF)
Separator:	<input type="text" value="#BFBFBF"/>	(Range: 1 - 32 Characters, Default: #BFBFBF)
Locale Label:	<input type="text" value="English"/>	(Range: 1 - 32 Characters, Default: English)
Locale:	<input type="text" value="en"/>	(Range: 1 - 32 Characters, Default: en)
Account Image:	<input type="text" value="login_key.jpg"/> <input type="button" value="Upload/Delete Custom Image"/>	
Account Label:	<input type="text" value="Enter your Username"/>	(Range: 1 - 32 Characters)
User Label:	<input type="text" value="Username:"/>	(Range: 1 - 32 Characters)
Password Label:	<input type="text" value="Password:"/>	(Range: 1 - 64 Characters)

步骤14。输入在帐户标签字段作用户指令输入用户名的文本。

Foreground Color:	<input type="text" value="#999999"/>	(Range: 1 - 32 Characters, Default: #999999)
Background Color:	<input type="text" value="#BFBFBF"/>	(Range: 1 - 32 Characters, Default: #BFBFBF)
Separator:	<input type="text" value="#BFBFBF"/>	(Range: 1 - 32 Characters, Default: #BFBFBF)
Locale Label:	<input type="text" value="English"/>	(Range: 1 - 32 Characters, Default: English)
Locale:	<input type="text" value="en"/>	(Range: 1 - 32 Characters, Default: en)
Account Image:	<input type="text" value="login_key.jpg"/> <input type="button" value="Upload/Delete Custom Image"/>	
Account Label:	<input type="text" value="Enter your Username"/>	(Range: 1 - 32 Characters)
User Label:	<input type="text" value="Username:"/>	(Range: 1 - 32 Characters)
Password Label:	<input type="text" value="Password:"/>	(Range: 1 - 64 Characters)

第15步。输入文本标记在用户标签字段的用户名文本框。

Foreground Color:	<input type="text" value="#999999"/>	(Range: 1 - 32 Characters, Default: #999999)
Background Color:	<input type="text" value="#BFBFBF"/>	(Range: 1 - 32 Characters, Default: #BFBFBF)
Separator:	<input type="text" value="#BFBFBF"/>	(Range: 1 - 32 Characters, Default: #BFBFBF)
Locale Label:	<input type="text" value="English"/>	(Range: 1 - 32 Characters, Default: English)
Locale:	<input type="text" value="en"/>	(Range: 1 - 32 Characters, Default: en)
Account Image:	<input type="text" value="login_key.jpg"/> <input type="button" value="Upload/Delete Custom Image"/>	
Account Label:	<input type="text" value="Enter your Username"/>	(Range: 1 - 32 Characters)
User Label:	<input type="text" value="Username:"/>	(Range: 1 - 32 Characters)
Password Label:	<input type="text" value="Password:"/>	(Range: 1 - 64 Characters)

第16步。输入文本标记在密码标签字段的用户密码文本框。

User Label:	<input type="text" value="Username:"/>	(Range: 1 - 32 Characters)
Password Label:	<input type="text" value="Password:"/>	(Range: 1 - 64 Characters)
Button Label:	<input type="text" value="Connect"/>	(Range: 2 - 32 Characters, Default: Connect)
Fonts:	<input type="text" value="'MS UI Gothic', arial, sans-serif"/>	(Range: 1 - 512 Characters, Default: 'MS UI Gothic', arial, sans-serif)
Browser Title:	<input type="text" value="Captive Portal"/>	(Range: 1 - 128 Characters, Default: Captive Portal)
Browser Content:	<input type="text" value="Welcome to the Wireless Network"/>	(Range: 1 - 128 Characters, Default: Welcome to the Wireless Network)

第17步。输入文本标记按钮用于提交用户名和密码信息在按钮标签字段。

User Label:	<input type="text" value="Username:"/>	(Range: 1 - 32 Characters)
Password Label:	<input type="text" value="Password:"/>	(Range: 1 - 64 Characters)
Button Label:	<input type="text" value="Connect"/>	(Range: 2 - 32 Characters, Default: Connect)
Fonts:	<input type="text" value="'MS UI Gothic', arial, sans-serif"/>	(Range: 1 - 512 Characters, Default: 'MS UI Gothic', arial, sans-serif)
Browser Title:	<input type="text" value="Captive Portal"/>	(Range: 1 - 128 Characters, Default: Captive Portal)
Browser Content:	<input type="text" value="Welcome to the Wireless Network"/>	(Range: 1 - 128 Characters, Default: Welcome to the Wireless Network)

第18步。输入字体的名字使用在俘虏入口页面的所有文本在字体字段。您能输入多字体名，逗号分离的其中每一。如果第一个字体不是可用的在客户端系统，使用下个字体，等等。对于有空间的字体名，在单引号必须包围整个名字。

User Label: Username: (Range: 1 - 32 Characters)

Password Label: Password: (Range: 1 - 64 Characters)

Button Label: Connect (Range: 2 - 32 Characters, Default: Connect)

Fonts: 'MS UI Gothic', arial, sans-serif (Range: 1 - 512 Characters, Default: 'MS UI Gothic', arial, sans-serif)

Browser Title: Captive Portal (Range: 1 - 128 Characters, Default: Captive Portal)

Browser Content: Welcome to the Wireless Network (Range: 1 - 128 Characters, Default: Welcome to the Wireless Network)

第19步。输入在浏览器窗口的标题栏将显示的文本在浏览器标题字段的。

User Label: Username: (Range: 1 - 32 Characters)

Password Label: Password: (Range: 1 - 64 Characters)

Button Label: Connect (Range: 2 - 32 Characters, Default: Connect)

Fonts: 'MS UI Gothic', arial, sans-serif (Range: 1 - 512 Characters, Default: 'MS UI Gothic', arial, sans-serif)

Browser Title: Captive Portal (Range: 1 - 128 Characters, Default: Captive Portal)

Browser Content: Welcome to the Wireless Network (Range: 1 - 128 Characters, Default: Welcome to the Wireless Network)

第20步。输入在浏览器内容字段的徽标镜像右边显示的受欢迎的文本。

Browser Content: Welcome to the Wireless Network (Range: 1 - 128 Characters, Default: Welcome to the Wireless Network)

Content: To start using this service, enter your credentials and click the connect button. (Range: 1 - 256 Characters, Default: To start using this service, enter your credentials and click the connect button.)

Acceptance Use Policy: Acceptance Use Policy. (Range: 1 - 4096 Characters, Default: Acceptance Use Policy.)

第21步。输入在内容字段的用户名和密码文本框之下能将显示的用户的教育文本。

Browser Content:	Welcome to the Wireless Network	(Range: 1 - 128 Characters, Default: Welcome to the Wireless Network)
Content:	To start using this service, enter your credentials and click the connect button.	(Range: 1 - 256 Characters, Default: To start using this service, enter your credentials)
Acceptance Use Policy:	Acceptance Use Policy.	(Range: 1 - 4096 Characters, Default: Acceptance Use Policy.)

第22步。输入用户在接受使用Policy字段必须接受登录的条件。

Acceptance Use Policy:	Acceptance Use Policy.	(Range: 1 - 4096 Characters, Default: Acceptance Use Policy.)
Accept Label:	Check here to indicate that you have read and accepted the Acceptance Use Policy.	(Range: 1 - 128 Characters, Default: Check here to indicate that you)
No Accept Text:	Error: You must acknowledge the Acceptance Use Policy before connecting!	(Range: 1 - 128 Characters, Default: Error: You must acknowledge)

第23步。输入文本提示用户选择复选框接受接受使用策略接受标签字段。

Acceptance Use Policy:	Acceptance Use Policy.	(Range: 1 - 4096 Characters, Default: Acceptance Use Policy.)
Accept Label:	Check here to indicate that you have read and accepted the Acceptance Use Policy.	(Range: 1 - 128 Characters, Default: Check here to indicate that you)
No Accept Text:	Error: You must acknowledge the Acceptance Use Policy before connecting!	(Range: 1 - 128 Characters, Default: Error: You must acknowledge)

第24步。在没有请接受文本字段，输入出版的文本，当用户不接受并且尝试登陆的接受使用策略。

No Accept Text:	Error: You must acknowledge the Acceptance Use Policy before connecting!	(Range: 1 - 128 Characters, Default: Error: You must acknowledge the Acceptanc
Work In Progress Text:	Connecting, please be patient...	(Range: 1 - 128 Characters, Default: Connecting, please be patient...)
Denied Text:	Error: Invalid Credentials, please try again!	(Range: 1 - 128 Characters, Default: Error: Invalid Credentials, please try again!)

第25步。在进展中的工作文本字段，请输入显示的文本，当用户等待认证时。

No Accept Text:	Error: You must acknowledge the Acceptance Use Policy before connecting!	(Range: 1 - 128 Characters, Default: Error: You must acknowledge the Acceptanc
Work In Progress Text:	Connecting, please be patient...	(Range: 1 - 128 Characters, Default: Connecting, please be patient...)
Denied Text:	Error: Invalid Credentials, please try again!	(Range: 1 - 128 Characters, Default: Error: Invalid Credentials, please try again!)

第26步。在被拒绝的文本字段，请输入显示的文本，当用户的认证发生故障时。

Denied Text:	Error: Invalid Credentials, please try again!	(Range: 1 - 128 Characters, Default: Error: Invalid Credentials, please try again!)
Welcome Title:	Congratulations!	(Range: 1 - 128 Characters, Default: Congratulations!)
Welcome Content:	You are now authorized and connected to the network.	(Range: 1 - 256 Characters, Default: You are now authorized and connected to t
Delete Locale:	<input type="checkbox"/>	

Save Preview...

第27步。在受欢迎的标题字段，请输入显示的文本，当用户成功时验证。

The screenshot shows a configuration window with the following fields and values:

- Denied Text: Error: Invalid Credentials, please try again! (Range: 1 - 128 Characters, Default: Error: Invalid Credentials, please try again!)
- Welcome Title: Congratulations! (Range: 1 - 128 Characters, Default: Congratulations!)
- Welcome Content: You are now authorized and connected to the network. (Range: 1 - 256 Characters, Default: You are now authorized and connected to the network.)
- Delete Locale:

Buttons: Save, Preview...

第28步。在受欢迎的内容字段，请输入指示的文本，当用户被联络到网络时。

The screenshot shows the same configuration window as above, but with the 'Welcome Content' field highlighted by a red box.

第29步。(可选)，如果要删除当前本地配置，请检查删除现场复选框。

The screenshot shows the same configuration window as above, but with the 'Delete Locale' checkbox highlighted by a red box.

第30步。点击“Save”保存被做的所有配置。

Denied Text: (Range: 1 - 128 Characters, Default: Error: Invalid Credentials, please try again!)

Welcome Title: (Range: 1 - 128 Characters, Default: Congratulations!)

Welcome Content: (Range: 1 - 256 Characters, Default: You are now authorized and connected to the network.)

Delete Locale:

Save Preview...

第31步。(可选), 如果要预览被做的本地配置, 请点击**预览**。

Denied Text: (Range: 1 - 128 Characters, Default: Error: Invalid Credentials, please try again!)

Welcome Title: (Range: 1 - 128 Characters, Default: Congratulations!)

Welcome Content: (Range: 1 - 256 Characters, Default: You are now authorized and connected to the network.)


Delete Locale:

Save **Preview...**

俘虏门户Web现场Web现场参数预览页打开：

Captive Portal Web Locale Parameters Preview

CISCO Welcome to the Wireless Network

 Enter your Username

Username:

To start using this service, enter your credentials and click the connect button.

Acceptance Use Policy.

Check here to indicate that you have accepted the Acceptance Use Policy.


Note:预览显示已经被保存了对启动配置的文本和镜像。如果做一个变动, 请在点击预览前发

现您的更改点击“Save”。


加载/删除自定义镜像

您可以定制与您自己的徽标和镜像的俘虏入口页面。18个自定义镜像可以上载到设备(假设有3个镜像的6个被配置的地点中的每一个)。

步骤1.点击在俘虏门户Web现场参数页的**加载/删除自定义镜像**按钮。Web门户自定义镜像页打开：

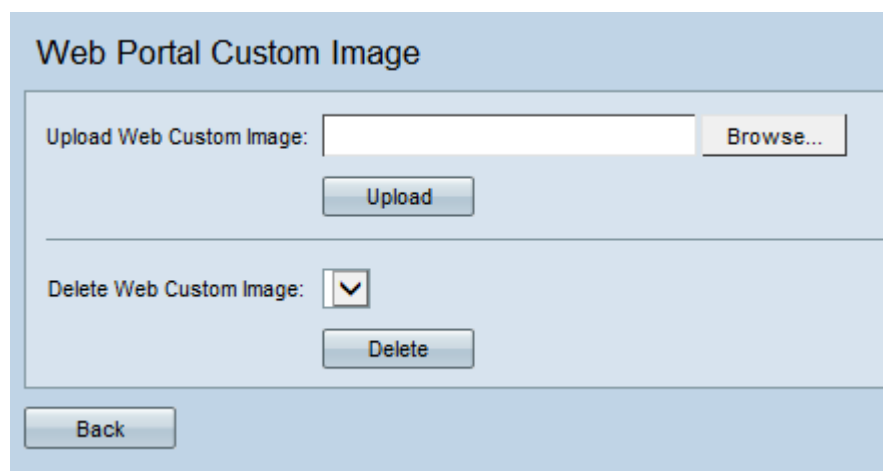

Step 2.如果希望上载镜像从您的计算机使用，请点击访问在**加载Web自定义Image**字段。如果希望删除镜像，请跳到第**4.步**。

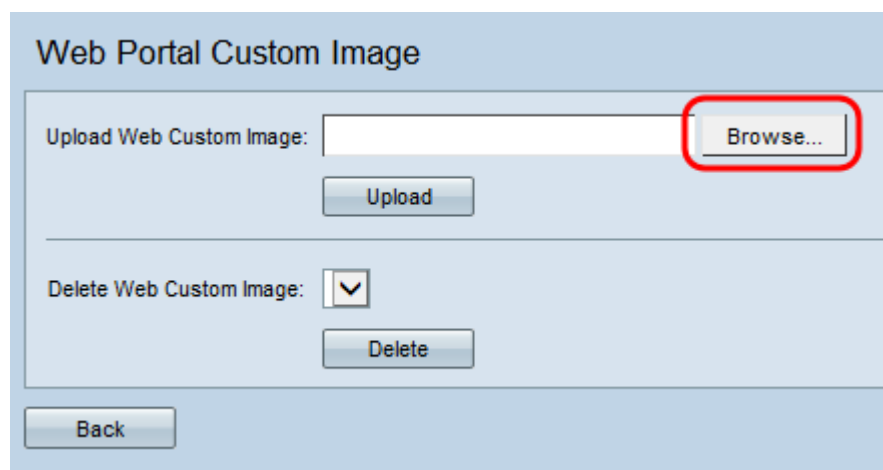

Note:镜像一定是5千字节或更小的，并且必须是GIF或JPEG格式文件。镜像被重量尺寸适合指定的维数。对于最佳的外观，您的徽标和帐户镜像应该是对默认镜像维数的一个相似的比例如下所示：

- 背景— 10由800象素
- 徽标— 168由78象素
- 帐户— 295由55象素

步骤3.点击**加载**上载镜像到WAP设备。

Web Portal Custom Image

Upload Web Custom Image: C:\image_001.gif

Delete Web Custom Image:

[第4步](#)。如果希望删除镜像，请选择您要从删除Web自定义镜像下拉列表被删除的文件。否则，请跳到[第6步](#)。

Web Portal Custom Image

Upload Web Custom Image:

Delete Web Custom Image:

步骤5. 点击删除从WAP设备删除所选的文件。

Web Portal Custom Image

Upload Web Custom Image:

Delete Web Custom Image: image_001.gif

Note: 当前使用的镜像的删除将重置Web定制页的部分默认。

[步骤6](#). 点击回到连接回到Web门户定制页。

Web Portal Custom Image

Upload Web Custom Image:

Delete Web Custom Image:

第7步。要恢复编辑您的现场，您将需要再次选择它从俘虏门户Web现场下拉列表。

Web Portal Customization

Captive Portal Web Locale:

Captive Portal Web Locale Parameters

Web Locale Name: (Range: 1 - 32 Characters)

Captive Portal Instances

您可以点击此处回到[现场参数部分](#)。