

对MD精心制作的配置的MD与FCIP

目录

[简介](#)

[先决条件](#)

[要求](#)

[使用的组件](#)

[规则](#)

[背景信息](#)

[配置](#)

[网络图](#)

[配置](#)

[验证](#)

[故障排除](#)


[相关信息](#)

简介

本文为精心制作的TCP/IP光纤信道多层导向交换机提供一配置示例给MD。

FCIP描述了在基于IP的光纤信道(FC)存储区域网络 (SAN) 岛实现互连的机制，以便在单个FC光组织中组成统一的SAN。FCIP依靠基于IP的网络服务，在通过局域网、城域网或广域网的SAN岛之间提供连通性。

图1 – FCIP连接的光纤信道SAN

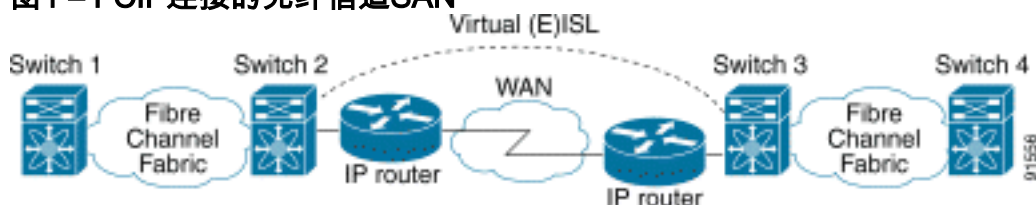

FCIP在端口3225的用途传输控制协议(TCP)作为网络层传输。

先决条件

要求

尝试进行此配置之前，请确保满足以下要求：

- IP骨干网必须是可操作的和提供所需的带宽支持在FCIP链路间运行—的应用程序这可能是 Layer2 (L2)或第3层(L3)拓扑。
- 如果它是L3拓扑，必须设置和配置中间路由器或多层交换机适当地转发在FCIP通道之间的源和

目的IP地址的IP数据流。如果服务质量(QoS)或流量整形被强制执行在任何网络设备在FCIP对等体之间的路径，管理IP基础设施的网络管理器应该咨询在配置任何相关参数和功能前获得必要的详细信息在多层导向交换机FCIP配置文件。

- 是在MDSes附近的以太网交换机必须为802.1q中继支持和配置，如果子接口在MDS IP Storage (IPS)服务模块配置。

使用的组件

本文档中的信息基于以下软件和硬件版本：

- MDS9509用该IPS的服务模块(DS-X9308-SMIP)运行版本1.2.(2a)
- MDS9216用该IPS的服务模块(DS-X9308-SMIP)运行版本1.2.(2a)
- 运行Catalyst OS的Catalyst 6509 (CatOS) 7.4(3)
- 带有Emulex LP9K HBA的Win2003服务器(HPQ Pro-Liant-P4)
- IBM 存储阵列 (ESS-2105-F20)

本文档中的信息都是基于特定实验室环境中的设备编写的。本文档中使用的所有设备最初均采用原始（默认）配置。如果您使用的是真实网络，请确保您已经了解所有命令的潜在影响。

规则

有关文档规则的详细信息，请参阅 [Cisco 技术提示规则](#)。

背景信息

FCIP包括这些规格：

[ANSI T11](#)

1. FC-SW-2描述FC交换机的操作和交互作用包括E_Port和结构操作。
2. FC-BB-2是适合通过TCP网络主干的FC交换网络扩展的映射，它同时还定义了支持E_端口 和 B_端口的参考模型。

[IETF IPS 工作组](#)

1. TCP的FC包括在一个IP网络上传输FC帧的TCP/IP要求。
2. FC 帧封装可定义普通的光纤封装格式。

在两个SAN交换机或结构之间的互连在FCIP间呼叫FCIP链路，并且能包含一个或更多TCP连接。FCIP链路的每个结尾与虚拟E端口(VE_端口)或B_端口连接，这取决于实施情况。FC-BB 和 FC-BB-2 可描述两种方法之间的区别。IPS服务模块(DS-X9308-SMIP)支持两种模式，但是默认对VE_Port，也是运行的推荐的模式，如果所有相关对等体是DS-X9308-SMIP模块。在此拓扑示例方面，在PortChannels的FCIP，配置的TCP参数和FSF (特殊帧)配置参数讨论。

配置

本部分提供有关如何配置本文档所述功能的信息。

在MDSes，您需要熟悉自己两平台的IPS配置指南。您能找到指南的多数当前版本在[配置](#)在


Cisco.com的[IP存储设备](#)。

注意：有关本文档所用命令的详细信息，请使用[命令查找工具](#)（仅限注册用户）。


网络图

本文档使用以下网络设置：

图2 –拓扑3

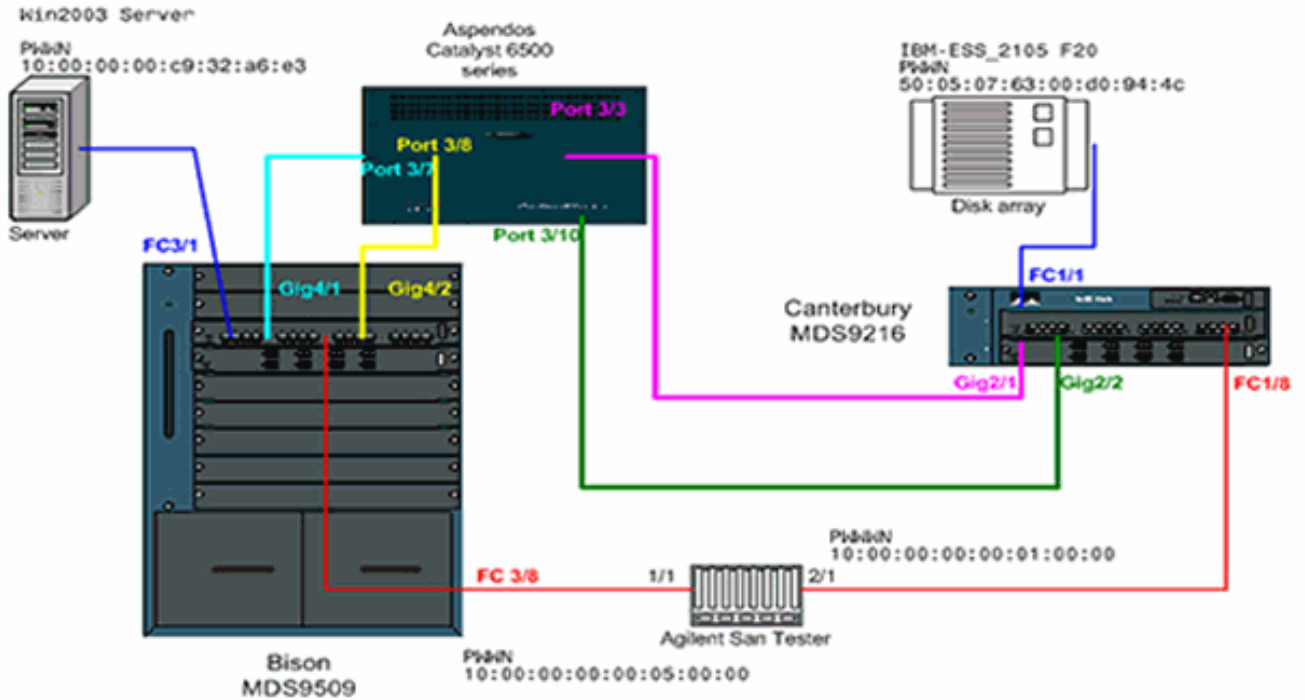

Topology 3 - PortChannel of two FCIP interfaces

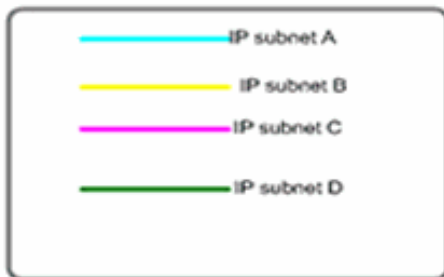

拓扑3表示两个各自的FCIP通道形成的—FCIP端口通道;对等体接口是在IP网云间。IP网云崩溃到路由流量从子网A分支子网C和和从子网C分支子网A的一台多层交换机(Catalyst 6500) (和从分支子网D的子网B和从子网D分支子网A)。子网定义如下：

- 子网回答:100.100.100.0/30 -北美野牛int Gig4/1
- 子网B : 100.100.100.4/30 -北美野牛int Gig4/2
- 子网C : 200.200.200.0/30-坎特伯雷Gig2/1
- 子网D : 200.200.200.4/30 -坎特伯雷Gig2/2

拓扑提供已知**最大带宽100 Mbps**和**最小带宽100 Mbps**，是我们的相关IP数据流的配置文件运行通过此IP网云。初始配置显示开辟信道基于FCIP的波尔特的方面和TCP数据流调节。在随后部分FSF，被动TCP接口和FCIP时间戳将进一步解释。

配置

本文档使用以下配置：

- [具备 IPS-8 模块的 MDS9509 \(Bison\)](#)
- [MD 9612 \(坎特伯雷\)用IPS-8模块](#)

具备 IPS-8 模块的 MDS9509 (Bison)

```
bison# sh ver Cisco Storage Area Networking Operating
System (SAN-OS) Software TAC support:
http://www.cisco.com/tac Copyright (c) 2002-2003 by
Cisco Systems, Inc. All rights reserved. The copyright
for certain works contained herein are owned by Andiamo
Systems, Inc. and/or other third parties and are used
and distributed under license. Software BIOS: version
1.0.8 loader: version 1.2(2) kickstart: version 1.2(2a)
system: version 1.2(2a) BIOS compile time: 08/07/03
kickstart image file is: bootflash:/k122a kickstart
compile time: 9/23/2003 11:00:00 system image file is:
bootflash:/s122a system compile time: 10/8/2003 18:00:00
Hardware RAM 1024584 kB bootflash: 500736 blocks (block
size 512b) slot0: 0 blocks (block size 512b) bison
uptime is 1 days 15 hours 45 minute(s) 44 second(s) Last
reset Reason: Unknown System version: 1.2(2a) Service:
bison# sh run Building Configuration ... fcip profile 1
ip address 100.100.100.1 tcp max-bandwidth-mbps 100 min-
available-bandwidth-mbps 100 round-trip-time-ms 10 !---
TCP bandwidth parameters defined specifically for this
FCIP tunnel. !--- Restricted to 100 Mbps max and min.
See the Note on TCP Parameters !--- comment section in
this table below for more details. fcip profile 2 ip
address 100.100.100.5 tcp max-bandwidth-mbps 100 min-
available-bandwidth-mbps 100 round-trip-time-ms 10 !---
TCP max and min bandwidth parameter are configured here
exactly the !--- same as for FCIP 1 because both tunnels
are combined in one PortChannel !--- interface and are
subject to the same bandwidth restrictions in the IP
core. vsan database vsan 600 vsan 601 fcdomain domain 1
preferred vsan 600 fcdomain domain 1 preferred vsan 601
interface port-channel 1 switchport trunk allowed vsan
600-601 interface fcip1 channel-group 1 force no
shutdown use-profile 1 peer-info ipaddr 200.200.200.1 !-
-- Interface FCIP 1 is a member of channel-group 1. The
force keyword makes it !--- adopt the specific settings
configured on interface port-channel 1. interface fcip2
channel-group 1 force no shutdown use-profile 2 peer-
info ipaddr 200.200.200.5 !--- Interface FCIP 2 is also
member of channel-group 1. boot system bootflash:/s122a
sup-1 boot kickstart bootflash:/k122a sup-1 boot system
bootflash:/s122a sup-2 boot kickstart bootflash:/k122a
sup-2 ip domain-name cisco.com ip name-server
144.254.10.123 ip route 200.200.200.0 255.255.255.252
100.100.100.2 distance 2 ip route 200.200.200.4
255.255.255.252 100.100.100.6 distance 2 !--- FCIP
interfaces are on separate IP subnets, so in order to
reach the FCIP !--- peer IP address, you need adequate
static routes to an L3 device that !--- knows how to
forward the packets to the final destination. Multiple
routes !--- to the same destination IP subnet are
allowed, and the distance parameter !--- can be used to
specify a preferred next hop. Multiple next hops would
!--- require a subnet mask providing for a larger number
of host; for example, !--- a 28-bit subnet mask. ssh key
dsa 768 force ssh server enable switchname bison zone
```

```
default-zone permit vsan 600-601 interface
GigabitEthernet4/1 ip address 100.100.100.1
255.255.255.252 switchport mtu 3000 no shutdown !--- MTU
size is defined as 3000 bytes. Make sure that all
intermediate network !--- devices between this interface
and the peer IP address are capable of !--- switching
and routing Jumbo frames. In order to avoid FC Frame
split, !--- an MTU value of 2300 is required; 3000 is
used in the configuration example !--- for simplicity.
FCIP TCP segments will normally never exceed 2264 bytes
for !--- TE ports or 2256 bytes for E ports, regardless
of the configured MTU size. interface GigabitEthernet4/2
ip address 100.100.100.5 255.255.255.252 switchport mtu
3000 no shutdown interface fc3/1 interface fc3/2
interface fc3/3 interface fc3/4 interface fc3/5
interface fc3/6 interface fc3/7 interface fc3/8
interface fc3/9 interface fc3/10 interface fc3/11
interface fc3/12 interface fc3/13 interface fc3/14
interface fc3/15 interface fc3/16 interface mgmt0 ip
address 10.48.69.151 255.255.255.128 !--- Note on TCP
Parameters !--- The following TCP parameters can be
individually configured per FCIP profile: bison(config-
profile)# tcp ? cwm Enable congestion window monitoring
keepalive-timeout Set keep alive timeout in sec max-
bandwidth-kbps Configure maximum available path
bandwidth in Kbps max-bandwidth-mbps Configure maximum
available path bandwidth in Mbps max-retransmissions
Maximum number of retransmissions min-retransmit-time
Set minimum retransmit time in millisecond pmtu-enable
Enable PMTU Discovery sack-enable Enable SACK option for
TCP send-buffer-size Send buffer size in KBytes !--- The
CWM parameter default value is 10K and should be left
untouched under !--- normal conditions. Congestion
window monitoring (CWM) is a way of !--- controlling
burstiness after long idle times or loss of Acks. !---
The keepalive-timeout is the TCP keepalive timeout value
and is !--- set to 60 seconds by default, though it can
range between 1 and 7200 seconds. !--- The max- and min-
bandwidth parameters program the TCP Maximum Window Size
!--- (scaling factor) and engages an internal "shaper"
functionality. !--- These values should be carefully
chosen and requires understanding of the !---
intermediate network's end-to-end topology. The default
values are to be !--- changed according to the
aforementioned requirements. !--- The Round-trip-time
can be derived once you have your FCIP tunnel up and !--
- running by issuing the following command: bison# ips
measure 200.200.200.1 interface gigabitethernet 4/1
Round trip time is 53 micro seconds (0.05 milliseconds )
!--- Always add an additional margin of at least a few
microseconds to this value. !--- The max-retransmissions
counter is set to 4 by default. In a healthy network !--
- environment, this value should be left unchanged. !---
The max-retransmission timer is set to 200 milliseconds.
If you experience !--- extremely high retransmission
counters, this value can be increased; but, !--- in
general, changing this parameter is not required unless
the RTT is !--- above 200 milliseconds. !--- The PMTU
(Path MTU discovery) is enabled by default. Best
practice is to know !--- what is the maximum MTU size
supported by all interfaces along the logical !--- path
between both peers. !--- The SACK feature (Selective
Acknowledgment) is not enabled by default. !--- Consider
enabling it when you have a lot of retransmissions
```

occurring between !--- the two peers. SACK allows selective retransmissions of your window, which is !--- beneficial if larger maximum window sizes are configured and retransmissions !--- occur frequently. It is enabled in this sample configuration; when you do so, !--- make sure that it is enabled at both sides of the link. !--- The **send-buffer-size** is the amount of buffers in addition to the TCP window !--- that are allowed to be transmitted out before starting to flow control the FC !--- sources. The default value is set to 0.

- 欲了解更详细的信息在PMTU，参考[RFC 1191 -路径MTU发现](#)。
- 欲了解更详细的信息在SACK，参考[RFC 2018 - TCP选择性应答选项](#)和[RFC 2883 -对选择性应答\(SACK\)选项的一分机TCP的](#)

具备 IPS-8 模块的 MDS 9216 (Canterbury)

```
canterbury# sh run Building Configuration ... fcip
profile 200 ip address 200.200.200.1 tcp max-bandwidth-
mbps 100 min-available-bandwidth-mbps 100 round-trip-
time-ms 10 fcip profile 201 ip address 200.200.200.5 tcp
max-bandwidth-mbps 100 min-available-bandwidth-mbps 100
round-trip-time-ms 10 !--- The TCP parameters are
identical to what is configured on the peering !--- FCIP
interfaces. Only in very specific cases should different
values be !--- considered, for example, if the return-
path(s) are running across a different !--- part of the
network or if the application dictates asymmetrical
values. vsan database vsan 600 vsan 601 fcdomain domain
2 preferred vsan 600 fcdomain domain 2 preferred vsan
601 interface port-channel 2 switchport trunk mode auto
switchport trunk allowed vsan 600-601 interface fcip1
channel-group 2 force no shutdown use-profile 200 peer-
info ipaddr 100.100.100.1 interface fcip2 channel-group
2 force no shutdown use-profile 201 peer-info ipaddr
100.100.100.5 !--- Both FCIP 1 and FCIP 2 are bound to
the same channel-group 2. Also note that !--- there is
no strict relationship between profile-id and FCIP
interface !--- numbering here, as this is not a
requirement. From a management and !--- troubleshooting
perspective, however, a "strict" relationship of both
values !--- is recommended. vsan database vsan 600
interface fcl/1 vsan 601 interface fcl/8 boot system
bootflash:/sl22a boot kickstart bootflash:/kl22a ip
domain-name cisco.com ip name-server 144.254.10.123 ip
default-gateway 10.48.69.129 ip route 100.100.100.0
255.255.255.252 200.200.200.2 distance 2 ip route
100.100.100.4 255.255.255.252 200.200.200.6 distance 2
!--- IP routes are defined for both FCIP peer IP
addresses. The next hop must be !--- aware of the best
route to the peer's addresses or to the relevant IP
subnets. ssh key dsa 768 force ssh server enable
switchname canterbury system default switchport trunk
mode auto username admin password 5
$l$KcCrqxlu$mtU03/60PRUIfjl.aeEEc0 role network-admin
zone default-zone permit vsan 600-601 zoneset distribute
full vsan 1-4093 interface GigabitEthernet2/1 ip address
200.200.200.1 255.255.255.252 switchport mtu 3000 no
shutdown interface GigabitEthernet2/2 ip address
200.200.200.5 255.255.255.252 switchport mtu 3000 no
shutdown interface GigabitEthernet2/3 interface
GigabitEthernet2/4 interface GigabitEthernet2/5
interface GigabitEthernet2/6 interface
GigabitEthernet2/7 interface GigabitEthernet2/8
```

```
interface fc1/1 interface fc1/2 interface fc1/3
interface fc1/4 interface fc1/5 interface fc1/6
interface fc1/7 interface fc1/8 interface fc1/9
interface fc1/10 interface fc1/11 interface fc1/12
interface fc1/13 interface fc1/14 interface fc1/15
interface fc1/16 interface mgmt0 ip address 10.48.69.156
255.255.255.128 interface iscsi2/1 interface iscsi2/2
interface iscsi2/3 interface iscsi2/4 interface iscsi2/5
interface iscsi2/6 interface iscsi2/7 interface iscsi2/8
```

验证

使用本部分可确认配置能否正常运行。

[命令输出解释程序 \(仅限注册用户 \)](#) (OIT) 支持某些 **show** 命令。使用 OIT 可查看对 show 命令输出的分析。

- **show interface gig x/y** - 显示绑定到 FCIP 配置文件的相关千兆接口的状态。
- **show ips stats tcp int gig x/y**---显示相关千兆接口的TCP统计数据 and 活动连接。
- **show ips arp int gig x/y** - 显示相关千兆接口的所有地址解析协议 (ARP) 条目；对端的下一跳应该是存在于此列表中。
- **show ips ip route int gig x/y** - 显示通过相关千兆接口的特定路由。
- **show interface fcip x**——显示FCIP接口状态和与此FCIP隧道相关的全部详情。
- **show profile fcip x** ——显示文件夹所捆绑的IP地址，以及所有配置的TCP参数。
- **show int fcip x counters**——用于检查是否有任何帧通过FCIP隧道。
- **show fcdomain vsan x** - 列出所有与域相关的详细信息；过去常常验证结构在FCIP隧道间被形成。
- **show fcns da vsan x** ---显示与VSAN相关的所有pwwn、FC4-类型和FCID;用于验证所有期望的条目通过FCIP隧道被分配。

故障排除

使用本部分可排除配置故障。

请务必发出**显示**命令多次建立计数器历史记录。与此刻没有涉及和只收集的计数器一次是通常无用的。

请使用如下所示的配置为做进一步的故障排除。

- [MDS9509 \(Bison\)](#)
- [MDS9216 \(Canterbury\)](#)
- [特殊帧配置\(北美野牛\)](#)
- [特殊帧配置\(坎特伯雷\)](#)
- [从北美野牛和坎特伯雷显示-坎特伯雷被动](#)
- [从北美野牛和坎特伯雷显示-时间戳集](#)

MDS9509 (Bison)

```
bison# sh int gig 4/1 GigabitEthernet4/1 is up Hardware
is GigabitEthernet, address is 0005.3000.a85a Internet
address is 100.100.100.1/30 MTU 3000 bytes Port mode is
IPS Speed is 1 Gbps Beacon is turned off Auto-
```

```
Negotiation is turned on 5 minutes input rate 312
bits/sec, 39 bytes/sec, 0 frames/sec 5 minutes output
rate 312 bits/sec, 39 bytes/sec, 0 frames/sec 8685
packets input, 976566 bytes 0 multicast frames, 0
compressed 0 input errors, 0 frame, 0 overrun 0 fifo
8679 packets output, 972382 bytes, 0 underruns 0 output
errors, 0 collisions, 0 fifo 0 carrier errors bison# sh
int gig 4/2 GigabitEthernet4/2 is up Hardware is
GigabitEthernet, address is 0005.3000.a85b Internet
address is 100.100.100.5/30 MTU 3000 bytes Port mode is
IPS Speed is 1 Gbps Beacon is turned off Auto-
Negotiation is turned on 5 minutes input rate 16
bits/sec, 2 bytes/sec, 0 frames/sec 5 minutes output
rate 16 bits/sec, 2 bytes/sec, 0 frames/sec 590 packets
input, 46496 bytes 0 multicast frames, 0 compressed 0
input errors, 0 frame, 0 overrun 0 fifo 547 packets
output, 30898 bytes, 0 underruns 0 output errors, 0
collisions, 0 fifo 0 carrier errors bison# sh ips stats
tcp int gig 4/1 TCP Statistics for port
GigabitEthernet4/1 Connection Stats 14 active openings,
4 accepts 4 failed attempts, 0 reset received, 14
established Segment stats 8897 received, 8505 sent, 0
retransmitted 0 bad segments received, 0 reset sent TCP
Active Connections Local Address Remote Address State
Send-Q Recv-Q 100.100.100.1:65480 200.200.200.1:3225
ESTABLISH 0 0 100.100.100.1:65482 200.200.200.1:3225
ESTABLISH 0 0 100.100.100.1:3225 0.0.0.0:0 LISTEN 0 0
bison# sh ips stats tcp int gig 4/2 TCP Statistics for
port GigabitEthernet4/2 Connection Stats 2 active
openings, 0 accepts 0 failed attempts, 0 reset received,
2 established Segment stats 598 received, 43 sent, 0
retransmitted 0 bad segments received, 0 reset sent TCP
Active Connections Local Address Remote Address State
Send-Q Recv-Q 100.100.100.5:65531 200.200.200.5:3225
ESTABLISH 0 0 100.100.100.5:65533 200.200.200.5:3225
ESTABLISH 0 0 100.100.100.5:3225 0.0.0.0:0 LISTEN 0 0
bison# sh int fcipl-2 fcipl is trunking Hardware is
GigabitEthernet Port WWN is 20:c2:00:05:30:00:7a:de Peer
port WWN is 20:42:00:0c:30:6c:24:40 Admin port mode is
auto, trunk mode is on Port mode is TE vsan is 1 Belongs
to port-channel 1 Trunk vsans (allowed active) (600-601)
Trunk vsans (operational) (600-601) Trunk vsans (up)
(600-601) Trunk vsans (isolated) () Trunk vsans
(initializing) () Using Profile id 1 (interface
GigabitEthernet4/1) Peer Information Peer Internet
address is 200.200.200.1 and port is 3225 Special Frame
is disabled Maximum number of TCP connections is 2 Time
Stamp is disabled QOS control code point is 0 QOS data
code point is 0 B-port mode disabled TCP Connection
Information 2 Active TCP connections Control connection:
Local 100.100.100.1:65480, Remote 200.200.200.1:3225
Data connection: Local 100.100.100.1:65482, Remote
200.200.200.1:3225 28 Attempts for active connections, 7
close of connections TCP Parameters Path MTU 3000 bytes
Current retransmission timeout is 200 ms Round trip
time: Smoothed 5 ms, Variance: 6 Advertized window:
Current: 118 KB, Maximum: 118 KB, Scale: 1 Peer receive
window: Current: 118 KB, Maximum: 118 KB, Scale: 1
Congestion window: Current: 10 KB, Slow start threshold:
118 KB 5 minutes input rate 120 bits/sec, 15 bytes/sec,
0 frames/sec 5 minutes output rate 120 bits/sec, 15
bytes/sec, 0 frames/sec 4077 frames input, 379836 bytes
4071 Class F frames input, 379100 bytes 6 Class 2/3
frames input, 736 bytes 0 Error frames timestamp error 0
```



```
4077 frames output, 381064 bytes 4071 Class F frames
output, 380364 bytes 6 Class 2/3 frames output, 700
bytes 0 Error frames 0 reass frames fcip2 is trunking
Hardware is GigabitEthernet Port WWN is
20:c6:00:05:30:00:7a:de Peer port WWN is
20:46:00:0c:30:6c:24:40 Admin port mode is auto, trunk
mode is on Port mode is TE vsan is 1 Belongs to port-
channel 1 Trunk vsans (allowed active) (600-601) Trunk
vsans (operational) (600-601) Trunk vsans (up) (600-601)
Trunk vsans (isolated) ( ) Trunk vsans (initializing) ( )
Using Profile id 2 (interface GigabitEthernet4/2) Peer
Information Peer Internet address is 200.200.200.5 and
port is 3225 Special Frame is disabled Maximum number of
TCP connections is 2 Time Stamp is disabled QOS control
code point is 0 QOS data code point is 0 B-port mode
disabled TCP Connection Information 2 Active TCP
connections Control connection: Local
100.100.100.5:65531, Remote 200.200.200.5:3225 Data
connection: Local 100.100.100.5:65533, Remote
200.200.200.5:3225 2 Attempts for active connections, 0
close of connections TCP Parameters Path MTU 3000 bytes
Current retransmission timeout is 200 ms Round trip
time: Smoothed 0 ms, Variance: 0 Advertized window:
Current: 118 KB, Maximum: 118 KB, Scale: 1 Peer receive
window: Current: 118 KB, Maximum: 118 KB, Scale: 1
Congestion window: Current: 8 KB, Slow start threshold:
118 KB 5 minutes input rate 32 bits/sec, 4 bytes/sec, 0
frames/sec 5 minutes output rate 32 bits/sec, 4
bytes/sec, 0 frames/sec 8 frames input, 1232 bytes 8
Class F frames input, 1232 bytes 0 Class 2/3 frames
input, 0 bytes 0 Error frames timestamp error 0 8 frames
output, 1228 bytes 8 Class F frames output, 1228 bytes 0
Class 2/3 frames output, 0 bytes 0 Error frames 0 reass
frames bison# sh fcip pro 1 FCIP Profile 1 Internet
Address is 100.100.100.1 (interface GigabitEthernet4/1)
Listen Port is 3225 TCP parameters SACK is enabled PMTU
discovery is enabled, reset timeout is 3600 sec Keep
alive is 60 sec Minimum retransmission timeout is 200 ms
Maximum number of re-transmissions is 4 Send buffer size
is 0 KB Maximum allowed bandwidth is 100000 kbps Minimum
available bandwidth is 100000 kbps Estimated round trip
time is 10000 usec Congestion window monitoring is
enabled, burst size is 10 KB bison# sh fcip pro 2 FCIP
Profile 2 Internet Address is 100.100.100.5 (interface
GigabitEthernet4/2) Listen Port is 3225 TCP parameters
SACK is enabled PMTU discovery is enabled, reset timeout
is 3600 sec Keep alive is 60 sec Minimum retransmission
timeout is 200 ms Maximum number of re-transmissions is
4 Send buffer size is 0 KB Maximum allowed bandwidth is
100000 kbps Minimum available bandwidth is 100000 kbps
Estimated round trip time is 10000 usec Congestion
window monitoring is enabled, burst size is 10 KB bison#
sh int port-channel 1 port-channel 1 is trunking
Hardware is Fibre Channel Port WWN is
24:01:00:05:30:00:7a:de Admin port mode is auto, trunk
mode is on Port mode is TE Port vsan is 1 Speed is 2
Gbps Trunk vsans (admin allowed and active) (600-601)
Trunk vsans (up) (600-601) Trunk vsans (isolated) ( )
Trunk vsans (initializing) ( ) 5 minutes input rate 120
bits/sec, 15 bytes/sec, 0 frames/sec 5 minutes output
rate 120 bits/sec, 15 bytes/sec, 0 frames/sec 3969
frames input, 369812 bytes 3963 Class F frames input,
369076 bytes 6 Class 2/3 frames input, 736 bytes 0 Error
frames timestamp error 0 3969 frames output, 371040
```

```

bytes 3963 Class F frames output, 370340 bytes 6 Class
2/3 frames output, 700 bytes 0 Error frames 0 reass
frames Member[1] : fcip1 Member[2] : fcip2 bison# sh ips
ip route interface gigabitethernet 4/1 Codes: C -
connected, S - static No default gateway S
200.200.200.0/30 via 100.100.100.2, GigabitEthernet4/1 C
100.100.100.0/30 is directly connected,
GigabitEthernet4/1 bison# sh ips ip route interface
gigabitethernet 4/2 Codes: C - connected, S - static No
default gateway S 200.200.200.4/30 via 100.100.100.6,
GigabitEthernet4/2 C 100.100.100.4/30 is directly
connected, GigabitEthernet4/2 bison# sh ips arp int gig
4/1 Protocol Address Age (min) Hardware Addr Type
Interface Internet 100.100.100.2 8 0008.e21e.c7bc ARPA
GigabitEthernet4/1 !--- Verify that the hardware address
listed belongs to the !--- next hop networking device.
bison# sh ips arp int gig 4/2 Protocol Address Age (min)
Hardware Addr Type Interface Internet 100.100.100.6 5
0008.e21e.c7bc ARPA GigabitEthernet4/2 bison# sh int
port-channel 1 trunk vsan 600-601 port-channel 1 is
trunking Vsan 600 is up, FCID is 0x010000 Vsan 601 is
up, FCID is 0x010000 bison# sh fcdomain vsan 600 The
local switch is the Principal Switch. Local switch run
time information: State: Stable Local switch WWN:
22:58:00:05:30:00:7a:df Running fabric name:
22:58:00:05:30:00:7a:df Running priority: 2 Current
domain ID: 0x01(1) Local switch configuration
information: State: Enabled FCID persistence: Disabled
Auto-reconfiguration: Disabled Contiguous-allocation:
Disabled Configured fabric name: 20:01:00:05:30:00:28:df
Configured priority: 128 Configured domain ID: 0x01(1)
(preferred) Principal switch run time information:
Running priority: 2 Interface Role RCF-reject -----
----- port-channel 1
Downstream Disabled -----
----- bison# sh fcdomain vsan 601 The local switch is
the Principal Switch. Local switch run time information:
State: Stable Local switch WWN: 22:59:00:05:30:00:7a:df
Running fabric name: 22:59:00:05:30:00:7a:df Running
priority: 2 Current domain ID: 0x01(1) Local switch
configuration information: State: Enabled FCID
persistence: Disabled Auto-reconfiguration: Disabled
Contiguous-allocation: Disabled Configured fabric name:
20:01:00:05:30:00:28:df Configured priority: 128
Configured domain ID: 0x01(1) (preferred) Principal
switch run time information: Running priority: 2
Interface Role RCF-reject -----
----- port-channel 1 Downstream Disabled -----
-----

```

MDS9216 (Canterbury)

```

canterbury# sh int gig 2/1-2 GigabitEthernet2/1 is up
Hardware is GigabitEthernet, address is 0005.3000.ade6
Internet address is 200.200.200.1/30 MTU 3000 bytes Port
mode is IPS Speed is 1 Gbps Beacon is turned off Auto-
Negotiation is turned on 5 minutes input rate 320
bits/sec, 40 bytes/sec, 0 frames/sec 5 minutes output
rate 320 bits/sec, 40 bytes/sec, 0 frames/sec 8844
packets input, 993118 bytes 0 multicast frames, 0
compressed 0 input errors, 0 frame, 0 overrun 0 fifo
8855 packets output, 994686 bytes, 0 underruns 0 output
errors, 0 collisions, 0 fifo 0 carrier errors
GigabitEthernet2/2 is up Hardware is GigabitEthernet,
address is 0005.3000.ade7 Internet address is

```

```
200.200.200.5/30 MTU 3000 bytes Port mode is IPS Speed
is 1 Gbps Beacon is turned off Auto-Negotiation is
turned on 5 minutes input rate 16 bits/sec, 2 bytes/sec,
0 frames/sec 5 minutes output rate 8 bits/sec, 1
bytes/sec, 0 frames/sec 634 packets input, 39538 bytes 0
multicast frames, 0 compressed 0 input errors, 0 frame,
0 overrun 0 fifo 610 packets output, 47264 bytes, 0
underruns 0 output errors, 0 collisions, 0 fifo 0
carrier errors canterbury# sh ips stats tcp int gig 2/1
TCP Statistics for port GigabitEthernet2/1 Connection
Stats 18 active openings, 10 accepts 14 failed attempts,
0 reset received, 8 established Segment stats 8919
received, 8923 sent, 0 retransmitted 0 bad segments
received, 0 reset sent TCP Active Connections Local
Address Remote Address State Send-Q Recv-Q
200.200.200.1:3225 100.100.100.1:65480 ESTABLISH 0 0
200.200.200.1:3225 100.100.100.1:65482 ESTABLISH 0 0
200.200.200.1:3225 0.0.0.0:0 LISTEN 0 0 canterbury# sh
ips stats tcp int gig 2/2 TCP Statistics for port
GigabitEthernet2/2 Connection Stats 498 active openings,
2 accepts 498 failed attempts, 0 reset received, 2
established Segment stats 556 received, 579 sent, 0
retransmitted 0 bad segments received, 0 reset sent TCP
Active Connections Local Address Remote Address State
Send-Q Recv-Q 200.200.200.5:3225 100.100.100.5:65531
ESTABLISH 0 0 200.200.200.5:3225 100.100.100.5:65533
ESTABLISH 0 0 200.200.200.5:3225 0.0.0.0:0 LISTEN 0 0
canterbury# sh int fcip 1-2 fcip1 is trunking Hardware
is GigabitEthernet Port WWN is 20:42:00:0c:30:6c:24:40
Peer port WWN is 20:c2:00:05:30:00:7a:de Admin port mode
is auto, trunk mode is auto Port mode is TE vsan is 1
Belongs to port-channel 2 Trunk vsans (allowed active)
(600-601) Trunk vsans (operational) (600-601) Trunk
vsans (up) (600-601) Trunk vsans (isolated) ( ) Trunk
vsans (initializing) ( ) Using Profile id 200 (interface
GigabitEthernet2/1) Peer Information Peer Internet
address is 100.100.100.1 and port is 3225 Special Frame
is disabled Maximum number of TCP connections is 2 Time
Stamp is disabled QOS control code point is 0 QOS data
code point is 0 B-port mode disabled TCP Connection
Information 2 Active TCP connections Control connection:
Local 200.200.200.1:3225, Remote 100.100.100.1:65480
Data connection: Local 200.200.200.1:3225, Remote
100.100.100.1:65482 18 Attempts for active connections,
2 close of connections TCP Parameters Path MTU 3000
bytes Current retransmission timeout is 200 ms Round
trip time: Smoothed 5 ms, Variance: 6 Advertized window:
Current: 118 KB, Maximum: 118 KB, Scale: 1 Peer receive
window: Current: 118 KB, Maximum: 118 KB, Scale: 1
Congestion window: Current: 10 KB, Slow start threshold:
112 KB 5 minutes input rate 136 bits/sec, 17 bytes/sec,
0 frames/sec 5 minutes output rate 136 bits/sec, 17
bytes/sec, 0 frames/sec 4189 frames input, 391368 bytes
4183 Class F frames input, 390668 bytes 6 Class 2/3
frames input, 700 bytes 0 Error frames timestamp error 0
4189 frames output, 390140 bytes 4183 Class F frames
output, 389404 bytes 6 Class 2/3 frames output, 736
bytes 0 Error frames 0 reass frames fcip2 is trunking
Hardware is GigabitEthernet Port WWN is
20:46:00:0c:30:6c:24:40 Peer port WWN is
20:c6:00:05:30:00:7a:de Admin port mode is auto, trunk
mode is auto Port mode is TE vsan is 1 Belongs to port-
channel 2 Trunk vsans (allowed active) (600-601) Trunk
vsans (operational) (600-601) Trunk vsans (up) (600-601)
```

```

Trunk vsans (isolated) () Trunk vsans (initializing) ()
Using Profile id 201 (interface GigabitEthernet2/2) Peer
Information Peer Internet address is 100.100.100.5 and
port is 3225 Special Frame is disabled Maximum number of
TCP connections is 2 Time Stamp is disabled QOS control
code point is 0 QOS data code point is 0 B-port mode
disabled TCP Connection Information 2 Active TCP
connections Control connection: Local
200.200.200.5:3225, Remote 100.100.100.5:65531 Data
connection: Local 200.200.200.5:3225, Remote
100.100.100.5:65533 498 Attempts for active connections,
0 close of connections TCP Parameters Path MTU 3000
bytes Current retransmission timeout is 200 ms Round
trip time: Smoothed 10 ms, Variance: 5 Advertized
window: Current: 118 KB, Maximum: 118 KB, Scale: 1 Peer
receive window: Current: 118 KB, Maximum: 118 KB, Scale:
1 Congestion window: Current: 8 KB, Slow start
threshold: 112 KB 5 minutes input rate 0 bits/sec, 0
bytes/sec, 0 frames/sec 5 minutes output rate 0
bits/sec, 0 bytes/sec, 0 frames/sec 8 frames input, 1228
bytes 8 Class F frames input, 1228 bytes 0 Class 2/3
frames input, 0 bytes 0 Error frames timestamp error 0 8
frames output, 1232 bytes 8 Class F frames output, 1232
bytes 0 Class 2/3 frames output, 0 bytes 0 Error frames
0 reass frames canterbury# sh int port 2 port-channel 2
is trunking Hardware is Fibre Channel Port WWN is
24:02:00:0c:30:6c:24:40 Admin port mode is auto, trunk
mode is auto Port mode is TE Port vsan is 1 Speed is 2
Gbps Trunk vsans (admin allowed and active) (600-601)
Trunk vsans (up) (600-601) Trunk vsans (isolated) ()
Trunk vsans (initializing) () 5 minutes input rate 120
bits/sec, 15 bytes/sec, 0 frames/sec 5 minutes output
rate 120 bits/sec, 15 bytes/sec, 0 frames/sec 4213
frames input, 394068 bytes 4207 Class F frames input,
393368 bytes 6 Class 2/3 frames input, 700 bytes 0 Error
frames timestamp error 0 4213 frames output, 392844
bytes 4207 Class F frames output, 392108 bytes 6 Class
2/3 frames output, 736 bytes 0 Error frames 0 reass
frames Member[1] : fcip1 Member[2] : fcip2 canterbury#
sh ips ip route interface gig 2/1 Codes: C - connected,
S - static No default gateway S 100.100.100.0/30 via
200.200.200.2, GigabitEthernet2/1 C 200.200.200.0/30 is
directly connected, GigabitEthernet2/1 canterbury# sh
ips ip route interface gig 2/2 Codes: C - connected, S -
static No default gateway S 100.100.100.4/30 via
200.200.200.6, GigabitEthernet2/2 C 200.200.200.4/30 is
directly connected, GigabitEthernet2/2 canterbury# sh
fcns da VSAN 600: -----
----- FCID TYPE PWWN
(VENDOR) FC4-TYPE:FEATURE -----
----- 0x010001 N
10:00:00:00:c9:32:a6:e3 (Emulex) scsi-fcp:init 0x020001
N 50:05:07:63:00:d0:94:4c (IBM) scsi-fcp:target fc..
Total number of entries = 2 VSAN 601: -----
-----
FCID TYPE PWWN (VENDOR) FC4-TYPE:FEATURE -----
-----
--- 0x010100 N 10:00:00:00:00:05:00:00 0x020100 N
10:00:00:00:00:01:00:00 !--- Always verify that the
fabric has formed with the expected neighbor(s) !---
through FCIP E or TE port when the configuration is
completed.

```

特殊帧配置(北美野牛)

```
!--- Special frames are used to improve security. !---
Before user-data is transmitted across an FCIP tunnel,
FSF verifies that !--- the peer is defined on the
configured wwn. interface fcip1 channel-group 1 force no
shutdown use-profile 1 peer-info ipaddr 200.200.200.1
special-frame peer-wwn 20:00:00:0c:30:6c:24:40 profile-
id 200 interface fcip2 channel-group 1 force no shutdown
use-profile 2 peer-info ipaddr 200.200.200.5 special-
frame peer-wwn 20:00:00:0c:30:6c:24:40 profile-id 201 !-
-- The peer-wwn is derived from the peer MDS by issuing
the following command: canterbury# sh wwn switch Switch
WWN is 20:00:00:0c:30:6c:24:40 !--- This value is
significant per peer switch, so it is used for all
tunnels !--- towards this switch. This configuration
shows the following: bison# sh int fcip 1-2 fcip1 is
trunking Hardware is GigabitEthernet Port WWN is
20:c2:00:05:30:00:7a:de Peer port WWN is
20:42:00:0c:30:6c:24:40 Admin port mode is auto, trunk
mode is on Port mode is TE vsan is 1 Belongs to port-
channel 1 Trunk vsans (allowed active) (600-601) Trunk
vsans (operational) (600-601) Trunk vsans (up) (600-601)
Trunk vsans (isolated) ( ) Trunk vsans (initializing) ( )
Using Profile id 1 (interface GigabitEthernet4/1) Peer
Information Peer Internet address is 200.200.200.1 and
port is 3225 Special Frame is enabled Peer switch WWN is
20:00:00:0c:30:6c:24:40 Peer profile id is 200 Maximum
number of TCP connections is 2 Time Stamp is disabled
QOS control code point is 0 QOS data code point is 0 B-
port mode disabled TCP Connection Information 2 Active
TCP connections Control connection: Local
100.100.100.1:65372, Remote 200.200.200.1:3225 Data
connection: Local 100.100.100.1:65374, Remote
200.200.200.1:3225 82 Attempts for active connections, 9
close of connections TCP Parameters Path MTU 3000 bytes
Current retransmission timeout is 200 ms Round trip
time: Smoothed 2 ms, Variance: 1 Advertized window:
Current: 118 KB, Maximum: 118 KB, Scale: 1 Peer receive
window: Current: 118 KB, Maximum: 118 KB, Scale: 1
Congestion window: Current: 106 KB, Slow start
threshold: 118 KB 5 minutes input rate 46128 bits/sec,
5766 bytes/sec, 19 frames/sec 5 minutes output rate
194867736 bits/sec, 24358467 bytes/sec, 20732 frames/sec
5841 frames input, 1729836 bytes 4575 Class F frames
input, 429444 bytes 1266 Class 2/3 frames input, 1300392
bytes 0 Error frames timestamp error 0 6339146 frames
output, 7447938520 bytes 4576 Class F frames output,
431800 bytes 6334570 Class 2/3 frames output, 7447506720
bytes 0 Error frames 0 reass frames fcip2 is trunking
Hardware is GigabitEthernet Port WWN is
20:c6:00:05:30:00:7a:de Peer port WWN is
20:46:00:0c:30:6c:24:40 Admin port mode is auto, trunk
mode is on Port mode is TE vsan is 1 Belongs to port-
channel 1 Trunk vsans (allowed active) (600-601) Trunk
vsans (operational) (600-601) Trunk vsans (up) (600-601)
Trunk vsans (isolated) ( ) Trunk vsans (initializing) ( )
Using Profile id 2 (interface GigabitEthernet4/2) Peer
Information Peer Internet address is 200.200.200.5 and
port is 3225 Special Frame is enabled Peer switch WWN is
20:00:00:0c:30:6c:24:40 Peer profile id is 201 Maximum
number of TCP connections is 2 Time Stamp is disabled
QOS control code point is 0 QOS data code point is 0 B-
port mode disabled TCP Connection Information 2 Active
TCP connections Control connection: Local
```

```
100.100.100.5:3225, Remote 200.200.200.5:64535 Data
connection: Local 100.100.100.5:3225, Remote
200.200.200.5:64537 58 Attempts for active connections,
1 close of connections TCP Parameters Path MTU 3000
bytes Current retransmission timeout is 200 ms Round
trip time: Smoothed 2 ms, Variance: 1 Advertized window:
Current: 118 KB, Maximum: 118 KB, Scale: 1 Peer receive
window: Current: 118 KB, Maximum: 118 KB, Scale: 1
Congestion window: Current: 106 KB, Slow start
threshold: 112 KB 5 minutes input rate 0 bits/sec, 0
bytes/sec, 0 frames/sec 5 minutes output rate 0
bits/sec, 0 bytes/sec, 0 frames/sec 415 frames input,
398160 bytes 16 Class F frames input, 2460 bytes 399
Class 2/3 frames input, 395700 bytes 0 Error frames
timestamp error 0 6078322 frames output, 7147327176
bytes 16 Class F frames output, 2460 bytes 6078306 Class
2/3 frames output, 7147324716 bytes 0 Error frames 0
reass frames
```

特殊帧配置(坎特伯雷)

```
interface fcip1
channel-group 2 force
no shutdown
use-profile 200
peer-info ipaddr 100.100.100.1
special-frame peer-wwn 20:00:00:05:30:00:7a:de profile-
id 1 interface fcip2 channel-group 2 force no shutdown
use-profile 201 peer-info ipaddr 100.100.100.5 special-
frame peer-wwn 20:00:00:05:30:00:7a:de profile-id 2
canterbury# sh int fcip 1 fcip1 is trunking Hardware is
GigabitEthernet Port WWN is 20:42:00:0c:30:6c:24:40 Peer
port WWN is 20:c2:00:05:30:00:7a:de Admin port mode is
auto, trunk mode is auto Port mode is TE vsan is 1
Belongs to port-channel 2 Trunk vsans (allowed active)
(600-601) Trunk vsans (operational) (600-601) Trunk
vsans (up) (600-601) Trunk vsans (isolated) ( ) Trunk
vsans (initializing) ( ) Using Profile id 200 (interface
GigabitEthernet2/1) Peer Information Peer Internet
address is 100.100.100.1 and port is 3225 Special Frame
is enabled Peer switch WWN is 20:00:00:05:30:00:7a:de
Peer profile id is 1 Maximum number of TCP connections
is 2 Time Stamp is disabled QOS control code point is 0
QOS data code point is 0 B-port mode disabled TCP
Connection Information 2 Active TCP connections Control
connection: Local 200.200.200.1:3225, Remote
100.100.100.1:65372 Data connection: Local
200.200.200.1:3225, Remote 100.100.100.1:65374 2
Attempts for active connections, 0 close of connections
TCP Parameters Path MTU 3000 bytes Current
retransmission timeout is 200 ms Round trip time:
Smoothed 2 ms, Variance: 1 Advertized window: Current:
118 KB, Maximum: 118 KB, Scale: 1 Peer receive window:
Current: 118 KB, Maximum: 118 KB, Scale: 1 Congestion
window: Current: 10 KB, Slow start threshold: 112 KB 5
minutes input rate 94347400 bits/sec, 11793425
bytes/sec, 10031 frames/sec 5 minutes output rate 144
bits/sec, 18 bytes/sec, 0 frames/sec 3985861 frames
input, 4685834196 bytes 219 Class F frames input, 25228
bytes 3985642 Class 2/3 frames input, 4685808968 bytes 0
Error frames timestamp error 0 1043 frames output,
866780 bytes 218 Class F frames output, 23448 bytes 825
Class 2/3 frames output, 843332 bytes 0 Error frames 0
reass frames canterbury# sh int fcip 2 fcip2 is trunking
Hardware is GigabitEthernet Port WWN is
```

```

20:46:00:0c:30:6c:24:40 Peer port WWN is
20:c6:00:05:30:00:7a:de Admin port mode is auto, trunk
mode is auto Port mode is TE vsan is 1 Belongs to port-
channel 2 Trunk vsans (allowed active) (600-601) Trunk
vsans (operational) (600-601) Trunk vsans (up) (600-601)
Trunk vsans (isolated) ( ) Trunk vsans (initializing) ( )
Using Profile id 201 (interface GigabitEthernet2/2) Peer
Information Peer Internet address is 100.100.100.5 and
port is 3225 Special Frame is enabled Peer switch WWN is
20:00:00:05:30:00:7a:de Peer profile id is 2 Maximum
number of TCP connections is 2 Time Stamp is disabled
QOS control code point is 0 QOS data code point is 0 B-
port mode disabled TCP Connection Information 2 Active
TCP connections Control connection: Local
200.200.200.5:64535, Remote 100.100.100.5:3225 Data
connection: Local 200.200.200.5:64537, Remote
100.100.100.5:3225 500 Attempts for active connections,
0 close of connections TCP Parameters Path MTU 3000
bytes Current retransmission timeout is 300 ms Round
trip time: Smoothed 10 ms, Variance: 5 Advertized
window: Current: 118 KB, Maximum: 118 KB, Scale: 1 Peer
receive window: Current: 118 KB, Maximum: 118 KB, Scale:
1 Congestion window: Current: 8 KB, Slow start
threshold: 118 KB 5 minutes input rate 94399712
bits/sec, 11799964 bytes/sec, 10034 frames/sec 5 minutes
output rate 0 bits/sec, 0 bytes/sec, 0 frames/sec
9769115 frames input, 11486944196 bytes 16 Class F
frames input, 2460 bytes 9769099 Class 2/3 frames input,
11486941736 bytes 0 Error frames timestamp error 0 415
frames output, 398160 bytes 16 Class F frames output,
2460 bytes 399 Class 2/3 frames output, 395700 bytes 0
Error frames 0 reass frames

```

从北美野牛和坎特伯雷显示-坎特伯雷被动

```

interface fcip1
channel-group 2 force
no shutdown
use-profile 200
passive-mode peer-info ipaddr 100.100.100.1 special-
frame peer-wwn 20:00:00:05:30:00:7a:de profile-id 1
interface fcip2 channel-group 2 force no shutdown use-
profile 201 passive-mode peer-info ipaddr 100.100.100.5
special-frame peer-wwn 20:00:00:05:30:00:7a:de profile-
id 2 canterbury# sh ips stats tcp int gig 2/1 TCP
Statistics for port GigabitEthernet2/1 Connection Stats
20 active openings, 14 accepts 14 failed attempts, 0
reset received, 14 established Segment stats 12042719
received, 3181301 sent, 0 retransmitted 0 bad segments
received, 0 reset sent TCP Active Connections Local
Address Remote Address State Send-Q Recv-Q
200.200.200.1:3225 100.100.100.1:65368 ESTABLISH 0 0
200.200.200.1:3225 100.100.100.1:65370 ESTABLISH 0 0
200.200.200.1:3225 100.100.100.1:65372 TIME_WAIT 0 0
200.200.200.1:3225 0.0.0.0:0 LISTEN 0 0 !--- Both FCIP
interfaces for Canterbury are configured to be passive;
this !--- results in the above TCP statistics where
Canterbury, despite being !--- configured with the
highest IP addresses for both tunnels, did not !---
initiate the TCP connections. Its peer, Bison,
initiates. canterbury# sh ips stats tcp int gig 2/2 TCP
Statistics for port GigabitEthernet2/2 Connection Stats
500 active openings, 4 accepts 498 failed attempts, 0
reset received, 6 established Segment stats 11933351
received, 3144627 sent, 0 retransmitted 0 bad segments

```

```
received, 0 reset sent TCP Active Connections Local
Address Remote Address State Send-Q Recv-Q
200.200.200.5:3225 100.100.100.5:65415 ESTABLISH 0 0
200.200.200.5:3225 100.100.100.5:65417 ESTABLISH 0 0
200.200.200.5:64535 100.100.100.5:3225 TIME_WAIT 0 0
200.200.200.5:3225 0.0.0.0:0 LISTEN 0 0
```

从北美野牛和坎特伯雷显示-时间戳集

```
!--- FCIP Time Stamp is enabled to allow the peer to
drop FCIP userdata if it !--- exceeds the specified
time-difference. The time difference is the maximum !---
value in transit of user data frames between two peer
FCIP entities. bison(config-if)# time-stamp acceptable-
diff 1000 Please enable NTP with a common time source on
both MDS Switches that are on either side of the FCIP
link !--- Note that the value specified is in
milliseconds and, because a !--- time difference is
specified, both ends of the FCIP tunnel must have access
!--- to the same clock source through NTP. interface
fcip1 channel-group 1 force no shutdown use-profile 1
peer-info ipaddr 200.200.200.1 time-stamp acceptable-
diff 1000 special-frame peer-wwn 20:00:00:0c:30:6c:24:40
profile-id 200 interface fcip2 channel-group 1 force no
shutdown use-profile 2 peer-info ipaddr 200.200.200.5
time-stamp acceptable-diff 1000 special-frame peer-wwn
20:00:00:0c:30:6c:24:40 profile-id 201 bison# sh int
fcip 1 fcip1 is trunking Hardware is GigabitEthernet
Port WWN is 20:c2:00:05:30:00:7a:de Peer port WWN is
20:42:00:0c:30:6c:24:40 Admin port mode is auto, trunk
mode is on Port mode is TE vsan is 1 Belongs to port-
channel 1 Trunk vsans (allowed active) (600-601) Trunk
vsans (operational) (600-601) Trunk vsans (up) (600-601)
Trunk vsans (isolated) ( ) Trunk vsans (initializing) ( )
Using Profile id 1 (interface GigabitEthernet4/1) Peer
Information Peer Internet address is 200.200.200.1 and
port is 3225 Special Frame is enabled Peer switch WWN is
20:00:00:0c:30:6c:24:40 Peer profile id is 200 Maximum
number of TCP connections is 2 Time Stamp is enabled,
acceptable time difference 1000 ms QOS control code
point is 0 QOS data code point is 0 B-port mode disabled
TCP Connection Information 2 Active TCP connections
Control connection: Local 100.100.100.1:65368, Remote
200.200.200.1:3225 Data connection: Local
100.100.100.1:65370, Remote 200.200.200.1:3225 84
Attempts for active connections, 10 close of connections
TCP Parameters Path MTU 3000 bytes Current
retransmission timeout is 200 ms Round trip time:
Smoothed 2 ms, Variance: 3 Advertized window: Current:
118 KB, Maximum: 118 KB, Scale: 1 Peer receive window:
Current: 118 KB, Maximum: 118 KB, Scale: 1 Congestion
window: Current: 10 KB, Slow start threshold: 118 KB 5
minutes input rate 0 bits/sec, 0 bytes/sec, 0 frames/sec
5 minutes output rate 0 bits/sec, 0 bytes/sec, 0
frames/sec 5988 frames input, 1743840 bytes 4719 Class F
frames input, 443184 bytes 1269 Class 2/3 frames input,
1300656 bytes 0 Error frames timestamp error 0 15337275
frames output, 18028320932 bytes 4720 Class F frames
output, 445544 bytes 15332555 Class 2/3 frames output,
18027875388 bytes 0 Error frames 0 reass frames
canterbury(config-if)# time-stamp acceptable-diff 1000
Please enable NTP with a common time source on both MDS
Switches that are on either side of the FCIP link
interface fcip1 channel-group 2 force no shutdown use-
```



```
profile 200 passive-mode peer-info ipaddr 100.100.100.1
time-stamp acceptable-diff 1000 special-frame peer-wnn
20:00:00:05:30:00:7a:de profile-id 1 interface fcip2
channel-group 2 force no shutdown use-profile 201
passive-mode peer-info ipaddr 100.100.100.5 time-stamp
acceptable-diff 1000 special-frame peer-wnn
20:00:00:05:30:00:7a:de profile-id 2 canterbury# sh int
fcip 1 fcip1 is trunking Hardware is GigabitEthernet
Port WWN is 20:42:00:0c:30:6c:24:40 Peer port WWN is
20:c2:00:05:30:00:7a:de Admin port mode is auto, trunk
mode is auto Port mode is TE vsan is 1 Belongs to port-
channel 2 Trunk vsans (allowed active) (600-601) Trunk
vsans (operational) (600-601) Trunk vsans (up) (600-601)
Trunk vsans (isolated) ( ) Trunk vsans (initializing) ( )
Using Profile id 200 (interface GigabitEthernet2/1) Peer
Information Peer Internet address is 100.100.100.1 and
port is 3225 Passive mode is enabled Special Frame is
enabled Peer switch WWN is 20:00:00:05:30:00:7a:de Peer
profile id is 1 Maximum number of TCP connections is 2
Time Stamp is enabled, acceptable time difference 1000
ms QOS control code point is 0 QOS data code point is 0
B-port mode disabled TCP Connection Information 2 Active
TCP connections Control connection: Local
200.200.200.1:3225, Remote 100.100.100.1:65368 Data
connection: Local 200.200.200.1:3225, Remote
100.100.100.1:65370 2 Attempts for active connections, 0
close of connections TCP Parameters Path MTU 3000 bytes
Current retransmission timeout is 200 ms Round trip
time: Smoothed 6 ms, Variance: 6 Advertized window:
Current: 118 KB, Maximum: 118 KB, Scale: 1 Peer receive
window: Current: 118 KB, Maximum: 118 KB, Scale: 1
Congestion window: Current: 10 KB, Slow start threshold:
112 KB 5 minutes input rate 0 bits/sec, 0 bytes/sec, 0
frames/sec 5 minutes output rate 0 bits/sec, 0
bytes/sec, 0 frames/sec 9427366 frames input,
11084654892 bytes 295 Class F frames input, 32716 bytes
9427071 Class 2/3 frames input, 11084622176 bytes 145359
Error frames timestamp error 145359 1122 frames output,
874528 bytes 294 Class F frames output, 30932 bytes 828
Class 2/3 frames output, 843596 bytes 0 Error frames 0
reass frames
```

相关信息

- [T11 主页](#)
- [在TCP缓慢启动重新启动的问题在空闲以后](#)
- [RFC 1191 -路径MTU发现](#)
- [RFC 1323 -高性能的TCP扩展](#)
- [RFC 2018 - TCP选择性应答选项](#)
- [RFC 2883 -对选择性应答\(SACK\)选项的一分机TCP的](#)
- [RFC 3821 - 基于 TCP/IP 的光纤通道 \(FCIP\)](#)
- [技术支持和文档 - Cisco Systems](#)