

CVR100W VPN路由器上的WiFi Protected Setup(WPS)

目標

WiFi Protected Setup(WPS)是一種在啟用WPS的裝置與無線網路之間建立連線的快速簡便方法。無線裝置可以通過WPS輕鬆安全地連線到網路。WPS非常有用，因為它減少了管理員在無線區域網中設定和配置安全所需的時間。

本文說明如何在CVR100W VPN路由器上配置WPS設定。

適用的裝置


·CVR100W VPN路由器

軟體版本

•1.0.1.19

WPS設定

步驟1.登入到Web配置實用程式並選擇Wireless > WPS。WPS頁面隨即開啟：

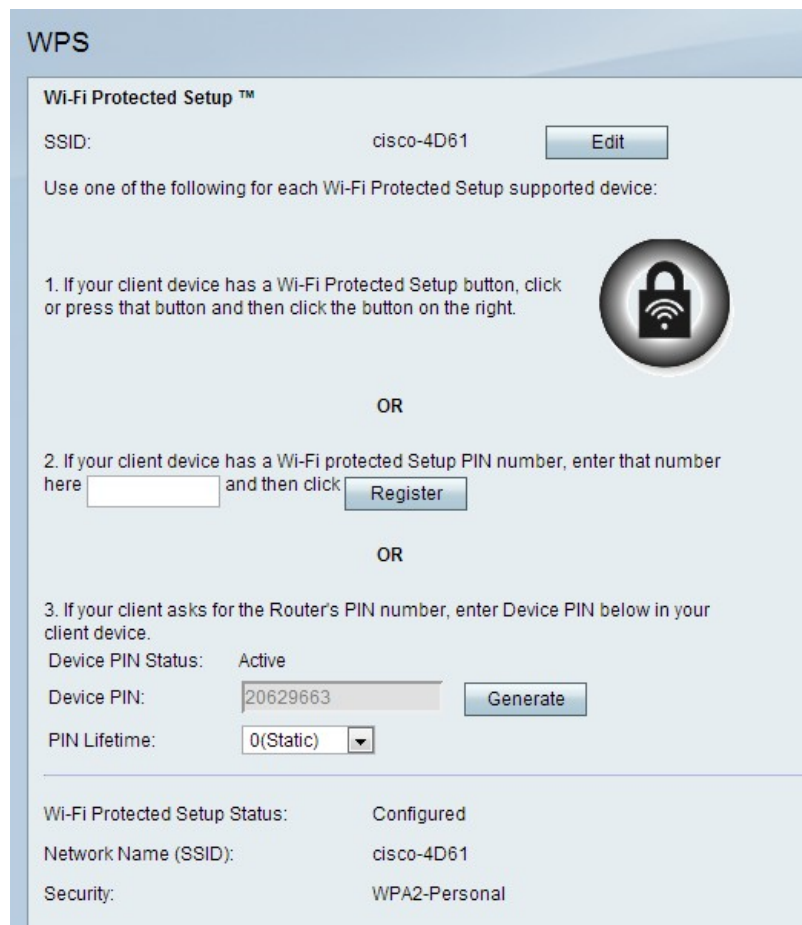

The screenshot shows the WPS configuration page with the following details:

- Wi-Fi Protected Setup™**
- SSID: cisco-4D61 (with an Edit button)
- Instruction: Use one of the following for each Wi-Fi Protected Setup supported device:
- Option 1: If your client device has a Wi-Fi Protected Setup button, click or press that button and then click the button on the right. (Accompanied by a Wi-Fi Protected Setup icon)
- OR
- Option 2: If your client device has a Wi-Fi protected Setup PIN number, enter that number here [input field] and then click [Register button]
- OR
- Option 3: If your client asks for the Router's PIN number, enter Device PIN below in your client device.
- Device PIN Status: Active
- Device PIN: 20629663 (with a Generate button)
- PIN Lifetime: 0(Static) (dropdown menu)
- Summary section:
 - Wi-Fi Protected Setup Status: Configured
 - Network Name (SSID): cisco-4D61
 - Security: WPA2-Personal

步驟2.按一下Edit以更改WPS設定應用到的服務集識別符號(SSID)。SSID標識無線網路。預

設SSID是SSID1。

附註：如果「Edit (編輯)」按鈕變暗，請參閱在CVR100W VPN路由器上配置基本無線設定一文以啟用該單選按鈕。

步驟3.選擇WPS方法。有三個可用選項。

- WPS方法1 — 如果客戶端裝置有WPS按鈕，則使用此選項
- WPS方法2 — 如果客戶端裝置具有WPS PIN號，則使用此選項。
- WPS方法3 — 如果客戶端裝置請求CVR100W VPN路由器PIN號，則使用此選項。

WPS方法1

步驟1.按實際位於遠端裝置上的Wi-Fi Protected Setup按鈕。

Wi-Fi Protected Setup™

SSID: Cisco-4D61

Use one of the following for each Wi-Fi Protected Setup supported device:

1. If your client device has a Wi-Fi Protected Setup button, click or press that button and then click the button on the right.



OR

2. If your client device has a Wi-Fi protected Setup PIN number, enter that number here and then click

OR

3. If your client asks for the Router's PIN number, enter Device PIN below in your client device.

Device PIN Status: Active

Device PIN:

PIN Lifetime: ▼

步驟2.按一下此頁上的WPS按鈕，或按CVR100W VPN路由器頂面板上的WPS按鈕。

附註：請參閱配置CVR100W VPN路由器上的基本無線設定文章，以在遠端裝置上配置基本無線設定，並將SSID與WPS按鈕相關聯。

有關無線保護設定的進一步說明，請參閱客戶端裝置或客戶端裝置的文檔。


WPS方法2

Wi-Fi Protected Setup™

SSID: Cisco-4D61

Use one of the following for each Wi-Fi Protected Setup supported device:

1. If your client device has a Wi-Fi Protected Setup button, click or press that button and then click the button on the right.



OR

2. If your client device has a Wi-Fi protected Setup PIN number, enter that number here and then click

OR

3. If your client asks for the Router's PIN number, enter Device PIN below in your client device.

Device PIN Status: Active

Device PIN:

PIN Lifetime: ▼

步驟1.在WPS PIN號欄位中輸入裝置的PIN號。可以從客戶端裝置上的Wi-Fi配置檔案獲取PIN。

步驟2.按一下**Register**。


有關無線保護設定的進一步說明，請參閱您的客戶端裝置或客戶端裝置的文檔。

WPS方法3

Wi-Fi Protected Setup™

SSID: Cisco-4D61

Use one of the following for each Wi-Fi Protected Setup supported device:

1. If your client device has a Wi-Fi Protected Setup button, click or press that button and then click the  button on the right.

OR

2. If your client device has a Wi-Fi protected Setup PIN number, enter that number here and then click

OR

3. If your client asks for the Router's PIN number, enter Device PIN below in your client device.

Device PIN Status: Active

Device PIN:

PIN Lifetime:

步驟1.在客戶端裝置上，輸入Device PIN欄位中列出的PIN碼。

附註：PIN也列在CVR100W VPN路由器底部的標籤上。

步驟2. (可選) 要獲取新的裝置PIN碼，請按一下**Generate**。

有關無線保護設定的進一步說明，請參閱客戶端裝置或客戶端裝置的文檔。

步驟3.從PIN Lifetime下拉選單中，選擇生成新PIN之前經過的時間。

Wi-Fi保護的設定狀態

Wi-Fi Protected Setup Status:	Configured
Network Name (SSID):	Cisco-4D61
Security:	WPA2-Personal

頁面底部顯示Wi-Fi保護設定狀態。

- Wi-Fi Protected Setup Status — 這表示是否已配置Wi-Fi Protected Setup Status。
- 網路名稱(SSID) — 顯示SSID的名稱。
- 安全性 — 顯示無線網路的安全型別。