

WAP121和WAP321存取點上的MAC地址過濾

目標

MAC位址是指定給每個網路介面卡(NIC)的唯一位址，且無法變更。透過MAC位址過濾器，您可以提高網路的安全性，因為您可以允許/拒絕某些MAC位址存取網路。這樣可為網路上的裝置提供額外的安全性，並可防止網路入侵。本文說明如何在WAP121和WAP321存取點上配置MAC地址過濾

適用裝置

- WAP121
- WAP321

軟體版本


- 1.0.3.4

MAC 位址過濾

步驟 1. 登入Web配置實用程式，然後選擇Wireless > MAC Filtering。此時將打開MAC Filtering頁：

MAC Filtering

Filter: Allow only stations in list
 Block all stations in list

Stations List: 

Remove

MAC Address: : : : : : Add


Save

步驟 2. 在Filter欄位中，按一下所需的選項以選擇如何允許MAC地址透過AP訪問網路。

- 僅允許清單中的站點-只允許網路訪問站點清單中列出的MAC地址。
- 阻止清單中的所有站點-阻止對站點清單中的所有MAC地址的網路訪問。

MAC Filtering

Filter: Allow only stations in list
 Block all stations in list

Stations List: 


Remove

MAC Address: : : : : : Add (xx:xx:xx:xx:xx:xx)

Save


步驟 3.在MAC Address欄位中輸入要允許或阻止的裝置的MAC地址，然後點選Add將MAC地址增加到清單中。

注意：重複步驟3，直到輸入完要允許或阻止的所有MAC地址為止。



The screenshot shows the 'MAC Filtering' configuration interface. At the top, the title 'MAC Filtering' is displayed. Below it, the 'Filter:' section has two radio buttons: 'Allow only stations in list' (selected) and 'Block all stations in list'. Underneath is a 'Stations List' area with an empty list box and a 'Remove' button below it. At the bottom, the 'MAC Address:' field is divided into six boxes labeled AA, BB, CC, DD, EE, and FF. To the right of these boxes is an 'Add' button, which is circled in red. Further right is a placeholder '(XX:XX:XX:XX:XX:XX)'. At the very bottom, there is a 'Save' button.

第4步：（可選）如果要從清單中刪除MAC地址，請從站點清單中點選要刪除的MAC地址，然後點選刪除以將所選MAC地址從清單中刪除。

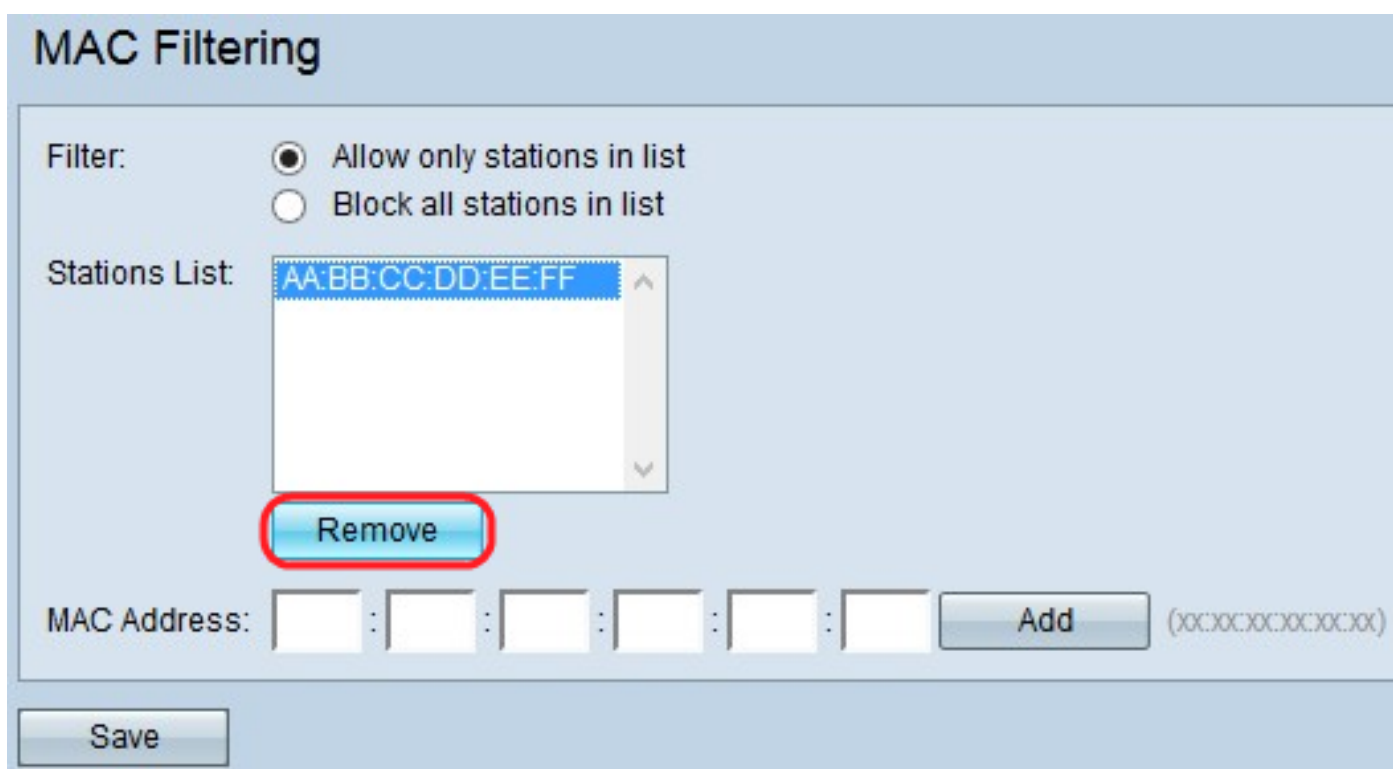

The screenshot shows the 'MAC Filtering' configuration interface. At the top, the title 'MAC Filtering' is displayed. Below it, the 'Filter:' section has two radio buttons: 'Allow only stations in list' (selected) and 'Block all stations in list'. Underneath is a 'Stations List' area with a list box containing the text 'AA:BB:CC:DD:EE:FF' highlighted in blue. Below the list box is a 'Remove' button, which is circled in red. At the bottom, the 'MAC Address:' field is divided into six empty boxes. To the right of these boxes is an 'Add' button. Further right is a placeholder '(XX:XX:XX:XX:XX:XX)'. At the very bottom, there is a 'Save' button.

步驟 5.按一下Save儲存對MAC過濾所做的所有更改。

關於此翻譯

思科已使用電腦和人工技術翻譯本文件，讓全世界的使用者能夠以自己的語言理解支援內容。請注意，即使是最佳機器翻譯，也不如專業譯者翻譯的內容準確。Cisco Systems, Inc. 對這些翻譯的準確度概不負責，並建議一律查看原始英文文件（提供連結）。