

# Unity Diagnostic Tool: Identify the Codec in Use for a Call

Document ID: 67175

---

**Introduction**

**Prerequisites**

Requirements

Components Used

Conventions

**Identify the Codec in Use**

**NetPro Discussion Forums – Featured Conversations**

**Related Information**

---

## Introduction

This document describes how to verify the codec in use for a specific call through the Unity Diagnostic Tool in a Cisco CallManager and Cisco Unity environment.

## Prerequisites

### Requirements

Cisco recommends that you have knowledge of these topics:

- Cisco CallManager
- Cisco Unity

### Components Used

The information in this document is based on these software and hardware versions:

- Cisco CallManager
- Cisco Unity

The information in this document was created from the devices in a specific lab environment. All of the devices used in this document started with a cleared (default) configuration. If your network is live, make sure that you understand the potential impact of any command.

### Conventions

Refer to Cisco Technical Tips Conventions for more information on document conventions.

## Identify the Codec in Use

Complete these steps to identify the codec in use from Cisco Unity.

1. Run Configure Micro Traces.

Use this task to configure individual component traces and levels.

- a. Select **Start > Programs > Unity > Unity Diagnostic Tool**.
- b. Double-click **Configure Micro Traces** (see arrow A in Figure 1).


The Welcome to the Configure Micro Traces Wizard window displays (see Figure 2).

**Figure 1 Cisco Unity Diagnostic Tasks**




- c. Click **Next** (see arrow A in Figure 2). The Configure Micro Traces wizard displays (see Figure 3).

**Figure 2 Welcome to the Configure Micro Traces Wizard**

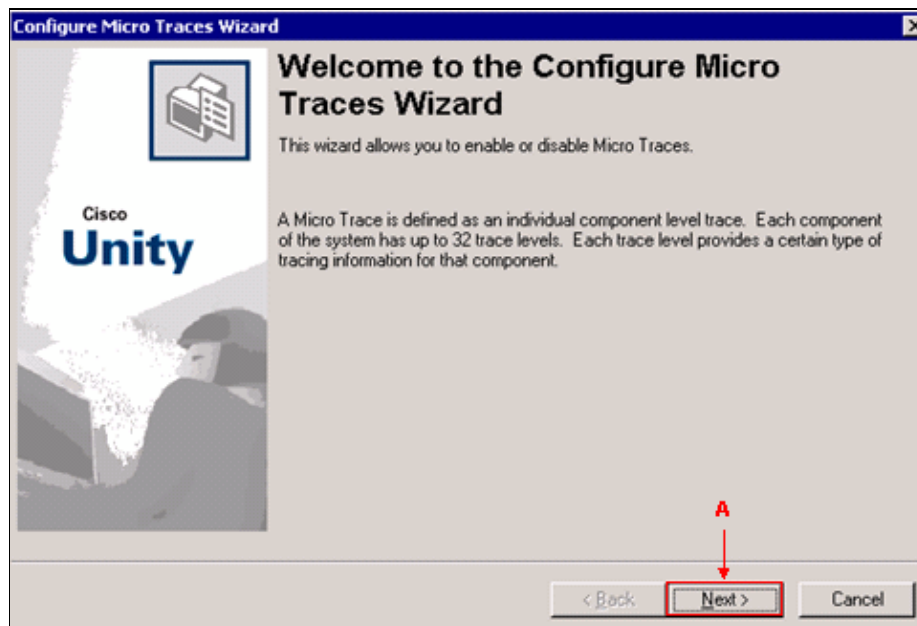

- d. Check **SkinnyTsp** (see arrow A in Figure 3).


**Figure 3 Configure Micro Traces**

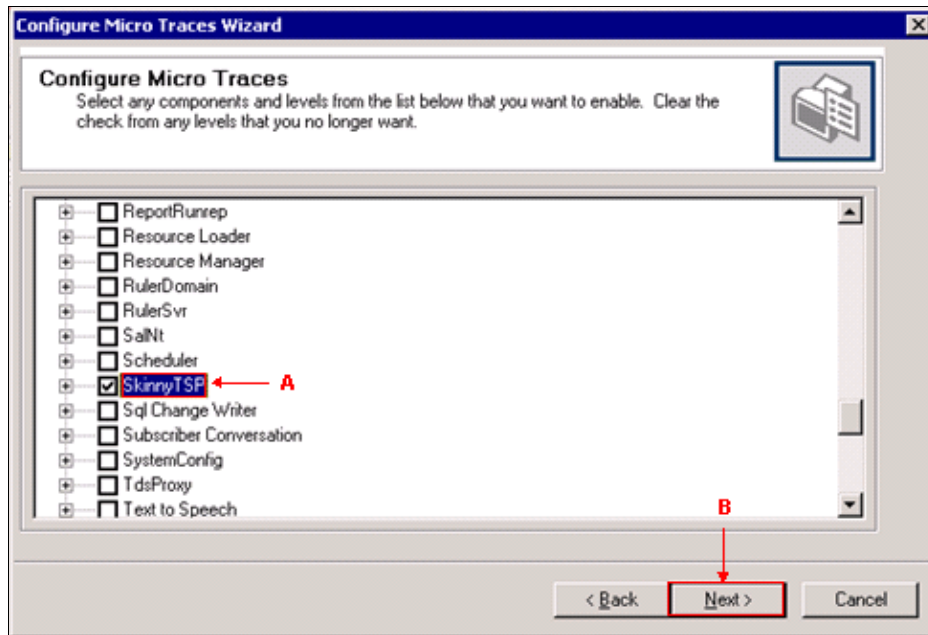

- e. Click **Next** (see arrow B in Figure 3).
  - f. Click **Finish**.
2. Double-click **Start New Log Files** to start a new log file (see arrow B in Figure 1).
  3. Make a phone call.
  4. Double-click **Start New Log Files** to close current log files.
  5. Locate the correct log in the c:\CommServer\Log.s.

The format of the file name is diag\_svchost\_XXXXXXXX\_YYYYYY where XXXXXXXX represents the year and date, and YYYYYY represents the hour, minute, and second. In this case, the file name is diag\_svchost\_20051003\_220000 (see arrow A in Figure 4).

**Figure 4 Log Folder – C:\CommServer\Log.s**

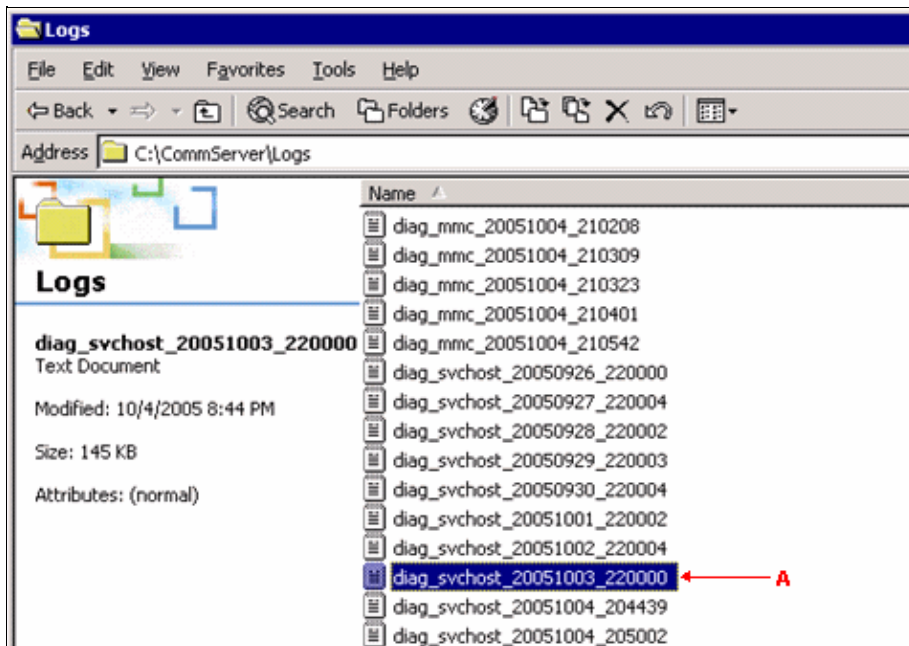

6. Open the log files with Notepad and search a line similar to this output:

**Note:** This output is displayed over multiple lines due to space limitations.

```
Receive StationOpenReceiveChannelMessage (72 bytes) conferenceID=16777218
passThruPartyID=16777249 millisecondPacketSize=20 compressionType=4=Media_Payload_G7
qualifierIn=[ecValue=0=Media_EchoCancellation_Off g723BitRate=0] callReference=16777
```

In this case, the `compressionType=4` represents G.711 (see the bold characters in the output). If the `compressionType=11` is displayed, it represents G.729A.

## NetPro Discussion Forums – Featured Conversations

Networking Professionals Connection is a forum for networking professionals to share questions, suggestions, and information about networking solutions, products, and technologies. The featured links are some of the most recent conversations available in this technology.

NetPro Discussion Forums – Featured Conversations for Voice
Service Providers: Voice over IP
Voice & Video: Voice over IP
Voice & Video: IP Telephony
Voice & Video: IP Phone Services for End Users
Voice & Video: Unified Communications
Voice & Video: IP Phone Services for Developers
Voice & Video: General

## Related Information

- [Voice Technology Support](#)
- [Voice and IP Communications Product Support](#)
- [Recommended Reading: Troubleshooting Cisco IP Telephony](#)
- [Technical Support & Documentation – Cisco Systems](#)

---

All contents are Copyright © 2006–2007 Cisco Systems, Inc. All rights reserved. Important Notices and Privacy Statement.

---

Updated: Jul 27, 2007

Document ID: 67175

---