

# Gateway del ingreso a PSTN IOS al flujo de llamada del CVP (la cola de la llamada y recoge)

## Contenido

[Introducción](#)

[prerrequisitos](#)

[Requisitos](#)

[Componentes Utilizados](#)

[Convenciones](#)

[Configurar](#)

[Diagrama de la red](#)

[Configuraciones](#)

[Ejemplo de flujo de llamada](#)

[Verificación](#)

[Troubleshooting](#)

[Comandos para resolución de problemas](#)

['Resultados de la depuración'](#)

[Información Relacionada](#)

## [Introducción](#)

Cisco Customer Voice Portal (CVP) proporciona aplicaciones de respuesta de voz interactiva (IVR) e inteligente a las que se puede acceder a través del teléfono. Hay tres tipos de implementaciones de CVP:

- Servicio independiente
- Control de llamadas del CVP
- Llame la cola y recoja

Este documento describe el flujo de llamada desde la perspectiva de H.323 basó el gateway de ingreso IOS® en una cola de la llamada y recoge el despliegue.

En la cola de la llamada y recoja el despliegue, el CVP obra recíprocamente con el Intelligent Contact Management (ICM) para tomar las decisiones de ruteo de llamadas. El ICM solicita el CVP para proporcionar el tratamiento del Voice Response Unit (VRU) a la llamada entrante para jugar los prompts del menú y recoger los dígitos para determinar al grupo de capacidades que se seleccionará. Cuando han identificado al grupo de capacidades y un agente del grupo de capacidades está disponible, el ICM solicita el CVP para conectar la llamada entrante con el teléfono del IP del agente vía el Cisco CallManager. Si el agente no está disponible, CVP de las peticiones ICM para proporcionar el tratamiento de la cola de la llamada (por ejemplo juegue un prompt del música-en-control). El CVP proporciona el VRU o el tratamiento de la cola de la llamada usando un gateway VXML.

# prerrequisitos

## Requisitos

No hay requisitos específicos para este documento

## Componentes Utilizados

La información que contiene este documento se basa en las siguientes versiones de software y hardware.

- Gateway del ingreso a PSTN IOS: Cisco 2821, IOS 12.4(15)T1
- Portero IOS: Cisco 2651XM, IOS 12.4(7f)
- Gateway IOS VXML: Cisco AS5400XM, IOS 12.4(15)T1
- Portal de la Voz de Cisco: CVP 4.0
- Cisco CallManager 5.1.2
- Servidor ASR/TTS: Matiz ASR v8.5 y TTS v4.0.6

La información que contiene este documento se creó a partir de los dispositivos en un ambiente de laboratorio específico. Todos los dispositivos que se utilizan en este documento se pusieron en funcionamiento con una configuración verificada (predeterminada). Si la red está funcionando, asegúrese de haber comprendido el impacto que puede tener cualquier comando.

## Convenciones

Consulte [Convenciones de Consejos TécnicosCisco](#) para obtener más información sobre las convenciones del documento.


## Configurar

En esta sección encontrará la información para configurar las funciones descritas en este documento.

**Nota:** Use la herramienta [Command Lookup Tool](#) ([clientes registrados solamente](#)) para encontrar más información sobre los comandos usados en este documento.

## Diagrama de la red

En este documento, se utiliza esta configuración de red:

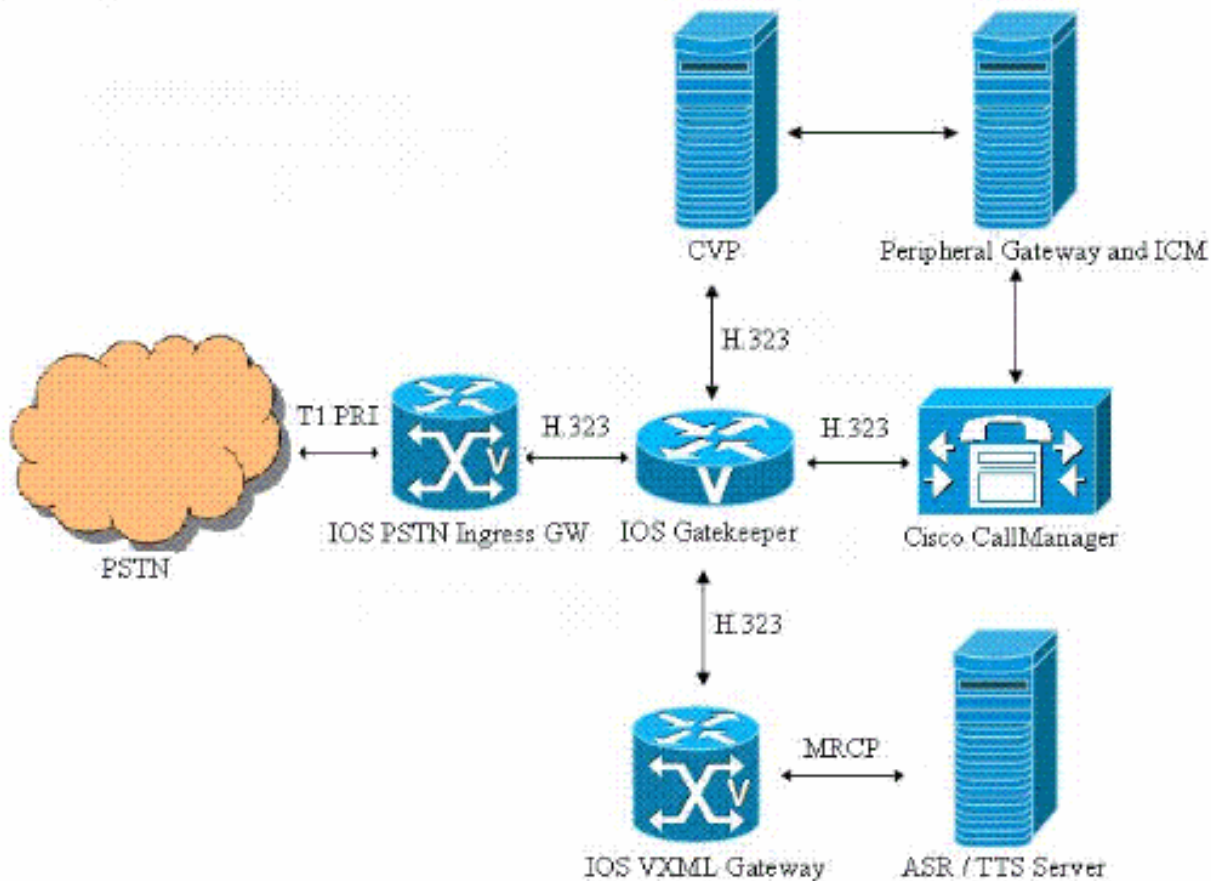

## Configuraciones

En este documento, se utilizan estas configuraciones:

- [Configuración de gateway de ingreso](#)
- [Configuración de Gatekeeper \(control de acceso\)](#)
- [Configuración de gateway VXML](#)

### Configuración de gateway de ingreso

```
!--- Configure the IOS PSTN Ingress GW to register with
the IOS Gatekeeper. interface GigabitEthernet0/1 ip
address 14.50.201.11 255.255.255.0 h323-gateway voip
interface h323-gateway voip id IPCC-GW ipaddr
14.50.201.14 1719 h323-gateway voip h323-id PSTN-GW
h323-gateway voip bind srcaddr 14.50.201.11 !---
Configure the T1 PRI. controller T1 1/0/0 framing esf
linecode b8zs pri-group timeslots 1-24 !--- Configure
the ISDN switch type and incoming-voice under the D-
channel interface. interface Serial1/0/0:23 no ip
address encapsulation hdlc isdn switch-type primary-ni
isdn incoming-voice voice no cdp enable !--- Configure a
POTS dial-peer that will be used as inbound dial-peer
for calls !--- coming in across the T1 PRI line. dial-
peer voice 2 pots description PSTN PRI Circuit incoming
```

```
called-number . direct-inward-dial port 1/0/0:23 !---  
Configure an outbound voip dial-peer to route calls to  
the CVP. !--- Gateway sends ARQ to Gatekeeper for call  
routing decision. dial-peer voice 1 voip description "To  
IPCC" destination-pattern 800..... session target ras  
tech-prefix 2# dtmf-relay rtp-nte codec g711ulaw no vad
```

## Configuración de Gatekeeper (control de acceso)

```
!--- Configure the local zones and zone prefixes. In  
this example, !--- VXML GW registers with Gatekeeper  
with Tech-Prefix 1# !--- CVP registers with Gatekeeper  
with Tech-Prefix 2# !--- CCM registers with CCM with  
Tech-Prefix 3# !--- CVP handles calls with called number  
in the 800555.... range !--- CCM handles calls with called  
numbers in the 75... range (agent dn range) !--- VXML  
Gateway handles calls with called numbers starting with  
8001112222 (network vru label) gatekeeper zone local  
IPCC-GW cisco.com 14.50.201.14 zone local IPCC-VXML  
cisco.com zone local IPCC-CCM cisco.com zone local IPCC-  
CVP cisco.com zone prefix IPCC-CCM 75... zone prefix  
IPCC-CVP 800555.... zone prefix IPCC-VXML 8001112222*  
gw-type-prefix 1#* default-technology no shutdown!
```

## Configuración de gateway VXML

```
!--- Define Hostname to IP Address mapping for ASR and  
TTS servers. ip host asrtts-en-us 14.50.201.16 !---  
Define the amount of maximum memory to used for  
downloaded prompts. ivr prompt memory 15000 !--- Define  
the RTSP URI of ASR and TTS Server. ivr asr-server  
rtsp://asrtts-en-us/recognizer ivr tts-server  
rtsp://asrtts-en-us/synthesizer !--- Configure an  
application service for CVPErrror.tcl. application  
service cvperror flash:cvperror.tcl paramspace english  
language en paramspace english index 0 paramspace  
english location flash paramspace english prefix en !---  
Configure an application service for CVP bootstrap.vxml  
and bootstrap.tcl. service new-call flash:bootstrap.vxml  
paramspace english language en paramspace english index  
0 paramspace english location flash paramspace english  
prefix en ! service bootstrap flash:bootstrap.tcl  
paramspace english language en paramspace english index  
0 paramspace english location flash paramspace english  
prefix en !--- Configure an application service for CVP  
handoff.tcl. service handoff flash:handoff.tcl  
paramspace english language en paramspace english index  
0 paramspace english location flash paramspace english  
prefix en !--- Specify that the Gateway's RTP stream to  
the ASR / TTS to go around the !--- Content Service  
Switch instead of through the CSS. mrcp client rtpsetup  
enable !--- Specify the maximum memory size for the HTTP  
Client Cache. http client cache memory pool 15000 !---  
Specify the maximum number of file that can be stored in  
the HTTP Client Cache. http client cache memory file 500  
!--- Disable Persistent HTTP Connections. no http client  
connection persistent !--- Configure the VXML GW to  
register with the IOS Gatekeeper. interface  
GigabitEthernet0/0 ip address 14.50.201.15 255.255.255.0  
h323-gateway voip interface h323-gateway voip id IPCC-  
VXML ipaddr 14.50.201.14 1719 h323-gateway voip h323-id
```

```

VXML-GW h323-gateway voip tech-prefix 1# h323-gateway
voip bind srcaddr 14.50.201.15 !--- Configure an inbound
voip dial-peer to block calls with called number !---
starting with 987654. voice translation-rule 1 rule 1
/987654/ // ! ! voice translation-profile block
translate called 1 dial-peer voice 987654 voip
description Dial-peer needed for PM Micro-App
translation-profile incoming block incoming called-
number 987654 !--- Configure a VoIP dial-peer that will
be used as inbound dial-peer for calls coming !--- in
from CVP. The "bootstrap" service is applied under this
dial-peer. !--- The "800112222" in the destination-
pattern is the VRU label that is configured in ICM.
dial-peer voice 800 voip description ICM VRU Label
translation-profile incoming block service bootstrap
incoming called-number 800112222T dtmf-relay rtp-nte
h245-signal h245-alphanumeric codec g711ulaw no vad

```

## Ejemplo de flujo de llamada

Esta sección describe el flujo de llamada ese los resultados de este ejemplo de configuración:

1. Una llamada ISDN llega el gateway PSTN/VXML a través del T1 PRI 1/0/0.
2. El gateway del IOS hace juego al POTS dial peer 2 como el dial peer de entrada para esta llamada.
3. El gateway del IOS hace juego al VoIP dial-peer 1 como el dial-peer de salida para esta llamada.
4. El gateway del IOS prepends el tecnología-prefijo "2#" al número al que se llamó y envía un ARQ al portero.
5. El portero rutea la llamada al CVP.
6. El CVP contesta que la llamada y la conexión de medios RTP está establecida entre el gateway de ingreso IOS y el CVP.
7. El CVP informa al ICM sobre la nueva llamada.
8. El ICM ejecuta el script asociado al número al que se llamó de esta llamada.
9. El ICM solicita el CVP para proporcionar el tratamiento VRU para jugar un prompt del menú (Main\_Welcome\_Menu.wav) y para recoger los dígitos para identificar al grupo de capacidades.1 para TAC2 para las ventasEl ICM también envía la escritura de la etiqueta ICM (800112222) de la red VRU al CVP.
10. El CVP envía una petición ARQ (con el destino = la escritura de la etiqueta de la red VRU) al portero.
11. El portero proporciona la dirección IP del gateway VXML en la respuesta ACF.
12. El CVP envía un H225 puesto al gateway VXML que entonces establece una sesión VXML al CVP. Refiera las interacciones al gateway estos URL para entender el gateway y el CVP VXML, y VXML y al servidor ASR/TTS:[MRCPv1MRCPv2](#)
13. El CVP desconecta su conexión de medios existente RTP al gateway de ingreso enviando H245 el TCS vacío.
14. El CVP establece una conexión de medios RTP entre el gateway de ingreso y el gateway VXML.
15. El llamador PSTN ingresa el dígito "1" seleccionar al grupo de capacidades "TAC". El gateway de ingreso envía el DTMF vía RTP NTE al gateway del gateway 16) VXML VXML señala los dígitos al CVP vía el VXML que entonces señala al ICM.
16. El gateway VXML señala los dígitos al CVP vía el VXML que entonces señala al ICM.

17. El ICM después encuentra un agente disponible del skillgroup seleccionado y solicita el CVP rutear la llamada al agente enviando la escritura de la etiqueta ICM (3#75001) del agente.
18. El CVP desconecta la conexión de medios existente RTP entre el gateway de ingreso y el gateway VXML.
19. El CVP envía una petición ARQ (con el destino = la escritura de la etiqueta del agente) al portero.
20. El portero proporciona la dirección IP del Cisco CallManager en la respuesta ACF.
21. El CVP envía un H225 puesto al Cisco CallManager que entonces establece una llamada al teléfono del IP del agente.
22. El CVP establece una conexión de medios RTP entre el gateway de ingreso y el teléfono del agente.
23. El llamador PSTN cuelga para arriba la llamada después de acabar la conversación con el agente.
24. El gateway de ingreso desconecta la llamada al CVP e informa al portero sobre la terminación de llamada.
25. El CVP entonces desconecta la llamada a CCM.

## Verificación

Utilice esta sección para confirmar que su configuración trabaja correctamente en el portero IOS.

[La herramienta Output Interpreter Tool \(clientes registrados solamente\)](#) (OIT) soporta ciertos comandos show. Utilice la OIT para ver un análisis del resultado del comando show.

- **show gatekeeper endpoints**

```
GATEKEEPER ENDPOINT REGISTRATION
```

```

=====
CallSignalAddr  Port  RASSignalAddr  Port  Zone Name          Type  Flags
-----
14.50.201.11    1720  14.50.201.11   53981 IPCC-GW            VOIP-GW

  ENDPOINT-ID: 8527186C00000002  VERSION: 4  AGE: 32 secs  SupportsAnnexE: FALSE
  g_supp_protos: 0x00000050
  H323-ID: PSTN-GW

  Voice Capacity Max.= Avail.= Current.= 0

14.50.201.15    1720  14.50.201.15   62367 IPCC-VXML          VOIP-GW

  ENDPOINT-ID: 84DB194800000003  VERSION: 4  AGE: 27 secs  SupportsAnnexE: FALSE
  g_supp_protos: 0x00000050
  H323-ID: VXML-GW

  Voice Capacity Max.= Avail.= Current.= 0

172.18.110.75   1720  172.18.110.75   1719  IPCC-CVP           VOIP-GW

```

ENDPOINT-ID: 84F5E78C00000001 VERSION: 5 AGE: 3 secs SupportsAnnexE: FALSE

g\_supp\_prots: 0x00000040

H323-ID: CVP

Voice Capacity Max.= Avail.= Current.= 0

172.18.110.84 43843 172.18.110.84 49600 IPCC-CCM VOIP-GW

ENDPOINT-ID: 852A9F2C00000004 VERSION: 5 AGE: 27 secs SupportsAnnexE: FALSE

g\_supp\_prots: 0x00000050

H323-ID: CCM-GK-Trunk\_1

Voice Capacity Max.= Avail.= Current.= 0

Total number of active registrations = 4

- **muestre el GW-tipo-prefijo del portero**

GATEWAY TYPE PREFIX TABLE

=====

Prefix: 1#\* (Default gateway-technology)

Zone IPCC-GW master gateway list:

14.50.201.11:1720 PSTN-GW

Zone IPCC-VXML master gateway list:

14.50.201.15:1720 VXML-GW

Prefix: 2#\*

Zone IPCC-CVP master gateway list:

172.18.110.75:1720 CVP

Prefix: 3#\*

Zone IPCC-CCM master gateway list:

172.18.110.84:43843 CCM-GK-Trunk\_1

Utilice esta sección para confirmar que su configuración trabaja correctamente en el **gateway del ingreso a PSTN IOS**.

- **muestre la descripción de la voz activa de la llamada**

Call is connected to VXML Gateway

11E6 : 228 2061411860ms.1 +160 pid:2 Answer 9999 active

dur 00:00:44 tx:1942/326256 rx:2221/354112

Tele 1/0/0:23 (228) [1/0/0.1] tx:44300/44300/0ms g711ulaw noise:-79 acom:7  
i/0:-44/-18 dBm

11E6 : 229 2061411870ms.1 +130 pid:1 Originate 2#8005555555 active

dur 00:00:44 tx:2215/1169571516 rx:1942/310720

IP 14.50.201.15:21134 SRTP: off rtt:0ms pl:35210/40ms lost:0/0/0 delay:55/55/65ms  
g711ulaw TextRelay: off

media inactive detected:n media contrl rcvd:n/a timestamp:n/a

long duration call detected:n long duration call duration:n/a timestamp:n/a

Telephony call-legs: 1

SIP call-legs: 0

H323 call-legs: 1

Call agent controlled call-legs: 0

SCCP call-legs: 0

Multicast call-legs: 0

Media call-legs: 0

Total call-legs: 2

**Call is connected to Agent IP Phone**

11E6 : 228 2061411860ms.1 +160 pid:2 Answer 9999 active

dur 00:01:06 tx:2848/478464 rx:3343/533632

Tele 1/0/0:23 (228) [1/0/0.1] tx:66730/66730/0ms g711ulaw noise:-54 acom:7  
i/0:-44/-44 dBm

11E6 : 229 2061411870ms.1 +130 pid:1 Originate 2#8005555555 active

dur 00:01:06 tx:3336/1169571516 rx:2848/455680

IP 14.50.202.26:17156 SRTP: off rtt:1ms pl:10290/0ms lost:0/0/0 delay:55/55/65ms  
g711ulaw TextRelay: off

media inactive detected:n media contrl rcvd:n/a timestamp:n/a

long duration call detected:n long duration call duration:n/a timestamp:n/a

Telephony call-legs: 1



```
SIP call-legs: 0
H323 call-legs: 1
Call agent controlled call-legs: 0
SCCP call-legs: 0
Multicast call-legs: 0
Media call-legs: 0
Total call-legs: 2
```

## Troubleshooting

En esta sección encontrará información que puede utilizar para solucionar problemas de configuración.

### Comandos para resolución de problemas

Configure el gateway del IOS para registrar los debugs en su memoria intermedia de registro y para inhabilitar la “consola de registro”.

Éstos son los comandos usados para configurar el gateway para salvar los debugs en memoria intermedia de registro del gateway:

- **service timestamps debug datetime msec**
- **mantenga la secuencia**
- **ninguna consola de registro**
- **el registro mitigó el debug 5000000**
- **borre el registro**

Éstos son los **comandos debug** usados para resolver problemas la configuración:

**Nota:** Consulte [Información Importante sobre Comandos de Debug](#) antes de usar un **comando debug**.

- **debug isdn q931**
- **debug voip ccapi inout**
- **ras del debug**
- **debug h225 asn1**
- **asn1 del debug h245**
- **debug cch323 h225**
- **debug cch323 h245**
- **Nombrado-evento del nte de la sesión del rtp del voip del debug**

### 'Resultados de la depuración'

Esta sección proporciona las salidas de los debugs para este flujo de llamada de la muestra:

1. [Llamada entrante del PSTN a 800-555-5555](#)

2. [El gateway de ingreso hace juego al dial peer de entrada 2](#)
3. [El gateway de ingreso hace juego al dial-peer de salida 1](#)
4. [El ingreso GW prepends el Tecnología-prefijo el "#2" y envía un pedido de admisión \(ARQ\) al portero](#)
5. [El ingreso GW envía la llamada ISDN que procede en el tramo pots](#)
6. [El ingreso GW recibe el Admission Confirm del GK. El IP Address de destino es la dirección IP del CVP \(172.18.110.75\)](#)
7. [El GW envía el mensaje setup H225 FastStart al CVP](#)
8. [El GW recibe el mensaje CONNECT H225 del CVP](#)
9. [El GW envía el Information Request Response \(IRR\) al portero](#)
10. [El GW establece la conexión TCP H245 al CVP y envía el conjunto de la Capacidad del terminal \(TCS\) y el mensaje amo-esclavo de la determinación al CVP](#)
11. [El GW recibe el mensaje TCS y MSD del CVP](#)
12. [El ingreso GW envía TCS Ack y MSD Ack al CVP](#)
13. [El ingreso GW recibe TCS y MSD ACK del CVP](#)
14. [Ahora, el CVP reorienta la conexión de medios al gateway VXML. El ingreso GW recibe el TCS vacío del CVP](#)
15. [El ingreso GW cierra su canal lógico enviando CloseLogicalChannel \(CLC\) al CVP](#)
16. [El ingreso GW envía TCS ACK al CVP](#)
17. [El ingreso GW envía el pedido de ancho de banda al portero para poner al día el ancho de banda actual \(cero\) usado para la llamada](#)
18. [El CVP cierra su canal lógico enviando el CLC al ingreso GW](#)
19. [El ingreso GW recibe el TCS y el MSD del CVP. Este TCS proporciona la información sobre las Capacidades del terminal del gateway VXML](#)
20. [El ingreso GW envía su TCS y MSD al CVP](#)
21. [El ingreso GW envía MSD Ack y TCS Ack al CVP](#)
22. [El ingreso GW envía el BRQ al portero para poner al día el ancho de banda actual usado para la llamada \(el kbps  \$2\*64=128\$ \)](#)
23. [El ingreso GW envía la petición OLC al CVP](#)
24. [El ingreso GW recibe el OLC del CVP. El CVP proporciona la dirección IP del gateway VXML para la conexión RTCP](#)
25. [El ingreso GW envía la respuesta OLC Ack al CVP](#)
26. [El ingreso GW recibe OLC Ack del CVP. El CVP proporciona la dirección IP del gateway VXML para la conexión de RTP. La conexión de RTP entre el ingreso GW y VXML GW se establece](#)
27. [El gateway detecta el dígito DTMF el "1" y lo envía vía los eventos basados del relé dtmf RTP NTE \(RFC 2833\) al VXML GW](#)
28. [Ahora, el CVP reorienta la llamada al teléfono del IP del agente que contestó a la llamada. El ingreso GW recibe el TCS vacío](#)
29. Los pasos 15 – 18 ocurren (las salidas de los debugs no mostradas)
30. [El ingreso GW recibe el TCS y el MSD del CVP. Este TCS proporciona la información sobre las Capacidades del terminal del teléfono del IP](#)
31. Los pasos 20 – 23 ocurren (las salidas de los debugs no mostradas)
32. [El ingreso GW recibe el OLC del CVP. El CVP proporciona la dirección IP del CallManager para la conexión RTCP](#)
33. [El GW envía la respuesta OLC Ack al CVP](#)
34. [El GW recibe OLC Ack del CVP. El CVP proporciona la dirección IP del teléfono del IP del agente para la conexión de RTP. La conexión de RTP entre el ingreso GW y el teléfono del](#)

IP se establece

35. Después de acabar la conversación con el agente, el llamador PSTN cuelga para arriba la llamada. El ingreso GW recibe la desconexión ISDN del PSTN
36. El ingreso GW termina la llamada H323 en la pierna IP enviando el mensaje Complete de la versión H225 al CVP
37. El GW envía DisengageRequest (DRQ) al portero
38. La conexión H245 entre el GW y el CVP consigue cerrada después del intercambio de los comandos CLC y de EndSession

**Nota:** Algunas de las líneas en la salida en esta sección se han movido a la segunda línea debido a los apremios del espacio.

### Llamada entrante del PSTN a 800-555-5555

**Call is connected to VXML Gateway**

11E6 : 228 2061411860ms.1 +160 pid:2 Answer 9999 active

dur 00:00:44 tx:1942/326256 rx:2221/354112

Tele 1/0/0:23 (228) [1/0/0.1] tx:44300/44300/0ms g711ulaw noise:-79 acom:7  
i/0:-44/-18 dBm

11E6 : 229 2061411870ms.1 +130 pid:1 Originate 2#8005555555 active

dur 00:00:44 tx:2215/1169571516 rx:1942/310720

IP 14.50.201.15:21134 SRTP: off rtt:0ms pl:35210/40ms lost:0/0/0 delay:55/55/65ms  
g711ulaw TextRelay: off

media inactive detected:n media contrl rcvd:n/a timestamp:n/a

long duration call detected:n long duration call duration:n/a timestamp:n/a

Telephony call-legs: 1

SIP call-legs: 0

H323 call-legs: 1

Call agent controlled call-legs: 0

SCCP call-legs: 0

Multicast call-legs: 0

Media call-legs: 0

Total call-legs: 2

Call is connected to Agent IP Phone

11E6 : 228 2061411860ms.1 +160 pid:2 Answer 9999 active

dur 00:01:06 tx:2848/478464 rx:3343/533632

Tele 1/0/0:23 (228) [1/0/0.1] tx:66730/66730/0ms g711ulaw noise:-54 acom:7  
i/0:-44/-44 dBm

11E6 : 229 2061411870ms.1 +130 pid:1 Originate 2#8005555555 active

dur 00:01:06 tx:3336/1169571516 rx:2848/455680

IP 14.50.202.26:17156 SRTP: off rtt:1ms pl:10290/0ms lost:0/0/0 delay:55/55/65ms  
g711ulaw TextRelay: off

media inactive detected:n media contrl rcvd:n/a timestamp:n/a

long duration call detected:n long duration call duration:n/a timestamp:n/a

Telephony call-legs: 1

SIP call-legs: 0

H323 call-legs: 1

Call agent controlled call-legs: 0

SCCP call-legs: 0

Multicast call-legs: 0

Media call-legs: 0

Total call-legs: 2

[El gateway de ingreso hace juego al dial peer de entrada 2](#)

Call is connected to VXML Gateway

11E6 : 228 2061411860ms.1 +160 pid:2 Answer 9999 active

dur 00:00:44 tx:1942/326256 rx:2221/354112

Tele 1/0/0:23 (228) [1/0/0.1] tx:44300/44300/0ms g711ulaw noise:-79 acom:7  
i/0:-44/-18 dBm

11E6 : 229 2061411870ms.1 +130 pid:1 Originate 2#8005555555 active

dur 00:00:44 tx:2215/1169571516 rx:1942/310720

IP 14.50.201.15:21134 SRTP: off rtt:0ms pl:35210/40ms lost:0/0/0 delay:55/55/65ms

g711ulaw TextRelay: off

media inactive detected:n media contrl rcvd:n/a timestamp:n/a

long duration call detected:n long duration call duration:n/a timestamp:n/a

Telephony call-legs: 1

SIP call-legs: 0

H323 call-legs: 1

Call agent controlled call-legs: 0

SCCP call-legs: 0

Multicast call-legs: 0

Media call-legs: 0

Total call-legs: 2

**Call is connected to Agent IP Phone**

11E6 : 228 2061411860ms.1 +160 pid:2 Answer 9999 active

dur 00:01:06 tx:2848/478464 rx:3343/533632

Tele 1/0/0:23 (228) [1/0/0.1] tx:66730/66730/0ms g711ulaw noise:-54 acom:7  
i/0:-44/-44 dBm

11E6 : 229 2061411870ms.1 +130 pid:1 Originate 2#8005555555 active

dur 00:01:06 tx:3336/1169571516 rx:2848/455680

IP 14.50.202.26:17156 SRTP: off rtt:lms pl:10290/0ms lost:0/0/0 delay:55/55/65ms  
g711ulaw TextRelay: off

media inactive detected:n media contrl rcvd:n/a timestamp:n/a

long duration call detected:n long duration call duration:n/a timestamp:n/a

Telephony call-legs: 1

SIP call-legs: 0

H323 call-legs: 1

Call agent controlled call-legs: 0

SCCP call-legs: 0

Multicast call-legs: 0

Media call-legs: 0

Total call-legs: 2

## [El gateway de ingreso hace juego al dial-peer de salida 1](#)

**Call is connected to VXML Gateway**

11E6 : 228 2061411860ms.1 +160 pid:2 Answer 9999 active

dur 00:00:44 tx:1942/326256 rx:2221/354112

Tele 1/0/0:23 (228) [1/0/0.1] tx:44300/44300/0ms g711ulaw noise:-79 acom:7  
i/0:-44/-18 dBm

11E6 : 229 2061411870ms.1 +130 pid:1 Originate 2#8005555555 active

dur 00:00:44 tx:2215/1169571516 rx:1942/310720

IP 14.50.201.15:21134 SRTP: off rtt:0ms pl:35210/40ms lost:0/0/0 delay:55/55/65ms  
g711ulaw TextRelay: off

media inactive detected:n media contrl rcvd:n/a timestamp:n/a

long duration call detected:n long duration call duration:n/a timestamp:n/a

Telephony call-legs: 1

SIP call-legs: 0

H323 call-legs: 1

Call agent controlled call-legs: 0

SCCP call-legs: 0

Multicast call-legs: 0

Media call-legs: 0

Total call-legs: 2

**Call is connected to Agent IP Phone**

11E6 : 228 2061411860ms.1 +160 pid:2 Answer 9999 active

dur 00:01:06 tx:2848/478464 rx:3343/533632

Tele 1/0/0:23 (228) [1/0/0.1] tx:66730/66730/0ms g711ulaw noise:-54 acom:7  
i/0:-44/-44 dBm

11E6 : 229 2061411870ms.1 +130 pid:1 Originate 2#8005555555 active

dur 00:01:06 tx:3336/1169571516 rx:2848/455680

IP 14.50.202.26:17156 SRTP: off rtt:1ms pl:10290/0ms lost:0/0/0 delay:55/55/65ms  
g711ulaw TextRelay: off

media inactive detected:n media contrl rcvd:n/a timestamp:n/a

long duration call detected:n long duration call duration:n/a timestamp:n/a

Telephony call-legs: 1

SIP call-legs: 0

H323 call-legs: 1

Call agent controlled call-legs: 0

SCCP call-legs: 0

Multicast call-legs: 0

Media call-legs: 0

Total call-legs: 2

[El ingreso GW prepends el Tecnología-prefijo el "#2" y envía un pedido de admisión \(ARQ\) al portero](#)

**Call is connected to VXML Gateway**

11E6 : 228 2061411860ms.1 +160 pid:2 Answer 9999 active

dur 00:00:44 tx:1942/326256 rx:2221/354112

Tele 1/0/0:23 (228) [1/0/0.1] tx:44300/44300/0ms g711ulaw noise:-79 acom:7  
i/0:-44/-18 dBm

11E6 : 229 2061411870ms.1 +130 pid:1 Originate 2#8005555555 active

dur 00:00:44 tx:2215/1169571516 rx:1942/310720

IP 14.50.201.15:21134 SRTP: off rtt:0ms pl:35210/40ms lost:0/0/0 delay:55/55/65ms  
g711ulaw TextRelay: off

media inactive detected:n media contrl rcvd:n/a timestamp:n/a

long duration call detected:n long duration call duration:n/a timestamp:n/a

Telephony call-legs: 1

SIP call-legs: 0

H323 call-legs: 1

Call agent controlled call-legs: 0

SCCP call-legs: 0

Multicast call-legs: 0

Media call-legs: 0

Total call-legs: 2

**Call is connected to Agent IP Phone**

11E6 : 228 2061411860ms.1 +160 pid:2 Answer 9999 active

dur 00:01:06 tx:2848/478464 rx:3343/533632

Tele 1/0/0:23 (228) [1/0/0.1] tx:66730/66730/0ms g711ulaw noise:-54 acom:7  
i/0:-44/-44 dBm

11E6 : 229 2061411870ms.1 +130 pid:1 Originate 2#8005555555 active

dur 00:01:06 tx:3336/1169571516 rx:2848/455680

IP 14.50.202.26:17156 SRTP: off rtt:1ms pl:10290/0ms lost:0/0/0 delay:55/55/65ms  
g711ulaw TextRelay: off

media inactive detected:n media contrl rcvd:n/a timestamp:n/a

long duration call detected:n long duration call duration:n/a timestamp:n/a

Telephony call-legs: 1

SIP call-legs: 0

H323 call-legs: 1

Call agent controlled call-legs: 0

SCCP call-legs: 0

Multicast call-legs: 0

Media call-legs: 0

Total call-legs: 2

**[El ingreso GW envía la llamada ISDN que procede en el tramo pots](#)**

**Call is connected to VXML Gateway**



11E6 : 228 2061411860ms.1 +160 pid:2 Answer 9999 active

dur 00:00:44 tx:1942/326256 rx:2221/354112

Tele 1/0/0:23 (228) [1/0/0.1] tx:44300/44300/0ms g711ulaw noise:-79 acom:7  
i/0:-44/-18 dBm

11E6 : 229 2061411870ms.1 +130 pid:1 Originate 2#8005555555 active

dur 00:00:44 tx:2215/1169571516 rx:1942/310720

IP 14.50.201.15:21134 SRTP: off rtt:0ms pl:35210/40ms lost:0/0/0 delay:55/55/65ms  
g711ulaw TextRelay: off

media inactive detected:n media contrl rcvd:n/a timestamp:n/a

long duration call detected:n long duration call duration:n/a timestamp:n/a

Telephony call-legs: 1

SIP call-legs: 0

H323 call-legs: 1

Call agent controlled call-legs: 0

SCCP call-legs: 0

Multicast call-legs: 0

Media call-legs: 0

Total call-legs: 2

**Call is connected to Agent IP Phone**

11E6 : 228 2061411860ms.1 +160 pid:2 Answer 9999 active

dur 00:01:06 tx:2848/478464 rx:3343/533632

Tele 1/0/0:23 (228) [1/0/0.1] tx:66730/66730/0ms g711ulaw noise:-54 acom:7  
i/0:-44/-44 dBm

11E6 : 229 2061411870ms.1 +130 pid:1 Originate 2#8005555555 active

dur 00:01:06 tx:3336/1169571516 rx:2848/455680

IP 14.50.202.26:17156 SRTP: off rtt:1ms pl:10290/0ms lost:0/0/0 delay:55/55/65ms  
g711ulaw TextRelay: off

media inactive detected:n media contrl rcvd:n/a timestamp:n/a

long duration call detected:n long duration call duration:n/a timestamp:n/a

Telephony call-legs: 1

SIP call-legs: 0

H323 call-legs: 1

Call agent controlled call-legs: 0

SCCP call-legs: 0

Multicast call-legs: 0

Media call-legs: 0

Total call-legs: 2

[El ingreso GW recibe el Admission Confirm del GK. El IP Address de destino es la dirección IP del CVP \(172.18.110.75\)](#)

**Call is connected to VXML Gateway**

11E6 : 228 2061411860ms.1 +160 pid:2 Answer 9999 active

dur 00:00:44 tx:1942/326256 rx:2221/354112

Tele 1/0/0:23 (228) [1/0/0.1] tx:44300/44300/0ms g711ulaw noise:-79 acom:7  
i/0:-44/-18 dBm

11E6 : 229 2061411870ms.1 +130 pid:1 Originate 2#8005555555 active

dur 00:00:44 tx:2215/1169571516 rx:1942/310720

IP 14.50.201.15:21134 SRTP: off rtt:0ms pl:35210/40ms lost:0/0/0 delay:55/55/65ms  
g711ulaw TextRelay: off

media inactive detected:n media contrl rcvd:n/a timestamp:n/a

long duration call detected:n long duration call duration:n/a timestamp:n/a

Telephony call-legs: 1

SIP call-legs: 0

H323 call-legs: 1

Call agent controlled call-legs: 0

SCCP call-legs: 0

Multicast call-legs: 0

Media call-legs: 0

Total call-legs: 2

**Call is connected to Agent IP Phone**

11E6 : 228 2061411860ms.1 +160 pid:2 Answer 9999 active

dur 00:01:06 tx:2848/478464 rx:3343/533632

Tele 1/0/0:23 (228) [1/0/0.1] tx:66730/66730/0ms g711ulaw noise:-54 acom:7  
i/0:-44/-44 dBm

11E6 : 229 2061411870ms.1 +130 pid:1 Originate 2#8005555555 active

dur 00:01:06 tx:3336/1169571516 rx:2848/455680

IP 14.50.202.26:17156 SRTP: off rtt:1ms pl:10290/0ms lost:0/0/0 delay:55/55/65ms  
g711ulaw TextRelay: off

media inactive detected:n media contrl rcvd:n/a timestamp:n/a

long duration call detected:n long duration call duration:n/a timestamp:n/a

Telephony call-legs: 1

SIP call-legs: 0

H323 call-legs: 1

Call agent controlled call-legs: 0

SCCP call-legs: 0

Multicast call-legs: 0

Media call-legs: 0

Total call-legs: 2

**[EI GW envía el mensaje setup H225 FastStart al CVP](#)**

**Call is connected to VXML Gateway**

11E6 : 228 2061411860ms.1 +160 pid:2 Answer 9999 active

dur 00:00:44 tx:1942/326256 rx:2221/354112

Tele 1/0/0:23 (228) [1/0/0.1] tx:44300/44300/0ms g711ulaw noise:-79 acom:7  
i/0:-44/-18 dBm

11E6 : 229 2061411870ms.1 +130 pid:1 Originate 2#8005555555 active

dur 00:00:44 tx:2215/1169571516 rx:1942/310720

IP 14.50.201.15:21134 SRTP: off rtt:0ms pl:35210/40ms lost:0/0/0 delay:55/55/65ms  
g711ulaw TextRelay: off

media inactive detected:n media contrl rcvd:n/a timestamp:n/a

long duration call detected:n long duration call duration:n/a timestamp:n/a

Telephony call-legs: 1

SIP call-legs: 0

H323 call-legs: 1

Call agent controlled call-legs: 0

SCCP call-legs: 0

Multicast call-legs: 0

Media call-legs: 0

Total call-legs: 2

**Call is connected to Agent IP Phone**

11E6 : 228 2061411860ms.1 +160 pid:2 Answer 9999 active

dur 00:01:06 tx:2848/478464 rx:3343/533632

Tele 1/0/0:23 (228) [1/0/0.1] tx:66730/66730/0ms g711ulaw noise:-54 acom:7  
i/0:-44/-44 dBm

11E6 : 229 2061411870ms.1 +130 pid:1 Originate 2#8005555555 active

dur 00:01:06 tx:3336/1169571516 rx:2848/455680

IP 14.50.202.26:17156 SRTP: off rtt:1ms pl:10290/0ms lost:0/0/0 delay:55/55/65ms  
g711ulaw TextRelay: off

media inactive detected:n media contrl rcvd:n/a timestamp:n/a

long duration call detected:n long duration call duration:n/a timestamp:n/a

Telephony call-legs: 1

SIP call-legs: 0

H323 call-legs: 1

Call agent controlled call-legs: 0

SCCP call-legs: 0

Multicast call-legs: 0

Media call-legs: 0

Total call-legs: 2

[El GW recibe el mensaje CONNECT H225 del CVP](#)

**Call is connected to VXML Gateway**

11E6 : 228 2061411860ms.1 +160 pid:2 Answer 9999 active

dur 00:00:44 tx:1942/326256 rx:2221/354112

Tele 1/0/0:23 (228) [1/0/0.1] tx:44300/44300/0ms g711ulaw noise:-79 acom:7  
i/0:-44/-18 dBm

11E6 : 229 2061411870ms.1 +130 pid:1 Originate 2#8005555555 active

dur 00:00:44 tx:2215/1169571516 rx:1942/310720

IP 14.50.201.15:21134 SRTP: off rtt:0ms pl:35210/40ms lost:0/0/0 delay:55/55/65ms  
g711ulaw TextRelay: off

media inactive detected:n media contrl rcvd:n/a timestamp:n/a

long duration call detected:n long duration call duration:n/a timestamp:n/a

Telephony call-legs: 1

SIP call-legs: 0

H323 call-legs: 1

Call agent controlled call-legs: 0

SCCP call-legs: 0

Multicast call-legs: 0

Media call-legs: 0

Total call-legs: 2

**Call is connected to Agent IP Phone**

11E6 : 228 2061411860ms.1 +160 pid:2 Answer 9999 active

dur 00:01:06 tx:2848/478464 rx:3343/533632

Tele 1/0/0:23 (228) [1/0/0.1] tx:66730/66730/0ms g711ulaw noise:-54 acom:7  
i/0:-44/-44 dBm

11E6 : 229 2061411870ms.1 +130 pid:1 Originate 2#8005555555 active

dur 00:01:06 tx:3336/1169571516 rx:2848/455680

IP 14.50.202.26:17156 SRTP: off rtt:1ms pl:10290/0ms lost:0/0/0 delay:55/55/65ms  
g711ulaw TextRelay: off

media inactive detected:n media contrl rcvd:n/a timestamp:n/a

long duration call detected:n long duration call duration:n/a timestamp:n/a

Telephony call-legs: 1

SIP call-legs: 0

H323 call-legs: 1

Call agent controlled call-legs: 0

SCCP call-legs: 0

Multicast call-legs: 0

Media call-legs: 0

Total call-legs: 2

[El GW envía el Information Request Response \(IRR\) al portero](#)

**Call is connected to VXML Gateway**

11E6 : 228 2061411860ms.1 +160 pid:2 Answer 9999 active

dur 00:00:44 tx:1942/326256 rx:2221/354112

Tele 1/0/0:23 (228) [1/0/0.1] tx:44300/44300/0ms g711ulaw noise:-79 acom:7  
i/0:-44/-18 dBm

11E6 : 229 2061411870ms.1 +130 pid:1 Originate 2#8005555555 active

dur 00:00:44 tx:2215/1169571516 rx:1942/310720

IP 14.50.201.15:21134 SRTP: off rtt:0ms pl:35210/40ms lost:0/0/0 delay:55/55/65ms  
g711ulaw TextRelay: off

media inactive detected:n media contrl rcvd:n/a timestamp:n/a

long duration call detected:n long duration call duration:n/a timestamp:n/a

Telephony call-legs: 1

SIP call-legs: 0

H323 call-legs: 1

Call agent controlled call-legs: 0

SCCP call-legs: 0

Multicast call-legs: 0

Media call-legs: 0

Total call-legs: 2

**Call is connected to Agent IP Phone**

11E6 : 228 2061411860ms.1 +160 pid:2 Answer 9999 active

dur 00:01:06 tx:2848/478464 rx:3343/533632

Tele 1/0/0:23 (228) [1/0/0.1] tx:66730/66730/0ms g711ulaw noise:-54 acom:7  
i/0:-44/-44 dBm

11E6 : 229 2061411870ms.1 +130 pid:1 Originate 2#8005555555 active

dur 00:01:06 tx:3336/1169571516 rx:2848/455680

IP 14.50.202.26:17156 SRTP: off rtt:1ms pl:10290/0ms lost:0/0/0 delay:55/55/65ms  
g711ulaw TextRelay: off

media inactive detected:n media contrl rcvd:n/a timestamp:n/a

long duration call detected:n long duration call duration:n/a timestamp:n/a

Telephony call-legs: 1

SIP call-legs: 0

H323 call-legs: 1

Call agent controlled call-legs: 0

SCCP call-legs: 0

Multicast call-legs: 0

Media call-legs: 0

Total call-legs: 2

[El GW establece la conexión TCP H245 al CVP y envía el conjunto de la Capacidad del terminal \(TCS\) y el mensaje amo-esclavo de la determinación al CVP](#)

**Call is connected to VXML Gateway**

11E6 : 228 2061411860ms.1 +160 pid:2 Answer 9999 active

dur 00:00:44 tx:1942/326256 rx:2221/354112

Tele 1/0/0:23 (228) [1/0/0.1] tx:44300/44300/0ms g711ulaw noise:-79 acom:7  
i/0:-44/-18 dBm

11E6 : 229 2061411870ms.1 +130 pid:1 Originate 2#8005555555 active

dur 00:00:44 tx:2215/1169571516 rx:1942/310720

IP 14.50.201.15:21134 SRTP: off rtt:0ms pl:35210/40ms lost:0/0/0 delay:55/55/65ms  
g711ulaw TextRelay: off

media inactive detected:n media contrl rcvd:n/a timestamp:n/a

long duration call detected:n long duration call duration:n/a timestamp:n/a

Telephony call-legs: 1

SIP call-legs: 0

H323 call-legs: 1

Call agent controlled call-legs: 0

SCCP call-legs: 0

Multicast call-legs: 0

Media call-legs: 0

Total call-legs: 2

**Call is connected to Agent IP Phone**

11E6 : 228 2061411860ms.1 +160 pid:2 Answer 9999 active

dur 00:01:06 tx:2848/478464 rx:3343/533632

Tele 1/0/0:23 (228) [1/0/0.1] tx:66730/66730/0ms g711ulaw noise:-54 acom:7  
i/0:-44/-44 dBm

11E6 : 229 2061411870ms.1 +130 pid:1 Originate 2#8005555555 active

dur 00:01:06 tx:3336/1169571516 rx:2848/455680



IP 14.50.202.26:17156 SRTP: off rtt:1ms pl:10290/0ms lost:0/0/0 delay:55/55/65ms  
g711ulaw TextRelay: off

media inactive detected:n media contrl rcvd:n/a timestamp:n/a

long duration call detected:n long duration call duration:n/a timestamp:n/a

Telephony call-legs: 1

SIP call-legs: 0

H323 call-legs: 1

Call agent controlled call-legs: 0

SCCP call-legs: 0

Multicast call-legs: 0

Media call-legs: 0

Total call-legs: 2

[El GW recibe el mensaje TCS y MSD del CVP](#)

**Call is connected to VXML Gateway**

11E6 : 228 2061411860ms.1 +160 pid:2 Answer 9999 active

dur 00:00:44 tx:1942/326256 rx:2221/354112

Tele 1/0/0:23 (228) [1/0/0.1] tx:44300/44300/0ms g711ulaw noise:-79 acom:7  
i/0:-44/-18 dBm

11E6 : 229 2061411870ms.1 +130 pid:1 Originate 2#8005555555 active

dur 00:00:44 tx:2215/1169571516 rx:1942/310720

IP 14.50.201.15:21134 SRTP: off rtt:0ms pl:35210/40ms lost:0/0/0 delay:55/55/65ms  
g711ulaw TextRelay: off

media inactive detected:n media contrl rcvd:n/a timestamp:n/a

long duration call detected:n long duration call duration:n/a timestamp:n/a

Telephony call-legs: 1

SIP call-legs: 0

H323 call-legs: 1

Call agent controlled call-legs: 0

SCCP call-legs: 0

Multicast call-legs: 0

Media call-legs: 0

Total call-legs: 2

**Call is connected to Agent IP Phone**

11E6 : 228 2061411860ms.1 +160 pid:2 Answer 9999 active

dur 00:01:06 tx:2848/478464 rx:3343/533632

Tele 1/0/0:23 (228) [1/0/0.1] tx:66730/66730/0ms g711ulaw noise:-54 acom:7  
i/0:-44/-44 dBm

11E6 : 229 2061411870ms.1 +130 pid:1 Originate 2#8005555555 active

dur 00:01:06 tx:3336/1169571516 rx:2848/455680

IP 14.50.202.26:17156 SRTP: off rtt:1ms pl:10290/0ms lost:0/0/0 delay:55/55/65ms  
g711ulaw TextRelay: off

media inactive detected:n media contrl rcvd:n/a timestamp:n/a

long duration call detected:n long duration call duration:n/a timestamp:n/a

Telephony call-legs: 1

SIP call-legs: 0

H323 call-legs: 1

Call agent controlled call-legs: 0

SCCP call-legs: 0

Multicast call-legs: 0

Media call-legs: 0

Total call-legs: 2

**[El ingreso GW envía TCS Ack y MSD Ack al CVP](#)**

**Call is connected to VXML Gateway**

11E6 : 228 2061411860ms.1 +160 pid:2 Answer 9999 active

dur 00:00:44 tx:1942/326256 rx:2221/354112

Tele 1/0/0:23 (228) [1/0/0.1] tx:44300/44300/0ms g711ulaw noise:-79 acom:7

i/0:-44/-18 dBm

11E6 : 229 2061411870ms.1 +130 pid:1 Originate 2#8005555555 active

dur 00:00:44 tx:2215/1169571516 rx:1942/310720

IP 14.50.201.15:21134 SRTP: off rtt:0ms pl:35210/40ms lost:0/0/0 delay:55/55/65ms  
g711ulaw TextRelay: off

media inactive detected:n media contrl rcvd:n/a timestamp:n/a

long duration call detected:n long duration call duration:n/a timestamp:n/a

Telephony call-legs: 1

SIP call-legs: 0

H323 call-legs: 1

Call agent controlled call-legs: 0

SCCP call-legs: 0

Multicast call-legs: 0

Media call-legs: 0

Total call-legs: 2

**Call is connected to Agent IP Phone**

11E6 : 228 2061411860ms.1 +160 pid:2 Answer 9999 active

dur 00:01:06 tx:2848/478464 rx:3343/533632

Tele 1/0/0:23 (228) [1/0/0.1] tx:66730/66730/0ms g711ulaw noise:-54 acom:7  
i/0:-44/-44 dBm

11E6 : 229 2061411870ms.1 +130 pid:1 Originate 2#8005555555 active

dur 00:01:06 tx:3336/1169571516 rx:2848/455680

IP 14.50.202.26:17156 SRTP: off rtt:1ms pl:10290/0ms lost:0/0/0 delay:55/55/65ms  
g711ulaw TextRelay: off

media inactive detected:n media contrl rcvd:n/a timestamp:n/a

long duration call detected:n long duration call duration:n/a timestamp:n/a

Telephony call-legs: 1

SIP call-legs: 0

H323 call-legs: 1

Call agent controlled call-legs: 0

SCCP call-legs: 0

Multicast call-legs: 0

Media call-legs: 0

Total call-legs: 2

[El ingreso GW recibe TCS y MSD ACK del CVP](#)

**Call is connected to VXML Gateway**

11E6 : 228 2061411860ms.1 +160 pid:2 Answer 9999 active

dur 00:00:44 tx:1942/326256 rx:2221/354112

Tele 1/0/0:23 (228) [1/0/0.1] tx:44300/44300/0ms g711ulaw noise:-79 acom:7  
i/0:-44/-18 dBm

11E6 : 229 2061411870ms.1 +130 pid:1 Originate 2#8005555555 active

dur 00:00:44 tx:2215/1169571516 rx:1942/310720

IP 14.50.201.15:21134 SRTP: off rtt:0ms pl:35210/40ms lost:0/0/0 delay:55/55/65ms  
g711ulaw TextRelay: off

media inactive detected:n media contrl rcvd:n/a timestamp:n/a

long duration call detected:n long duration call duration:n/a timestamp:n/a

Telephony call-legs: 1

SIP call-legs: 0

H323 call-legs: 1

Call agent controlled call-legs: 0

SCCP call-legs: 0

Multicast call-legs: 0

Media call-legs: 0

Total call-legs: 2

**Call is connected to Agent IP Phone**

11E6 : 228 2061411860ms.1 +160 pid:2 Answer 9999 active

dur 00:01:06 tx:2848/478464 rx:3343/533632

Tele 1/0/0:23 (228) [1/0/0.1] tx:66730/66730/0ms g711ulaw noise:-54 acom:7  
i/0:-44/-44 dBm

11E6 : 229 2061411870ms.1 +130 pid:1 Originate 2#8005555555 active

dur 00:01:06 tx:3336/1169571516 rx:2848/455680

IP 14.50.202.26:17156 SRTP: off rtt:1ms pl:10290/0ms lost:0/0/0 delay:55/55/65ms  
g711ulaw TextRelay: off

media inactive detected:n media contrl rcvd:n/a timestamp:n/a

long duration call detected:n long duration call duration:n/a timestamp:n/a

Telephony call-legs: 1

SIP call-legs: 0

H323 call-legs: 1

Call agent controlled call-legs: 0

SCCP call-legs: 0

Multicast call-legs: 0

Media call-legs: 0

Total call-legs: 2

[Ahora, el CVP reorienta la conexión de medios al gateway VXML. El ingreso GW recibe el TCS vacío del CVP](#)

**Call is connected to VXML Gateway**

11E6 : 228 2061411860ms.1 +160 pid:2 Answer 9999 active

dur 00:00:44 tx:1942/326256 rx:2221/354112

Tele 1/0/0:23 (228) [1/0/0.1] tx:44300/44300/0ms g711ulaw noise:-79 acom:7  
i/0:-44/-18 dBm

11E6 : 229 2061411870ms.1 +130 pid:1 Originate 2#8005555555 active

dur 00:00:44 tx:2215/1169571516 rx:1942/310720

IP 14.50.201.15:21134 SRTP: off rtt:0ms pl:35210/40ms lost:0/0/0 delay:55/55/65ms  
g711ulaw TextRelay: off

media inactive detected:n media contrl rcvd:n/a timestamp:n/a

long duration call detected:n long duration call duration:n/a timestamp:n/a

Telephony call-legs: 1

SIP call-legs: 0

H323 call-legs: 1

Call agent controlled call-legs: 0

SCCP call-legs: 0

Multicast call-legs: 0

Media call-legs: 0

Total call-legs: 2

**Call is connected to Agent IP Phone**

11E6 : 228 2061411860ms.1 +160 pid:2 Answer 9999 active

dur 00:01:06 tx:2848/478464 rx:3343/533632

Tele 1/0/0:23 (228) [1/0/0.1] tx:66730/66730/0ms g711ulaw noise:-54 acom:7  
i/0:-44/-44 dBm

11E6 : 229 2061411870ms.1 +130 pid:1 Originate 2#8005555555 active

dur 00:01:06 tx:3336/1169571516 rx:2848/455680

IP 14.50.202.26:17156 SRTP: off rtt:lms pl:10290/0ms lost:0/0/0 delay:55/55/65ms  
g711ulaw TextRelay: off

media inactive detected:n media contrl rcvd:n/a timestamp:n/a

long duration call detected:n long duration call duration:n/a timestamp:n/a

Telephony call-legs: 1

SIP call-legs: 0

H323 call-legs: 1

Call agent controlled call-legs: 0

SCCP call-legs: 0

Multicast call-legs: 0

Media call-legs: 0

Total call-legs: 2

**El ingreso GW cierra su canal lógico enviando CloseLogicalChannel (CLC) al CVP**

**Call is connected to VXML Gateway**

11E6 : 228 2061411860ms.1 +160 pid:2 Answer 9999 active

dur 00:00:44 tx:1942/326256 rx:2221/354112

Tele 1/0/0:23 (228) [1/0/0.1] tx:44300/44300/0ms g711ulaw noise:-79 acom:7  
i/0:-44/-18 dBm

11E6 : 229 2061411870ms.1 +130 pid:1 Originate 2#8005555555 active

dur 00:00:44 tx:2215/1169571516 rx:1942/310720

IP 14.50.201.15:21134 SRTP: off rtt:0ms pl:35210/40ms lost:0/0/0 delay:55/55/65ms  
g711ulaw TextRelay: off

media inactive detected:n media contrl rcvd:n/a timestamp:n/a

long duration call detected:n long duration call duration:n/a timestamp:n/a

Telephony call-legs: 1

SIP call-legs: 0

H323 call-legs: 1

Call agent controlled call-legs: 0

SCCP call-legs: 0

Multicast call-legs: 0

Media call-legs: 0

Total call-legs: 2

**Call is connected to Agent IP Phone**

11E6 : 228 2061411860ms.1 +160 pid:2 Answer 9999 active

dur 00:01:06 tx:2848/478464 rx:3343/533632

Tele 1/0/0:23 (228) [1/0/0.1] tx:66730/66730/0ms g711ulaw noise:-54 acom:7  
i/0:-44/-44 dBm

11E6 : 229 2061411870ms.1 +130 pid:1 Originate 2#8005555555 active

dur 00:01:06 tx:3336/1169571516 rx:2848/455680

IP 14.50.202.26:17156 SRTP: off rtt:1ms pl:10290/0ms lost:0/0/0 delay:55/55/65ms  
g711ulaw TextRelay: off

media inactive detected:n media contrl rcvd:n/a timestamp:n/a

long duration call detected:n long duration call duration:n/a timestamp:n/a

Telephony call-legs: 1

SIP call-legs: 0

H323 call-legs: 1

Call agent controlled call-legs: 0

SCCP call-legs: 0

Multicast call-legs: 0

Media call-legs: 0

Total call-legs: 2

[El ingreso GW envía TCS ACK al CVP](#)

**Call is connected to VXML Gateway**

11E6 : 228 2061411860ms.1 +160 pid:2 Answer 9999 active

dur 00:00:44 tx:1942/326256 rx:2221/354112

Tele 1/0/0:23 (228) [1/0/0.1] tx:44300/44300/0ms g711ulaw noise:-79 acom:7  
i/0:-44/-18 dBm

11E6 : 229 2061411870ms.1 +130 pid:1 Originate 2#8005555555 active

dur 00:00:44 tx:2215/1169571516 rx:1942/310720

IP 14.50.201.15:21134 SRTP: off rtt:0ms pl:35210/40ms lost:0/0/0 delay:55/55/65ms  
g711ulaw TextRelay: off

media inactive detected:n media contrl rcvd:n/a timestamp:n/a

long duration call detected:n long duration call duration:n/a timestamp:n/a

Telephony call-legs: 1

SIP call-legs: 0

H323 call-legs: 1



Call agent controlled call-legs: 0

SCCP call-legs: 0

Multicast call-legs: 0

Media call-legs: 0

Total call-legs: 2

**Call is connected to Agent IP Phone**

11E6 : 228 2061411860ms.1 +160 pid:2 Answer 9999 active

dur 00:01:06 tx:2848/478464 rx:3343/533632

Tele 1/0/0:23 (228) [1/0/0.1] tx:66730/66730/0ms g711ulaw noise:-54 acom:7  
i/0:-44/-44 dBm

11E6 : 229 2061411870ms.1 +130 pid:1 Originate 2#8005555555 active

dur 00:01:06 tx:3336/1169571516 rx:2848/455680

IP 14.50.202.26:17156 SRTP: off rtt:1ms pl:10290/0ms lost:0/0/0 delay:55/55/65ms  
g711ulaw TextRelay: off

media inactive detected:n media contrl rcvd:n/a timestamp:n/a

long duration call detected:n long duration call duration:n/a timestamp:n/a

Telephony call-legs: 1

SIP call-legs: 0

H323 call-legs: 1

Call agent controlled call-legs: 0

SCCP call-legs: 0

Multicast call-legs: 0

Media call-legs: 0

Total call-legs: 2

[El ingreso GW envía el pedido de ancho de banda al portero para poner al día el ancho de banda actual \(cero\) usado para la llamada](#)

**Call is connected to VXML Gateway**

11E6 : 228 2061411860ms.1 +160 pid:2 Answer 9999 active

dur 00:00:44 tx:1942/326256 rx:2221/354112

Tele 1/0/0:23 (228) [1/0/0.1] tx:44300/44300/0ms g711ulaw noise:-79 acom:7  
i/0:-44/-18 dBm

11E6 : 229 2061411870ms.1 +130 pid:1 Originate 2#8005555555 active

dur 00:00:44 tx:2215/1169571516 rx:1942/310720

IP 14.50.201.15:21134 SRTP: off rtt:0ms pl:35210/40ms lost:0/0/0 delay:55/55/65ms  
g711ulaw TextRelay: off

media inactive detected:n media contrl rcvd:n/a timestamp:n/a

long duration call detected:n long duration call duration:n/a timestamp:n/a

Telephony call-legs: 1

SIP call-legs: 0

H323 call-legs: 1

Call agent controlled call-legs: 0

SCCP call-legs: 0

Multicast call-legs: 0

Media call-legs: 0

Total call-legs: 2

**Call is connected to Agent IP Phone**

11E6 : 228 2061411860ms.1 +160 pid:2 Answer 9999 active

dur 00:01:06 tx:2848/478464 rx:3343/533632

Tele 1/0/0:23 (228) [1/0/0.1] tx:66730/66730/0ms g711ulaw noise:-54 acom:7  
i/0:-44/-44 dBm

11E6 : 229 2061411870ms.1 +130 pid:1 Originate 2#8005555555 active

dur 00:01:06 tx:3336/1169571516 rx:2848/455680

IP 14.50.202.26:17156 SRTP: off rtt:1ms pl:10290/0ms lost:0/0/0 delay:55/55/65ms  
g711ulaw TextRelay: off

media inactive detected:n media contrl rcvd:n/a timestamp:n/a

long duration call detected:n long duration call duration:n/a timestamp:n/a

Telephony call-legs: 1

SIP call-legs: 0

H323 call-legs: 1

Call agent controlled call-legs: 0

SCCP call-legs: 0

Multicast call-legs: 0

Media call-legs: 0

Total call-legs: 2

[El CVP cierra su canal lógico enviando el CLC al ingreso GW](#)

**Call is connected to VXML Gateway**

11E6 : 228 2061411860ms.1 +160 pid:2 Answer 9999 active

dur 00:00:44 tx:1942/326256 rx:2221/354112

Tele 1/0/0:23 (228) [1/0/0.1] tx:44300/44300/0ms g711ulaw noise:-79 acom:7  
i/0:-44/-18 dBm

11E6 : 229 2061411870ms.1 +130 pid:1 Originate 2#8005555555 active

dur 00:00:44 tx:2215/1169571516 rx:1942/310720

IP 14.50.201.15:21134 SRTP: off rtt:0ms pl:35210/40ms lost:0/0/0 delay:55/55/65ms  
g711ulaw TextRelay: off

media inactive detected:n media contrl rcvd:n/a timestamp:n/a

long duration call detected:n long duration call duration:n/a timestamp:n/a

Telephony call-legs: 1

SIP call-legs: 0

H323 call-legs: 1

Call agent controlled call-legs: 0

SCCP call-legs: 0

Multicast call-legs: 0

Media call-legs: 0

Total call-legs: 2

**Call is connected to Agent IP Phone**

11E6 : 228 2061411860ms.1 +160 pid:2 Answer 9999 active

dur 00:01:06 tx:2848/478464 rx:3343/533632

Tele 1/0/0:23 (228) [1/0/0.1] tx:66730/66730/0ms g711ulaw noise:-54 acom:7  
i/0:-44/-44 dBm

11E6 : 229 2061411870ms.1 +130 pid:1 Originate 2#8005555555 active

dur 00:01:06 tx:3336/1169571516 rx:2848/455680

IP 14.50.202.26:17156 SRTP: off rtt:1ms pl:10290/0ms lost:0/0/0 delay:55/55/65ms  
g711ulaw TextRelay: off

media inactive detected:n media contrl rcvd:n/a timestamp:n/a

long duration call detected:n long duration call duration:n/a timestamp:n/a

Telephony call-legs: 1

SIP call-legs: 0

H323 call-legs: 1

Call agent controlled call-legs: 0

SCCP call-legs: 0

Multicast call-legs: 0

Media call-legs: 0

Total call-legs: 2

[El ingreso GW recibe el TCS y el MSD del CVP. Este TCS proporciona la información sobre las Capacidades del terminal del gateway VXML](#)

**Call is connected to VXML Gateway**

11E6 : 228 2061411860ms.1 +160 pid:2 Answer 9999 active

dur 00:00:44 tx:1942/326256 rx:2221/354112

Tele 1/0/0:23 (228) [1/0/0.1] tx:44300/44300/0ms g711ulaw noise:-79 acom:7  
i/0:-44/-18 dBm

11E6 : 229 2061411870ms.1 +130 pid:1 Originate 2#8005555555 active

dur 00:00:44 tx:2215/1169571516 rx:1942/310720

IP 14.50.201.15:21134 SRTP: off rtt:0ms pl:35210/40ms lost:0/0/0 delay:55/55/65ms  
g711ulaw TextRelay: off

media inactive detected:n media contrl rcvd:n/a timestamp:n/a

long duration call detected:n long duration call duration:n/a timestamp:n/a

Telephony call-legs: 1

SIP call-legs: 0

H323 call-legs: 1

Call agent controlled call-legs: 0

SCCP call-legs: 0

Multicast call-legs: 0

Media call-legs: 0

Total call-legs: 2

**Call is connected to Agent IP Phone**

11E6 : 228 2061411860ms.1 +160 pid:2 Answer 9999 active

dur 00:01:06 tx:2848/478464 rx:3343/533632

Tele 1/0/0:23 (228) [1/0/0.1] tx:66730/66730/0ms g711ulaw noise:-54 acom:7  
i/0:-44/-44 dBm

11E6 : 229 2061411870ms.1 +130 pid:1 Originate 2#8005555555 active

dur 00:01:06 tx:3336/1169571516 rx:2848/455680

IP 14.50.202.26:17156 SRTP: off rtt:1ms pl:10290/0ms lost:0/0/0 delay:55/55/65ms  
g711ulaw TextRelay: off

media inactive detected:n media contrl rcvd:n/a timestamp:n/a

long duration call detected:n long duration call duration:n/a timestamp:n/a

Telephony call-legs: 1

SIP call-legs: 0

H323 call-legs: 1

Call agent controlled call-legs: 0

SCCP call-legs: 0

Multicast call-legs: 0

Media call-legs: 0

Total call-legs: 2

[El ingreso GW envía su TCS y MSD al CVP](#)

**Call is connected to VXML Gateway**

11E6 : 228 2061411860ms.1 +160 pid:2 Answer 9999 active

dur 00:00:44 tx:1942/326256 rx:2221/354112

Tele 1/0/0:23 (228) [1/0/0.1] tx:44300/44300/0ms g711ulaw noise:-79 acom:7  
i/0:-44/-18 dBm

11E6 : 229 2061411870ms.1 +130 pid:1 Originate 2#8005555555 active

dur 00:00:44 tx:2215/1169571516 rx:1942/310720

IP 14.50.201.15:21134 SRTP: off rtt:0ms pl:35210/40ms lost:0/0/0 delay:55/55/65ms  
g711ulaw TextRelay: off

media inactive detected:n media contrl rcvd:n/a timestamp:n/a

long duration call detected:n long duration call duration:n/a timestamp:n/a

Telephony call-legs: 1

SIP call-legs: 0

H323 call-legs: 1

Call agent controlled call-legs: 0

SCCP call-legs: 0

Multicast call-legs: 0

Media call-legs: 0

Total call-legs: 2

**Call is connected to Agent IP Phone**

11E6 : 228 2061411860ms.1 +160 pid:2 Answer 9999 active

dur 00:01:06 tx:2848/478464 rx:3343/533632

Tele 1/0/0:23 (228) [1/0/0.1] tx:66730/66730/0ms g711ulaw noise:-54 acom:7  
i/0:-44/-44 dBm

11E6 : 229 2061411870ms.1 +130 pid:1 Originate 2#8005555555 active

dur 00:01:06 tx:3336/1169571516 rx:2848/455680

IP 14.50.202.26:17156 SRTP: off rtt:1ms pl:10290/0ms lost:0/0/0 delay:55/55/65ms  
g711ulaw TextRelay: off

media inactive detected:n media contrl rcvd:n/a timestamp:n/a

long duration call detected:n long duration call duration:n/a timestamp:n/a

Telephony call-legs: 1

SIP call-legs: 0

H323 call-legs: 1

Call agent controlled call-legs: 0

SCCP call-legs: 0

Multicast call-legs: 0

Media call-legs: 0

Total call-legs: 2

[El ingreso GW envía MSD Ack y TCS Ack al CVP](#)

**Call is connected to VXML Gateway**

11E6 : 228 2061411860ms.1 +160 pid:2 Answer 9999 active

dur 00:00:44 tx:1942/326256 rx:2221/354112

Tele 1/0/0:23 (228) [1/0/0.1] tx:44300/44300/0ms g711ulaw noise:-79 acom:7  
i/0:-44/-18 dBm

11E6 : 229 2061411870ms.1 +130 pid:1 Originate 2#8005555555 active

dur 00:00:44 tx:2215/1169571516 rx:1942/310720

IP 14.50.201.15:21134 SRTP: off rtt:0ms pl:35210/40ms lost:0/0/0 delay:55/55/65ms  
g711ulaw TextRelay: off

media inactive detected:n media contrl rcvd:n/a timestamp:n/a

long duration call detected:n long duration call duration:n/a timestamp:n/a

Telephony call-legs: 1

SIP call-legs: 0

H323 call-legs: 1

Call agent controlled call-legs: 0

SCCP call-legs: 0

Multicast call-legs: 0

Media call-legs: 0

Total call-legs: 2

**Call is connected to Agent IP Phone**

11E6 : 228 2061411860ms.1 +160 pid:2 Answer 9999 active

dur 00:01:06 tx:2848/478464 rx:3343/533632

Tele 1/0/0:23 (228) [1/0/0.1] tx:66730/66730/0ms g711ulaw noise:-54 acom:7  
i/0:-44/-44 dBm

11E6 : 229 2061411870ms.1 +130 pid:1 Originate 2#8005555555 active

dur 00:01:06 tx:3336/1169571516 rx:2848/455680

IP 14.50.202.26:17156 SRTP: off rtt:1ms pl:10290/0ms lost:0/0/0 delay:55/55/65ms  
g711ulaw TextRelay: off

media inactive detected:n media contrl rcvd:n/a timestamp:n/a

long duration call detected:n long duration call duration:n/a timestamp:n/a

Telephony call-legs: 1

SIP call-legs: 0

H323 call-legs: 1

Call agent controlled call-legs: 0

SCCP call-legs: 0

Multicast call-legs: 0

Media call-legs: 0

Total call-legs: 2

[El ingreso GW envía el BRQ al portero para poner al día el ancho de banda actual usado para la llamada \(el kbps 2\\*64=128\)](#)



**Call is connected to VXML Gateway**

11E6 : 228 2061411860ms.1 +160 pid:2 Answer 9999 active

dur 00:00:44 tx:1942/326256 rx:2221/354112

Tele 1/0/0:23 (228) [1/0/0.1] tx:44300/44300/0ms g711ulaw noise:-79 acom:7  
i/0:-44/-18 dBm

11E6 : 229 2061411870ms.1 +130 pid:1 Originate 2#8005555555 active

dur 00:00:44 tx:2215/1169571516 rx:1942/310720

IP 14.50.201.15:21134 SRTP: off rtt:0ms pl:35210/40ms lost:0/0/0 delay:55/55/65ms  
g711ulaw TextRelay: off

media inactive detected:n media contrl rcvd:n/a timestamp:n/a

long duration call detected:n long duration call duration:n/a timestamp:n/a

Telephony call-legs: 1

SIP call-legs: 0

H323 call-legs: 1

Call agent controlled call-legs: 0

SCCP call-legs: 0

Multicast call-legs: 0

Media call-legs: 0

Total call-legs: 2

**Call is connected to Agent IP Phone**

11E6 : 228 2061411860ms.1 +160 pid:2 Answer 9999 active

dur 00:01:06 tx:2848/478464 rx:3343/533632

Tele 1/0/0:23 (228) [1/0/0.1] tx:66730/66730/0ms g711ulaw noise:-54 acom:7  
i/0:-44/-44 dBm

11E6 : 229 2061411870ms.1 +130 pid:1 Originate 2#8005555555 active

dur 00:01:06 tx:3336/1169571516 rx:2848/455680

IP 14.50.202.26:17156 SRTP: off rtt:1ms pl:10290/0ms lost:0/0/0 delay:55/55/65ms  
g711ulaw TextRelay: off

media inactive detected:n media contrl rcvd:n/a timestamp:n/a

long duration call detected:n long duration call duration:n/a timestamp:n/a

Telephony call-legs: 1

SIP call-legs: 0

H323 call-legs: 1

Call agent controlled call-legs: 0

SCCP call-legs: 0

Multicast call-legs: 0

Media call-legs: 0

Total call-legs: 2

[El ingreso GW envía la petición OLC al CVP](#)

**Call is connected to VXML Gateway**

11E6 : 228 2061411860ms.1 +160 pid:2 Answer 9999 active

dur 00:00:44 tx:1942/326256 rx:2221/354112

Tele 1/0/0:23 (228) [1/0/0.1] tx:44300/44300/0ms g711ulaw noise:-79 acom:7  
i/0:-44/-18 dBm

11E6 : 229 2061411870ms.1 +130 pid:1 Originate 2#8005555555 active

dur 00:00:44 tx:2215/1169571516 rx:1942/310720

IP 14.50.201.15:21134 SRTP: off rtt:0ms pl:35210/40ms lost:0/0/0 delay:55/55/65ms  
g711ulaw TextRelay: off

media inactive detected:n media contrl rcvd:n/a timestamp:n/a

long duration call detected:n long duration call duration:n/a timestamp:n/a

Telephony call-legs: 1

SIP call-legs: 0

H323 call-legs: 1

Call agent controlled call-legs: 0

SCCP call-legs: 0

Multicast call-legs: 0

Media call-legs: 0

Total call-legs: 2

**Call is connected to Agent IP Phone**

11E6 : 228 2061411860ms.1 +160 pid:2 Answer 9999 active

dur 00:01:06 tx:2848/478464 rx:3343/533632

Tele 1/0/0:23 (228) [1/0/0.1] tx:66730/66730/0ms g711ulaw noise:-54 acom:7  
i/0:-44/-44 dBm

11E6 : 229 2061411870ms.1 +130 pid:1 Originate 2#8005555555 active

dur 00:01:06 tx:3336/1169571516 rx:2848/455680

IP 14.50.202.26:17156 SRTP: off rtt:1ms pl:10290/0ms lost:0/0/0 delay:55/55/65ms  
g711ulaw TextRelay: off

media inactive detected:n media contrl rcvd:n/a timestamp:n/a

long duration call detected:n long duration call duration:n/a timestamp:n/a

Telephony call-legs: 1

SIP call-legs: 0

H323 call-legs: 1

Call agent controlled call-legs: 0

SCCP call-legs: 0

Multicast call-legs: 0

Media call-legs: 0

Total call-legs: 2

[El ingreso GW recibe el OLC del CVP. El CVP proporciona la dirección IP del gateway VXML para la conexión RTCP](#)

**Call is connected to VXML Gateway**

11E6 : 228 2061411860ms.1 +160 pid:2 Answer 9999 active

dur 00:00:44 tx:1942/326256 rx:2221/354112

Tele 1/0/0:23 (228) [1/0/0.1] tx:44300/44300/0ms g711ulaw noise:-79 acom:7  
i/0:-44/-18 dBm

11E6 : 229 2061411870ms.1 +130 pid:1 Originate 2#8005555555 active

dur 00:00:44 tx:2215/1169571516 rx:1942/310720

IP 14.50.201.15:21134 SRTP: off rtt:0ms pl:35210/40ms lost:0/0/0 delay:55/55/65ms  
g711ulaw TextRelay: off

media inactive detected:n media contrl rcvd:n/a timestamp:n/a

long duration call detected:n long duration call duration:n/a timestamp:n/a

Telephony call-legs: 1

SIP call-legs: 0

H323 call-legs: 1

Call agent controlled call-legs: 0

SCCP call-legs: 0

Multicast call-legs: 0

Media call-legs: 0

Total call-legs: 2

**Call is connected to Agent IP Phone**

11E6 : 228 2061411860ms.1 +160 pid:2 Answer 9999 active

dur 00:01:06 tx:2848/478464 rx:3343/533632

Tele 1/0/0:23 (228) [1/0/0.1] tx:66730/66730/0ms g711ulaw noise:-54 acom:7  
i/0:-44/-44 dBm

11E6 : 229 2061411870ms.1 +130 pid:1 Originate 2#8005555555 active

dur 00:01:06 tx:3336/1169571516 rx:2848/455680

IP 14.50.202.26:17156 SRTP: off rtt:1ms pl:10290/0ms lost:0/0/0 delay:55/55/65ms  
g711ulaw TextRelay: off

media inactive detected:n media contrl rcvd:n/a timestamp:n/a

long duration call detected:n long duration call duration:n/a timestamp:n/a

Telephony call-legs: 1

SIP call-legs: 0

H323 call-legs: 1

Call agent controlled call-legs: 0

SCCP call-legs: 0

Multicast call-legs: 0

Media call-legs: 0

Total call-legs: 2

[El GW envía la respuesta OLC Ack al CVP](#)

**Call is connected to VXML Gateway**

11E6 : 228 2061411860ms.1 +160 pid:2 Answer 9999 active

dur 00:00:44 tx:1942/326256 rx:2221/354112

Tele 1/0/0:23 (228) [1/0/0.1] tx:44300/44300/0ms g711ulaw noise:-79 acom:7  
i/0:-44/-18 dBm

11E6 : 229 2061411870ms.1 +130 pid:1 Originate 2#8005555555 active

dur 00:00:44 tx:2215/1169571516 rx:1942/310720

IP 14.50.201.15:21134 SRTP: off rtt:0ms pl:35210/40ms lost:0/0/0 delay:55/55/65ms  
g711ulaw TextRelay: off

media inactive detected:n media contrl rcvd:n/a timestamp:n/a

long duration call detected:n long duration call duration:n/a timestamp:n/a

Telephony call-legs: 1

SIP call-legs: 0

H323 call-legs: 1

Call agent controlled call-legs: 0

SCCP call-legs: 0

Multicast call-legs: 0

Media call-legs: 0

Total call-legs: 2

**Call is connected to Agent IP Phone**

11E6 : 228 2061411860ms.1 +160 pid:2 Answer 9999 active

dur 00:01:06 tx:2848/478464 rx:3343/533632

Tele 1/0/0:23 (228) [1/0/0.1] tx:66730/66730/0ms g711ulaw noise:-54 acom:7  
i/0:-44/-44 dBm

11E6 : 229 2061411870ms.1 +130 pid:1 Originate 2#8005555555 active

dur 00:01:06 tx:3336/1169571516 rx:2848/455680

IP 14.50.202.26:17156 SRTP: off rtt:1ms pl:10290/0ms lost:0/0/0 delay:55/55/65ms  
g711ulaw TextRelay: off

media inactive detected:n media contrl rcvd:n/a timestamp:n/a

long duration call detected:n long duration call duration:n/a timestamp:n/a

Telephony call-legs: 1

SIP call-legs: 0

H323 call-legs: 1

Call agent controlled call-legs: 0

SCCP call-legs: 0

Multicast call-legs: 0

Media call-legs: 0

Total call-legs: 2

[El GW recibe OLC Ack del CVP. El CVP proporciona la dirección IP del gateway VXML para la conexión de RTP. La conexión de RTP entre el ingreso GW y VXML GW se establece](#)

**Call is connected to VXML Gateway**

11E6 : 228 2061411860ms.1 +160 pid:2 Answer 9999 active

dur 00:00:44 tx:1942/326256 rx:2221/354112

Tele 1/0/0:23 (228) [1/0/0.1] tx:44300/44300/0ms g711ulaw noise:-79 acom:7  
i/0:-44/-18 dBm

11E6 : 229 2061411870ms.1 +130 pid:1 Originate 2#8005555555 active

dur 00:00:44 tx:2215/1169571516 rx:1942/310720

IP 14.50.201.15:21134 SRTP: off rtt:0ms pl:35210/40ms lost:0/0/0 delay:55/55/65ms  
g711ulaw TextRelay: off

media inactive detected:n media contrl rcvd:n/a timestamp:n/a

long duration call detected:n long duration call duration:n/a timestamp:n/a

Telephony call-legs: 1

SIP call-legs: 0

H323 call-legs: 1

Call agent controlled call-legs: 0

SCCP call-legs: 0

Multicast call-legs: 0

Media call-legs: 0

Total call-legs: 2

**Call is connected to Agent IP Phone**

11E6 : 228 2061411860ms.1 +160 pid:2 Answer 9999 active

dur 00:01:06 tx:2848/478464 rx:3343/533632

Tele 1/0/0:23 (228) [1/0/0.1] tx:66730/66730/0ms g711ulaw noise:-54 acom:7  
i/0:-44/-44 dBm

11E6 : 229 2061411870ms.1 +130 pid:1 Originate 2#8005555555 active

dur 00:01:06 tx:3336/1169571516 rx:2848/455680

IP 14.50.202.26:17156 SRTP: off rtt:1ms pl:10290/0ms lost:0/0/0 delay:55/55/65ms  
g711ulaw TextRelay: off

media inactive detected:n media contrl rcvd:n/a timestamp:n/a

long duration call detected:n long duration call duration:n/a timestamp:n/a

Telephony call-legs: 1

SIP call-legs: 0

H323 call-legs: 1

Call agent controlled call-legs: 0

SCCP call-legs: 0

Multicast call-legs: 0

Media call-legs: 0

Total call-legs: 2

[El gateway detecta el dígito DTMF el "1" y lo envía vía los eventos basados del relé dtmf RTP NTE \(RFC 2833\) al VXML GW](#)

**Call is connected to VXML Gateway**

11E6 : 228 2061411860ms.1 +160 pid:2 Answer 9999 active

dur 00:00:44 tx:1942/326256 rx:2221/354112

Tele 1/0/0:23 (228) [1/0/0.1] tx:44300/44300/0ms g711ulaw noise:-79 acom:7  
i/0:-44/-18 dBm

11E6 : 229 2061411870ms.1 +130 pid:1 Originate 2#8005555555 active

dur 00:00:44 tx:2215/1169571516 rx:1942/310720

IP 14.50.201.15:21134 SRTP: off rtt:0ms pl:35210/40ms lost:0/0/0 delay:55/55/65ms  
g711ulaw TextRelay: off

media inactive detected:n media contrl rcvd:n/a timestamp:n/a

long duration call detected:n long duration call duration:n/a timestamp:n/a

Telephony call-legs: 1

SIP call-legs: 0

H323 call-legs: 1

Call agent controlled call-legs: 0

SCCP call-legs: 0

Multicast call-legs: 0

Media call-legs: 0

Total call-legs: 2

**Call is connected to Agent IP Phone**

11E6 : 228 2061411860ms.1 +160 pid:2 Answer 9999 active

dur 00:01:06 tx:2848/478464 rx:3343/533632

Tele 1/0/0:23 (228) [1/0/0.1] tx:66730/66730/0ms g711ulaw noise:-54 acom:7



i/0:-44/-44 dBm

11E6 : 229 2061411870ms.1 +130 pid:1 Originate 2#8005555555 active

dur 00:01:06 tx:3336/1169571516 rx:2848/455680

IP 14.50.202.26:17156 SRTP: off rtt:1ms pl:10290/0ms lost:0/0/0 delay:55/55/65ms  
g711ulaw TextRelay: off

media inactive detected:n media contrl rcvd:n/a timestamp:n/a

long duration call detected:n long duration call duration:n/a timestamp:n/a

Telephony call-legs: 1

SIP call-legs: 0

H323 call-legs: 1

Call agent controlled call-legs: 0

SCCP call-legs: 0

Multicast call-legs: 0

Media call-legs: 0

Total call-legs: 2

[Ahora, el CVP reorienta la llamada al teléfono del IP del agente que contestó a la llamada. El GW recibe el TCS vacío](#)

**Call is connected to VXML Gateway**

11E6 : 228 2061411860ms.1 +160 pid:2 Answer 9999 active

dur 00:00:44 tx:1942/326256 rx:2221/354112

Tele 1/0/0:23 (228) [1/0/0.1] tx:44300/44300/0ms g711ulaw noise:-79 acom:7  
i/0:-44/-18 dBm

11E6 : 229 2061411870ms.1 +130 pid:1 Originate 2#8005555555 active

dur 00:00:44 tx:2215/1169571516 rx:1942/310720

IP 14.50.201.15:21134 SRTP: off rtt:0ms pl:35210/40ms lost:0/0/0 delay:55/55/65ms  
g711ulaw TextRelay: off

media inactive detected:n media contrl rcvd:n/a timestamp:n/a

long duration call detected:n long duration call duration:n/a timestamp:n/a

Telephony call-legs: 1

SIP call-legs: 0

H323 call-legs: 1

Call agent controlled call-legs: 0

SCCP call-legs: 0

Multicast call-legs: 0

Media call-legs: 0

Total call-legs: 2

**Call is connected to Agent IP Phone**

11E6 : 228 2061411860ms.1 +160 pid:2 Answer 9999 active

dur 00:01:06 tx:2848/478464 rx:3343/533632

Tele 1/0/0:23 (228) [1/0/0.1] tx:66730/66730/0ms g711ulaw noise:-54 acom:7  
i/0:-44/-44 dBm

11E6 : 229 2061411870ms.1 +130 pid:1 Originate 2#8005555555 active

dur 00:01:06 tx:3336/1169571516 rx:2848/455680

IP 14.50.202.26:17156 SRTP: off rtt:1ms pl:10290/0ms lost:0/0/0 delay:55/55/65ms  
g711ulaw TextRelay: off

media inactive detected:n media contrl rcvd:n/a timestamp:n/a

long duration call detected:n long duration call duration:n/a timestamp:n/a

Telephony call-legs: 1

SIP call-legs: 0

H323 call-legs: 1

Call agent controlled call-legs: 0

SCCP call-legs: 0

Multicast call-legs: 0

Media call-legs: 0

Total call-legs: 2

[El ingreso GW recibe el TCS y el MSD del CVP. Este TCS proporciona la información sobre las Capacidades del terminal del teléfono del IP](#)

**Call is connected to VXML Gateway**

11E6 : 228 2061411860ms.1 +160 pid:2 Answer 9999 active

dur 00:00:44 tx:1942/326256 rx:2221/354112

Tele 1/0/0:23 (228) [1/0/0.1] tx:44300/44300/0ms g711ulaw noise:-79 acom:7  
i/0:-44/-18 dBm

11E6 : 229 2061411870ms.1 +130 pid:1 Originate 2#8005555555 active

dur 00:00:44 tx:2215/1169571516 rx:1942/310720

IP 14.50.201.15:21134 SRTP: off rtt:0ms pl:35210/40ms lost:0/0/0 delay:55/55/65ms  
g711ulaw TextRelay: off

media inactive detected:n media contrl rcvd:n/a timestamp:n/a

long duration call detected:n long duration call duration:n/a timestamp:n/a

Telephony call-legs: 1

SIP call-legs: 0

H323 call-legs: 1

Call agent controlled call-legs: 0

SCCP call-legs: 0

Multicast call-legs: 0

Media call-legs: 0

Total call-legs: 2

**Call is connected to Agent IP Phone**

11E6 : 228 2061411860ms.1 +160 pid:2 Answer 9999 active

dur 00:01:06 tx:2848/478464 rx:3343/533632

Tele 1/0/0:23 (228) [1/0/0.1] tx:66730/66730/0ms g711ulaw noise:-54 acom:7  
i/0:-44/-44 dBm

11E6 : 229 2061411870ms.1 +130 pid:1 Originate 2#8005555555 active

dur 00:01:06 tx:3336/1169571516 rx:2848/455680

IP 14.50.202.26:17156 SRTP: off rtt:1ms pl:10290/0ms lost:0/0/0 delay:55/55/65ms  
g711ulaw TextRelay: off

media inactive detected:n media contrl rcvd:n/a timestamp:n/a

long duration call detected:n long duration call duration:n/a timestamp:n/a

Telephony call-legs: 1

SIP call-legs: 0

H323 call-legs: 1

Call agent controlled call-legs: 0

SCCP call-legs: 0

Multicast call-legs: 0

Media call-legs: 0

Total call-legs: 2

[El ingreso GW recibe el OLC del CVP. El CVP proporciona la dirección IP del CallManager para la conexión RTCP](#)

**Call is connected to VXML Gateway**

11E6 : 228 2061411860ms.1 +160 pid:2 Answer 9999 active

dur 00:00:44 tx:1942/326256 rx:2221/354112

Tele 1/0/0:23 (228) [1/0/0.1] tx:44300/44300/0ms g711ulaw noise:-79 acom:7  
i/0:-44/-18 dBm

11E6 : 229 2061411870ms.1 +130 pid:1 Originate 2#8005555555 active

dur 00:00:44 tx:2215/1169571516 rx:1942/310720

IP 14.50.201.15:21134 SRTP: off rtt:0ms pl:35210/40ms lost:0/0/0 delay:55/55/65ms  
g711ulaw TextRelay: off

media inactive detected:n media contrl rcvd:n/a timestamp:n/a

long duration call detected:n long duration call duration:n/a timestamp:n/a

Telephony call-legs: 1

SIP call-legs: 0

H323 call-legs: 1

Call agent controlled call-legs: 0

SCCP call-legs: 0

Multicast call-legs: 0

Media call-legs: 0

Total call-legs: 2

**Call is connected to Agent IP Phone**

11E6 : 228 2061411860ms.1 +160 pid:2 Answer 9999 active

dur 00:01:06 tx:2848/478464 rx:3343/533632

Tele 1/0/0:23 (228) [1/0/0.1] tx:66730/66730/0ms g711ulaw noise:-54 acom:7  
i/0:-44/-44 dBm

11E6 : 229 2061411870ms.1 +130 pid:1 Originate 2#8005555555 active

dur 00:01:06 tx:3336/1169571516 rx:2848/455680

IP 14.50.202.26:17156 SRTP: off rtt:1ms pl:10290/0ms lost:0/0/0 delay:55/55/65ms  
g711ulaw TextRelay: off

media inactive detected:n media contrl rcvd:n/a timestamp:n/a

long duration call detected:n long duration call duration:n/a timestamp:n/a

Telephony call-legs: 1

SIP call-legs: 0

H323 call-legs: 1

Call agent controlled call-legs: 0

SCCP call-legs: 0

Multicast call-legs: 0

Media call-legs: 0

Total call-legs: 2

**[El GW envía la respuesta OLC Ack al CVP](#)**

**Call is connected to VXML Gateway**

11E6 : 228 2061411860ms.1 +160 pid:2 Answer 9999 active

dur 00:00:44 tx:1942/326256 rx:2221/354112

Tele 1/0/0:23 (228) [1/0/0.1] tx:44300/44300/0ms g711ulaw noise:-79 acom:7  
i/0:-44/-18 dBm

11E6 : 229 2061411870ms.1 +130 pid:1 Originate 2#8005555555 active

dur 00:00:44 tx:2215/1169571516 rx:1942/310720

IP 14.50.201.15:21134 SRTP: off rtt:0ms pl:35210/40ms lost:0/0/0 delay:55/55/65ms  
g711ulaw TextRelay: off

media inactive detected:n media contrl rcvd:n/a timestamp:n/a

long duration call detected:n long duration call duration:n/a timestamp:n/a

Telephony call-legs: 1

SIP call-legs: 0

H323 call-legs: 1

Call agent controlled call-legs: 0

SCCP call-legs: 0

Multicast call-legs: 0

Media call-legs: 0

Total call-legs: 2

**Call is connected to Agent IP Phone**

11E6 : 228 2061411860ms.1 +160 pid:2 Answer 9999 active

dur 00:01:06 tx:2848/478464 rx:3343/533632

Tele 1/0/0:23 (228) [1/0/0.1] tx:66730/66730/0ms g711ulaw noise:-54 acom:7  
i/0:-44/-44 dBm

11E6 : 229 2061411870ms.1 +130 pid:1 Originate 2#8005555555 active

dur 00:01:06 tx:3336/1169571516 rx:2848/455680

IP 14.50.202.26:17156 SRTP: off rtt:1ms pl:10290/0ms lost:0/0/0 delay:55/55/65ms  
g711ulaw TextRelay: off

media inactive detected:n media contrl rcvd:n/a timestamp:n/a

long duration call detected:n long duration call duration:n/a timestamp:n/a

Telephony call-legs: 1

SIP call-legs: 0

H323 call-legs: 1

Call agent controlled call-legs: 0

SCCP call-legs: 0

Multicast call-legs: 0

Media call-legs: 0

Total call-legs: 2

[El GW recibe OLC Ack del CVP. El CVP proporciona la dirección IP del teléfono del IP del agente para la conexión de RTP. La conexión de RTP entre el ingreso GW y el teléfono del IP se establece](#)

**Call is connected to VXML Gateway**

11E6 : 228 2061411860ms.1 +160 pid:2 Answer 9999 active

dur 00:00:44 tx:1942/326256 rx:2221/354112

Tele 1/0/0:23 (228) [1/0/0.1] tx:44300/44300/0ms g711ulaw noise:-79 acom:7  
i/0:-44/-18 dBm

11E6 : 229 2061411870ms.1 +130 pid:1 Originate 2#8005555555 active

dur 00:00:44 tx:2215/1169571516 rx:1942/310720

IP 14.50.201.15:21134 SRTP: off rtt:0ms pl:35210/40ms lost:0/0/0 delay:55/55/65ms  
g711ulaw TextRelay: off

media inactive detected:n media contrl rcvd:n/a timestamp:n/a

long duration call detected:n long duration call duration:n/a timestamp:n/a

Telephony call-legs: 1

SIP call-legs: 0

H323 call-legs: 1

Call agent controlled call-legs: 0

SCCP call-legs: 0

Multicast call-legs: 0

Media call-legs: 0

Total call-legs: 2

Call is connected to Agent IP Phone

11E6 : 228 2061411860ms.1 +160 pid:2 Answer 9999 active

dur 00:01:06 tx:2848/478464 rx:3343/533632

Tele 1/0/0:23 (228) [1/0/0.1] tx:66730/66730/0ms g711ulaw noise:-54 acom:7  
i/0:-44/-44 dBm

11E6 : 229 2061411870ms.1 +130 pid:1 Originate 2#8005555555 active

dur 00:01:06 tx:3336/1169571516 rx:2848/455680

IP 14.50.202.26:17156 SRTP: off rtt:1ms pl:10290/0ms lost:0/0/0 delay:55/55/65ms  
g711ulaw TextRelay: off

media inactive detected:n media contrl rcvd:n/a timestamp:n/a

long duration call detected:n long duration call duration:n/a timestamp:n/a

Telephony call-legs: 1

SIP call-legs: 0

H323 call-legs: 1

Call agent controlled call-legs: 0

SCCP call-legs: 0

Multicast call-legs: 0

Media call-legs: 0

Total call-legs: 2

[Después de acabar la conversación con el agente, el llamador PSTN cuelga para arriba la llamada. El ingreso GW recibe la desconexión ISDN del PSTN](#)

Call is connected to VXML Gateway

11E6 : 228 2061411860ms.1 +160 pid:2 Answer 9999 active

dur 00:00:44 tx:1942/326256 rx:2221/354112

Tele 1/0/0:23 (228) [1/0/0.1] tx:44300/44300/0ms g711ulaw noise:-79 acom:7  
i/0:-44/-18 dBm

11E6 : 229 2061411870ms.1 +130 pid:1 Originate 2#8005555555 active



dur 00:00:44 tx:2215/1169571516 rx:1942/310720

IP 14.50.201.15:21134 SRTP: off rtt:0ms pl:35210/40ms lost:0/0/0 delay:55/55/65ms  
g711ulaw TextRelay: off

media inactive detected:n media contrl rcvd:n/a timestamp:n/a

long duration call detected:n long duration call duration:n/a timestamp:n/a

Telephony call-legs: 1

SIP call-legs: 0

H323 call-legs: 1

Call agent controlled call-legs: 0

SCCP call-legs: 0

Multicast call-legs: 0

Media call-legs: 0

Total call-legs: 2

**Call is connected to Agent IP Phone**

11E6 : 228 2061411860ms.1 +160 pid:2 Answer 9999 active

dur 00:01:06 tx:2848/478464 rx:3343/533632

Tele 1/0/0:23 (228) [1/0/0.1] tx:66730/66730/0ms g711ulaw noise:-54 acom:7  
i/0:-44/-44 dBm

11E6 : 229 2061411870ms.1 +130 pid:1 Originate 2#8005555555 active

dur 00:01:06 tx:3336/1169571516 rx:2848/455680

IP 14.50.202.26:17156 SRTP: off rtt:1ms pl:10290/0ms lost:0/0/0 delay:55/55/65ms  
g711ulaw TextRelay: off

media inactive detected:n media contrl rcvd:n/a timestamp:n/a

long duration call detected:n long duration call duration:n/a timestamp:n/a

Telephony call-legs: 1

SIP call-legs: 0

H323 call-legs: 1

Call agent controlled call-legs: 0

SCCP call-legs: 0

Multicast call-legs: 0

Media call-legs: 0

Total call-legs: 2

[El ingreso GW termina la llamada H323 en la pierna IP enviando el mensaje Complete de la versión H225 al CVP](#)

**Call is connected to VXML Gateway**

11E6 : 228 2061411860ms.1 +160 pid:2 Answer 9999 active

dur 00:00:44 tx:1942/326256 rx:2221/354112

Tele 1/0/0:23 (228) [1/0/0.1] tx:44300/44300/0ms g711ulaw noise:-79 acom:7  
i/0:-44/-18 dBm

11E6 : 229 2061411870ms.1 +130 pid:1 Originate 2#8005555555 active

dur 00:00:44 tx:2215/1169571516 rx:1942/310720

IP 14.50.201.15:21134 SRTP: off rtt:0ms pl:35210/40ms lost:0/0/0 delay:55/55/65ms  
g711ulaw TextRelay: off

media inactive detected:n media contrl rcvd:n/a timestamp:n/a

long duration call detected:n long duration call duration:n/a timestamp:n/a

Telephony call-legs: 1

SIP call-legs: 0

H323 call-legs: 1

Call agent controlled call-legs: 0

SCCP call-legs: 0

Multicast call-legs: 0

Media call-legs: 0

Total call-legs: 2

**Call is connected to Agent IP Phone**

11E6 : 228 2061411860ms.1 +160 pid:2 Answer 9999 active

dur 00:01:06 tx:2848/478464 rx:3343/533632

Tele 1/0/0:23 (228) [1/0/0.1] tx:66730/66730/0ms g711ulaw noise:-54 acom:7  
i/0:-44/-44 dBm

11E6 : 229 2061411870ms.1 +130 pid:1 Originate 2#8005555555 active

dur 00:01:06 tx:3336/1169571516 rx:2848/455680

IP 14.50.202.26:17156 SRTP: off rtt:1ms pl:10290/0ms lost:0/0/0 delay:55/55/65ms  
g711ulaw TextRelay: off

media inactive detected:n media contrl rcvd:n/a timestamp:n/a

long duration call detected:n long duration call duration:n/a timestamp:n/a

Telephony call-legs: 1

SIP call-legs: 0

H323 call-legs: 1

Call agent controlled call-legs: 0

SCCP call-legs: 0

Multicast call-legs: 0

Media call-legs: 0

Total call-legs: 2

[EI GW envía DisengageRequest \(DRQ\) al portero](#)

**Call is connected to VXML Gateway**

11E6 : 228 2061411860ms.1 +160 pid:2 Answer 9999 active

dur 00:00:44 tx:1942/326256 rx:2221/354112

Tele 1/0/0:23 (228) [1/0/0.1] tx:44300/44300/0ms g711ulaw noise:-79 acom:7  
i/0:-44/-18 dBm

11E6 : 229 2061411870ms.1 +130 pid:1 Originate 2#8005555555 active

dur 00:00:44 tx:2215/1169571516 rx:1942/310720

IP 14.50.201.15:21134 SRTP: off rtt:0ms pl:35210/40ms lost:0/0/0 delay:55/55/65ms  
g711ulaw TextRelay: off

media inactive detected:n media contrl rcvd:n/a timestamp:n/a

long duration call detected:n long duration call duration:n/a timestamp:n/a

Telephony call-legs: 1

SIP call-legs: 0

H323 call-legs: 1

Call agent controlled call-legs: 0

SCCP call-legs: 0

Multicast call-legs: 0

Media call-legs: 0

Total call-legs: 2

**Call is connected to Agent IP Phone**

11E6 : 228 2061411860ms.1 +160 pid:2 Answer 9999 active

dur 00:01:06 tx:2848/478464 rx:3343/533632

Tele 1/0/0:23 (228) [1/0/0.1] tx:66730/66730/0ms g711ulaw noise:-54 acom:7  
i/0:-44/-44 dBm

11E6 : 229 2061411870ms.1 +130 pid:1 Originate 2#8005555555 active

dur 00:01:06 tx:3336/1169571516 rx:2848/455680

IP 14.50.202.26:17156 SRTP: off rtt:1ms pl:10290/0ms lost:0/0/0 delay:55/55/65ms  
g711ulaw TextRelay: off

media inactive detected:n media contrl rcvd:n/a timestamp:n/a

long duration call detected:n long duration call duration:n/a timestamp:n/a

Telephony call-legs: 1

SIP call-legs: 0

H323 call-legs: 1

Call agent controlled call-legs: 0

SCCP call-legs: 0

Multicast call-legs: 0

Media call-legs: 0

Total call-legs: 2

[La conexión H245 entre el GW y el CVP consigue cerrada después del intercambio de los comandos CLC y de EndSession](#)

**Call is connected to VXML Gateway**

11E6 : 228 2061411860ms.1 +160 pid:2 Answer 9999 active

dur 00:00:44 tx:1942/326256 rx:2221/354112

Tele 1/0/0:23 (228) [1/0/0.1] tx:44300/44300/0ms g711ulaw noise:-79 acom:7  
i/0:-44/-18 dBm

11E6 : 229 2061411870ms.1 +130 pid:1 Originate 2#8005555555 active

dur 00:00:44 tx:2215/1169571516 rx:1942/310720

IP 14.50.201.15:21134 SRTP: off rtt:0ms pl:35210/40ms lost:0/0/0 delay:55/55/65ms  
g711ulaw TextRelay: off

media inactive detected:n media contrl rcvd:n/a timestamp:n/a

long duration call detected:n long duration call duration:n/a timestamp:n/a

Telephony call-legs: 1

SIP call-legs: 0

H323 call-legs: 1

Call agent controlled call-legs: 0

SCCP call-legs: 0

Multicast call-legs: 0

Media call-legs: 0

Total call-legs: 2

**Call is connected to Agent IP Phone**

11E6 : 228 2061411860ms.1 +160 pid:2 Answer 9999 active

dur 00:01:06 tx:2848/478464 rx:3343/533632

Tele 1/0/0:23 (228) [1/0/0.1] tx:66730/66730/0ms g711ulaw noise:-54 acom:7  
i/0:-44/-44 dBm

11E6 : 229 2061411870ms.1 +130 pid:1 Originate 2#8005555555 active

dur 00:01:06 tx:3336/1169571516 rx:2848/455680

IP 14.50.202.26:17156 SRTP: off rtt:1ms pl:10290/0ms lost:0/0/0 delay:55/55/65ms  
g711ulaw TextRelay: off

media inactive detected:n media contrl rcvd:n/a timestamp:n/a

long duration call detected:n long duration call duration:n/a timestamp:n/a

Telephony call-legs: 1

SIP call-legs: 0

H323 call-legs: 1

Call agent controlled call-legs: 0

SCCP call-legs: 0

Multicast call-legs: 0

Media call-legs: 0

Total call-legs: 2

## [Información Relacionada](#)

- [Soporte de tecnología de voz](#)
- [Soporte de Productos de Voice and Unified Communications](#)
- [Troubleshooting de Cisco IP Telephony](#)
- [Soporte Técnico y Documentación - Cisco Systems](#)