

# 目录

## [简介](#)

## [如何升级SPA400固件？](#)

## [相关信息](#)

## [简介](#)

本文是一系列协助设置、排错和维护Cisco小型企业产品文档中的一篇。

### Q. [如何升级SPA400固件？](#)

A.

新的固件添加许多修正和高级功能到SPA400 -互联网电话网关用4个FXO端口。为了升级SPA400的固件，请执行这两个步骤：

1. 下载固件
2. 升级固件SPA400


### 下载固件

#### 步骤 1：

在下载前固件，确保您的计算机有活动互联网连接。？如果您的计算机直接连到路由器的，而无法上线，请断开您的路由器并且把您的计算机直接插到您的电缆或DSL调制解调器。

#### 步骤 2：

为了去Linksys下载页，[点击此处](#)和验证您的Linksys产品型号和版本号。对于说明，点击**我的型号**的地方？

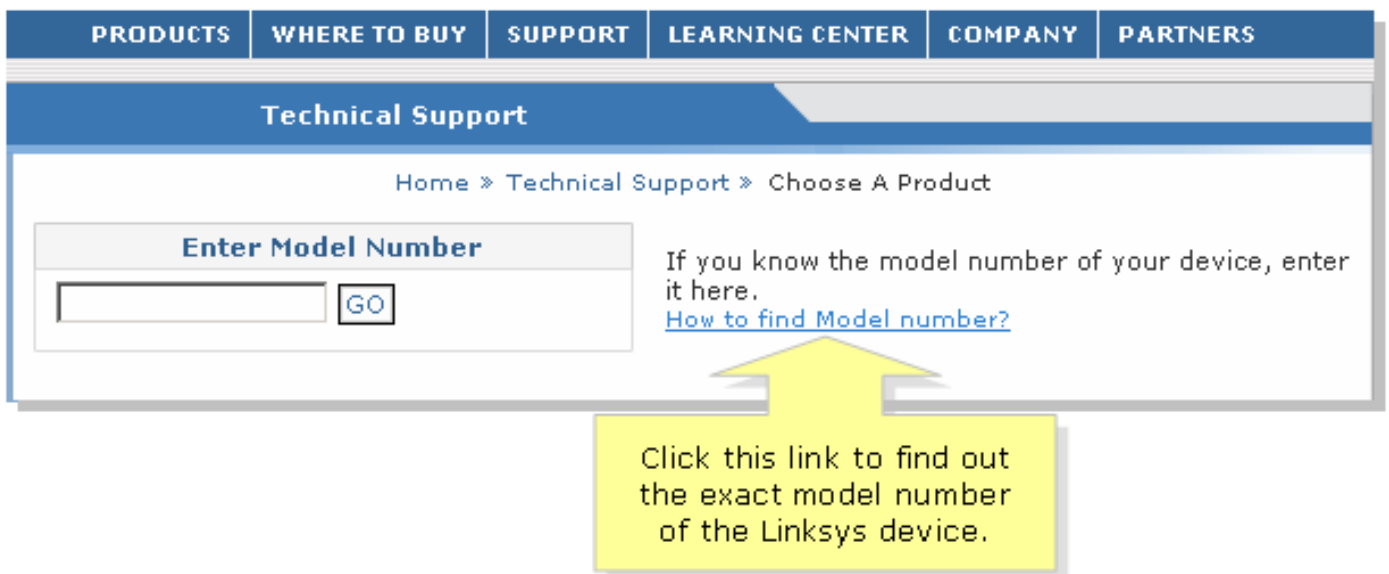

The screenshot shows the Linksys Technical Support website. At the top, there is a navigation bar with links: PRODUCTS, WHERE TO BUY, SUPPORT, LEARNING CENTER, COMPANY, and PARTNERS. Below this is a blue header for 'Technical Support'. The main content area shows a breadcrumb trail: Home » Technical Support » Choose A Product. There is a form titled 'Enter Model Number' with a text input field and a 'GO' button. To the right of the form, there is text: 'If you know the model number of your device, enter it here.' and a blue link: 'How to find Model number?'. A yellow callout box with a white arrow points to this link, containing the text: 'Click this link to find out the exact model number of the Linksys device.'

#### 步骤 3：

在获取Linksys产品的型号以后，请在**回车型号**数字域进入型号，然后单击去。

## Technical Support

Home » Technical Support » Choose A Product

## Enter Model Number

GO

If you know the model number of your device, enter it here.

[How to find Model number?](#)

Enter the device's model number on this field.

**步骤 4 :**

寻找找出版版本号并且选择Linksys产品的版本从下拉菜单的。

**注意 :** 镜像可能根据Linksys产品的型号变化。

## SPA400 Downloads

## Device version number



Locate Version Number

Please select version

Please select version

Version 1.0

## Support Tools

-  [Ask Linksys](#)
-  [Community Forums](#)
-  [EasyLink Home Networking Tools](#)

Enter Model Number

GO

Select the device's version from the drop-down menu.

To view pdf files, you will need Adobe Reader installed. Download it for free [here](#).





**Note:** Some of these files have been compressed into zip format to speed up downloading. You will need a third party "un-zipping" programs such as [WinZip](#), to unzip these files.

**步骤 5 :**


点击**固件**为了下载最新的固件文件。


**Downloads For The SPA400**

**Firmware**

|   |  |         |   |
|---|--|---------|---|
| <a href="#">Firmware</a>                                      | 1.0.0.7 1/18/2007 <a href="#">Version Info</a> | 3.30 MB |  |
| <b>Click <b>Firmware</b> to download the latest firmware.</b> |  |         |   |
|   |  | 121 KB  |  |

**Quick Install**

|                               |  |        |   |
|-------------------------------|--|--------|---|
| <a href="#">Quick Install</a> |  | 327 KB |  |
|-------------------------------|--|--------|---|


[Config Guide](#) 382 KB 

**GPL Code**

[Click here to view GPL Code](#)


**步骤 6 :**

如果用Windows XP服务包2 (SP2)和Internet Explorer，在您的浏览器信息柱状图可以发现一个“上推阻止”消息。点击柱状图，选择**临时地允许弹出窗口**，并且再单击**固件**。

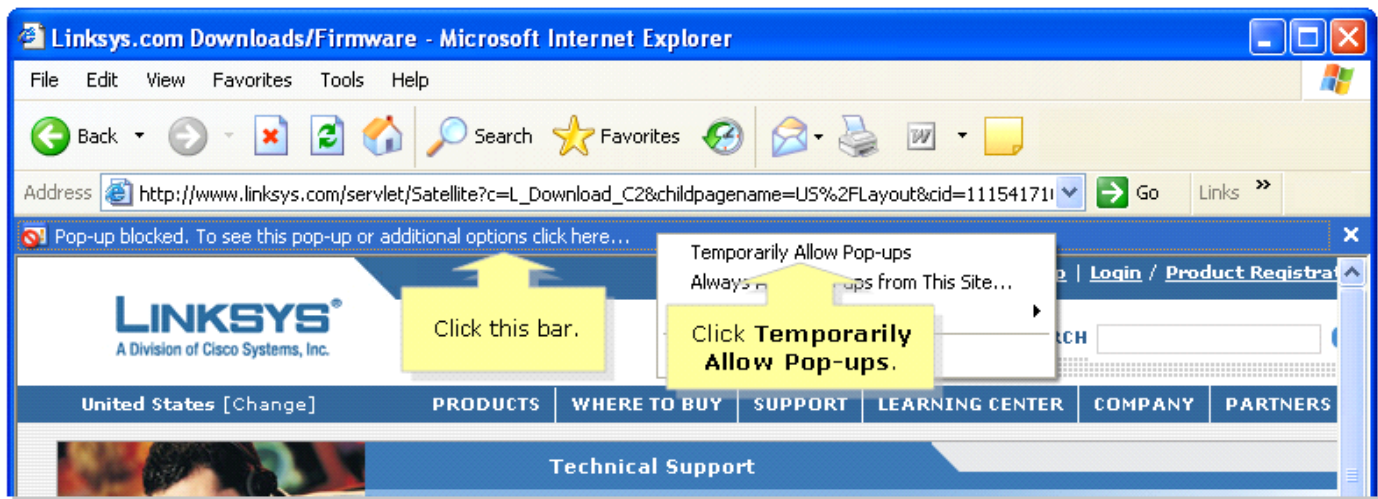

### 步骤 7 :


点击在出现的文件下载对话框的“Save”。寻找Save As对话框，选择文件的一个位置类似桌面，并且点击“Save”。当下载是完全的时，请点击Close，如果提示。

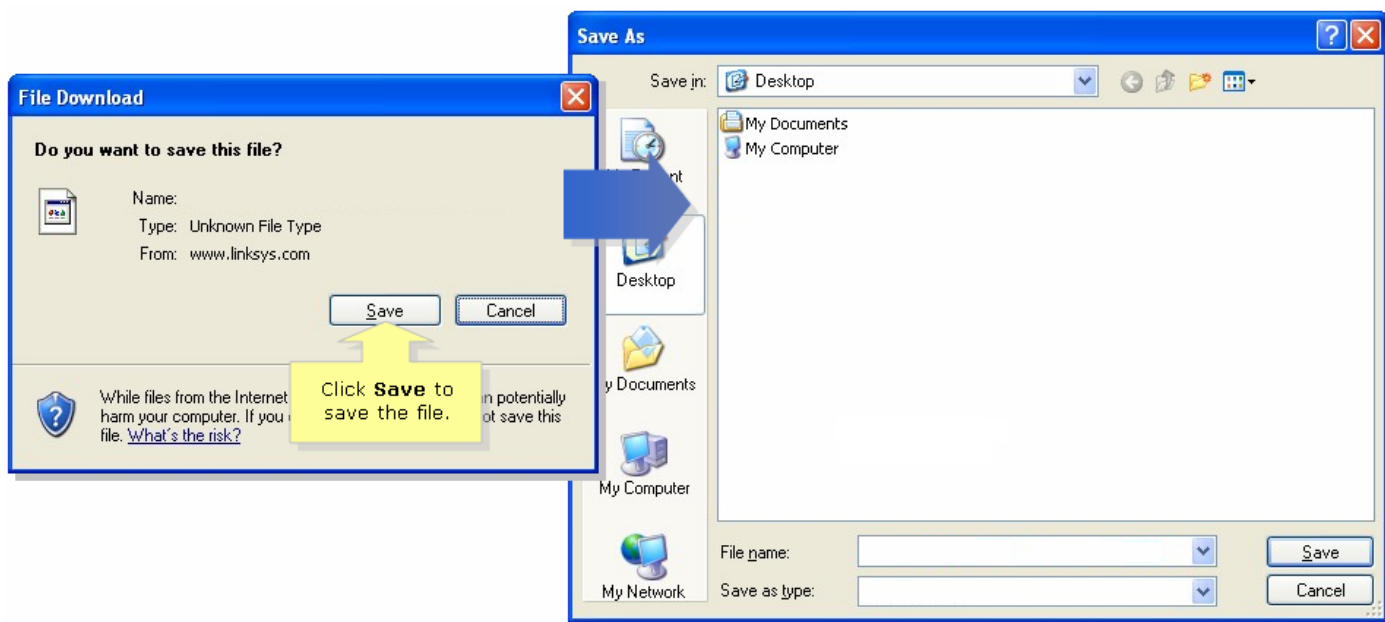

**注意：**文件的名称可能根据您的SPA400驱动程序文件变化-互联网电话网关用4个FXO端口。

### 步骤 8::

双击压缩文件并且解压缩其内容到单个文件夹或到桌面。在下载以后固件文件然后更新固件。请跟随下面步骤获得指导。

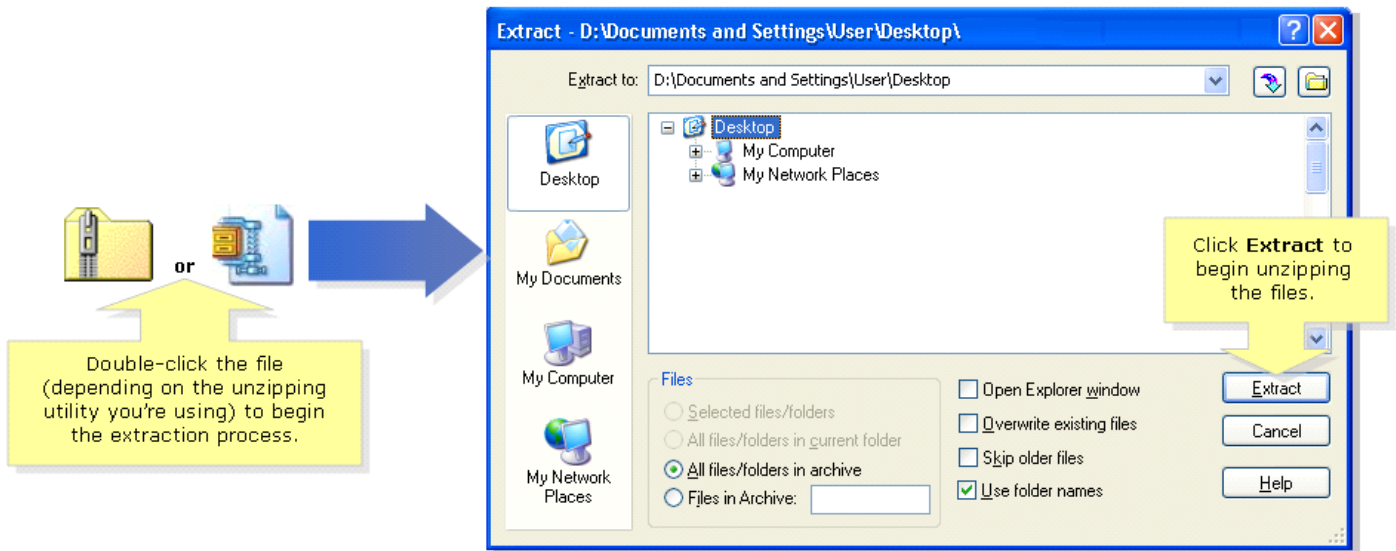

**注意：**您将需要使用实用程序从压缩文件存档打开和提取文件，例如WinZipregTag。为了下载WinZipregTag; 请访问<http://www.winzip.com>。您能也使用Windows XP固定解压缩的功能解从存档的目录中解压缩。


## 升级固件SPA400

### 步骤 1：

访问SPA400 -有4个FXO端口基于Web的设置页的互联网电话网关。如需指导，请点击[这里](#)。


### 步骤 2：

当VoIP网关的基于Web的设置页出版时，请点击**管理**，然后固件升级。

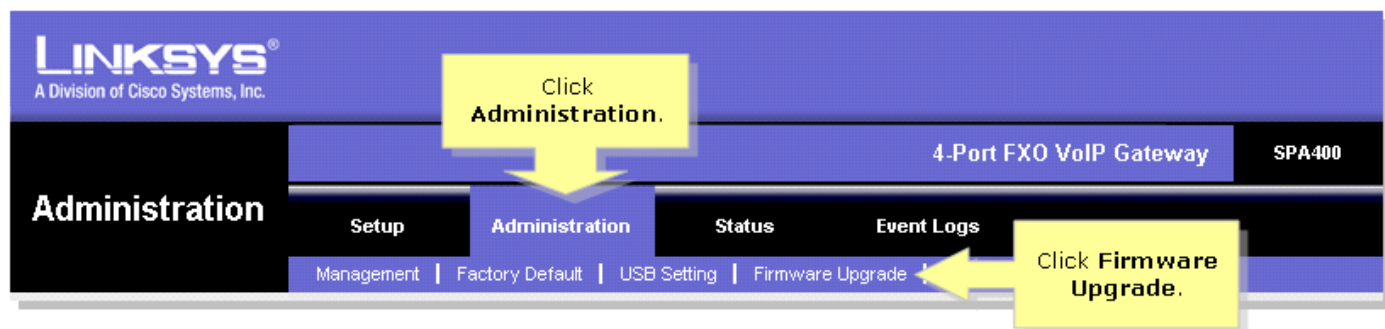


### 步骤 3：

当固件升级窗口打开时，请单击**浏览**。寻找包含必要的文件升级VoIP网关的固件的.bin文件。

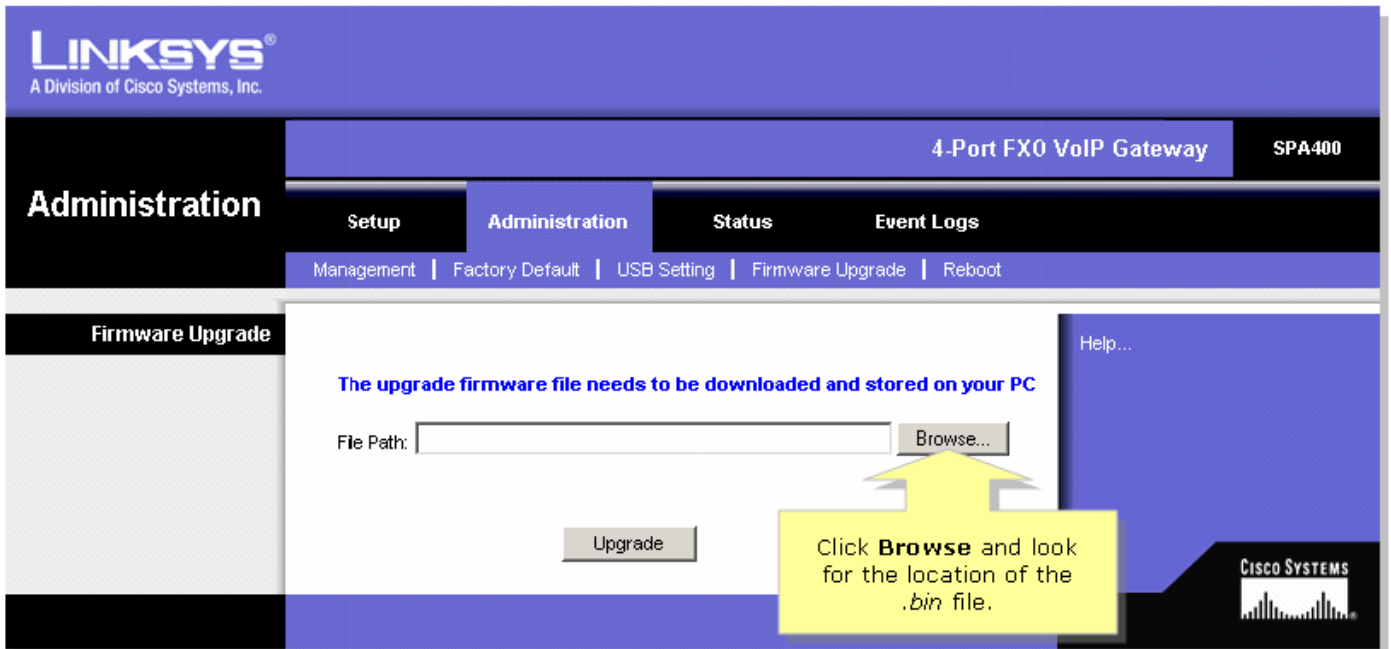

#### 步骤 4 :

浏览到固件文件解压缩的位置并且选择 *.bin* 文件。当文件被选择时，请点击 **Open**。

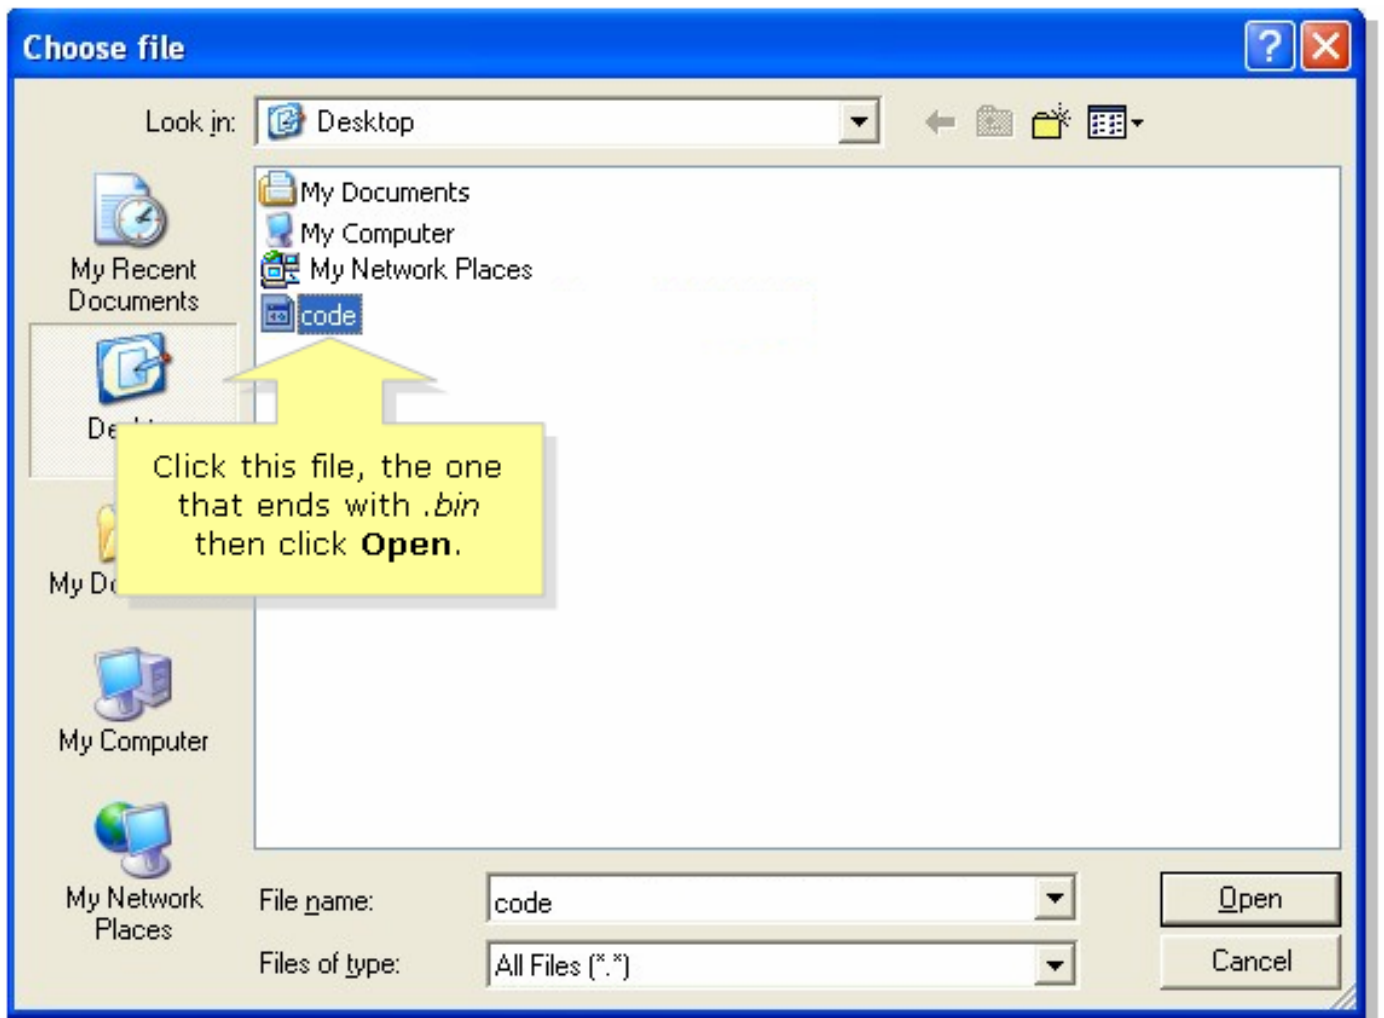

#### 步骤 5 :

单击。

**步骤 6 :**  
关闭Internet Explorer。

**步骤 7 :**  
重新通电单元。

## **相关信息**

- [技术支持和文档 - Cisco Systems](#)