



Cisco VIM REST API

The following topics explain how to use the Cisco VIM REST API to manage Cisco NFVI.

- [Overview to Cisco VIM REST API, on page 1](#)
- [Cisco VIM REST API Resources, on page 3](#)
- [Cisco VIM REST API Using curl for IPv4, on page 38](#)
- [Cisco VIM REST API Using curl for IPv6, on page 44](#)


Overview to Cisco VIM REST API

Cisco VIM provides a Representational State Transfer (REST) API that is used to install, expand, and update Cisco VIM. Actions performed using the REST APIs are:

- Install Cisco VIM on Cisco NFVI pods
- Add and delete pods to and from Cisco NFVI installations
- Update Cisco VIM software
- Replace controller nodes
- Perform cloud maintenance operations
- Run cloud validations using Virtual Machine ThroughPut (VMTP), a data path performance measurement tool for OpenStack clouds

The following figure shows the workflow of Cisco VIM REST API.

Figure 1: Workflow of Cisco VIM REST API

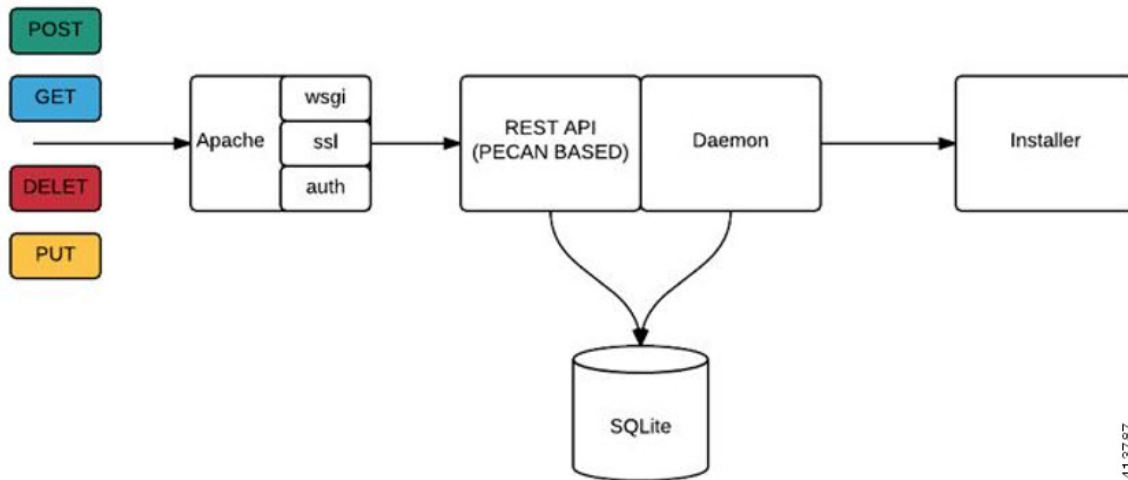

The Cisco VIM REST API security is provided by the Secure Sockets Layer (SSL) included on the Apache web server. The Pecan-based web application is called by `mod_wsgi`, which runs the Rest API server. The Pecan REST API server requires a username and password to authorize the REST API server requests. Apache handles the authorization process, which authorizes the request to access the Pecan web application. Use the Cisco VIM API to upload a new `setup_data.yaml` file, and start, stop, and query the state of the installation. You can use it to manage the cloud, add and remove compute and Ceph nodes, and replace the controller nodes. A REST API to launch VMTP (L2/L3 data plane testing) and CloudPulse is also provided.

The Cisco VIM REST API is enabled by default in the management node if you are using the supplied Cisco VIM `buildnode.iso`. You can access API server on the `br_api` interface on port 8445. Authentication is enabled by default in the web service.

You can access the API end points using the following URL format:

```
https://<Management_node_api_ip>:8445
```

By default, basic authentication is enabled for the API endpoints in the management node. You can find the authentication credentials in the following file in the management node:

```
/opt/cisco/ui_config.json
```

The following code shows a sample `ui_config.json` file.

```
{
  "Kibana-Url": "http://10.10.10.10:5601",
  "RestAPI-Url": "https:// 10.10.10.10:8445",
  "RestAPI-Username": "admin",
  "RestAPI-Password": "a96e86ccb28d92ceb1df",
  "RestDB-Password": "e32de2263336446e0f57",
  "BuildNodeIP": "10.10.10.10"
}
```

For more information on the Rest API for an end-point, see the *Ciscovim Client RestAPI* section in [Troubleshooting](#).

Cisco VIM REST API Resources

Setupdata

REST wrapper for setupdata. Provides methods for listing, creating, modifying, and deleting setupdata.

Retrieving the setupdata

Resource URI

| Verb | URI |
|------|---------------|
| GET | /v1/setupdata |

Example

JSON Request

```
GET /v1/setupdata
Accept: application/json
```

JSON Response

```
200 OK
Content-Type: application/json
{"setupdatas": [{
  "status": "Active",
  "name": "GG34",
  "uuid": "123"
  "meta": {
    "user": "root"
  },
  "jsondata": {
    .....
  }
}]}
```

Creating the setupdata

Resource URI

| Verb | URI |
|------|---------------|
| POST | /v1/setupdata |

Example

JSON Request

```
POST /v1/setupdata
Accept: application/json
```

```
{
  "name": "GG34",
  "uuid": "123"
  "meta": {
    "user": "root"
  },
  "jsondata": {
    .....
  }
}
```

```

    }
  }

```

JSON Response

```

201 OK
Content-Type: application/json
{
  "status": "Active",
  "name": "GG34",
  "uuid": "123"
  "meta": {
    "user": "root"
  },
  "jsondata": {
    .....
  }
}

```

```

400 Bad Request
Content-Type: application/json
{
  "debuginfo": null
  "faultcode": "Client"
  "faultstring": "Error"
}

```

```

409 CONFLICT
Content-Type: application/json
{
  "debuginfo": null
  "faultcode": "Client"
  "faultstring": "Error"
}

```

Retrieving a single setupdata

Resource URI

| Verb | URI |
|------|--------------------|
| GET | /v1/setupdata/(id) |

Property:

id—The ID of the setupdata that you want to retrieve.

Example

JSON Request

```

GET /v1/setupdata/123
Accept: application/json

```

JSON Response

```

200 OK
Content-Type: application/json
{
  "status": "Active",
  "name": "GG34",
  "uuid": "123"
}

```

```

        "meta":{
            "user":"root"
        },
        "jsondata":{
            .....
        }
    }
}

404 NOT FOUND
Content-Type: application/json
{
    "debuginfo": null
    "faultcode": "Client"
    "faultstring": "Setupdata could not be found."
}

```

Updating a setupdata

Resource URI

| Verb | URI |
|------|--------------------|
| PUT | /v1/setupdata/(id) |

Property:

id—The ID of the setupdata that you want to update.

Example

JSON Request

```

PUT /v1/setupdata/123
Accept: application/json

```

JSON Response

```

200 OK
Content-Type: application/json
{
    "status": "Active",
    "name": "GG34",
    "uuid": "123"
    "meta":{
        "user":"root"
    },
    "jsondata":{
        .....
    }
}

404 NOT FOUND
Content-Type: application/json
{
    "debuginfo": null
    "faultcode": "Client"
    "faultstring": "Setupdata could not be found."
}

```

Deleting a setupdata

Resource URI

| Verb | URI |
|--------|--------------------|
| DELETE | /v1/setupdata/(id) |

Property:

id—The ID of the setupdata that you want to delete.

Example

JSON Request

```
DELETE /v1/setupdata/123
Accept: application/json
```

JSON Response

```
204 NO CONTENT
Returned on success
```

```
404 NOT FOUND
Content-Type: application/json
{
  "debuginfo": null
  "faultcode": "Client"
  "faultstring": "Setupdata could not be found."
}
```

```
400 BAD REQUEST
Content-Type: application/json
```

```
{
  "debuginfo": null
  "faultcode": "Client"
  "faultstring": "Setupdata cannot be deleted when it is being used by an installation"
}
```

Install resource

REST wrapper for install. Provides methods for starting, stopping, and viewing the status of the installation process.

Return a list of installation

Resource URI

| Verb | URI |
|------|-------------|
| GET | /v1/install |

Example

JSON Request

```
GET /v1/install
Accept: application/json
```

JSON Response

```
200 OK
Content-Type: application/json
```

```

{"installs": [{
  "ceph": "Skipped",
  "uuid": "123",
  "setupdata": "345",
  "vmtpresult": "{
    "status": "PASS",
    "EXT_NET": []
  }",
  "baremetal": "Success",
  "orchestration": "Success",
  "validationstatus": "{
    "status": "PASS",
    "Software_Validation": [],
    "Hardware_Validation": []
  }",
  "currentstatus": "Completed",
  "validation": "Success",
  "hostsetup": "Success",
  "vmtp": "Skipped"
}]
}

```

Create an installation

Resource URI

| Verb | URI |
|------|-------------|
| POST | /v1/install |

Example

JSON Request

```

GET /v1/install
Accept: application/js
{
  "setupdata": "123",
  "stages": [
    "validation",
    "bootstrap",
    "runtimevalidation",
    "baremetal",
    "orchestration",
    "hostsetup",
    "ceph",
    "vmtp"
  ]
}

```

JSON Response

```

201 CREATED
Content-Type: application/json
{
  "ceph": "Skipped",
  "uuid": "123",
  "setupdata": "345",
  "vmtpresult": "{
    "status": "PASS",
    "EXT_NET": []
  }",
  "baremetal": "Success",

```

```

    "orchestration": "Success",
    "validationstatus": "{
      "status": "PASS",
      "Software_Validation": [],
      "Hardware_Validation": []
    }",
    "currentstatus": "Completed",
    "validation": "Success",
    "hostsetup": "Success",
    "vmtp": "Skipped"
  }

```

```

409 CONFLICT
Content-Type: application/json
{
  "debuginfo": null
  "faultcode": "Client"
  "faultstring": "Install already exists"
}

```

Retrieve the installation

Resource URI

| Verb | URI |
|------|------------------|
| GET | /v1/install/{id} |

Property:

id—The ID of the installation that you want to retrieve.

Example

JSON Request

```

GET /v1/install/345
Accept: application/js

```

JSON Response

```

200 OK
Content-Type: application/json
{
  "ceph": "Skipped",
  "uuid": "123",
  "setupdata": "345",
  "vmtpresult": "{
    "status": "PASS",
    "EXT_NET": []
  }",
  "baremetal": "Success",
  "orchestration": "Success",
  "validationstatus": "{
    "status": "PASS",
    "Software_Validation": [],
    "Hardware_Validation": []
  }",
  "currentstatus": "Completed",
  "validation": "Success",
  "hostsetup": "Success",

```



```

    "vmtp": "Skipped"
  }

404 NOT FOUND
Content-Type: application/json
{
  "debuginfo": null
  "faultcode": "Client"
  "faultstring": "Install doesn't exists"
}

```

Stop the installation

Resource URI

| Verb | URI |
|--------|------------------|
| DELETE | /v1/install/{id} |

Property:

id—The ID of the installation that you want to stop.

Example

JSON Request

```

DELETE /v1/install/345
Accept: application/js

```

JSON Response

```

204 NO CONTENT
Content-Type: application/json

404 NOT FOUND
Content-Type: application/json
{
  "debuginfo": null
  "faultcode": "Client"
  "faultstring": "Install doesn't exists"
}

```

Nodes

Getting a list of nodes

Resource URI

| Verb | URI |
|------|-----------|
| GET | /v1/nodes |

Example

JSON Request

```

Get /v1/nodes
Accept: application/js

```

JSON Response

```

200 OK
Content-Type: application/json
{
  "nodes": [
    [
      "status": "Active",
      "uuid": "456",
      "setupdata": "123",
      "node_data": "{
        "rack_info": {
          "rack_id": "RackA"
        },
        "cimc_info": {
          "cimc_ip": "10.10.10.10"
        },
        "management_ip": "7.7.7.10"
      }",
      "updated_at": null,
      "mtype": "compute",
      "install": "345",
      "install_logs": "logurl",
      "created_at": "2016-0710T06:17:03.761152",
      "name": " compute-1"
    ]
  ]
}

```

Add New Nodes

The nodes are in compute or block_storage type. Before adding the nodes to the system, the name of the nodes and other necessary information like cimc_ip and rackid must be updated in the setupdata object. If the setupdata object is not updated, the post call does not allow you to add the node.

Resource URI

| Verb | URI |
|------|-----------|
| POST | /v1/nodes |

Example

JSON Request

```

POST /v1/nodes
Accept: application/js
{
  "name" : "compute-5"
}

```

JSON Response

```

201 CREATED
Content-Type: application/json
{
  "status": "ToAdd",
  "uuid": "456",
  "setupdata": "123",
  "node_data": "{
    "rack_info": {

```

```

    "rack_id": "RackA"
  },
  "cimc_info": {
    "cimc_ip": "10.10.10.10"
  },
  "management_ip": "7.7.7.10"
  },
  "updated_at": null,
  "mtype": "compute",
  "install": "345",
  "install_logs": "logurl",
  "created_at": "2016-0710T06:17:03.761152",
  "name": " compute-1"
}

```

Retrieve information about a particular node

Resource URI

| Verb | URI |
|------|---------------|
| GET | /v1/nodes{id} |

Property:

id—The ID of the node that you want to retrieve.

Example

JSON Request

```

POST /v1/nodes
Accept: application/js

```

JSON Response

```

200 OK
Content-Type: application/json
{
  "status": "Active",
  "uuid": "456",
  "setupdata": "123",
  "node_data": "{
    "rack_info": {
      "rack_id": "RackA"
    },
    "cimc_info": {
      "cimc_ip": "10.10.10.10"
    },
    "management_ip": "7.7.7.10"
  }",
  "updated_at": null,
  "mtype": "compute",
  "install": "345",
  "install_logs": "logurl",
  "created_at": "2016-0710T06:17:03.761152",
  "name": " compute-1"
}

404 NOT FOUND
Content-Type: application/json
{

```

```

    "debuginfo": null
    "faultcode": "Client"
    "faultstring": "Node doesn't exists"
  }

```

Remove a Node

The node that must be deleted must be removed from the setupdata object. Once the setupdata object is updated, you can safely delete the node. The node object cannot be deleted until it calls the remove node backend and succeeds.

Resource URI

| Verb | URI |
|--------|---------------|
| DELETE | /v1/nodes{id} |

Property:

id—The ID of the node that you want to remove.

Example

JSON Request

```

DELETE /v1/nodes/456
Accept: application/js

```

JSON Response

```

204 ACCEPTED
Content-Type: application/json

404 NOT FOUND
Content-Type: application/json
{
  "debuginfo": null
  "faultcode": "Client"
  "faultstring": "Node doesn't exists"
}

```

To clear the database and delete the entries in the nodes, the delete API is called with special parameters that are passed along with the delete request. The JSON parameters are in the following format.

JSON Request

```

DELETE /v1/nodes/456
Accept: application/js
{
  "clear_db_entry": "True"
}

```

JSON Response

```

204 ACCEPTED
Content-Type: application/json

404 NOT FOUND
Content-Type: application/json

```

```
{
  "debuginfo": null
  "faultcode": "Client"
  "faultstring": "Node doesn't exists"
}
```



Note This is done only if the node is deleted from the REST API database. The failure reason of the node must be rectified manually apart from the API. True is a string and not a boolean in the preceding line.

Replace a controller

Resource URI

| Verb | URI |
|------|---------------|
| PUT | /v1/nodes{id} |

Property:

id—The ID of the controller that you want to replace.

Example

JSON Request

```
PUT /v1/nodes/456
Accept: application/js
```

JSON Response

```
200 OK
Content-Type: application/json

404 NOT FOUND
Content-Type: application/json
{
  "debuginfo": null
  "faultcode": "Client"
  "faultstring": "Node doesn't exists"
}
```

Offline validation

REST wrapper does the offline validation of setupdata. Rest Wrapper does only the Software Validation of the input setupdata.

Create an offline validation operation

Resource URI

| Verb | URI |
|------|-----------------------|
| POST | /v1/offlinevalidation |

Example

JSON Request

```
POST /v1/offlinevalidation
Accept: application/json
{
  "jsondata": "... .."
}
```

JSON Response

```
201 CREATED
Content-Type: application/json
{
  "status": "NotValidated",
  "uuid": "bb42e4ba-c8b7-4a5c-98b3-1f384aae2b69",
  "created_at": "2016-02-03T02:05:28.384274",
  "updated_at": "2016-02-03T02:05:51.880785",
  "jsondata": "{}",
  "validationstatus": {
    "status": "PASS",
    "Software_Validation": [],
    "Hardware_Validation": []
  }
}
```

Retrieve the results of offline validation

Resource URI

| Verb | URI |
|------|-----------------------|
| GET | /v1/offlinevalidation |

Property:

id—The ID of the node you want to retrieve.

Example

JSON Request

```
GET /v1/offlinevalidation/789
Accept: application/json
```

JSON Response

```
200 OK
Content-Type: application/json
{
  "status": " ValidationSuccess",
  "uuid": "bb42e4ba-c8b7-4a5c-98b3-1f384aae2b69",
  "created_at": "2016-02-03T02:05:28.384274",
  "updated_at": "2016-02-03T02:05:51.880785",
  "jsondata": "{}",
  "validationstatus": {
    "status": "PASS",
    "Software_Validation": [],
    "Hardware_Validation": []
  }
}
```

Update

Start an Update Process

Resource URI

| Verb | URI |
|------|------------|
| POST | /v1/update |

Parameters:

- fileupload - "tar file to upload"
- filename - "Filename being uploaded"

Example

JSON Request

```
curl -sS -X POST --form
"fileupload=@Test/installer.good.tgz" --form
"filename=installer.good.tgz"
https://10.10.10.8445/v1/update
```



Note This curl request is done as a form request.

JSON Response

```
200 OK
Content-Type: application/json
{
  "update_logs": "logurl",
  "update_status": "UpdateSuccess",
  "update_filename": "installer-4579.tgz",
  "created_at": "2016-07-10T18:33:52.698656",
  "updated_at": "2016-07-10T18:54:56.885083"
}

409 CONFLICT
Content-Type: application/json
{
  "debuginfo": null
  "faultcode": "Client"
  "faultstring": "Uploaded file is not in tar format"
}
```

Roll back an update

Resource URI

| Verb | URI |
|------|------------|
| PUT | /v1/update |

Example

JSON Request

```
PUT /v1/update
Accept: application/json
{
  "action": "rollback"
}
```

JSON Response

```
200 OK
Content-Type: application/json
{
  "update_logs": "logurl",
  "update_status": "ToRollback",
  "update_filename": "installer-4579.tgz",
  "created_at": "2016-07-10T18:33:52.698656",
  "updated_at": "2016-07-10T18:54:56.885083"
}
```

Commit an update

Resource URI

| Verb | URI |
|------|------------|
| PUT | /v1/update |

Example

JSON Request

```
PUT /v1/update
Accept: application/json
{
  "action": "commit"
}
```

JSON Response

```
200 OK
Content-Type: application/json
{
  "update_logs": "logurl",
  "update_status": "ToCommit",
  "update_filename": "installer-4579.tgz",
  "created_at": "2016-07-10T18:33:52.698656",
  "updated_at": "2016-07-10T18:54:56.885083"
}
```

Retrieve the details of an update

Resource URI

| Verb | URI |
|------|------------|
| GET | /v1/update |

Example

JSON Request

```
GET /v1/update
Accept: application/json
```

JSON Response

```
200 OK
Content-Type: application/json
{
  "update_logs": "logurl",
  "update_status": "UpdateSuccess",
  "update_filename": "installer-4579.tgz",
  "created_at": "2016-07-10T18:33:52.698656",
  "updated_at": "2016-07-10T18:54:56.885083"
}
```

Secrets

Retrieve the list of secrets that are associated with the OpenStack Setup

You can retrieve the set of secret password that are associated with the OpenStack setup using the preceding api. This gives the list of secrets for each service in OpenStack.

Resource URI

| Verb | URI |
|------|-------------|
| GET | /v1/secrets |

Example

JSON Request

```
GET /v1/secrets
Accept: application/json
```

JSON Response

```
200 OK
Content-Type: application/json
{
  "HEAT_KEYSTONE_PASSWORD": "xxxx",
  "CINDER_KEYSTONE_PASSWORD": "xxxxx",
  ....
  "RABBITMQ_PASSWORD": "xxxxxx"
}
```

OpenStack Configs

Retrieve the list of OpenStack configs associated with the OpenStack Setup

You can retrieve the set of OpenStack configs associated with the OpenStack setup using the preceding api. This gives the current settings of different configs such as verbose logging, debug logging for different OpenStack services.

Resource URI

| Verb | URI |
|------|----------------------|
| GET | /v1/openstack_config |

Example

JSON Request

```
GET /v1/openstack_config
Accept: application/json
```

JSON Response

```
200 OK
Content-Type: application/json
{
  "CINDER_DEBUG_LOGGING": false,
  "KEYSTONE_DEBUG_LOGGING": false,
  ...:
  ...:
  "NOVA_VERBOSE_LOGGING": true
}
```

Version

Retrieve the version of the Cisco Virtualized Infrastructure Manager.

Resource URI

| Verb | URI |
|------|-------------|
| GET | /v1/version |

Example

JSON Request

```
GET /v1/version
Accept: application/json
```

JSON Response

```
200 OK
Content-Type: application/json
{"version": "1.9.1"}
```

Health of the Management Node

Retrieve the health of the Management node

This API is used to retrieve the health of the management node. It checks various parameters such as partitions, space and so on.

Resource URI

| Verb | URI |
|------|------------|
| GET | /v1/health |

Example

JSON Request

```
GET /v1/health
Accept: application/json
```

JSON Response

```
200 OK
Content-Type: application/json
```

```
{
  "status": "PASS",
  "pod_status": {
    "color": "BLUE",
    "version": "<VERSION_NO.>"
  },
  "insight_version": "<VERSION_NO.>"
}
```

Color signifies the health of the pod for Insight:

- Grey signifies that no installation is kicked off on the pod.
- Green signifies that everything is in Good state and cloud installation is active.
- Blue signifies that some operation is running on the pod.
- Red signifies that the pod is in critical state and you might need TAC support to recover the pod.
- Amber indicates a warning if a pod management (Add/Remove/Replace) operation failed.

Hardware Information

REST wrapper to query hardware information of setupdata. This returns the hardware information of all hardware available in the setupdata.

Create a Hwinfo operation

Resource URI

| Verb | URI |
|------|------------|
| GET | /v1/hwinfo |

Example

JSON Request

```
POST /v1/hwinfo
Accept: application/json
{
  "setupdata": "c94d7973-2fcc-4cd1-832d-453d66e6b3bf"
}
```

JSON Response

```
201 CREATED
Content-Type: application/json
{
  "status": "hwinfoscheduled",
  "uuid": "928216dd-9828-407b-9739-8a7162bd0676",
  "setupdata": "c94d7973-2fcc-4cd1-832d-453d66e6b3bf",
  "created_at": "2017-03-19T13:41:25.488524",
  "updated_at": null,
  "hwinforeresult": ""
}
```

Retrieve the results of Hwinfo Operation

Resource URI

| Verb | URI |
|------|-----------------|
| GET | /v1/hwinfo/{id} |

Property:

id—The ID of the node you want to query.

Example

JSON Request

```
GET /v1/hwinfo/789
Accept: application/json
```

JSON Response

```
200 OK
Content-Type: application/json
{
  "status": "hwinfosuccess",
  "uuid": "928216dd-9828-407b-9739-8a7162bd0676",
  "setupdata": "c94d7973-2fcc-4cd1-832d-453d66e6b3bf",
  "created_at": "2017-03-19T13:41:25.488524",
  "updated_at": "2017-03-19T13:42:05.087491",
  "hwinforesult": "{\"172.29.172.73\": {\"firmware\": .....
  .....
  .....
}
```

Release mapping Information

This api is used to see the list of Features included and list of options which can be reconfigured in the Openstack Setup.

Retrieve the release mapping information

Resource URI

| Verb | URI |
|------|--------------------|
| GET | /v1/releasemapping |

JSON Request

```
GET /v1/releasemapping
Accept: application/json
```

JSON Response

```
200 OK
Content-Type: application/json
[
  {
    "SWIFTSTACK": {
      "feature_status": true,
    },
    "desc": "swift stack feature"
  }, .....
  .....
]
```

POST Install operations

The following are the post install operations that can be performed, after the successful installation of OpenStack. It uses a common api. Following is an Example:

1. reconfigure

2. reconfigure -regenerate passwords
3. reconfigure -setpasswords,setopenstack_configs
4. reconfigure -alertmanager_config, -alerting_rules_config
5. check-fernet-keys
6. resync-fernet-keys
7. rotate-fernet-keys

Create a post install operation

Resource URI

| Verb | URI |
|------|----------|
| POST | /v1/misc |

Examples:

JSON Request

```
POST /v1/misc
Accept: application/json
{"action": {"reconfigure": true}}
```

JSON Response

```
201 CREATED
Content-Type: application/json
{
  "uuid": "7e30a671-bacf-4e3b-9a8f-5a1fd8a46733",
  "created_at": "2017-03-19T14:03:39.723914",
  "updated_at": null,
  "operation_status": "OperationScheduled",
  "operation_logs": "",
  "operation_name": {"reconfigure": true}
}
```

JSON Request

```
POST /v1/misc
Accept: application/json
{"action": {"reconfigure": true, "alertmanager_config": <json_config>}}
```

JSON Response

```
201 CREATED
Content-Type: application/json
{
  "uuid": "68b67265-8f09-480e-8608-b8aff77e0ec7",
  "created_at": "2019-01-09T16:42:11.484604+00:00",
  "updated_at": null,
  "operation_status": "OperationScheduled",
  "operation_logs": "",
  "operation_name": {"alertmanager_config": <json_config>, "reconfigure": true}
}
```

Retrieve a status of the post install operation

Resource URI

| Verb | URI |
|------|----------|
| GET | /v1/misc |

Example

JSON Request

```
GET /v1/misc
Accept: application/json
```

JSON Response

```
201 CREATED
Content-Type: application/json
{
  "uuid": "7e30a671-bacf-4e3b-9a8f-5a1fd8a46733",
  "created_at": "2017-03-19T14:03:39.723914",
  "updated_at": "2017-03-19T14:03:42.181180",
  "operation_status": "OperationRunning",
  "operation_logs": "xxxxxxxxxxxxxxxxxxxx",
  "operation_name": "{\"reconfigure\": true}"
}
```

In VIM Rest APIs exist to support NFVBench, query hardware information and to get a list of optional and mandatory features that the pod supports.

Following are the API details:

NFVBench Network Performance Testing**Create NFVBench Run**

Starts the network performance test with provided configuration.

REST API To Create Fixed Rate Test

| Verb | URI |
|------|----------------------------------|
| Post | v1/nfvbench/ create_ndr_pdr_test |

Example

JSON Request

```
POST Request URL
/v1/nfvbench/create_fixed_rate_test
JSON Request:
{"nfvbench_request":
{
  "duration_sec": 20,
  "traffic_profile": [
    {
      "name": "custom",
      "l2frame_size": [
        "64",
        "IMIX",
        "1518"
      ]
    }
  ]
},
"traffic": {
```

```

        "bidirectional": true,
        "profile": "custom"
    },
    "flow_count": 1000
}
}

```

JSON Response

```

201 CREATED
Content-Type: application/json
{
  "status": "not_run",
  "nfvbench_request":
  '{
    "duration_sec": 20,
    "traffic_profile": [
      {
        "name": "custom",
        "l2frame_size": [
          "64",
          "IMIX",
          "1518"
        ]
      }
    ],
    "traffic": {
      "bidirectional": true,
      "profile": "custom"
    },
    "flow_count": 1000
  }',
  "created_at": "2017-08-16T06:14:54.219106",
  "updated_at": null,
  "nfvbench_result": "",
  "test_name": "Fixed_Rate_Test"
}

```

Status Polling

Polling of NFVbench run status which is one of nfvbench_running, nfvbench_failed, nfvbench_completed.

Resource URI

| Verb | URI |
|------|-------------------------|
| GET | v1/nfvbench/<test_name> |

REST API To Get Fixed Rate Test Result

```

GET Request URL
/v1/upgrade/get_fixed_rate_test_result
JSON Response:
Check If NFVbench Test is running
200 OK
Content-Type: application/json
{
  "status": "nfvbench_running",
  "nfvbench_request": '{"traffic": {"bidirectional": true, "profile": "custom"},
"rate": "1000000pps",
"traffic_profile": [{"l2frame_size": ["1518"], "name": "custom"}], "duration_sec": 60,
"flow_count": 1000}',
  "nfvbench_result": ""
  "created_at": "2017-05-30T21:40:40.394274",
}

```

```

        "updated_at": "2017-05-30T21:40:41.367279",
    }

Check If NFVbench Test is completed
200 OK
Content-Type: application/json
{
  "status": "nfvbench_completed",
  "nfvbench_request": '{"traffic": {"bidirectional": true, "profile": "custom"},
    "rate": "1000000pps",
    "traffic_profile": [{"l2frame_size": ["1518"], "name": "custom"}], "duration_sec": 60,
    "flow_count": 1000}',
  "nfvbench_result": '{"status": "PROCESSED", "message": {"date": "2017-08-15 23:15:04"},
    "nfvbench_version": "0.9.3.dev2", ...}',
  "created_at": "2017-05-30T21:40:40.394274",
  "updated_at": "2017-05-30T22:29:56.970779",
}

```

REST API to create NDR/PDR Test

POST Request URL
/v1/nfvbench/create_ndr_pdr_test

Accept: application/json

```

{"nfvbench_request":
{
  "duration_sec": 20,
  "traffic_profile": [
    {
      "name": "custom",
      "l2frame_size": [
        "64",
        "IMIX",
        "1518"
      ]
    }
  ],
  "traffic": {
    "bidirectional": true,
    "profile": "custom"
  },
  "flow_count": 1000
}
}

```

JSON Response

```

201 CREATED
Content-Type: application/json
{
  "status": "not_run",
  "nfvbench_request":
  \{
    "duration_sec": 20,
    "traffic_profile": [
      {
        "name": "custom",
        "l2frame_size": [
          "64",
          "IMIX",
          "1518"
        ]
      }
    ]
  },
  "traffic": {
    "bidirectional": true,

```



```

        "profile": "custom"
    },
    "flow_count": 1000
}'

"created_at": "2017-08-16T07:18:41.652891",
"updated_at": null,
  "nfvbench_result": "",
  "test_name": "NDR_PDR_Test"
}

```

REST API To Get NDR/PDR Test Results

GET Request URL

```
/v1/ nfvbench/get_ndr_pdr_test_result
```

JSON Response:

If Nfvbench NDR/PDR test is running

200 OK

Content-Type: application/json

```

{
  "status": "nfvbench_running",
  "nfvbench_request": '{"duration_sec": 20,
  "traffic": {"bidirectional": true, "profile": "custom"},
  "traffic_profile": [{"l2frame_size": ["64", "IMIX", "1518"], "name": "custom"}],
  "flow_count": 1000}',
  "nfvbench_result": ""
"created_at": "2017-08-16T07:18:41.652891",
"updated_at": "2017-09-30T22:29:56.970779",
}

```

If Nfvbench NDR/PDR test is completed

200 OK

Content-Type: application/json

```

{
  "status": "nfvbench_completed",
  "nfvbench_request": '{"duration_sec": 20,
  "traffic": {"bidirectional": true, "profile": "custom"},
  "traffic_profile": [{"l2frame_size": ["64", "IMIX", "1518"], "name": "custom"}], "flow_count":
  1000}',
  "nfvbench_result": '{"status": "PROCESSED",...}'
"created_at": "2017-08-16T07:18:41.652891",
"updated_at": "2017-09-30T22:29:56.970779",
}

```

REST API to Get Node Hardware Information

Rest API helps you to get the hardware information of all the nodes in the POD through CIMC/UCSM.

- Total Memory
- Firmware Info (Model, Serial Number)
- CIMC IP

GET Request URL

```
/v1/hwinfo
```

Output Response

```

{
  "hwinforesult": {"control-server-2": {"memory": {"total_memory": "131072"},
  "firmware": {"serial_number": "FCH1905V16Q", "fw_model": "UCSC-C220-M4S"},
  "cimc_ip": "172.31.230.100", "storage": {"num_storage": 4},
  "cisco_vic_adapters": {"product_name": "UCS VIC 1225"},

```

```

    "cpu": {"number_of_cores": "24"}, "power_supply": {"power_state": "on"}}
  ...
}

```

REST API to Get Mandatory Features Mapping

POST Request URL
/v1/releasemapping/mandatory_features_mapping

JSON Response:

```

{
  "mandatory": {
    "networkType": {
      "C": {
        "feature_status": true,
        "values": [{"name": "VXLAN/Linux Bridge", "value": "VXLAN/Linux Bridge"}],
        "insight_label": "Tenant Network",
        "desc": "Tenant Network"
      },
      "B": {
        "feature_status": true,
        "values": [{"name": "VXLAN/Linux Bridge", "value": "VXLAN/Linux Bridge"}],
        "insight_label": "Tenant Network",
        "desc": "Tenant Network"
      }
    },
    "cephMode": {
      "all": {
        "feature_status": true,
        "values": [{"name": "Central", "value": "Central"}],
        "insight_label": "Ceph Mode",
        "desc": "Ceph Mode"
      }
    },
    "podType": {
      "C": {
        "feature_status": true,
        "values": [{"name": "Fullon", "value": "fullon"}],
        "insight_label": "POD Type",
        "desc": "POD Type"
      },
      "B": {
        "feature_status": true,
        "values": [{"name": "Fullon", "value": "fullon"}],
        "insight_label": "POD Type",
        "desc": "POD Type"
      }
    },
    "installMode": {
      "all": {
        "feature_status": true,
        "values": [{"name": "Connected", "value": "connected"}, ],
        "insight_label": "Install Mode",
        "desc": "Install Mode"
      }
    }
  },
  "platformType": [{"name": "B-series", "value": "B"}, {"name": "C-series", "value": "C"}],
  "postinstalllinks": {
    "view_cloudpulse": {"always_on": true, "feature_status": true, "platformtype": "all",
    "insight_label": "Run VMTP", "desc": "Cloudpluse"},
    "password_reconfigure": {"always_on": true, "feature_status": true, "platformtype":

```

```

    "all", "insight_label": "Reconfigure Passwords", "desc": "Reconfigure Passwords"}
  }
}

```

REST API to Get Optional Features Mapping

POST Request URL
/v1/releasemapping/optional_features_mapping

JSON Response:

```

[
  {
    "SWIFTSTACK": {
      "feature_status": true,
      "insight_label": "Swiftstack",
      "repeated_redeployment": true,
      "reconfigurable": ["cluster_api_endpoint", "reseller_prefix", "admin_password",
"protocol"],
      "desc": "swift stack feature"
    },
    {
      "heat": {
        "feature_status": true,
        "insight_label": "Heat",
        "repeated_redeployment": false,
        "reconfigurable": ["all"],
        "desc": "Openstack HEAT service"
      }
    },
    ... other features
  ]

```

Cloud sanity information

REST wrapper to run cloud-sanity test suites. The cloud-sanity extension to the VIM REST API enables support for managing cloud-sanity test actions

Create a cloud-sanity test

| Verb | URI |
|------|-------------------------|
| Post | /v1/cloud-sanity/create |

Example

JSON Request

```

POST /v1/cloudsanity/create
Accept: application/json
{"cloudsanity_request": {"command": "create",
                        "action": "test",
                        "test_name": "cephmon",
                        "uuid": ""}}

```

test_name can be all,management,control,compute,cephmon,cephosd

JSON Response

```

201 Created
{
  'cloudsanity_request': "{u'action': u'test', u'command': u'create', u'uuid':
'5dff1662-3d33-4901-808d-479927c01dde',
  u'test_name': u'cephmon'}",
  'cloudsanity_result': ''
}

```

```
'created_at': '2018-01-26T20:32:20.436445',
'status': 'not_run',
'test_name': 'cephmon',
'updated_at': ''
}
```

List cloud-sanity test results

| Verb | URI |
|------|------------------|
| GET | /v1/cloud-sanity |

JSON Request

```
GET /v1/cloudsanity
```

JSON Response

```
200 OK
{ '0b91746f-90b4-4355-a748-727c2e5c59c5': { 'action': 'test',
'created_at': '2018-01-25 12:08:22',
'status': 'cloudsanity_completed',
'test_name': 'management',
'uuid': '0b91746f-90b4-4355-a748-727c2e5c59c5'},

'5695cb31-39e4-4be2-9dee-09e7daffc2e7': { 'action': 'test',
'created_at': '2018-01-25 12:03:06',
'status': 'cloudsanity_completed',
'test_name': 'compute',
'uuid': '5695cb31-39e4-4be2-9dee-09e7daffc2e7'},

'5dff1662-3d33-4901-808d-479927c01dde': { 'action': 'test',
'created_at': '2018-01-26 20:32:20',
'status': 'cloudsanity_completed',
'test_name': 'cephmon',
'uuid': '5dff1662-3d33-4901-808d-479927c01dde'},

'7946255d-df58-4432-b729-20cf16eb5ba5': { 'action': 'test',
'created_at': '2018-01-25 12:05:56',
'status': 'cloudsanity_completed',
'test_name': 'cephosd',
'uuid': '7946255d-df58-4432-b729-20cf16eb5ba5'},

'797d79ba-9ee0-4e11-9d9e-47791dd05e07': { 'action': 'test',
'created_at': '2018-01-25 12:05:11',
'status': 'cloudsanity_completed',
'test_name': 'cephmon',
'uuid': '797d79ba-9ee0-4e11-9d9e-47791dd05e07'},

'962e2c8e-c7b0-4e24-87c1-528cad84002c': { 'action': 'test',
'created_at': '2018-01-26 18:52:31',
'status': 'cloudsanity_completed',
'test_name': 'control',
'uuid': '962e2c8e-c7b0-4e24-87c1-528cad84002c'},

'd0111530-ee3b-45df-994c-a0917fd18e11': { 'action': 'test',
'created_at': '2018-01-26 18:46:23',
'status': 'cloudsanity_completed',
'test_name': 'control',
'uuid': 'd0111530-ee3b-45df-994c-a0917fd18e11'}}
```

List specific cloud-sanity test results

| Verb | URI |
|------|---|
| GET | /v1/cloud-sanity/list/?test_name={all,management,control,compute,cephmon,cephosd} |

JSON Request

```
GET /v1/cloudsanity/list/?test_name=cephmon
Accept: application/json
```

JSON Response

```
200 OK
{ '5dff1662-3d33-4901-808d-479927c01dde': { 'action': 'test',
                                           'created_at': '2018-01-26 20:32:20',
                                           'status': 'cloudsanity_completed',
                                           'test_name': 'cephmon',
                                           'uuid': '5dff1662-3d33-4901-808d-479927c01dde'},

  '797d79ba-9ee0-4e11-9d9e-47791dd05e07': { 'action': 'test',
                                           'created_at': '2018-01-25 12:05:11',
                                           'status': 'cloudsanity_completed',
                                           'test_name': 'cephmon',
                                           'uuid': '797d79ba-9ee0-4e11-9d9e-47791dd05e07'}}
```

Show cloud-sanity test results

| Verb | URI |
|------|------------------------------------|
| GET | /v1/cloud-sanity/show/?uuid=<uuid> |

JSON Request

```
GET /v1/cloudsanity/show/?uuid=d0111530-ee3b-45df-994c-a0917fd18e11
```

JSON Response

```
200 OK
{ 'action': 'test',
  'cloudsanity_request':
    '{u'action': u'test',
     u'command': u'create',
     u'uuid': 'd0111530-ee3b-45df-994c-a0917fd18e11',
     u'test_name': u'control'}",
  'cloudsanity_result':
    '{"status": "PROCESSED",
     "message": {"status": "Pass",
                 "message": "[PASSED] Cloud Sanity Control Checks Passed",
                 "results": {"control": {"ping_all_controller_nodes": "PASSED",
                                         "check_rabbitmq_is_running": "PASSED",
                                         "check_rabbitmq_cluster_status": "PASSED",
                                         "check_nova_service_list": "PASSED",
                                         "ping_internal_vip": "PASSED",
                                         "disk_maintenance_raid_health": "PASSED",
                                         "check_mariadb_cluster_size": "PASSED",
                                         "disk_maintenance_vd_health": "PASSED"}}}}',
  'created_at': '2018-01-26 18:46:23',
  'status': 'cloudsanity_completed',
  'test_name': 'control',
  'updated_at': '2018-01-26 18:47:58',
  'uuid': 'd0111530-ee3b-45df-994c-a0917fd18e11'}
```

Delete cloud-sanity test results

| Verb | URI |
|--------|--------------------------------------|
| DELETE | /v1/cloud-sanity/delete/?uuid=<uuid> |

JSON Request

```
GET /v1/cloudsanity/delete/?uuid=444aa4c8-d2ba-4379-b035-0f47c686d1c4
```

JSON Response

```
200 OK
{
  "status": "deleted",
  "message": "UUID 444aa4c8-d2ba-4379-b035-0f47c686d1c4 deleted from database",
  "uuid": "444aa4c8-d2ba-4379-b035-0f47c686d1c4",
  "error": "None"
}
```

Disk Maintenance information

REST wrapper to query information about RAID disks on Pod nodes. This returns the RAID disk information of all or a selection of RAID disks available in the Pod.

The disk management extension to the VIM REST API enables support for Disk Management actions

Create a Check disk operation

Resource URI

| Verb | URI |
|------|--------------------------|
| POST | /v1/diskmgmt/check_disks |

Example

JSON Request

```
POST /v1/diskmgmt/check_disks Accept: application/json
'{"diskmgmt_request": {"command": "create",
  "action": "check-disks",
  "role": "control",
  "locator": "False",
  "json_display": "False",
  "servers": "", "uuid": ""}}'
```

JSON Response

```
201 Created
Content-Type: application/json
{
  'action': 'check-disks',
  'created_at': '2018-03-08T02:03:18.170849+00:00',
  'diskmgmt_request': "{u'uuid': '0729bdea-cc19-440f-8339-ab21e76be84b',
    u'json_display': u'False',
    u'servers': u'',
    u'locator': u'False',
    u'role': u'control',
    u'action': u'check-disks',
    u'command': u'create'}",
  'diskmgmt_result': '',
  'status': 'not_run',
```

```
    'updated_at': 'None'
  }
```

Create a replace disk operation

| Verb | URI |
|------|----------------------------|
| POST | /v1/diskmgmt/replace_disks |

Example

JSON Request

```
POST /v1/diskmgmt/replace_disks
Accept: application/json
'{"diskmgmt_request": {"command": "create",
                      "action": "replace-disks",
                      "role": "control",
                      "locator": "False",
                      "json_display": "False",
                      "servers": "", "uuid": ""}}'
```

JSON Response

```
201 Created
Content-Type: application/json
{
  "status": "not_run",
  "diskmgmt_request": "{u'uuid': 'cb353f41-6d25-4190-9386-330e971603c9',
                       u'json_display': u'False',
                       u'servers': u'',
                       u'locator': u'False',
                       u'role': u'control',
                       u'action': u'replace-disks',
                       u'command': u'create'}",
  "created_at": "2018-03-09T12:43:41.289531+00:00",
  "updated_at": "",
  "diskmgmt_result": "",
  "action": "replace-disks"}
```

List check disk operation

| Verb | URI |
|------|--|
| GET | /v1/diskmgmt/list/?action= {check-disks,replace-disks &role={all,management,control,compute} |

Example

JSON Request

```
GET /v1/diskmgmt/list/?action=check-disks&role=all
```

JSON Response

```
200 OK
Content-Type: application/json
{
  '0be7a55a-37fe-43a1-a975-cbf93ac78893': {
    'action': 'check-disks',
    'created_at': '2018-03-05 14:45:45+00:00',
    'role': 'compute',
    'status': 'diskmgmt_completed',
```

```

      '0be7a55a-37fe-43a1-a975-cbf93ac78893'},
      '861d4d73-ffee-40bf-9348-13afc697ee3d': {
        'action': 'check-disks',
        'created_at': '2018-03-05 14:44:47+00:00',
        'role': 'control',
        'status': 'diskmgmt_completed',
        'uuid':
      '861d4d73-ffee-40bf-9348-13afc697ee3d'},
      'cdfd18c1-6346-47a2-b0f5-661305b5d160': {
        'action': 'check-disks',
        'created_at': '2018-03-05 14:43:50+00:00',
        'role': 'all',
        'status': 'diskmgmt_completed',
        'uuid':
      'cdfd18c1-6346-47a2-b0f5-661305b5d160'}
    }
  }
}

```

Show a completed diskmgmt operation

| Verb | URI |
|------|-------------------------------|
| GET | v1/diskmgmt/show/?uuid=<uuid> |

Example

JSON Request

```
GET /v1/diskmgmt/show/?uuid=d24036c6-4557-4c12-8695-a92f6f9315ed
```

JSON Response

```

200 OK
Content-Type: application/json
{
  'action': 'check-disks',
  'created_at': '2018-03-07 21:46:41+00:00',
  'diskmgmt_request': "{u'uuid': 'd24036c6-4557-4c12-8695-a92f6f9315ed',
    u'json_display': False,
    u'servers': u'f24-michigan-micro-2',
    u'locator': False,
    u'role': u'compute',
    u'action': u'check-disks',
    u'command': u'create'}",
  'diskmgmt_result': '{"status": "PROCESSED", "message": [{"\Overall_Status\': \'PASS\',
  \'Result\': {\fcfg_disks_results_list\': [], \'spare_disks_results_list\': [],
  \'raid_results_list\': [{\RAID level\': \'RAID1\', \'Disk Med\': \'HDD\', \'server\':
  \'7.7.7.6\', \'RAID type\': \'HW\', \'host\': \'f24-michigan-micro-2\', \'role\':
  \'block_storage control compute\', \'VD health\': \'Opt1\', \'Num VDs\': 1, \'Num PDs\':
  8, \'RAID health\': \'Opt\'}], \'bad_disks_results_list\': [], \'rbld_disks_results_list\':
  [], \'add_as_spare_disks_results_list\': []}]}}',
  'role': 'compute',
  'status': 'diskmgmt_completed',
  'updated_at': '2018-03-07 21:47:35+00:00',
  'uuid': 'd24036c6-4557-4c12-8695-a92f6f9315ed'
}

```

Delete a completed diskmgmt operation

| Verb | URI |
|--------|---------------------------------|
| DELETE | v1/diskmgmt/delete/?uuid=<uuid> |

Example

JSON Request

```
DELETE /v1/diskmgmt/delete/?uuid=d24036c6-4557-4c12-8695-a92f6f9315ed
```

JSON Response

```
200 OK
Content-Type: application/json
{
  "status": "deleted",
  "message": "UUID d24036c6-4557-4c12-8695-a92f6f9315ed deleted from database",
  "uuid": "d24036c6-4557-4c12-8695-a92f6f9315ed",
  "error": "None"
}
```

OSD Maintenance information

REST wrapper to query information about OSD on Pod storage nodes. This returns to the OSD status information of all or a selection of OSDs available in the Pod.

Create a OSD disk operation

| Verb | URI |
|------|------------------------|
| POST | /v1/osdmgmt/check_osds |

Example

JSON Request

```
POST /v1/osdmgmt/osdmgmt/check_osds
{'osdmgmt_request': {'command': 'create',
                    'action': 'check-osds',
                    'locator': 'False',
                    'json_display': 'False',
                    'servers': '',
                    'osd': 'None',
                    'uuid': ''}}
```

JSON Response

```
201 Created
Content-Type: application/json
{
  'action': 'check-osds',
  'created_at': '2018-03-08T21:26:15.329195+00:00',
  'osdmgmt_request': '{u'uuid': '9c64ee52-bed5-4b69-91a2-d589411dd223', u'json_display':
u'False', u'servers': u'', u'locator': u'False', u'command': u'create', u'action':
u'check-osds', u'osd': u'None'}",
  'osdmgmt_result': '',
  'status': 'not_run',
  'updated_at': 'None'
}
```

Create a replace OSD operation

| Verb | URI |
|------|------------------------|
| POST | v1/osdmgmt/replace_osd |

Example

JSON Request

```

POST /v1/osdmgmt/replace_osd
Accept: application/json
'{"osdmgmt_request": {"command": "create",
                      "action": "replace-osd",
                      "locator": "False",
                      "json_display": "False",
                      "servers": "f24-michigan-micro-1",
                      "osd": "osd.9",
                      "uuid": ""}}'

```

JSON Response

```

201 Created
Content-Type: application/json
{
  "status": "not_run",
  "osdmgmt_request": "{u'uuid': '5140f6fb-dca3-4801-8c44-89b293405310', u'json_display':
u'False', u'servers': u'f24-michigan-micro-1', u'locator': u'False', u'command': u'create',
u'action': u'replace-osd', u'osd': u'osd.9'}",
  "created_at": "2018-03-09T15:07:10.731220+00:00",
  "updated_at": null,
  "action": "replace-osd",
  "osdmgmt_result": ""
}
}

```

List check OSD operation

| Verb | URI |
|------|--|
| GET | v1/osdmgmt/list/?action={check-osds,replace-osd} |

Example

JSON Request

```
GET /v1/osdmgmt/list/?action=check-osds
```

JSON Response

```

200 OK
Content-Type: application/json
{
  '4efd0be8-a76c-4bc3-89ce-142de458d844': {
    'action': 'check-osds',
    'created_at': '2018-03-08 21:31:01+00:00',
    'status': 'osdmgmt_running',
    'uuid':
  '4efd0be8-a76c-4bc3-89ce-142de458d844'},
  '5fd4f9b5-786a-4a21-a70f-bffac70a3f3f': {
    'action': 'check-osds',
    'created_at': '2018-03-08 21:11:13+00:00',
    'status': 'osdmgmt_completed',
    'uuid':
  '5fd4f9b5-786a-4a21-a70f-bffac70a3f3f'},
  '9c64ee52-bed5-4b69-91a2-d589411dd223': {
    'action': 'check-osds',
    'created_at': '2018-03-08 21:26:15+00:00',
    'status': 'osdmgmt_completed',
    'uuid':
  '9c64ee52-bed5-4b69-91a2-d589411dd223'}
}
}

```

Show a completed osdmgmt operation

| Verb | URI |
|------|------------------------------|
| GET | v1/osdmgmt/show/?uuid=<uuid> |

Example

JSON Request

```
GET /v1/osdmgmt/show/?uuid=9c64ee52-bed5-4b69-91a2-d589411dd223
```

JSON Response

```
200 OK
Content-Type: application/json
{
  'action': 'check-osds',
  'created_at': '2018-03-08 21:26:15+00:00',
  'osdmgmt_request': '{"u'uuid': '9c64ee52-bed5-4b69-91a2-d589411dd223', u'json_display':
u'False', u'servers': u'', u'locator': u'False', u'command': u'create', u'action':
u'check-osds', u'osd': u'None'}",
  'osdmgmt_result': '{"status": "PROCESSED", "message": [{"\'Overall_Status\': \'PASS\',
\'Result\': { ommitted for doc }}}}',
  'status': 'osdmgmt_completed',
  'updated_at': '2018-03-08 21:27:16+00:00',
  'uuid': '9c64ee52-bed5-4b69-91a2-d589411dd223'
}
}
```

Delete a completed osdmgmt operation

| Verb | URI |
|--------|--------------------------------|
| DELETE | v1/osdmgmt/delete/?uuid=<uuid> |

Example

JSON Request

```
DELETE /v1/osdmgmt/delete/?uuid=9c64ee52-bed5-4b69-91a2-d589411dd223
```

JSON Response

```
200 OK
Content-Type: application/json
{
  'error': 'None',
  'message': 'UUID 9c64ee52-bed5-4b69-91a2-d589411dd223 deleted from database',
  'status': 'deleted',
  'uuid': '9c64ee52-bed5-4b69-91a2-d589411dd223'
}
}
```

Hardware Management Utility

REST wrapper to control the execution of or query information from the hardware validation utility.

Create a Validate Operation

| Verb | URI |
|------|-----|
|------|-----|

| | |
|------|---------------------------|
| POST | /v1/hardwaremgmt/validate |
|------|---------------------------|

JSON Request

```
POST /v1/hardwaremgmt/validate
{"hwmgmt_request": {"command": "create",
                    "action": "validate",
                    "hosts": "None",
                    "file": "None",
                    "feature_list": "all",
                    "uuid": ""}}
```

feature_list is a comma separated list of valid features for the given POD

JSON Response

```
201 Created
Content-Type: application/json
{
  'action': 'validate',
  'created_at': '2018-03-08T22:01:22.195232+00:00',
  'hwmgmt_request': "{u'feature_list': u'all', u'command': u'create', u'file': None,
u'action': u'validate', u'hosts': None, u'uuid': '89e094d8-b246-4620-afca-ba3529385cac'}",
  'hwmgmt_result': '',
  'status': 'not_run',
  'updated_at': 'None'
}
```

Create a Validate Operation for Failure

| Verb | URI |
|------|-----------------------------------|
| GET | /v1/hardwaremgmt/resolve_failures |

JSON Request

```
POST /v1/hardwaremgmt/resolve_failures
{
  "hwmgmt_request": {
    "command": "create",
    "action": "resolve-failures",
    "hosts": "None",
    "file": "None",
    "feature_list": "all",
    "uuid": ""
  }
}
```

feature_list is a comma separated list of valid features for the given POD

JSON Response

```
201 Created
Content-Type: application/json
{
  "status": "not_run",
  "created_at": "2018-03-09T15:47:36.503712+00:00",
  "hwmgmt_request": "{u'feature_list': u'all', u'command': u'create', u'file': None,
u'action': u'resolve-failures', u'hosts': None, u'uuid':
'49dc1dc9-3170-4f68-b152-0f99bd19f7b1'}",
  "updated_at": "",
  "action": "resolve-failures",
  "hwmgmt_result": ""
}
```

Create a Validate Operation

| Verb | URI |
|------|----------------------|
| GET | v1/hardwaremgmt/list |

JSON Request

```
GET /v1/hardwaremgmt/list
```

JSON Response

```
200 OK
Content-Type: application/json
{
  '89e094d8-b246-4620-afca-ba3529385cac': {
    'action': 'validate',
    'created_at': '2018-03-08 22:01:22+00:00',
    'feature_list': 'all',
    'status': 'hardwaremgmt_completed',
    'uuid':

'89e094d8-b246-4620-afca-ba3529385cac'},
    '9f70e872-a888-439a-8661-2d2f36a4f4b1': {
    'action': 'validate',
    'created_at': '2018-03-08 20:34:32+00:00',
    'feature_list': 'all',
    'status': 'hardwaremgmt_completed',
    'uuid':

'9f70e872-a888-439a-8661-2d2f36a4f4b1'}
}
```

Show a completed hardwaremgmt operation

| Verb | URI |
|------|--|
| GET | /v1/hardwaremgmt/show /?uuid=<uuid> |

JSON Request

```
GET /v1/hardwaremgmt/show/?uuid=9f70e872-a888-439a-8661-2d2f36a4f4b
```

JSON Response

```
200 OK
Content-Type: application/json
{
  'action': 'validate',
  'created_at': '2018-03-08 20:34:32+00:00',
  'feature_list': 'all',
  'hwmgmt_request': "{u'feature_list': u'all', u'hosts': None, u'file': None, u'action':
u'validate', u'command': u'create', u'uuid': '9f70e872-a888-439a-8661-2d2f36a4f4b1'}",
  'hwmgmt_result': '{"status": "PROCESSED", "message": "Validate of all completed",
"results": [{"status": "PASS", "results": [{"status": "PASS", "name": "CIMC Firmware Version
Check", "err": null}, {"status": "PASS", "name": "All Onboard LOM Ports Check", "err":
null}, {"status": "PASS", "name": "PCIe Slot: HBA Status Check", "err": null}, {"status":
"PASS", "name": "Server Power Status Check", "err": null}, {"status": "PASS", "name": "NFV
Config Check", "err": null}, {"status": "PASS", "name": "Physical Drives Check", "err":
null}, {"status": "PASS", "name": "PCIe Slot(s) OptionROM Check", "err": null}, {"status":
"PASS", "name": "Intel Network Adapter Check", "err": null}]}}',
  'status': 'hardwaremgmt_completed',
  'updated_at': '2018-03-08 20:38:02+00:00',
  'uuid': '9f70e872-a888-439a-8661-2d2f36a4f4b1'
```

Delete a completed hardwaremgmt operation

| Verb | URI |
|------|-----|
|------|-----|

| | |
|--------|--------------------------------------|
| DELETE | /v1/hardwaremgmt/delete/?uuid=<uuid> |
|--------|--------------------------------------|

JSON Request

```
DELETE /v1/hardwaremgmt/delete/?uuid=9f70e872-a888-439a-8661-2d2f36a4f4b1
```

JSON Response

```
200 OK
Content-Type: application/json
{
  'error': 'None',
  'message': 'UUID 9f70e872-a888-439a-8661-2d2f36a4f4b1 deleted from database',
  'status': 'deleted',
  'uuid': '9f70e872-a888-439a-8661-2d2f36a4f4b1'
}
```

Cisco VIM REST API Using curl for IPv4

Getting REST API Username & Password

Use the following configuration to get REST API Username and Password:

```
cat /opt/cisco/ui_config.json
{
  "Kibana-Url": "http://172.31.231.17:5601",
  "RestAPI-Username": "admin",
  "RestAPI-Password": "****",
  "RestDB-Password": "****",
  "RestAPI-Url": "https://172.31.231.17:8445",
  "BuildNodeIP": "172.31.231.17"
}
```

CCP APIs and Commands**Get CCP:**

Use the following command to get the list of CCP operations executed:

```
curl -i -X GET -H 'Content-Type: application/json' -H 'Authorization: ****' -H 'Accept: application/json' --cacert /var/www/mercury/mercury-ca.crt https://172.29.84.207:8445/ccp
```

Response

```
HTTP/1.1 200 OK
content-length: 360
x-xss-protection: 1
x-content-type-options: nosniff
strict-transport-security: max-age=31536000
server: WSGIServer/0.1 Python/2.7.5
cache-control: no-cache, no-store, must-revalidate, max-age=0
date: Mon, 01 Jul 2019 11:22:03 GMT
x-frame-options: SAMEORIGIN
content-type: application/json

{u'ccps': {u'status': u'Success', u'ccp_result': {u'delete_tenant': False}, u'created_at': u'2019-07-01T10:50:31+00:00', u'updated_at': u'2019-07-01T11:06:25+00:00', u'op_name': u'CCP_Verify'}}
```

POST CCP Install:

Use the following command to initiate installation of CCP:

```
curl -i -X POST -H 'Content-Type: application/json' -H 'Authorization: ****' -H 'Accept: application/' --cacert /var/www/mercury/mercury-ca.crt -d 'None' https://172.29.84.207:8445/ccp
```

Response

```
HTTP/1.1 201 Created
content-length: 133
x-xss-protection: 1
x-content-type-options: nosniff
strict-transport-security: max-age=31536000
server: WSGIServer/0.1 Python/2.7.5
cache-control: no-cache, no-store, must-revalidate, max-age=0
date: Mon, 01 Jul 2019 10:46:18 GMT
x-frame-options: SAMEORIGIN
content-type: application/json
```

```
{'status': u'ToRun', u'ccp_result': u'', u'created_at': u'2019-07-01T10:46:18.106517+00:00', u'updated_at': None, u'op_name': u'CCP_Install'}
```

CCP Verify

Execute the following command to execute CCP Verify (Check tenant cluster status):

```
curl -i -X POST -H 'Content-Type: application/json' -H 'Authorization: ****' -H 'Accept: application/json' --cacert /var/www/mercury/mercury-ca.crt -d '{u'skip_delete': False}' https://172.29.84.207:8445/ccp/ccp_verify
```

Response

```
HTTP/1.1 201 Created
content-length: 158
x-xss-protection: 1
x-content-type-options: nosniff
strict-transport-security: max-age=31536000
server: WSGIServer/0.1 Python/2.7.5
cache-control: no-cache, no-store, must-revalidate, max-age=0
date: Mon, 01 Jul 2019 08:04:52 GMT
x-frame-options: SAMEORIGIN
content-type: application/json
```

```
{'status': u'ToRun', u'ccp_result': {u'delete_tenant': False}, u'created_at': u'2019-07-01T08:04:52.310432+00:00', u'updated_at': None, u'op_name': u'CCP_Verify'}
```

DELETE Control Cluster

Use the following command to delete the deployed control cluster:

```
curl -i -X DELETE -H 'Content-Type: application/json' -H 'Authorization: ****' -H 'Accept: application/json' -H 'User-Agent: python-ciscovimclient' --cacert /var/www/mercury/mercury-ca.crt -d '{u'delete_tenant': False, u'delete_control': True}' https://172.29.84.207:8445/ccp
```

Response

```
HTTP/1.1 204 No Content
x-xss-protection: 1
x-content-type-options: nosniff
strict-transport-security: max-age=31536000
server: WSGIServer/0.1 Python/2.7.5
cache-control: no-cache, no-store, must-revalidate, max-age=0
date: Mon, 01 Jul 2019 11:29:59 GM
x-frame-options: SAMEORIGIN
```

Nodes APIs and Commands

List Nodes

Use the following curl command to get the node's status, power status, reboot status, and mtype information:

```
curl -i -X GET -u admin:**** -H 'Content-Type: application/json' -H 'Accept: application/json'
--cacert /var/www/mercury/mercury-ca.crt https://172.31.231.17:8445/v1/nodes
```



Response

```
{"nodes": [{"status": ". . . . "name": "Store-2"}]}
```

Power OFF Nodes

To get the power off status of the nodes, use the below command:

```
curl -i -X POST -H 'Content-Type: application/json' -u admin:**** -H 'Accept:
application/json' --cacert /var/www/mercury/mercury-ca.crt -d '{"status': 'PowerOff',
'force_op': False, 'name': '<Node UUID>}'
https://172.31.231.17:8445/v1/nodes/node_power_status
```



Note UUID of the node can be found from the above List Nodes command

Power ON Nodes

To get the power ON status of the nodes, use the following command:

```
curl -i -X POST -H 'Content-Type: application/json' -u admin:**** -H 'Accept:
application/json' --cacert /var/www/mercury/mercury-ca.crt -d '{"status': 'PowerOn',
'force_op': False, 'name': '<Node UUID>}'
https://172.31.231.17:8445/v1/nodes/node_power_status
```




Note UUID of the node can be found from the above List Nodes command

Power Status of Nodes

To get the Live status of the nodes, first send POST request to `/v1/hwinfoAPI`, and then place the GET request on `v1/hwinfo/get_nodes_power_status` after a minute approximately.

Run the below commands to send the POST request and get the power status:

```
curl -i -X POST -H 'Content-Type: application/json' -u admin:**** -H 'Accept: application/json' --cacert /var/www/mercury/mercury-ca.crt -d '{}'  
https://172.31.231.17:8445/v1/hwinfo  
curl -i -X GET -H 'Content-Type: application/json' -u admin:**** -H 'Accept: application/json' --cacert /var/www/mercury/mercury-ca.crt  
https://172.31.231.17:8445/v1/hwinfo/get_nodes_power_status
```

Response

```
{'Store-3': {'intended_power_state': 'PowerOnSuccess', 'actual_power_state': 'on'},}}
```

Reboot Node

```
curl -i -X POST -H 'Content-Type: application/json' -u admin:**** -H 'Accept: application/json' --cacert /var/www/mercury/mercury-ca.crt -d '{'status': 'Reboot', 'force_op': False, 'name': '<Node UUID>}'  
https://172.31.231.17:8445/v1/nodes/node_power_status
```



Note UUID of the node can be found from the above List Nodes command

Reboot Status

Use the following two commands, to get the reboot status of the node:

```
curl -i -X POST -H 'Content-Type: application/json' -u admin:**** -H 'Accept: application/json' --cacert /var/www/mercury/mercury-ca.crt -d 'None' https://172.31.231.17:8445/v1/nodes/reboot_status  
curl -i -X GET -H 'Content-Type: application/json' -u admin:**** -H 'Accept: application/json' --cacert /var/www/mercury/mercury-ca.crt https://172.31.231.17:8445/v1/nodes
```

List Openstack Configuration

Command

```
curl -i -X GET -H 'Content-Type: application/json' -u admin:**** -H 'Accept: application/json' --cacert /var/www/mercury/mercury-ca.crt https://172.31.231.17:8445/v1/openstack_config
```

Response

```
{"KEYSTONE_VERBOSE_LOGGING": true, "GNOCCHI_VERBOSE_LOGGING": true, . . }
```

List Password Secrets

Command

```
curl -i -X GET -H 'Content-Type: application/json' -u admin:**** -H 'Accept: application/json'
--cacert /var/www/mercury/mercury-ca.crt https://172.31.231.17:8445/v1/secrets
```

Response

```
{ 'HEAT_KEYSTONE_PASSWORD': '****', 'CINDER_KEYSTONE_PASSWORD': '****' . . }
```

Cluster Recovery

Command

```
curl -i -X POST -H 'Content-Type: application/json' -u admin:**** -H 'Accept:
application/json' --cacert /var/www/mercury/mercury-ca.crt -d '{ 'action': { 'cluster-recovery':
{ 'run-disk-checks': False } } }'
https://172.31.231.17:8445/v1/misc
```

Response

```
{ 'uuid': 'ae3be813-4fae-4510-8467-fab09ac60d2b', 'created_at':
'2019-01-07T08:17:01.229976+00:00', 'updated_at': None, 'operation_status':
'OperationScheduled', 'operation_logs': '', 'operation_name': { 'cluster-recovery':
{ 'run-disk-checks': False } } }
```

NFVIMON

Command

```
curl -i -X POST -H 'Content-Type: application/json' -u admin:**** -H 'Accept:
application/json' --cacert /var/www/mercury/mercury-ca.crt -d '{ 'action': { 'nfvimon': True,
'generate_ssh_keys': '****' } }' https://172.31.231.17:8445/v1/misc
```

Response

```
{ 'uuid': 'd33e534b-b8c7-41c9-b8e4-7b1befe528c8', 'created_at':
'2019-01-07T08:27:56.925029+00:00', 'updated_at': None, 'operation_status':
'OperationScheduled', 'operation_logs': '', 'operation_name': { 'generate_ssh_keys': '****',
'nfvimon': True } }
```

Last-Run-Status

Command

```
curl -i -X GET -H 'Content-Type: application/json' -H 'Authorization: ****' -H 'Accept:
application/json' -H 'User-Agent: python-ciscovimclient' --cacert
/var/www/mercury/mercury-ca.crt
https://172.31.231.17:8445/v1/op_info
```

Response

```
{ 'created_at': '2019-01-07 08:27:56+00:00', 'updated_at': '2019-01-07 08:28:03+00:00',
'reboot_required': False, 'update_status': False, 'current_op_logs':
'https://172.31.231.17:8008/mercury/79c402d2-f156-4ba2-8f17-ec109401a538',
'current_op_status': 'OperationRunning', 'insight_monitor_status': 'Running',
'current_op_name': 'Generate_ssh_keys', 'current_op_monitor': 'Runner_Op_Generate_ssh_keys' }
```

Reconfigure Regenerate Secrets

Command

```
curl -i -X POST -H 'Content-Type: application/json' -u admin:**** -H 'Accept:
```

```
application/json' --cacert /var/www/mercury/mercury-ca.crt -d '{\`action\`:
{\`regenerate_secrets\`: '****', \`reconfigure\`: True}}' https://172.31.231.17:8445/v1/misc
```

Response

```
{\`uuid\`: '83cf2700-275f-4c18-a900-96c36c4987aa', \`created_at\`:
'2019-01-07T08:36:19.279425+00:00', \`updated_at\`: None, \`operation_status\`:
'OperationScheduled', \`operation_logs\`: '', \`operation_name\`: {\`regenerate_secrets\`: '****',
\`reconfigure\`: True}}
```

Reconfigure Set Password

Command

```
curl -i -X POST -H 'Content-Type: application/json' -u admin:**** -H 'Accept:
application/json' --cacert /var/www/mercury/mercury-ca.crt -d '{\`action\`: {\`reconfigure\`:
True, \`setopenstackconfigs\`: {\`GNOCCHI_VERBOSE_LOGGING\`: True}}}'
https://172.31.231.17:8445/v1/misc
```

Response

```
{\`uuid\`: '5f8d0504-d108-4b88-9d63-f9585dc96d38', \`created_at\`:
'2019-01-07T08:48:32.880245+00:00', \`updated_at\`: None, \`operation_status\`:
'OperationScheduled', \`operation_logs\`: '', \`operation_name\`: {\`setpassword\`: '****',
\`reconfigure\`: True}}
```

Reconfigure Set Openstack Configuration

Command

```
curl -i -X POST -H 'Content-Type: application/json' -u admin:**** -H 'Accept:
application/json' --cacert /var/www/mercury/mercury-ca.crt -d '{\`action\`: {\`reconfigure\`:
True, \`setopenstackconfigs\`: {\`GNOCCHI_VERBOSE_LOGGING\`: True}}}'
https://172.31.231.17:8445/v1/misc
```

Response

```
{\`uuid\`: '5bbbef7-76df-4444-a38a-8819a8b579e4', \`created_at\`:
'2019-01-07T08:54:13.733254+00:00', \`updated_at\`: None, \`operation_status\`:
'OperationScheduled', \`operation_logs\`: '', \`operation_name\`: {\`setopenstackconfigs\`:
{\`GNOCCHI_VERBOSE_LOGGING\`: True}, \`reconfigure\`: True}}
```

Reconfigure CIMC Password

1. List down the setupdata and find UUID of active setupdata using the following command:

```
curl -i -X GET -H 'Content-Type: application/json' -u admin:**** -H 'Accept:
application/json' --cacert /var/www/mercury/mercury-ca.crt
https://172.31.231.17:8445/v1/setupdata
```

Response



- Put the content of setupdata with new CIMC Password using the following command:

```
curl -i -X PUT -H 'Content-Type: application/json' -u admin:**** -H 'Accept: application/json' --cacert /var/www/mercury/mercury-ca.crt -d '{"meta": {}, "name": "NEWSETUPDATA", "jsondata": {"external_lb_vip_address": "172.29.86.9" . . .}, "uuid": "3e97381e-4b1c-41a2-9af4-f970a1f1493a"}' https://172.31.231.17:8445/v1/setupdata/3e97381e-4b1c-41a2-9af4-f970a1f1493a
```

- Post on Misc API using the below command:

```
curl -i -X POST -H 'Content-Type: application/json' -u admin:**** -H 'Accept: application/json' --cacert /var/www/mercury/mercury-ca.crt -d '{"action": {"reconfigure_cimc_password": True, "reconfigure": True}}' https://172.31.231.17:8445/misc
```

Response

```
{'uuid': 'f00e1ae0-5674-4218-b1de-8995c9f9c546', 'created_at': '2019-01-07T09:19:40.210121+00:00', 'updated_at': None, 'operation_status': 'OperationScheduled', 'operation_logs': '', 'operation_name': {'reconfigure_cimc_password': '****', 'reconfigure': True}}
```

Cisco VIM REST API Using curl for IPv6

Prerequisites

- You need to copy the certificates from the management node to local machine from where you would launch the APIs.
- Create a folder in local machine and copy the certificates.

```
# mkdir ~/certificates
```

- Copy REST API CA Certificates (for mercury commands)

```
# scp root@<Management Node>:/var/www/mercury/mercury-ca.crt ~/certificates
```



Note The key information that you need are `br_api` and `cloud_api` (`external_lb_vip_ipv6_address`).

- For each POD, get the REST API credentials:

```
# cat /opt/cisco/ui_config.json
```

```
{
  "Kibana-Url": "http://[2001:420:293:2440:b696:91ff:fe22:2dd8]:5601",
  "RestAPI-Username": "admin",
  "RestAPI-Password": "cfb605586d50115333c8",
  "RestDB-Password": "744ebc5feee30b733ac8",
  "RestAPI-Url": "https://[2001:420:293:2440:b696:91ff:fe22:2dd8]:8445",
  "BuildNodeIP": "2001:420:293:2440:b696:91ff:fe22:2dd8" -> br_api
}
```

Offline Validation using curl

1. Create offline validation test

Request

```
curl -g -i -X POST -H 'Content-Type: application/json' -u admin:46d13357ef15e5482b52 -H
'Accept: application/json' -H 'User-Agent: python-ciscovimclient' --cacert
~/certificates/mercury-ca.crt -d '{"jsondata" : {<SetupData in JSON Format>}}'
https://[2001:420:293:2440:b696:91ff:fe22:2dd8]:8445/v1/offlinevalidation
UUID is returned from request
```

Response

```
{"status": "NotValidated", "uuid": "2b8253f4-ad9f-4fbf-b224-a65bd210392a", "created_at":
"2019-02-28T18:02:36.808740+00:00", "updated_at": null, "jsondata": "{}"}
```

2. Get the offline validation test result

Request

```
Curl -g -i -X GET -H 'Content-Type: application/json' -u admin:46d13357ef15e5482b52 -H
'Accept: application/json' -H 'User-Agent: python-ciscovimclient' --cacert
~/certificates/mercury-ca.crt
https://[2001:420:293:2440:b696:91ff:fe22:2dd8]:8445/v1/offlinevalidation/2b8253f4-ad9f-4fbf-b224-a65bd210392a
```

Response

```
{"status": "ValidationFailed", "uuid": "2b8253f4-ad9f-4fbf-b224-a65bd210392a",
"created_at": "2019-02-28T18:02:36+00:00", "updated_at": "2019-02-28T18:02:57+00:00",
"jsondata": ""}
```

Start New Installation

1. Create new setup date before starting new installation, for example:

```
curl -g -i -X POST -H 'Content-Type: application/json' -u admin:46d13357ef15e5482b52 -H
'Accept: application/json' -H 'User-Agent: python-ciscovimclient' --cacert
~/certificates/mercury-ca.crt -d '{u'meta': {}, u'name': u'NEWSETUPDATA', u'jsondata':
{<SetupData in JSON Format>}}'
https://[2001:420:293:2440:b696:91ff:fe22:2dd8]:8445/setupdata
```

2. To start the installation:

Request

```
Curl -g -i -X POST -H 'Content-Type: application/json' admin:46d13357ef15e5482b52 -H
'Accept: application/json' -H 'User-Agent: python-ciscovimclient' --cacert
~/certificates/mercury-ca.crt -d '{u'stages': u'vmtp', u'setupdata':
u'8b0d4a46-c67f-4121-99af-32fde52a82eb}'
https://[2001:420:293:2440:b696:91ff:fe22:2dd8]:8445/install
```

Response

```
{u'uuid': u'6b02c2ab-441e-471a-9dcc-e771136186e1', u'setupdata':
u'8b0d4a46-c67f-4121-99af-32fde52a82eb', u'vmtpresult': u'', u'updated_at': None,
```

```
u'validationstatus': u'', u'currentstatus': u'Not Available', u'install_logs': u'',
u'stages': {u'baremetal': u'Scheduled', u'bootstrap': u'Scheduled', u'runtimevalidation':
  u'Scheduled', u'ceph': u'Scheduled', u'orchestration': u'Scheduled', u'validation':
u'Scheduled', u'hostsetup': u'Scheduled', u'vmtp': u'Scheduled'}, u'created_at':
u'2019-03-05T05:22:30.986823+00:00'}
```

3. Get active setupdata with UUID after installation is started

Request

```
curl -g -i -X GET -H 'Content-Type: application/json' -u admin:46d13357ef15e5482b52 -H
'Accept: application/json' -H 'User-Agent: python-ciscovimclient' --cacert
~/certificates/mercury-ca.crt
https://[2001:420:293:2440:b696:91ff:fe22:2dd8]:8445/setupdata
```

Response

It will return in the list format. You must check the status. The status can be **Active**, **Installation Failed**, or **Installing**.

```
{"setupdatas": [{"status": "Active", "uuid": "c5bc5fd9-6f4b-43e7-a61a-a9d409569943",
"jsondata": " {<Setupdata JSON>}", "meta": "{}", "name": "NEWSETUPDATA"}]}
```

4. Monitoring the installation using OP-information (current operation information):

Request

```
curl -g -i -X GET -H 'Content-Type: application/json' -u admin:46d13357ef15e5482b52 -H
'Accept: application/json' -H 'User-Agent: python-ciscovimclient' --cacert
~/certificates/mercury-ca.crt
https://[2001:420:293:2440:b696:91ff:fe22:2dd8]:8445/op_info
```

Response

Check for the value of key `insight_monitor_status`. If it is **Running**, it indicates that the last operation is still in running state. Once the Operation is completed, the value is either Success/Failed based on the result.

```
{u'created_at': u'2019-02-25 18:15:00+00:00', u'updated_at': u'2019-02-25 18:15:00+00:00',
u'reboot_required': False, u'update_status': False, u'current_op_logs':
u'https://[2001:420:293:2440:b696:91ff:fe22:2dd8]:8008/mercury/ae3ed699-2ffe-4ae0-a8ab-83ef7fdce008',
u'current_op_status': u'Running', u'insight_monitor_status': u'Running',
u'current_op_name': u'install_op Orchestration', u'current_op_monitor':
u'Install_Op_orchestration'}
```

Sample output information after successful completion is given below:

```
{"created_at": "2019-03-04 21:35:00+00:00", "updated_at": "2019-03-04 21:36:24+00:00",
"reboot_required": false, "update_status": false, "current_op_logs": "",
"current_op_status": "diskmgmt_completed", "insight_monitor_status": "Success",
"current_op_name": "DiskMgmt", "current_op_monitor": ""}
```

Pod Management Operations

Prerequisites

Before performing any pod management operation, you need to update the setup data using PUT method.

Update setup data

1. Get the active setup data UUID using the install API

Request

```
curl -g -i -X GET -H 'Content-Type: application/json' -u admin:46d13357ef15e5482b52 -H
'Accept: application/json' -H 'User-Agent: python-ciscovimclient' --cacert
~/certificates/mercury-ca.crt
https://[2001:420:293:2440:b696:91ff:fe22:2dd8]:8445/install1
```

Response

```
{u'installs': {u'uuid': u'6b02c2ab-441e-471a-9dcc-e771136186e1', u'setupdata':
u'8b0d4a46-c67f-4121-99af-32fde52a82eb', . . .}}
```

2. Send PUT request on setup data UUID

```
curl -g -i -X PUT -H 'Content-Type: application/json' -u admin:46d13357ef15e5482b52 -H
'Accept: application/json' -H 'User-Agent: python-ciscovimclient' --cacert
~/certificates/mercury-ca.crt -d '{u'meta': {}, u'name': u'NEWSETUPDATA', u'jsondata':
{<Setupdata JSON>}}'
```

https://[2001:420:293:2440:b696:91ff:fe22:2dd8]:8445/setupdata/8b0d4a46-c67f-4121-99af-32fde52a82eb

You can perform the following pod management operations:

- Add compute
- Add storage
- Remove compute
- Remove storage
- Replace controller

Add compute

1. Add the node entry in setup data and update the setup data by following the steps given under prerequisites.

2. POST to nodes to add entry:

```
curl -g -i -X POST -H 'Content-Type: application/json' -u admin:46d13357ef15e5482b52
-H 'Accept: application/json' -H 'User-Agent: python-ciscovimclient' --cacert
~/certificates/mercury-ca.crt -d '{u'name': u'Compute-4}'
```

https://[2001:420:293:2440:b696:91ff:fe22:2dd8]:8445/nodes/add_compute

Add storage

1. Add the node entry in setup data and update the setup data by following the steps given under prerequisites.

2. POST to nodes to add entry:

```
curl -g -i -X GET -H 'Content-Type: application/json' -u admin:46d13357ef15e5482b52 -H
'Accept: application/json' -H 'User-Agent: python-ciscovimclient' --cacert
~/certificates/mercury-ca.crt -d '{u'name': u'Store-4}'
```

https://[2001:420:293:2440:b696:91ff:fe22:2dd8]:8445/nodes/add_storage

Remove compute

1. List the nodes

Request

```
curl -g -i -X GET -H 'Content-Type: application/json' -u admin:46d13357ef15e5482b52 -H
'Accept: application/json' -H 'User-Agent: python-ciscovimclient' --cacert
~/certificates/mercury-ca.crt https://[2001:420:293:2440:b696:91ff:fe22:2dd8]:8445/nodes
```

Response

```
{
  "nodes": [
    {
      "status": "Active",
      "uuid": "1929776f-8b77-4b35-b55c-0abd6433b989",
      "setupdata": "8b0d4a46-c67f-4121-99af-32fde52a82eb",
      "node_data": {
        "rack_info": {
          "rack_id": "RackC",
          "cimc_info": {
            "cimc_ip": "172.29.172.81"
          },
          "management_ip": "21.0.0.13",
          "updated_at": "2019-03-04T21:42:38+00:00",
          "reboot_required": "No",
          "mtype": "block_storage",
          "install": "6b02c2ab-441e-471a-9dcc-e771136186e1",
          "power_status": "PowerOnSuccess",
          "install_logs": "https://172.31.231.17:8008/mercury/071e79a5-b279-4628-bcf0-df168152cc42",
          "created_at": "2019-03-05T05:42:38+00:00",
          "name": "compute-3"
        }
      }
    }
  ]
}
```

- Remove the node entry in setup data and update the setup data by following the steps given under prerequisites.
- Send DELETE request on nodes to remove the storage node for that UUID.

```
curl -g -i -X DELETE -H 'Content-Type: application/json' -u admin:46d13357ef15e5482b52 \
-H 'Accept: application/json' -H 'User-Agent: python-ciscovimclient' --cacert \
~/certificates/mercury-ca.crt -d '{u'force_op': False, u'name': \
u'1929776f-8b77-4b35-b55c-0abd6433b989'}' \
https://[2001:420:293:2440:b696:91ff:fe22:2dd8]:8445/nodes/remove_compute
```

Remove storage

- Get the UUID of the node to be removed by getting the list of nodes

Request

```
curl -g -i -X GET -H 'Content-Type: application/json' -u admin:46d13357ef15e5482b52 -H \
'Accept: application/json' -H 'User-Agent: python-ciscovimclient' --cacert \
~/certificates/mercury-ca.crt https://[2001:420:293:2440:b696:91ff:fe22:2dd8]:8445/nodes
```

Response

```
{
  "nodes": [
    {
      "status": "Active",
      "uuid": "0b7b2b6e-305c-48e0-b9f3-0ddb72bd3b3f",
      "setupdata": "8b0d4a46-c67f-4121-99af-32fde52a82eb",
      "node_data": {
        "rack_info": {
          "rack_id": "RackC",
          "cimc_info": {
            "cimc_ip": "172.29.172.81"
          },
          "management_ip": "21.0.0.13",
          "updated_at": "2019-03-04T21:42:38+00:00",
          "reboot_required": "No",
          "mtype": "block_storage",
          "install": "6b02c2ab-441e-471a-9dcc-e771136186e1",
          "power_status": "PowerOnSuccess",
          "install_logs": "https://172.31.231.17:8008/mercury/071e79a5-b279-4628-bcf0-df168152cc42",
          "created_at": "2019-03-05T05:42:38+00:00",
          "name": "Store-3"
        }
      }
    }
  ]
}
```

- Remove the node entry in setup data and update the setup data using steps mentioned in the prerequisites.
- Send DELETE request on nodes, to remove the storage node for that UUID.

```
curl -g -i -X DELETE -H 'Content-Type: application/json' -u admin:46d13357ef15e5482b52 \
-H 'Accept: application/json' -H 'User-Agent: python-ciscovimclient' --cacert \
~/certificates/mercury-ca.crt -d '{u'force_op': False, u'name': \
u'0b7b2b6e-305c-48e0-b9f3-0ddb72bd3b3f'}' \
https://[2001:420:293:2440:b696:91ff:fe22:2dd8]:8445/nodes/remove_storage
```

Replace controller

- Get the UUID of the node to be removed by getting the list of nodes:

Request

```
curl -g -i -X GET -H 'Content-Type: application/json' -u admin:46d13357ef15e5482b52 -H \
'Accept: application/json' -H 'User-Agent: python-ciscovimclient' --cacert \
~/certificates/mercury-ca.crt https://[2001:420:293:2440:b696:91ff:fe22:2dd8]:8445/nodes
```

Response


```
{
  "nodes": [
    {
      "status": "Active",
      "uuid": "79e43c4c-8cbd-4c81-8c22-3aec717298e9",
      "setupdata": "8b0d4a46-c67f-4121-99af-32fde52a82eb",
      "node_data": {
        "rack_info": {
          "rack_id": "RackC",
          "cimc_info": {
            "cimc_ip": "172.29.172.81",
            "management_ip": "21.0.0.13",
            "updated_at": "2019-03-04T21:42:38+00:00",
            "reboot_required": "No",
            "mtype": "control",
            "install": "6b02c2ab-441e-471a-9dcc-e771136186e1",
            "power_status": "PowerOnSuccess",
            "install_logs": "https://172.31.231.17:8008/mercury/071e79a5-b279-4628-bcf0-df168152cc42",
            "created_at": "2019-03-05T05:42:38+00:00",
            "name": "gg34-10",
            . . .
          }
        }
      }
    }
  ]
}
```

2. Remove the node entry in setup data and update the setup data using steps mentioned in the prerequisites.
3. PUT nodes to replace entry:


```
curl -g -i -X PUT -H 'Content-Type: application/json' -u admin:46d13357ef15e5482b52 -H
'Accept: application/json' -H 'User-Agent: python-ciscovimclient' --cacert
~/certificates/mercury-ca.crt -d '{u'status': u'ToReplace', u'force_op': False, u'name':
u'gg34-10}'
https://[2001:420:293:2440:b696:91ff:fe22:2dd8]:8445/nodes/79e43c4c-8cbd-4c81-8c22-3aec717298e9
```

Fetch Hardware Inventory

Request

```
curl -g -i -X GET -H 'Content-Type: application/json' -u admin:46d13357ef15e5482b52 -H
'Accept: application/json' -H 'User-Agent: python-ciscovimclient' --cacert
~/certificates/mercury-ca.crt https://[2001:420:293:2440:b696:91ff:fe22:2dd8]:8445/v1/hwinfo
```

Response

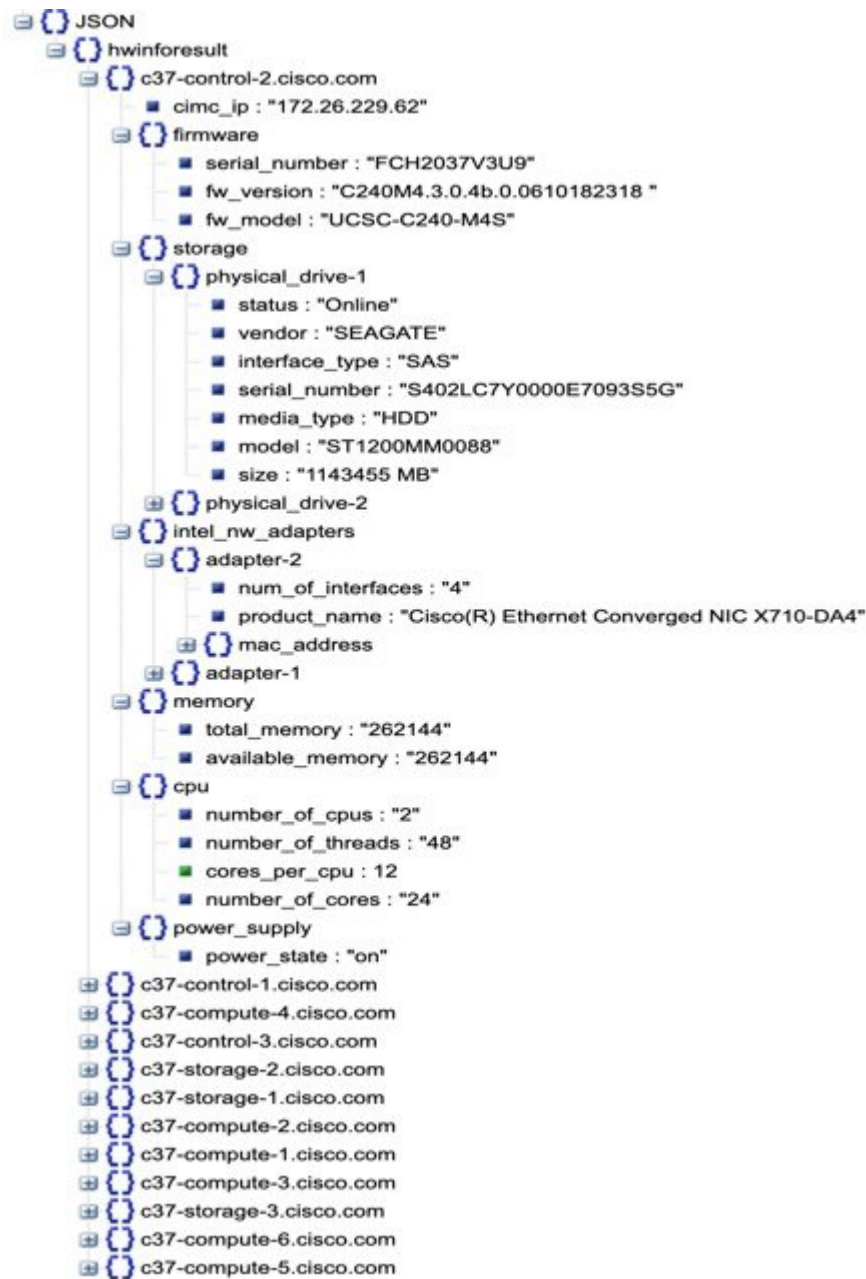

Glance Image Upload

With Cisco VIM 3.4.0, RestAPIs are introduced to upload and delete multiple images to/from the cloud. Following are the REST API that're available for usage.

POST /upload

This API is responsible for uploading the image to respective Openstack Cloud.

JSON Payload

```

{
  "podsip": [
    "172.31.231.17",
    "10.30.116.244",
  ],
  "images": [
    "Vodafone.iso",
    "Rakuten.qcow2",
  ]
}
Response
{"Upload":true}

```

CURL Request

Following is an example Curl request:

```

curl -s -k -X POST -d '{"upload": {"podsip":["172.23.105.218",
"172.29.85.78"],"images":["buildnode-internal-20606.iso","CentOS-7-x86_64-GenericCloud-1503.qcow2"]}}'
-H "Auth: <Token>" https://172.29.85.78:9001/upload

```

Delete /upload

This API is responsible for deleting the image from respective Openstack Cloud.

JSON Payload

```

{
  "podsip": [
    "172.31.231.17",
    "10.30.116.244",
  ],
  "images": [
    "Vodafone.iso",
    "Rakuten.qcow2",
  ]
}

```

CURL Request

Following is the example Curl request:

```

curl -s -k -X DELETE -d '{"upload": {"podsip":["172.23.105.218",
"172.29.85.78"],"images":["buildnode-internal-20606.iso","CentOS-7-x86_64-GenericCloud-1503.qcow2"]}}'
-H "Auth: <Token>" https://172.29.85.78:9001/upload

```

Response

```

{"Delete":true}

```

GET /upload

This API is responsible to get the image list from respective Openstack Cloud.

Following are the query string parameters to be passed with GET URL

1. odsip: It is a comma separated string which represents pod IPs, whose Openstack image list needs to be fetched.
2. images: It is a comma separated string which represents Openstack images whose status needs to be fetched.
3. refresh: Takes the value true or false. Used to get updated Openstack images list.

Following are the CURL request examples:

1. `curl -s -k -H "Auth: <Token>" https://172.29.85.78:9001/upload`

This gives the result of pods on which upload/get/delete operation are performed.

```
{
  "uploaded": {
    "172.29.85.78": {
      "opsinprogress": 0,
      "images": null,
      "error": ""
    },
    "172.23.105.218": {
      "opsinprogress": 0,
      "images": null,
      "error": ""
    }
  }
}
```

2. `curl -s -k -H "Auth: <Token>" https://172.29.85.78:9001/upload?"podsip=172.29.85.78"`

```
{
  "uploaded": {
    "172.29.85.78": {
      "opsinprogress": 0,
      "images": [
        {
          "OSStatus": "active",
          "UploadStatus": "UploadSuccess",
          "ErrStatus": "",
          "ID": "c50284d7-191a-42ed-a289-9b52d19b9fd5",
          "Name": "buildnode-internal-20606.iso"
        },
        {
          "OSStatus": "active",
          "UploadStatus": "UploadSuccess",
          "ErrStatus": "",
          "ID": "fee44efc-684e-46ac-aa89-b6e785faf1b4",
          "Name": "CentOS-7-x86_64-GenericCloud-1503.qcow2"
        }
      ],
      "error": ""
    }
  }
}
```

3. `curl -s -k -H "Auth: <Token>" https://172.29.85.78:9001/upload?"podsip=172.29.85.78&refresh=true"`

```
{
  "uploaded": {
    "172.29.85.78": {
      "opsinprogress": 1,
      "images": null,
      "error": ""
    }
  }
}
```

4. `curl -s -k -H "Auth: <Token>" https://172.29.85.78:9001/upload?"podsip=172.29.85.78&images=buildnode-internal-20606.iso"`

```
{
  "uploaded": {
```

```
"172.29.85.78": {
  "opsinprogress": 0,
  "images": [
    {
      "OSStatus": "active",
      "UploadStatus": "UploadSuccess",
      "ErrStatus": "",
      "ID": "c50284d7-191a-42ed-a289-9b52d19b9fd5",
      "Name": "buildnode-internal-20606.iso"
    }
  ],
  "error": ""
}
```

