



Decryption Rules and Policy Example

This chapter builds on concepts discussed in this guide to provide a specific example of an SSL policy with decryption rules that follow our best practices and recommendations. You should be able to apply this example to your situation, adapting it to the needs of your organization.

In short:

- For trusted traffic (such as transferring a large compressed server backup), bypass inspection entirely, using prefiltering and flow offload.
- Put *first* any decryption rules that can be evaluated quickly, such as those that apply to specific IP addresses.
- Put *last* any decryption rules that require processing, **Decrypt - Resign**, and rules that block unsecure protocol versions and cipher suites.
- [Decryption Rules Best Practices, on page 1](#)
- [Decryption Policy Walkthrough, on page 4](#)

Decryption Rules Best Practices

This chapter provides an example SSL policy with decryption rules that illustrates our best practices and recommendations. First we'll discuss settings for the SSL and access control policies and then walk through all the rules and why we recommend they be ordered in a particular way.

Following is the SSL policy we'll discuss in this chapter.

SSL Policy Example

Enter Description

Save Cancel

Rules Trusted CA Certificates Undecryptable Actions Advanced Settings

+ Add Category + Add Rule

#	Name	Source Zones	Dest Zones	Source Networks	Dest Networks	VLAN Tags	Users	Applicati...	Source Ports	Dest Ports	Categories	SSL	Action
Administrator Rules													
This category is empty													
Standard Rules													
1	DND internal source network	any	any	Intranet	any	any	any	any	any	any	any	any	Do not decrypt
2	Decrypt test site	any	any	any	any	any	any	any	any	any	Astrology (Any any		Decrypt - Resign
3	Do not decrypt low risk	any	any	any	any	any	any	Risks: Very Low	any	any	any	any	Do not decrypt
4	Do not decrypt applications	any	any	any	any	any	any	Facebook Facebook Mes Facebook Pho	any	any	any	any	Do not decrypt
5	Decrypt all but trusted categ	any	any	any	any	any	any	any	any	any	Any (Except Ui any		Decrypt - Resign
6	Block bad cert status	any	any	any	any	any	any	any	any	any	any	1 Cert Status se	Block
7	Block SSLv3. TLS 1.0, 1.1	any	any	any	any	any	any	any	any	any	any	3 Protocol Versi	Block
Root Rules													
This category is empty													
Default Action												Do not decrypt	

Bypass Inspection with Prefilter and Flow Offload

Prefiltering is the first phase of access control, before the system performs more resource-intensive evaluation. Prefiltering is simple, fast, and early. Prefiltering uses limited outer-header criteria to quickly handle traffic. Compare this to subsequent evaluation, which uses inner headers and has more robust inspection capabilities.

Configure prefiltering to:

- Improve performance— The sooner you exclude traffic that does not require inspection, the better. You can fastpath or block certain types of plaintext, passthrough tunnels based on their outer encapsulation headers, without inspecting their encapsulated connections. You can also fastpath or block any other connections that benefit from early handling.
- Tailor deep inspection to encapsulated traffic—You can rezone certain types of tunnels so that you can later handle their encapsulated connections using the same inspection criteria. Rezoning is necessary because after prefiltering, access control uses inner headers.

If you have a Firepower 4100/9300 available, you can use *large flow offload*, a technique where trusted traffic can bypass the inspection engine for better performance. You can use it, for example, in a data center to transfer server backups.

Related Topics

[Large Flow Offloads](#)

[Prefiltering vs Access Control](#)

[Best Practices for Fastpath Prefiltering](#)

Do Not Decrypt Best Practices

Log traffic

We recommend *against* creating **Do Not Decrypt** rules that do not log anything because these rules still take processing time on the managed device. If you set up any type of decryption rules, *enable logging* so you can see what traffic is being matched.

Guidelines for undecryptable traffic

We can determine that certain traffic is not decryptable either because the website itself is not decryptable or because the website uses SSL pinning, which effectively prevents users from accessing a decrypted site without errors in their browser.


For more information about certificate pinning, see [About TLS/SSL Pinning](#).

We maintain the list of these sites as follows:

- A Distinguished Name (DN) group named **Cisco-Undecryptable-Sites**
- The **pinned certificate** application filter

If you are decrypting traffic and you do not want users to see errors in their browsers when going to these sites, we recommend you set up a **Do Not Decrypt** rule toward the bottom of your decryption rules.

An example of setting up a **pinned certificate** application filter follows.

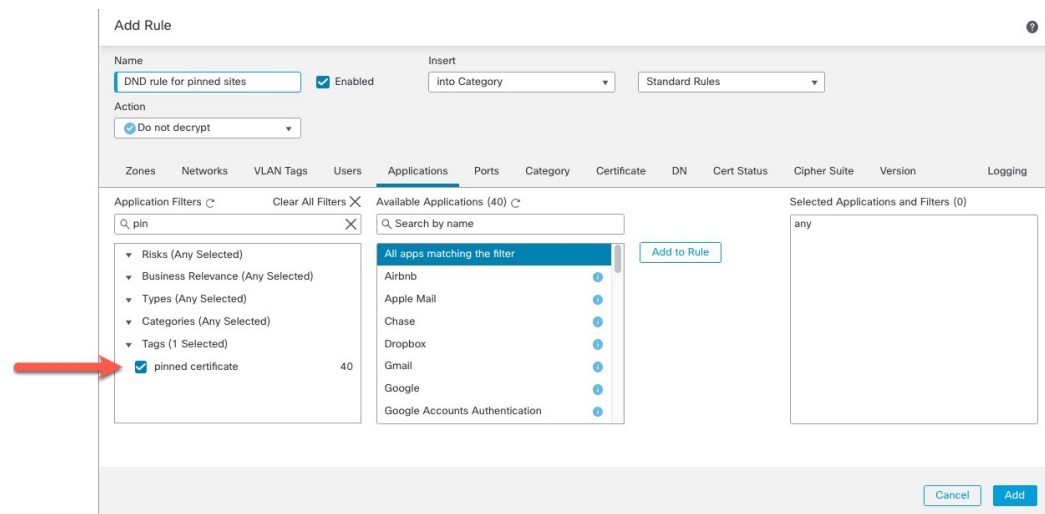

Decrypt - Resign and Decrypt - Known Key Best Practices

This topic discusses best practices for **Decrypt - Resign** and **Decrypt - Known Key** decryption rule.

Decrypt - Resign Best Practices With Certificate Pinning

Some applications use a technique referred to as *TLS/SSL pinning* or *certificate pinning*, which embeds the fingerprint of the original server certificate in the application itself. As a result, if you configured a decryption

rule with a **Decrypt - Resign** action, when the application receives a resigned certificate from a managed device, validation fails and the connection is aborted.

Because TLS/SSL pinning is used to avoid man-in-the-middle attacks, there is no way to prevent or work around it. You have the following options:

- Create a **Do Not Decrypt** for those applications rule ordered before **Decrypt - Resign** rules.
- Instruct users to access the applications using a web browser.

For more information about certificate pinning, see [About TLS/SSL Pinning](#).

Decrypt - Known Key Best Practices

Because a **Decrypt - Known Key** rule action is intended to be used for traffic going to an internal server, you should always add a destination network to these rules (**Networks** rule condition). That way the traffic goes directly to the network on which the server is located, thereby reducing traffic on the network.

Decryption Rules to Put First

Put first any rules that can be matched by the first part of the packet; an example is a rule that references IP addresses (**Networks** rule condition).

Decryption Rules to Put Last

Rules with the following rule conditions should be last because those rules require traffic to be examined for the longest amount of time by the system:

- Applications
- Category
- Certificate
- Distinguished Name (DN)
- Cert Status
- Cipher Suite
- Version

Decryption Policy Walkthrough

This chapter provides a step-by-step discussion and walkthrough of how to create a decryption policy using rules that employ our best practices. You'll see a preview of the decryption policy followed by a synopsis of the best practices and finally a discussion of the rules in the policy.

Following is the decryption policy we'll discuss in this chapter.

SSL Policy Example Save Cancel

Enter Description

Rules Trusted CA Certificates Undecryptable Actions Advanced Settings

+ Add Category + Add Rule

#	Name	Source Zones	Dest Zones	Source Networks	Dest Networks	VLAN Tags	Users	Applicati...	Source Ports	Dest Ports	Categories	SSL	Action
Administrator Rules													
This category is empty													
Standard Rules													
1	DND internal source network	any	any	Intranet	any	any	any	any	any	any	any	any	Do not decrypt
2	Decrypt test site	any	any	any	any	any	any	any	any	any	Astrology (Any any		Decrypt - Resign
3	Do not decrypt low risk	any	any	any	any	any	any	Risks: Very Low	any	any	any	any	Do not decrypt
4	Do not decrypt applications	any	any	any	any	any	any	Facebook Facebook Mes Facebook Phot	any	any	any	any	Do not decrypt
5	Decrypt all but trusted categ	any	any	any	any	any	any	any	any	any	Any (Except Ui any		Decrypt - Resign
6	Block bad cert status	any	any	any	any	any	any	any	any	any	any	1 Cert Status se	Block
7	Block SSLv3. TLS 1.0, 1.1	any	any	any	any	any	any	any	any	any	any	3 Protocol Versi	Block
Root Rules													
This category is empty													
Default Action												Do not decrypt	

See one of the following sections for more information.

Related Topics

- [Recommended Policy and Rule Settings](#), on page 5
- [Traffic to Prefilter](#), on page 9
- [First Decryption Rule: Do Not Decrypt Specific Traffic](#), on page 9
- [Next Decryption Rules: Decrypt Specific Test Traffic](#), on page 10
- [Create a Decrypt - Resign Rule for Categories](#), on page 12
- [Do Not Decrypt Low-Risk Categories, Reputations, or Applications](#), on page 11
- [Last Decryption Rules: Block or Monitor Certificates and Protocol Versions](#), on page 14

Recommended Policy and Rule Settings

We recommend the following policy settings:

- Decryption policy:
 - Default action **Do Not Decrypt**.
 - Enable logging.
 - Set **Undecryptable Actions** to **Block** for both **SSL v2 Session** and **Compressed Session**.
 - Enable TLS 1.3 decryption in the policy's advanced settings.
- decryption rule: Enable logging for every rule except those with a **Do Not Decrypt** rule action. (It's up to you; if you want to see information about traffic that isn't decrypted, enable logging for those rules also.)

- Access control policy:
 - Associate your decryption policy with an access control policy. (If you fail to do this, your decryption policy and rules have no effect.)
 - Set the default policy action to **Intrusion Prevention: Balanced Security and Connectivity**.
 - Enable logging.

Related Topics

- [Decryption Policy Settings](#), on page 6
- [Decryption Rule Settings](#), on page 20
- [Access Control Policy Settings](#), on page 7

Decryption Policy Settings

How to configure recommended the following best practice settings for your decryption policy:

- Default action **Do Not Decrypt**.
- Enable logging.
- Set **Undecryptable Actions** to **Block** for both **SSL v2 Session** and **Compressed Session**.
- Enable TLS 1.3 decryption in the policy's advanced settings.


Procedure

Step 1 Log in to the Secure Firewall Management Center if you haven't already done so.

Step 2 Click **Policies > Access Control > Decryption**.

Step 3 Click **Edit** (✎) next to your decryption policy.

Step 4 From the **Default Action** list at the bottom of the page, click **Do Not Decrypt**. The following figure shows an example.



Step 5 At the end of the row, click **Logging** (☑).

Step 6 Select the **Log at End of Connection** check box.

Step 7 Click **OK**.

Step 8 Click **Save**.

Step 9 Click the **Undecryptable Actions** tab.

Step 10 We recommend setting the action for **SSLv2 Session** and **Compressed Session** to **Block**.

You shouldn't allow SSL v2 on your network and compressed TLS/SSL traffic is not supported so you should block that traffic as well.

See [Default Handling Options for Undecryptable Traffic](#) for more information about setting each option.

The following figure shows an example.

SSL Policy Example

Enter Description

Rules Trusted CA Certificates **Undecryptable Actions** Advanced Settings

Decryption Errors	Block
Handshake Errors	Inherit Default Action
Session not cached	Inherit Default Action
Unsupported Cipher Suite	Inherit Default Action
Unknown Cipher Suite	Inherit Default Action
SSLv2 Session	Block
Compressed Session	Block

Revert to Defaults

Step 11 Click the **Advanced Settings** tab page.

Step 12 Select the **Enable TLS 1.3 Decryption** check box. For more information about the other options, see [Decryption Policy Advanced Options](#).

Applies to 7.1.0 and later

- Block flows requesting ESNi
- Disable HTTP/3 advertisement
- Propagate untrusted server certificates to clients

Applies to 7.2.0 and later

- Enable TLS 1.3 Decryption

Applies to 7.3.0 and later

- Enable adaptive TLS server identity probe

Advanced options are available only with Snort 3

Revert to Defaults

Step 13 At the top of the page, click **Save**.

What to do next

Configure decryption rules and set each one as discussed in [Decryption Rule Settings, on page 20](#).

Access Control Policy Settings

How to configure recommended the following best practice settings for your access control policy:


- Associate your decryption policy with an access control policy. (If you fail to do this, your decryption policy and rules have no effect.)
- Set the default policy action to **Intrusion Prevention: Balanced Security and Connectivity**.

- Enable logging.

Procedure


- Step 1** Log in to the Secure Firewall Management Center if you haven't already done so.
- Step 2** Click **Policies > Access Control**.
- Step 3** Click **Edit** (✎) next to your access control policy.
- Step 4** (If your decryption policy is not set up yet, you can do this later.)

- a) Click the **Decryption** link at the top of the page as the following figure shows.

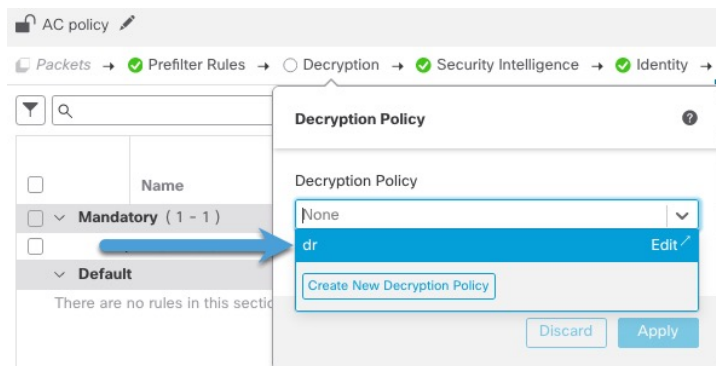

- b) From the list, click the name of your decryption policy.
- c) Click **Apply**.
- d) At the top of the page, click **Save**.

- Step 5** From the **Default Action** list at the bottom of the page, click **Intrusion Prevention: Balanced Security and Connectivity**.
The following figure shows an example.



- Step 6** Click **Logging** (📄).
- Step 7** Select the **Log at End of Connection** check box and click **OK**.
- Step 8** Click **Save**.

What to do next

See [Decryption Rule Examples, on page 8](#).

Decryption Rule Examples

This section provides an example of decryption rule that illustrate our best practices.

See one of the following sections for more information.

Related Topics

[Traffic to Prefilter](#), on page 9

[First Decryption Rule: Do Not Decrypt Specific Traffic](#), on page 9

[Next Decryption Rules: Decrypt Specific Test Traffic](#), on page 10

[Do Not Decrypt Low-Risk Categories, Reputations, or Applications](#), on page 11

[Create a Decrypt - Resign Rule for Categories](#), on page 12

[Last Decryption Rules: Block or Monitor Certificates and Protocol Versions](#), on page 14

Traffic to Prefilter

Prefiltering is the first phase of access control, before the system performs more resource-intensive evaluation. Prefiltering is simple, fast, and early compared to subsequent evaluation, which uses inner headers and has more robust inspection capabilities.

Based on your security needs and traffic profile, you should consider prefiltering and therefore excluding from any policy and inspection the following:

- Common intraoffice applications such as Microsoft Outlook 365
- [Elephant flows](#), such as server backups

Related Topics

[Prefiltering vs Access Control](#)

[Best Practices for Fastpath Prefiltering](#)

First Decryption Rule: Do Not Decrypt Specific Traffic

The first decryption rule in the example does not decrypt traffic that goes to an internal network (defined as **intranet**). **Do Not Decrypt** rule actions are matched during ClientHello so they are processed very fast.

The screenshot shows the 'SSL Policy Example' configuration page. The 'Rules' tab is active, displaying a table of rules. A red arrow points to the first rule, 'DND Internal source network', which is highlighted. The table has columns for #, Name, Source Zones, Dest Zones, Source Networks, Dest Networks, VLAN Tags, Users, Applicat..., Source Ports, Dest Ports, Categories, SSL, and Action. The rule 'DND Internal source network' has 'any' for Source and Dest Zones, 'Intranet' for Source Networks, and 'any' for other fields. Its action is 'Do not decrypt'.

#	Name	Source Zones	Dest Zones	Source Networks	Dest Networks	VLAN Tags	Users	Applicat...	Source Ports	Dest Ports	Categories	SSL	Action
Administrator Rules													
This category is empty													
Standard Rules													
1	DND Internal source network	any	any	Intranet	any	any	any	any	any	any	any	any	Do not decrypt
2	Decrypt test site	any	any	any	any	any	any	any	any	any	Astrology (Any	any	→ Decrypt - Resign
3	Do not decrypt low risk	any	any	any	any	any	any	Risks: Very Low	any	any	any	any	Do not decrypt
4	Do not decrypt applications	any	any	any	any	any	any	Facebook Facebook Mes Facebook Phot	any	any	any	any	Do not decrypt
5	Decrypt all but trusted categ	any	any	any	any	any	any	any	any	any	Any (Except Un	any	→ Decrypt - Resign
6	Block bad cert status	any	any	any	any	any	any	any	any	any	any	any	1 Cert Status se Block
7	Block SSLv3. TLS 1.0, 1.1	any	any	any	any	any	any	any	any	any	any	any	3 Protocol Versi Block
Root Rules													
This category is empty													
Default Action													
													Do not decrypt



Note If you have traffic going from internal DNS servers to internal DNS resolvers (such as Cisco Umbrella Virtual Appliances), you can add **Do Not Decrypt** rules for them as well. You can even add those to prefiltering policies if the internal DNS servers do their own logging.

However, we strongly recommend you *do not* use **Do Not Decrypt** rules or prefiltering for DNS traffic that goes to the internet, such as internet root servers (for example, Microsoft internal DNS resolvers built into Active Directory). In those cases, you should fully inspect the traffic or even consider blocking it.

Next Decryption Rules: Decrypt Specific Test Traffic

The next rule is *optional* in the example; use it to decrypt and monitor limited types of traffic before determining whether or not to allow it on your network.

#	Name	Source Zones	Dest Zones	Source Networks	Dest Networks	VLAN Tags	Users	Applicat...	Source Ports	Dest Ports	Categories	SSL	Action
Administrator Rules													
This category is empty													
Standard Rules													
1	DND internal source network	any	any	Intranet	any	any	any	any	any	any	any	any	Do not decrypt
2	Decrypt test site	any	any	any	any	any	any	any	any	any	Astrology (Any	any	→ Decrypt - Resign
3	Do not decrypt low risk	any	any	any	any	any	any	Risks: Very Low	any	any	any	any	Do not decrypt
4	Do not decrypt applications	any	any	any	any	any	any	Facebook Facebook Mes Facebook Plus	any	any	any	any	Do not decrypt
5	Decrypt all but trusted categ	any	any	any	any	any	any	any	any	any	Any (Except Un	any	→ Decrypt - Resign
6	Block bad cert status	any	any	any	any	any	any	any	any	any	any	1 Cert Status st	Block
7	Block SSLv3, TLS 1.0, 1.1	any	any	any	any	any	any	any	any	any	any	3 Protocol Ver	Block
Root Rules													
This category is empty													
Default Action												Do not decrypt	

Rule detail:

Editing Rule - Decrypt test site

Name: Decrypt test site Enabled [Move](#)

Action: Decrypt - Resign with IntCA Replace Key Only

Zones Networks VLAN Tags Users Applications Ports **Category** Certificate DN Cert Status Cipher Suite Version Logging

Categories

- Any (Except Uncategorized)
- Uncategorized
- Adult
- Advertisements
- Alcohol
- Animals and Pets
- Arts
- Astrology

Reputations

- Any
- 5 - Trusted
- 4 - Favorable
- 3 - Neutral
- 2 - Questionable
- 1 - Untrusted

Apply to unknown reputation

Selected Categories (1)

- Astrology (Any reputation)

<< Viewing 1-100 of 125 >>

[Cancel](#) [Save](#)

Do Not Decrypt Low-Risk Categories, Reputations, or Applications

Evaluate the traffic on your network to determine which would match low-risk categories, reputations, or applications, and add those rules with a **Do Not Decrypt** action. Put these rules *after* other more specific **Do Not Decrypt** rules because the system needs more time to process the traffic.

Following is the example.

SSL Policy Example

Enter Description [Save](#) [Cancel](#)

Rules Trusted CA Certificates Undecryptable Actions Advanced Settings

+ Add Category + Add Rule

#	Name	Source Zones	Dest Zones	Source Networks	Dest Networks	VLAN Tags	Users	Applicati...	Source Ports	Dest Ports	Categories	SSL	Action
Administrator Rules													
This category is empty													
Standard Rules													
1	DND internal source network	any	any	Intranet	any	any	any	any	any	any	any	any	Do not decrypt
2	Decrypt test site	any	any	any	any	any	any	any	any	any	Astrology (Any	any	Decrypt - Resign
3	Do not decrypt low risk	any	any	any	any	any	any	Risks: Very Low	any	any	any	any	Do not decrypt
4	Do not decrypt applications	any	any	any	any	any	any	Facebook Facebook Mes Facebook Photo	any	any	any	any	Do not decrypt
5	Decrypt all but trusted categ	any	any	any	any	any	any	any	any	any	Any (Except Un	any	Decrypt - Resign
6	Block bad cert status	any	any	any	any	any	any	any	any	any	any	1 Cert Status se	block
7	Block SSLv3, TLS 1.0, 1.1	any	any	any	any	any	any	any	any	any	any	3 Protocol Versi	block
Root Rules													
This category is empty													
Default Action												Do not decrypt	

Rule details:

Create a Decrypt - Resign Rule for Categories

Editing Rule - Do not decrypt low risk

Name: Do not decrypt low risk Enabled [Move](#)

Action: Do not decrypt

Zones Networks VLAN Tags Users Applications Ports Category Certificate DN Cert Status Cipher Suite Version Logging

Application Filters Clear All Filters Available Applications (1483) Selected Applications and Filters (1)

Application Filters: Risks (Any Selected)

- Very Low 538
- Low 454
- Medium 282
- High 139
- Very High 70

Business Relevance (Any Selected)

- Very Low 580

Available Applications (1483):

- 050plus
- 1&1 Internet
- 1-800-Flowers
- 1000mercis
- 12306.cn
- 123Movies
- 126.com
- 17173.com

Selected Applications and Filters (1):

Filters: Risks:Very Low, Low

<< Viewing 1-100 of 1483 >>

Cancel Save

Add Rule

Name: Do not decrypt applications Enabled Insert into Category Standard Rules

Action: Do not decrypt

Zones Networks VLAN Tags Users Applications Ports Category Certificate DN Cert Status Cipher Suite Version Logging

Application Filters Clear All Filters Available Applications (0) Selected Applications and Filters (4)

Application Filters: pinn

- Risks (Any Selected)
- Business Relevance (Any Selected)
- Types (Any Selected)
- Categories (Any Selected)
- Tags (1 Selected)
 - pinned certificate 0

Available Applications (0):

facebook

Selected Applications and Filters (4):

Filters: Tags:pinned certificate Filter:"faceb"

Applications: Facebook, Facebook Message, Facebook Photos

Cancel Add

Related Topics

- [Best Practices for Configuring Application Control](#)
- [Recommendations for Application Control](#)

Create a Decrypt - Resign Rule for Categories

This topic shows an example of creating a decryption rule with a **Decrypt - Resign** action for all but uncategorized sites. The rule uses the optional **Replace Key Only** option, which we always recommend with a **Decrypt-Resign** rule action.

Replace Key Only causes the user to see a security warning in the web browser when they browse to a site that uses a self-signed certificate, making the user aware that they are communicating with an unsecure site.

By putting this rule near the bottom, you get the best of both worlds: you can decrypt and optionally inspect traffic while not affecting performance as much as if you had put the rule earlier in the policy.

Procedure

- Step 1** Log in to the Secure Firewall Management Center if you haven't already done so.
- Step 2** If you haven't already done so, upload an internal certificate authority (CA) to the Secure Firewall Management Center (**Objects > Object Management**, then **PKI > Internal CAs**).
- Step 3** Click **Policies > Access Control > Decryption**.
- Step 4** Click **Edit** (✎) next to your SSL policy.
- Step 5** Click **Add Rule**.
- Step 6** In the **Name** field, enter a name to identify the rule.
- Step 7** From the **Action** list, click **Decrypt - Resign**.
- Step 8** From the **with** list, click the name of your internal CA.
- Step 9** Check the **Replace Key Only** box.

The following figure shows an example.

Name: DR rule sample Enabled Insert: below rule 8

Action: Decrypt - Resign with IntCA Replace Key Only

- Step 10** Click the **Category** tab page.
- Step 11** From the top of the **Categories** list, click **Any (Except Uncategorized)**.
- Step 12** From the **Reputations** list, click **Any**.
- Step 13** Click **Add to Rule**.

The following figure shows an example.

Editing Rule - Decrypt all except trusted cat

Name: Decrypt all except trusted cat Enabled Move

Action: Decrypt - Resign with IntCA Replace Key Only

Zones Networks VLAN Tags Users Applications Ports **Category** Certificate DN Cert Status Cipher Suite Version Logging

Categories Search by name or value

- Any (Except Uncategorized)**
- Uncategorized
- Adult
- Advertisements
- Alcohol
- Animals and Pets
- Arts
- Astrology

Reputations

- Any**
- 5 - Trusted
- 4 - Favorable
- 3 - Neutral
- 2 - Questionable
- 1 - Untrusted

Apply to unknown reputation

Selected Categories (1)

- Any (Except Uncategorized) (Reputations 1...)

<< Viewing 1-100 of 125 >>

Cancel Save

Related Topics

[Internal Certificate Authority Objects](#)

Last Decryption Rules: Block or Monitor Certificates and Protocol Versions

The last decryption rules, because they are the most specific and require the most processing, are rules that either monitor or block bad certificates and unsecure protocol versions.

SSL Policy Example

Enter Description Save Cancel

Rules Trusted CA Certificates Undecryptable Actions Advanced Settings

+ Add Category + Add Rule

#	Name	Source Zones	Dest Zones	Source Networks	Dest Networks	VLAN Tags	Users	Applicati...	Source Ports	Dest Ports	Categories	SSL	Action
Administrator Rules													
This category is empty													
Standard Rules													
1	DND internal source network	any	any	Intranet	any	any	any	any	any	any	any	any	Do not decrypt
2	Decrypt test site	any	any	any	any	any	any	any	any	any	Astrology (Any	any	Decrypt - Resign
3	Do not decrypt low risk	any	any	any	any	any	any	Risks: Very Lo	any	any	any	any	Do not decrypt
4	Do not decrypt applications	any	any	any	any	any	any	Facebook Facebook Mes Facebook Plo	any	any	any	any	Do not decrypt
5	Decrypt all but trusted categ	any	any	any	any	any	any	any	any	any	Any (Except U	any	Decrypt - Resign
6	Block bad cert status	any	any	any	any	any	any	any	any	any	any	1 Cert Status sc	Block
7	Block SSLv3, TLS 1.0, 1.1	any	any	any	any	any	any	any	any	any	any	3 Protocol Versi	Block
Root Rules													
This category is empty													
Default Action Do not decrypt													

Rule details:

Editing Rule - Block bad cert status

Name Enabled [Move](#)

Action Block

Zones Networks VLAN Tags Users Applications Ports Category Certificate DN **Cert Status** Cipher Suite Version Logging

Revoked:	Yes	No	Any	Self Signed:	Yes	No	Any	Revert to Defaults
Valid:	Yes	No	Any	Invalid Signature:	Yes	No	Any	
Invalid Issuer:	Yes	No	Any	Expired:	Yes	No	Any	
Not Yet Valid:	Yes	No	Any	Invalid Certificate:	Yes	No	Any	
Invalid CRL:	Yes	No	Any	Server Mismatch:	Yes	No	Any	

Cancel Save

Related Topics

[Example: Decryption Rule to Monitor or Block Certificate Status](#), on page 15

[Example: Decryption Rule to Monitor or Block Protocol Versions](#), on page 17

[Optional Example: Decryption Rule to Monitor or Block Certificate Distinguished Name](#), on page 18

Example: Decryption Rule to Monitor or Block Certificate Status

The last decryption rules, because they are the most specific and require the most processing, are rules that either monitor or block bad certificates and insecure protocol versions. The example in this section shows how to monitor or block traffic by certificate status.



Note Use the **Cipher Suite** and **Version** rule conditions *only* in rules with either the **Block** or **Block with reset** rule actions. The use of these conditions in rules with other rule actions can interfere with the system's ClientHello processing, resulting in unpredictable performance.

Procedure

- Step 1** Log in to the Secure Firewall Management Center if you haven't already done so.
- Step 2** Click **Policies > Access Control > Decryption**.
- Step 3** Click **Edit** (✎) next to your SSL policy.
- Step 4** Click **Edit** (✎) next to a decryption rule.
- Step 5** Click **Add Rule**.
- Step 6** In the Add Rule dialog box, in the **Name** field, enter a name for the rule.
- Step 7** Click **Cert Status**.
- Step 8** For each certificate status, you have the following options:
 - Click **Yes** to match against the presence of that certificate status.

- Click **No** to match against the absence of that certificate status.
- Click **Any** to skip the condition when matching the rule. In other words, choosing **Any** means the rule matches whether the certificate status is present or absent.

Step 9 From the **Action** list, click either **Monitor** to only monitor and log traffic that matches the rule or click **Block** or **Block with Reset** to block the traffic and optionally reset the connection.

Step 10 To save changes to the rule, at the bottom of the page, click **Save**.

Step 11 To save changes to the policy, at the top of the page, click **Save**.

Example

The organization trusts the Verified Authority certificate authority. The organization does not trust the Spammer Authority certificate authority. The system administrator uploads the Verified Authority certificate and an intermediate CA certificate issued by Verified Authority to the system. Because Verified Authority revoked a certificate it previously issued, the system administrator uploads the CRL that Verified Authority provided.

The following figure shows a certificate status rule condition checking for valid certificates, those issued by a Verified Authority, are not on the CRL, and still within the Valid From and Valid To date. Because of the configuration, traffic encrypted with these certificates is not decrypted and inspected with access control.

Revoked:	<input type="checkbox"/> Yes	<input type="checkbox"/> No	<input checked="" type="checkbox"/> Any	Self Signed:	<input type="checkbox"/> Yes	<input type="checkbox"/> No	<input checked="" type="checkbox"/> Any
Valid:	<input checked="" type="checkbox"/> Yes	<input type="checkbox"/> No	<input type="checkbox"/> Any	Invalid Signature:	<input type="checkbox"/> Yes	<input type="checkbox"/> No	<input checked="" type="checkbox"/> Any
Invalid Issuer:	<input type="checkbox"/> Yes	<input type="checkbox"/> No	<input checked="" type="checkbox"/> Any	Expired:	<input type="checkbox"/> Yes	<input type="checkbox"/> No	<input checked="" type="checkbox"/> Any
Not Yet Valid:	<input type="checkbox"/> Yes	<input type="checkbox"/> No	<input checked="" type="checkbox"/> Any	Invalid Certificate:	<input type="checkbox"/> Yes	<input type="checkbox"/> No	<input checked="" type="checkbox"/> Any
Invalid CRL:	<input type="checkbox"/> Yes	<input type="checkbox"/> No	<input checked="" type="checkbox"/> Any	Server Mismatch:	<input type="checkbox"/> Yes	<input type="checkbox"/> No	<input checked="" type="checkbox"/> Any

The following figure shows a certificate status rule condition checking for the absence of a status. In this case, because of the configuration, it matches against traffic encrypted with a certificate that has not expired and monitors that traffic.

Revoked:	<input type="checkbox"/> Yes	<input type="checkbox"/> No	<input checked="" type="checkbox"/> Any	Self Signed:	<input type="checkbox"/> Yes	<input type="checkbox"/> No	<input checked="" type="checkbox"/> Any
Valid:	<input type="checkbox"/> Yes	<input type="checkbox"/> No	<input checked="" type="checkbox"/> Any	Invalid Signature:	<input type="checkbox"/> Yes	<input type="checkbox"/> No	<input checked="" type="checkbox"/> Any
Invalid Issuer:	<input type="checkbox"/> Yes	<input type="checkbox"/> No	<input checked="" type="checkbox"/> Any	Expired:	<input type="checkbox"/> Yes	<input checked="" type="checkbox"/> No	<input type="checkbox"/> Any
Not Yet Valid:	<input type="checkbox"/> Yes	<input type="checkbox"/> No	<input checked="" type="checkbox"/> Any	Invalid Certificate:	<input type="checkbox"/> Yes	<input type="checkbox"/> No	<input checked="" type="checkbox"/> Any
Invalid CRL:	<input type="checkbox"/> Yes	<input type="checkbox"/> No	<input checked="" type="checkbox"/> Any	Server Mismatch:	<input type="checkbox"/> Yes	<input type="checkbox"/> No	<input checked="" type="checkbox"/> Any

In the following example, traffic would match this rule condition if the incoming traffic is using a certificate that has an invalid issuer, is self-signed, expired, and it is an invalid certificate.

Revoked:	Yes	No	Any	Self Signed:	Yes	No	Any
Valid:	Yes	No	Any	Invalid Signature:	Yes	No	Any
Invalid Issuer:	Yes	No	Any	Expired:	Yes	No	Any
Not Yet Valid:	Yes	No	Any	Invalid Certificate:	Yes	No	Any
Invalid CRL:	Yes	No	Any	Server Mismatch:	Yes	No	Any

The following graphic illustrates a certificate status rule condition that matches if the SNI of the request matches the server name or if the CRL is not valid.

Revoked:	Yes	No	Any	Self Signed:	Yes	No	Any
Valid:	Yes	No	Any	Invalid Signature:	Yes	No	Any
Invalid Issuer:	Yes	No	Any	Expired:	Yes	No	Any
Not Yet Valid:	Yes	No	Any	Invalid Certificate:	Yes	No	Any
Invalid CRL:	Yes	No	Any	Server Mismatch:	Yes	No	Any

Example: Decryption Rule to Monitor or Block Protocol Versions

This example shows how to block TLS and SSL protocols on your network that are no longer considered secure, such as TLS 1.0, TLS 1.1, and SSLv3. It's included to give you a little more detail about how protocol version rules work.

You should exclude nonsecure protocols from your network because they are all exploitable. In this example:

- You can block some protocols using **Version** page on the SSL rule.
- Because the system considers SSLv2 as undecryptable, you can block it using the **Undecryptable Actions** on the SSL policy.
- Similarly, because compressed TLS/SSL is not supported, you should block it as well.



Note Use the **Cipher Suite** and **Version** rule conditions *only* in rules with either the **Block** or **Block with reset** rule actions. The use of these conditions in rules with other rule actions can interfere with the system's ClientHello processing, resulting in unpredictable performance.

Procedure

- Step 1** Log in to the Secure Firewall Management Center if you haven't already done so.
- Step 2** Click **Policies > Access Control > Decryption**.
- Step 3** Click **Edit** (✎) next to your SSL policy.
- Step 4** Click **Edit** (✎) next to a decryption rule.
- Step 5** Click **Add Rule**.

Optional Example: Decryption Rule to Monitor or Block Certificate Distinguished Name

- Step 6** In the Add Rule dialog box, in the **Name** field, enter a name for the rule.
- Step 7** From the **Action** list, click **Block** or **Block with reset**.
- Step 8** Click **Version** page.
- Step 9** Check the check boxes for protocols that are no longer secure, such as **SSL v3.0**, **TLS 1.0**, and **TLS 1.1**. Clear the check boxes for any protocols that are still considered secure.

The following figure shows an example.

- Step 10** Choose other rule conditions as needed.
- Step 11** Click **Save**.

Optional Example: Decryption Rule to Monitor or Block Certificate Distinguished Name

This rule is included to give you an idea about how to monitor or block traffic based on the server certificate's Distinguished Name. It's included to give you a little more detail.

The distinguished name can consist of country code, common name, organization, and organizational unit, but typically consists of a common name only. For example, the common name in the certificate for `https://www.cisco.com` is `cisco.com`. (However, it's not always this simple; [Distinguished Name \(DN\) Rule Conditions](#) shows how to find common names.)

The host name portion of the URL in the client request is the [Server Name Indication \(SNI\)](#). The client specifies which hostname they want to connect to (for example, `auth.amp.cisco.com`) using the SNI extension in the TLS handshake. The server then selects the corresponding private key and certificate chain that are required to establish the connection while hosting all certificates on a single IP address.

Procedure

- Step 1** Log in to the Secure Firewall Management Center if you haven't already done so.
- Step 2** Click **Policies > Access Control > Decryption**.
- Step 3** Click **Edit** (✎) next to your SSL policy.

- Step 4** Click **Edit** (✎) next to a decryption rule.
- Step 5** Click **Add Rule**.
- Step 6** In the Add Rule dialog box, in the **Name** field, enter a name for the rule.
- Step 7** From the **Action** list, click **Block** or **Block with reset**.
- Step 8** Click **DN**.
- Step 9** Find the distinguished names you want to add from the **Available DNs**, as follows:
- To add a distinguished name object on the fly, which you can then add to the condition, click **Add** (+) above the **Available DNs** list.
 - To search for distinguished name objects and groups to add, click the **Search by name or value** prompt above the **Available DNs** list, then type either the name of the object, or a value in the object. The list updates as you type to display matching objects.
- Step 10** To select an object, click it. To select all objects, right-click and then **Select All**.
- Step 11** Click **Add to Subject** or **Add to Issuer**.
- Tip** You can also drag and drop selected objects.
- Step 12** Add any literal common names or distinguished names that you want to specify manually. Click the **Enter DN or CN** prompt below the **Subject DNs** or **Issuer DNs** list; then type a common name or distinguished name and click **Add**.
- Although you can add a CN or DN to either list, it's more common to add them to the **Subject DNs** list.
- Step 13** Add or continue editing the rule.
- Step 14** When you're done, to save changes to the rule, click **Save** at the bottom of the page.
- Step 15** To save changes to the policy, click **Save** at the top of the page.
-

Example

The following figure shows a distinguished name rule condition searching for certificates issued to goodbakery.example.com or issued by goodca.example.com. Traffic encrypted with these certificates is allowed, subject to access control.

Subject DNs (1)	Issuer DNs (1)
<div style="border: 1px solid #ccc; padding: 5px; min-height: 150px;"> GoodBakery 🗑️ </div>	<div style="border: 1px solid #ccc; padding: 5px; min-height: 150px;"> CN=goodca.example.com 🗑️ </div>
<input type="text" value="Enter DN or CN"/> <input type="button" value="Add"/>	<input type="text" value="Enter DN or CN"/> <input type="button" value="Add"/>

Decryption Rule Settings

How to configure recommended best practice settings for your decryption rules.

decryption rule: Enable logging for every rule except those with a **Do Not Decrypt** rule action. (It's up to you; if you want to see information about traffic that isn't decrypted, enable logging for those rules also.)

Procedure

-
- Step 1** Log in to the Secure Firewall Management Center if you haven't already done so.
 - Step 2** Click **Policies > Access Control > Decryption**.
 - Step 3** Click **Edit** (✎) next to your SSL policy.
 - Step 4** Click **Edit** (✎) next to a decryption rule.
 - Step 5** Click the **Logging** tab.
 - Step 6** Click **Log at End of Connection**.
 - Step 7** Click **Save**.
 - Step 8** Click **Save** at the top of the page.
-