



Deploying Multiple Datastores


- [Deploying Multiple Datastores, on page 1](#)

Deploying Multiple Datastores

This process should be carried out during the initial build of the VM host, if the VM host has two or more RAID arrays of disk storage. This configuration enables vSphere / vCenter to know about all the datastores.

- Step 1** From vSphere or vCenter Inventory list select the relevant Host.
- Step 2** Select the **Configuration** tab.
- Step 3** Select **Storage**.


Figure 1: Select Storage

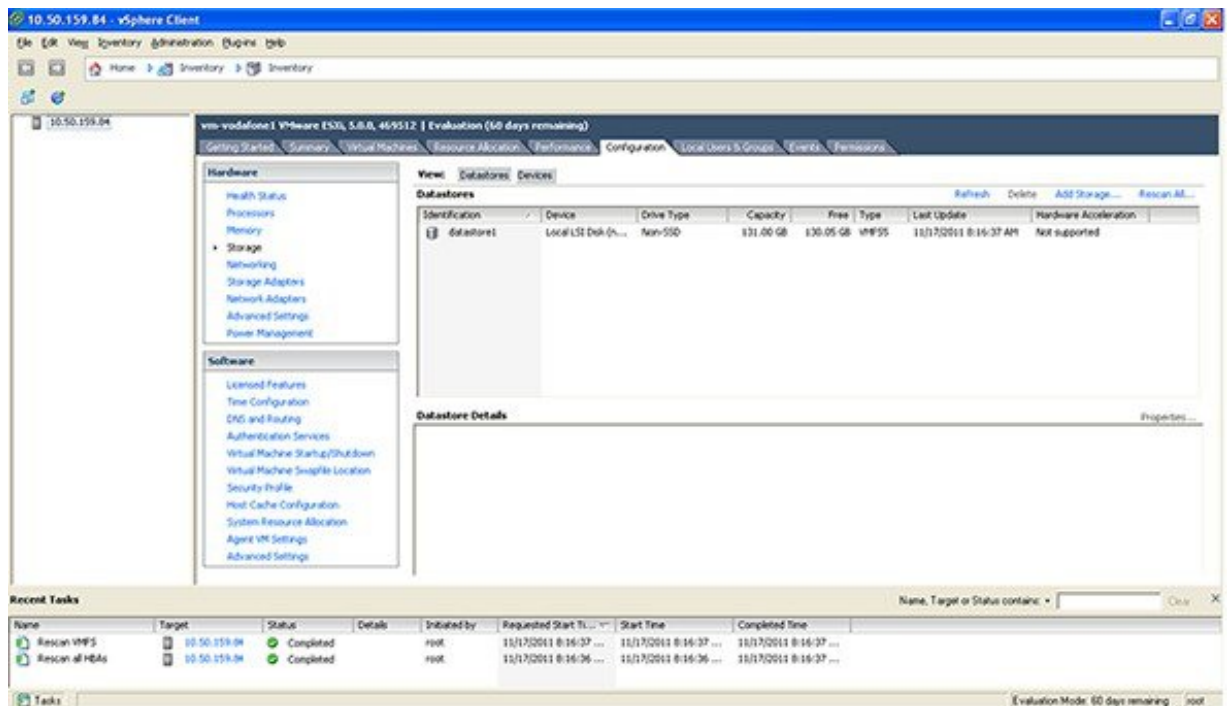

Step 4 Select **Add Storage ...** (on the right hand side window).


Step 5 Select **Disk/LUN** and click **Next**.

Figure 2: Select Disk/LUN

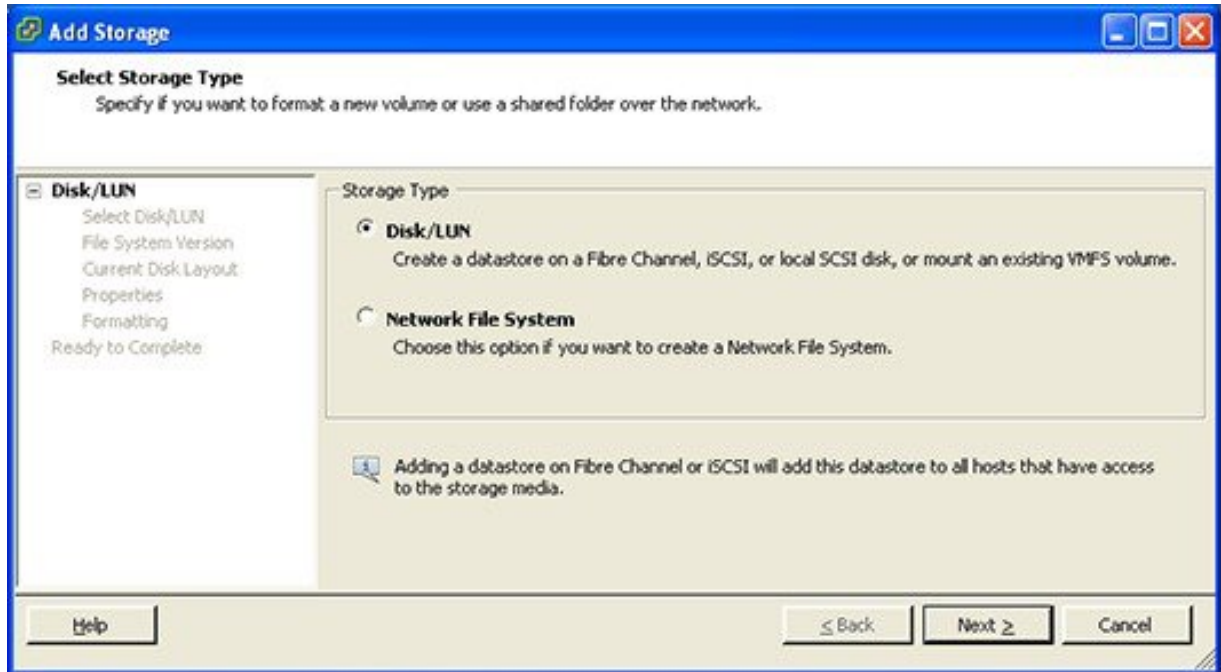

Step 6 Under **Disk/LUN** select the required Disc/LUN from the list presented and click **Next**.


Figure 3: Required Disc/LUN

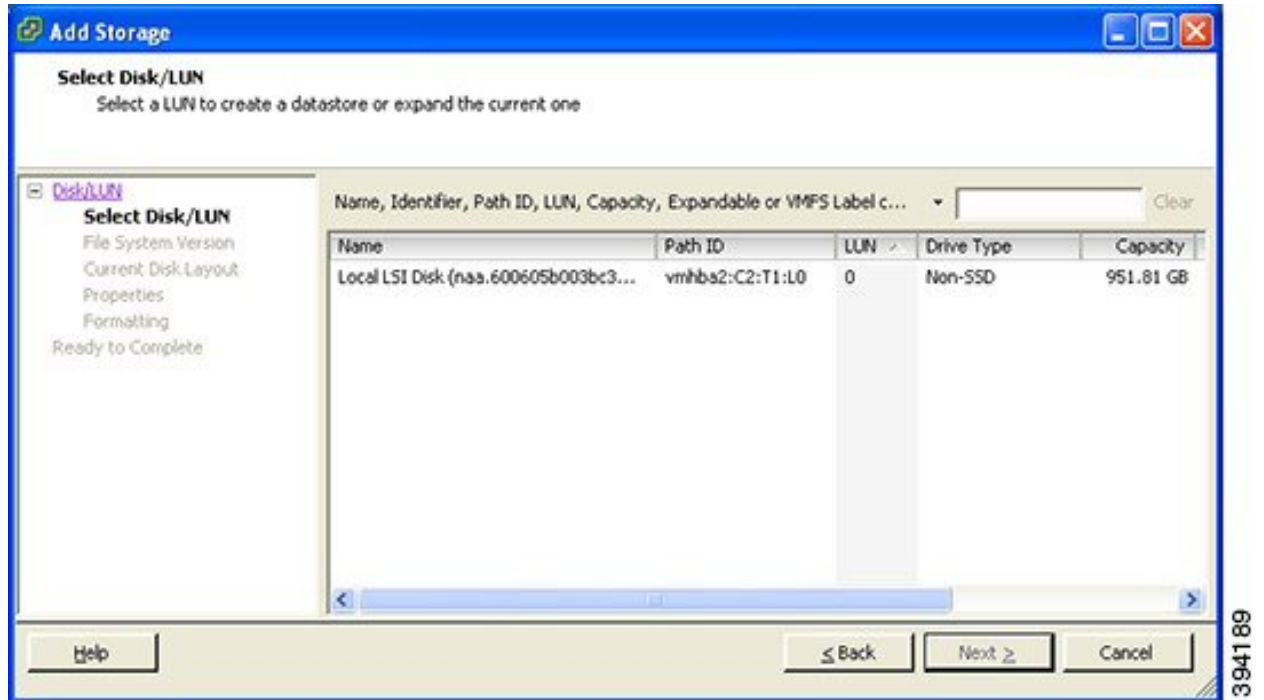

394189

Step 7 On the **File System Version** page select **VMFS-5** and then click **Next**.


Figure 4: Select VMFS-5

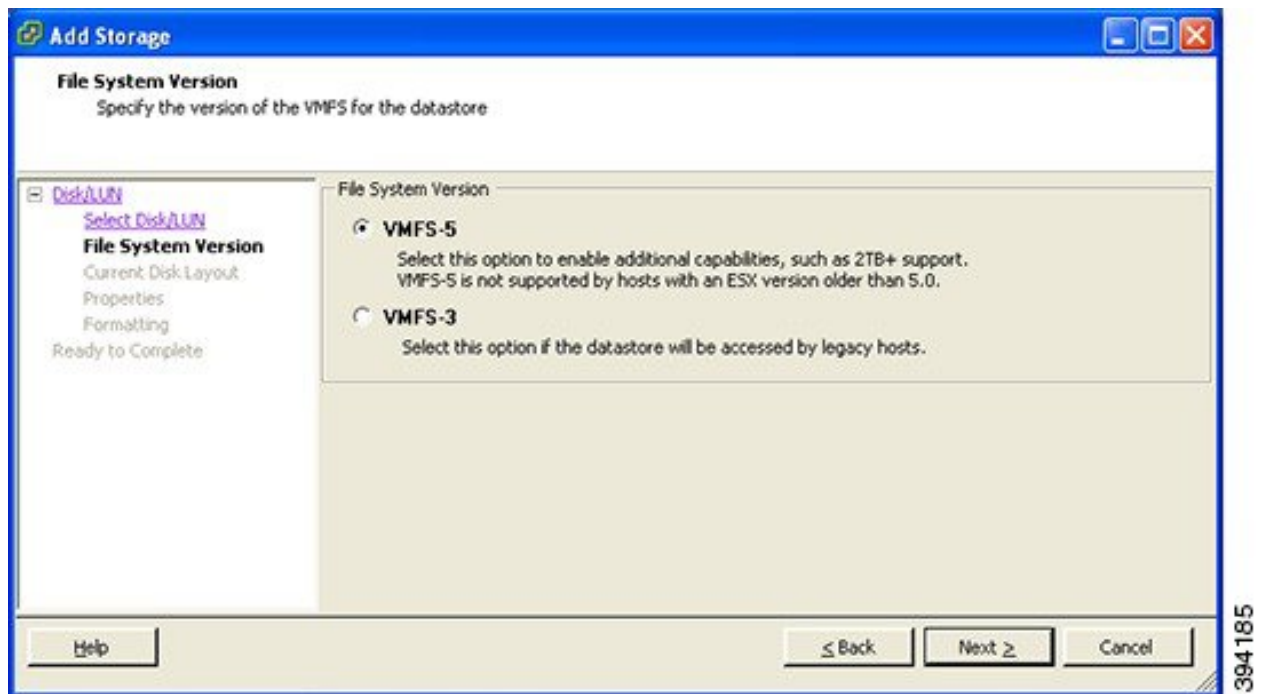

394185

Step 8 On the **Current Disk Layout** page verify the details and then click **Next**.


Figure 5: Verify Details

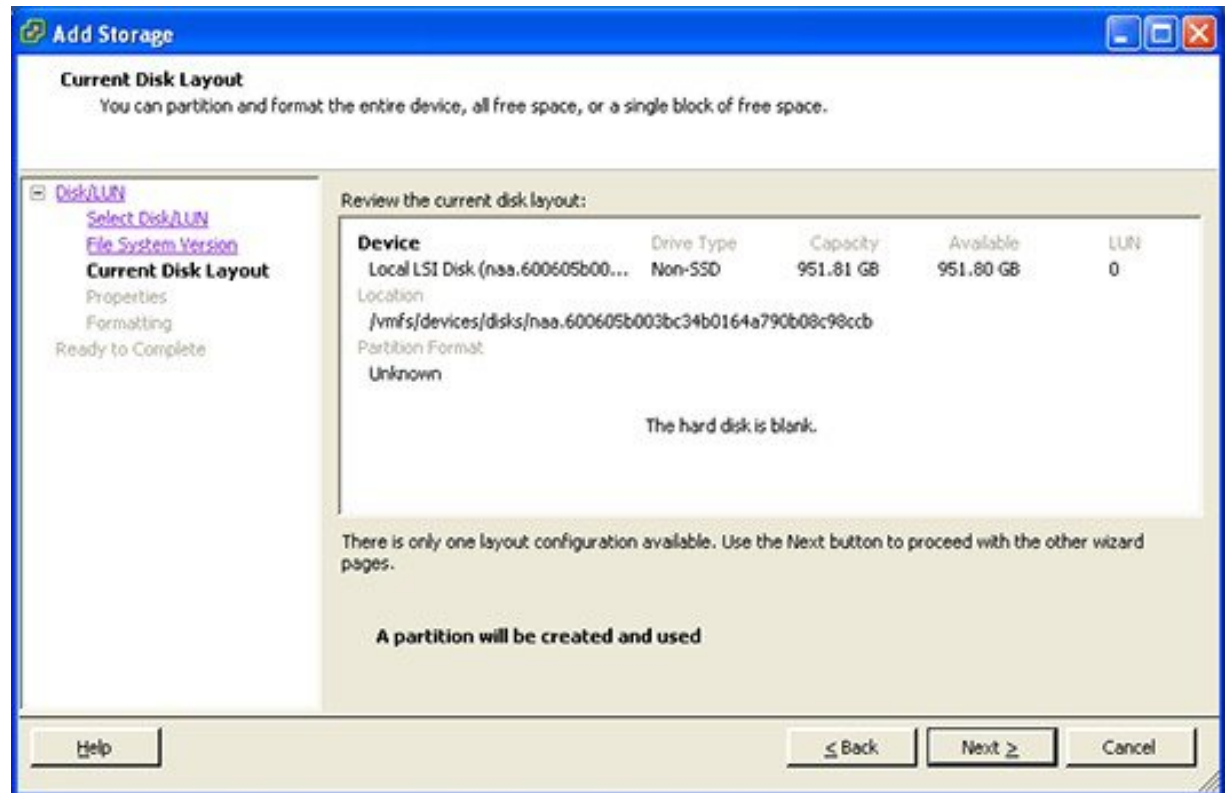

394183

Step 9 On the **Properties** page enter a name for the new datastore and then click **Next**.


Figure 6: Name for New Datastore

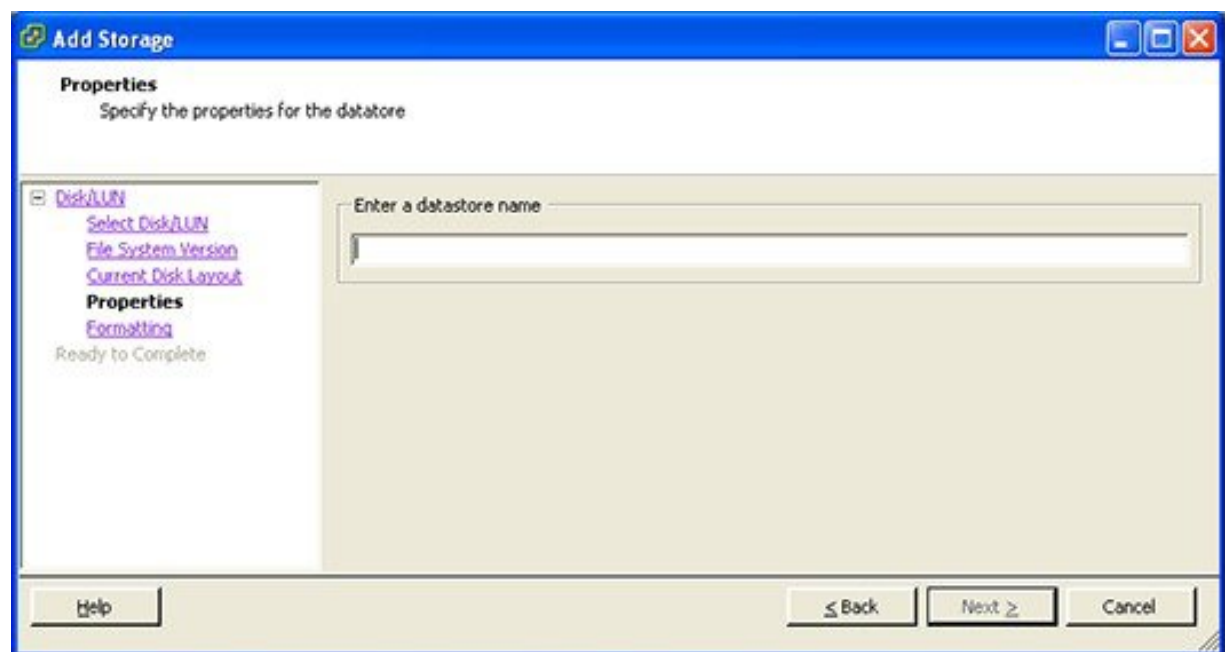

394191


Step 10 On the **Formatting** page select **Maximum available space** and then click **Next**.

Figure 7: Select Maximum Available Space

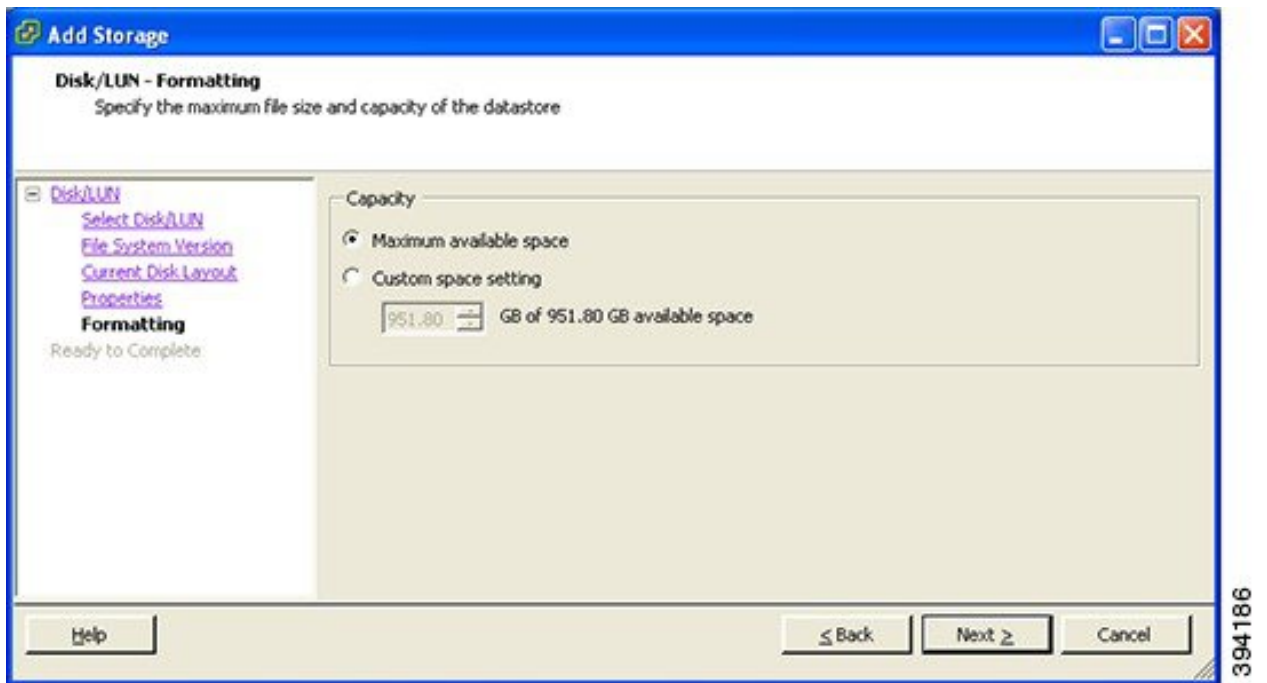

Step 11 On the **Ready to Complete** page verify the details and then click **Finish**.


Figure 8: Verify the Details

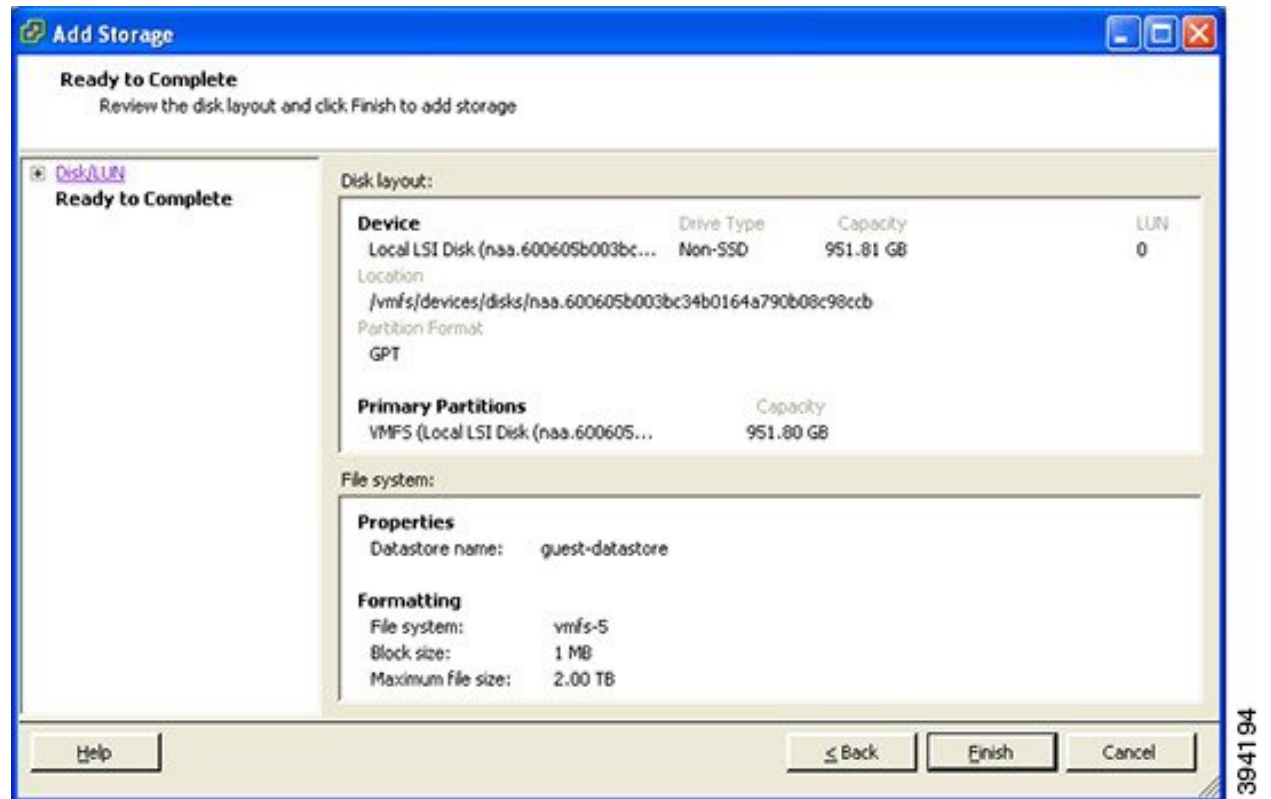

Step 12 Wait for the Create VMFS Datstore task to complete.

Step 13 On completion, the new datastore will be listed under the **Storage** section.

Figure 9: New Datastore

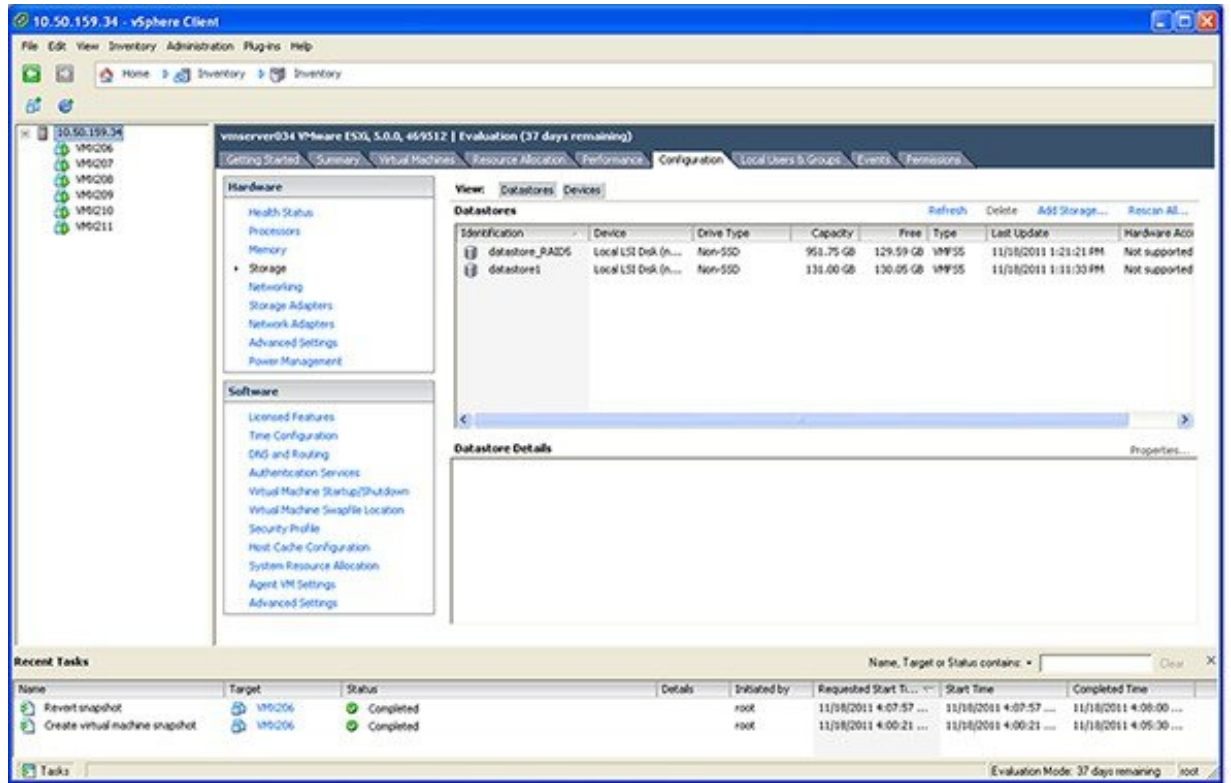

394178

