¿Cómo extraer un correo electrónico del mbox del archivo abre una sesión el dispositivo de seguridad del correo electrónico?

Contenido

[Introducción](#)
[¿Cómo extraer un correo electrónico del mbox del archivo abre una sesión el ESA?](#)
[Información Relacionada](#)

Introducción

Este documento describe cómo extraer un correo electrónico de los registros del archivo creados por el dispositivo de seguridad del correo electrónico (ESA).

¿Cómo extraer un correo electrónico del mbox del archivo abre una sesión el ESA?

1. Extraiga el registro del mbox del archivo que usted estaría extrayendo el correo electrónico de. Cómo extraer el mbox del archivo está disponible en el *artículo* proporcionado. (https://www.cisco.com/c/en/us/support/docs/security/email-security-appliance/118315-technote-esa-00.html)
2. Abra el archivo usando el editor de textos. Los ejemplos abajo se muestran usando *Notepad++*.
3. Identifique el correo electrónico que usted quisiera extraer el registro del archivo de los. Cada correo electrónico en el archivo comenzará con del <address>.
4. Copie el contenido de un solo correo electrónico a un nuevo archivo de texto y sálvelo como extensión **.eml**.
5. Abra el correo electrónico extraído en su cliente del correo, tal como perspectiva para ver el contenido.

Note: Un registro del mbox del archivo puede contener los correos electrónicos múltiples.

Fuente del correo electrónico de la muestra dentro del registro del archivo:

```
From test1@cisco.com Mon Jan 15 08:31:54 2018
X-IronPort-RCPT-TO: test2@cisco.com
Authentication-Results: ironport.example.com; spf=None
smtp.pra=test1@cisco.com; spf=SoftFail smtp.mailfrom=test1
@cisco.com; spf=None smtp.helo=postmaster@LIBIVARG-6622F
Received-SPF: None (ironport.example.com: no sender authenticity
  information available from domain of test1@cisco.com)
  identity=pra; client-ip=10.196.112.18;
  receiver=ironport.example.com;
  envelope-from="test1@cisco.com"; x-sender="test1@cisco.com";
  x-conformance=sidf_compatible
Received-SPF: SoftFail (ironport.example.com: domain of
  test1@cisco.com is inclined to not designate 10.196.112.18 as
  permitted sender) identity=mailfrom; client-ip=10.196.112.18;
  receiver=ironport.example.com;
  envelope-from="test1@cisco.com"; x-sender="test1@cisco.com";
  x-conformance=sidf_compatible; x-record-type="v=spf1"
Received-SPF: None (ironport.example.com: no sender authenticity
  information available from domain of
  postmaster@LIBIVARG-6622F) identity=helo;
  client-ip=10.196.112.18; receiver=ironport.example.com;
  envelope-from="test1@cisco.com";
  x-sender="postmaster@LIBIVARG-6622F";
  x-conformance=sidf_compatible
Received: from unknown (HELO LIBIVARG-6622F) ([10.196.112.18])
  by ironport.example.com with ESMTP; 15 Jan 2018 08:31:54 +0530
MIME-Version: 1.0
From: test1@cisco.com
To: test2@cisco.com
Date: 15 Jan 2018 11:16:23 +0530
Subject: Test archive filter
Content-Type: multipart/mixed; boundary=--boundary_0_
05c6bfa8-119c-40df-b0e9-917b1ffc110e


----boundary_0_05c6bfa8-119c-40df-b0e9-917b1ffc110e
Content-Type: text/plain; charset=us-ascii
Content-Transfer-Encoding: quoted-printable

This is a test email. Please ignore. Or don't.
----boundary_0_05c6bfa8-119c-40df-b0e9-917b1ffc110e
Content-Type: application/octet-stream; name=Onward.pdf
Content-Transfer-Encoding: base64

Q29udGVudC1UeXB1OiBtdWx0aXBhcnQvcmVsYXR1ZDsNC1B1b3VuZGFyeT0iLS0tLT1
fTnW4
dFBhcnRfODcwOTcxMC40MzO4MjUxMDI2NTI1DQpYLU1zIzJNaW11O1BUcnV1DQpYLU1
zZzJN
aW11UNnaWVudC1TdWJtaXQtVG1tZTogTW9uLCAwOCBKYW4gMjAxOCAxNzoyMDowNSA
tMDAw
```

```
----boundary_0_05c6bfa0-119c-40df-b0e9-917b1ffc110e--
```


Correo electrónico de la muestra extraído y abierto en la perspectiva:

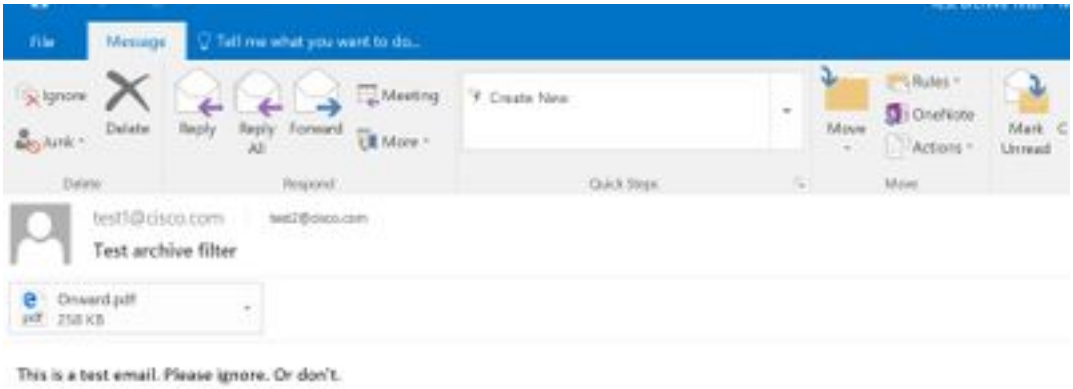

Información Relacionada

- Dispositivo de seguridad del correo electrónico de Cisco - Guías del usuario final
- Soporte Técnico y Documentación - Cisco Systems
- ¿Cuál es formato del mbox de UNIX (buzón)?
- ¿Dónde los registros se salvan en el dispositivo de seguridad del correo electrónico de Cisco (ESA) y cómo yo los acceden?

- Cómo archivar los correos electrónicos en el dispositivo de seguridad del correo electrónico (ESA)