

NGWC exemplo de configuração local da autenticação de EAP de 5760 e de 3850 WLC

Índice

[Introdução](#)

[Pré-requisitos](#)

[Requisitos](#)

[Componentes Utilizados](#)

[Informações de Apoio](#)

[Configurar](#)

[Diagrama de Rede](#)

[Configurações](#)

[Verificar](#)

[Troubleshooting](#)

[Permita traços para edições do cliente Wireless](#)

[Debuga para o dot1x e o EAP](#)

[O exemplo debuga](#)

Introdução

Este documento descreve o processo passo a passo usado a fim configurar os controladores wireless da nova geração de Cisco (NGWC) 5760 e 3850 controladores do Wireless LAN (WLC) para a autenticação local do Extensible Authentication Protocol (EAP) de usuários da rede Wireless. O método de autenticação usado neste documento é **PEAP-MSChapv2**, que é um dos métodos mais-comuns disponíveis nos suplicantes.

Pré-requisitos

Requisitos

Cisco recomenda que você cumpra estas exigências antes que você tente esta configuração:

- Tenha um conhecimento básico do WLC e do Lightweight Access Points (regações). Este documento não cobre a configuração de inicialização para os 5760 e 3850 WLC. Para obter mais informações sobre esta tarefa particular, visite por favor a [obtenção começado com o WLC 5760 e 3850 nos](#) fóruns do apoio.
- Tenha um conhecimento funcional do server do Authentication, Authorization, and Accounting (AAA).

- Tenha um conhecimento completo das redes Wireless e das edições de segurança Wireless.
- Este documento supõe que os pontos de acesso Wireless se têm juntado já ao WLC 5760 e/ou 3850.
- Este documento supõe que o suplicante está configurado corretamente para os métodos de autenticação que são usados.

Componentes Utilizados

As informações neste documento são baseadas nestas versões de software e hardware:

- A fim tirar proveito do GUI nos 5760 e nos 3850, e executar igualmente a maioria de código recente, asseguram-se de que você use o código 03.02.02.SE.150-1.EX2 ou acima. (Este é em junho 25, 2013 válidos.)
- O Access Point (AP) usado neste documento é AP1142N.
- O suplicante usado neste documento é empresa de Microsoft (MS) Windows 7, com um TP-link da placa Wireless n600 Dual adaptador da faixa USB e versão 3.1 de Cisco Anyconnect.

As informações neste documento foram criadas a partir de dispositivos em um ambiente de laboratório específico. Todos os dispositivos utilizados neste documento foram iniciados com uma configuração (padrão) inicial. Se a sua rede estiver ativa, certifique-se de que entende o impacto potencial de qualquer comando.

Informações de Apoio


O EAP local é um método de autenticação que permita a autenticação do usuário e de cliente Wireless localmente no controlador. Quando você permite o EAP local, o controlador serve como o Authentication Server e a base de dados de usuário local, assim que remove a dependência em um servidor de autenticação externa. O EAP local recupera credenciais do usuário da base de dados de usuário local.

Inscreva este comando CLI a fim ver os métodos que o EAP local apoia para a autenticação entre o controlador e o cliente Wireless:

```
3850-1(config-eap-profile)#method ?  fast          EAP-FAST method allowed
gtc          EAP-GTC method allowed
leap        EAP-LEAP method allowed
md5         EAP-MD5 method allowed
mschapv2    EAP-MSCHAPV2 method allowed
peap        EAP-PEAP method allowed
tls         EAP-TLS method allowed
```

Configurar

Diagrama de Rede

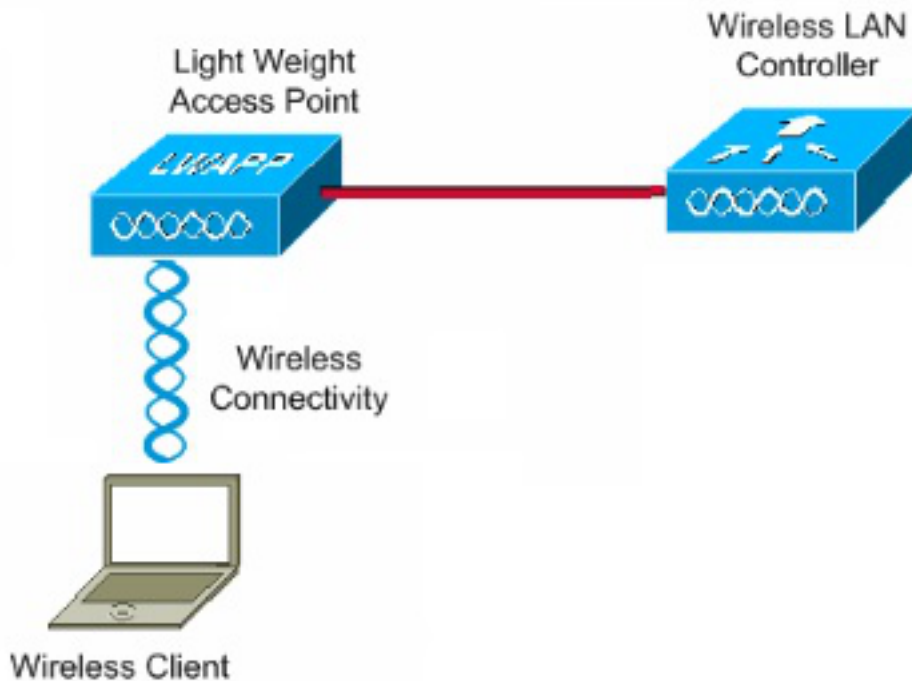

Configurações

Termine estas etapas a fim configurar a autenticação de EAP local:

1. Inscreva este comando CLI a fim criar um usuário de teste:

```
user-name test
  privilege 15
  password 0 cisco
  type network-user description pass=cisco
```

2. Inscreva este comando CLI a fim permitir o AAA:

```
aaa new-model
```

3. Defina a authentication e autorização para o AAA:

```
aaa authentication dot1x default local
```

```
aaa authorization credential-download author_list local
```

```
aaa authentication dot1x authen_list local
```

```
aaa local authentication authen_list authorization author_list
```

Incorpore este comando no CLI a fim fazer a sessão EAP local-terminada.

```
aaa authentication dot1x default local
```

Inscreva este comando CLI a fim preparar uma lista de método para a transferência credencial:

Note: Neste exemplo, o local é configurado no **author_list da lista de método**. Este nome da lista de método é um dos parâmetros para o comando CLI do **author_list da autorização do authen_list da autenticação local aaa**.

```
aaa authorization credential-download author_list local
```

Inscreva este comando CLI a fim definir uma lista do método de autenticação, que esteja usada pelo EAP local para a verificação das credenciais quando o EAP pede o EAP local com o evento **EAP_VERIFY_PASSWORD_EVENT**:

Note: Este nome da lista de método é o parâmetro para o comando CLI do **author_list da autorização do authen_list da autenticação local aaa**.

```
aaa authentication dot1x authen_list local
```

Inscreva este comando CLI a fim especificar onde o EAP local deve transferir/verifica as credenciais:

Note: Você deve definir o **authen_list** e o **author_list** antes que este ocorra; refira etapas 2 e 3 para obter mais informações sobre de como definir a lista de método.

```
aaa local authentication authen_list authorization author_list
```

4. Inscreva este comando CLI a fim começar o processo do **dot1x**:

```
dot1x system-auth-control
```

5. Crie o perfil EAP a fim definir os métodos de autenticação apoiados. Neste exemplo, **PEAP-MSchapv2** é permitido:

```
eap profile PEAPProfile
method peap
method mschapv2
```

6. Configurar o Service Set Identifier (SSID) a fim usar o perfil EAP que você criou:

```
wlan TiagoNGWC 1 TiagoNGWC

client vlan VLAN0080
ip dhcp server 192.168.80.14
local-auth PEAPProfile
```

7. Estabelecer o conjunto de DHCP e a interface virtual do interruptor (SVI) para o cliente VLAN. Neste exemplo, isto é terminado diretamente no NGWC com uso de **VLAN80**:

```
ip dhcp excluded-address 192.168.80.1 192.168.80.99
```

```

!
ip dhcp pool VLAN80
  network 192.168.80.0 255.255.255.0
  default-router 192.168.80.14

interface Vlan80
  ip address 192.168.80.14 255.255.255.0

```

Verificar

Use esta seção a fim verificar que suas configurações trabalham corretamente.

```

3850-1#show wlan name TiagoNGWC
WLAN Profile Name      : TiagoNGWC
=====
Identifier              : 1
Network Name (SSID)    : TiagoNGWC
Status                  : Enabled
Broadcast SSID         : Enabled
Maximum number of Associated Clients : 0
AAA Policy Override    : Disabled
Network Admission Control
  NAC-State             : Disabled
Number of Active Clients : 1
Exclusionlist Timeout  : 60
Session Timeout       : 1800 seconds
CHD per WLAN          : Enabled
Webauth DHCP exclusion : Disabled
Interface              : VLAN0080
Interface Status       : Up
Multicast Interface    : Unconfigured
WLAN IPv4 ACL          : unconfigured
WLAN IPv6 ACL          : unconfigured
DHCP Server            : 192.168.80.14
DHCP Address Assignment Required : Disabled
DHCP Option 82         : Disabled
DHCP Option 82 Format  : ap-mac
DHCP Option 82 Ascii Mode : Disabled
DHCP Option 82 Rid Mode : Disabled
QoS Service Policy - Input
  Policy Name           : unknown
  Policy State          : None
QoS Service Policy - Output
  Policy Name           : unknown
  Policy State          : None
QoS Client Service Policy
  Input Policy Name     : unknown
  Output Policy Name    : unknown
WMM                     : Allowed
Channel Scan Defer Priority:
  Priority (default)    : 4
  Priority (default)    : 5
  Priority (default)    : 6
Scan Defer Time (msecs) : 100
Media Stream Multicast-direct : Disabled
CCX - AironetIe Support : Enabled
CCX - Gratuitous ProbeResponse (GPR) : Disabled
CCX - Diagnostics Channel Capability : Disabled
Dot11-Phone Mode (7920) : Invalid
Wired Protocol         : None

```

```

Peer-to-Peer Blocking Action      : Disabled
Radio Policy                      : All
DTIM period for 802.11a radio    : 1
DTIM period for 802.11b radio    : 1
Local EAP Authentication         : PEAPProfile
Mac Filter Authorization list name : Disabled
Accounting list name             : Disabled
802.1x authentication list name  : Disabled
Security
  802.11 Authentication          : Open System
  Static WEP Keys                : Disabled
  802.1X                         : Disabled
  Wi-Fi Protected Access (WPA/WPA2) : Enabled
    WPA (SSN IE)                 : Disabled
    WPA2 (RSN IE)                : Enabled
      TKIP Cipher                 : Disabled
      AES Cipher                  : Enabled
    Auth Key Management
      802.1x                      : Enabled
      PSK                         : Disabled
      CCKM                        : Disabled
  CKIP                           : Disabled
  IP Security                     : Disabled
  IP Security Passthru           : Disabled
  L2TP                           : Disabled
  Web Based Authentication       : Disabled
  Conditional Web Redirect       : Disabled
  Splash-Page Web Redirect       : Disabled
  Auto Anchor                     : Disabled
  Sticky Anchoring               : Enabled
  Cranite Passthru               : Disabled
  Fortress Passthru              : Disabled
  PPTP                           : Disabled
  Infrastructure MFP protection   : Enabled
  Client MFP                     : Optional
  Webauth On-mac-filter Failure  : Disabled
  Webauth Authentication List Name : Disabled
  Webauth Parameter Map         : Disabled
  Tkip MIC Countermeasure Hold-down Timer : 60
Call Snooping                    : Disabled
Passive Client                   : Disabled
Non Cisco WGB                    : Disabled
Band Select                      : Disabled
Load Balancing                   : Disabled
IP Source Guard                  : Disabled

```

3850-1#**show wireless client mac-address 6470.0227.0a89 detail**

```

Client MAC Address : 6470.0227.0a89
Client Username   : tiago
AP MAC Address    : 64d8.146f.e5a0
AP Name           : APd48c.b52f.4a1e
Client State      : Associated
Wireless LAN Id   : 1
Wireless LAN Name : TiagoNGWC
BSSID             : 64d8.146f.e5a0
Connected For     : 323 secs
Protocol          : 802.11n - 2.4 GHz
Channel           : 6
IPv4 Address      : 192.168.80.100
IPv6 Address      : Unknown
Association Id    : 1
Authentication Algorithm : Open System

```

```
...
Policy Manager State : RUN
Policy Manager Rule Created : Yes
NPU Fast Fast Notified : Yes
Last Policy Manager State : RUN
Client Entry Create Time : 153207 seconds
Policy Type : WPA2
Authentication Key Management : 802.1x
Encryption Cipher : CCMP (AES)
Management Frame Protection : No
EAP Type : PEAP
Interface : VLAN0080
VLAN : 80
Quarantine VLAN : 0
Access VLAN : 80
...
```

Troubleshooting

Use esta seção a fim pesquisar defeitos suas configurações.

Permita traços para edições do cliente Wireless

Inscreva estes comandos CLI a fim seguir para edições do cliente Wireless:

```
set trace group-wireless-client level debug
debug client mac <MAC>
```

Inscreva este comando CLI a fim filtrar em um MAC address específico:

```
set trace group-wireless-client filter mac <MAC>
```

Inscreva este comando CLI a fim ver saída não filtrada:

```
show trace messages group-wireless-client
```

Inscreva este comando CLI a fim ver a saída filtrada:

```
show trace sys-filtered-traces
```

Inscreva este comando CLI a fim ver os ajustes:

```
show trace all-buffer settings
```

Você pôde precisar de ver outros traços, dependentes de se a edição está com [®] do Cisco IOS ou ALIMENTADO. Se você encontra edições quando você tenta recuperar endereços IP de Um ou Mais Servidores Cisco ICM NT, permita **debugam o seguimento do dispositivo IP**.

Debuga para o dot1x e o EAP

Estão aqui os comandos debug usados para o **dot1x** e as configurações **EAP**:

```
debug aaa wireless all
debug dot1x all
debug eap all
```

O exemplo debuga

Estão aqui alguns outputs do comando debug do exemplo:

```
3850-1#
*Sep 19 07:00:21.423: 6470.0227.0A89 Association received from mobile on AP
64D8.146F.E5A0 1 wcm: cct Msg Sent at 1379573926 se
*Sep 19 07:00:21.423: 6470.0227.0A89 qos upstream policy is unknown and
downstreampolicy is unknown 1 wcm: Sent at 1379573926 se
*Sep 19 07:00:21.423: 6470.0227.0A89 apChanged 0 wlanChanged 0 mscb ipAddr
192.168.80.100, apf RadiusOverride 0x0, numIPv6Addr=0 1 wcm: = 0^M
*Sep 19 07:00:21.423: 6470.0227.0A89 Applying WLAN policy on MSCB. 1 wcm:
ipAddr 192.168.80.100, apf RadiusOverride 0x0, numIPv6Addr=0
*Sep 19 07:00:21.424: 6470.0227.0A89 Applying WLAN ACL policies to client 1
wcm: 192.168.80.100, apf RadiusOverride 0x0, numIPv6Addr=0
*Sep 19 07:00:21.424: 6470.0227.0A89 No Interface ACL used for Wireless
client in WCM(NGWC) 1 wcm: pf RadiusOverride 0x0, numIPv6Addr=0
*Sep 19 07:00:21.424: 6470.0227.0A89 Applying site-specific IPv6 override for
station 6470.0227.0A89 - vapId 1, site 'default-group', interface
'VLAN0080' 1 wcm:
*Sep 19 07:00:21.424: 6470.0227.0A89 Applying local bridging Interface Policy
for station 6470.0227.0A89 - vlan 80, interface 'VLAN0080' 1 wcm: erface
'VLAN0080'
*Sep 19 07:00:21.424: 6470.0227.0A89 STA - rates (8): 1 wcm:
130 132 139 12 18 150 24 36 48 72 96 108 0 0 0 0
*Sep 19 07:00:21.424: 6470.0227.0A89 STA - rates (12): 1 wcm:
130 132 139 12 18 150 24 36 48 72 96 108 0 0 0 0
*Sep 19 07:00:21.424: 6470.0227.0A89 new capwap_wtp_iif_id d7844000000004,sm
capwap_wtp_iif_id d7844000000004 1 wcm: an 80, interface 'VLAN0080'
*Sep 19 07:00:21.424: 6470.0227.0A89 In >= L2AUTH_COMPLETE for station
6470.0227.0A89 1 wcm: _iif_id d7844000000004
*Sep 19 07:00:21.424: 6470.0227.0A89 192.168.80.100 RUN (20) Change state
to START (0) last state RUN (20)
1 wcm:
*Sep 19 07:00:21.424: 6470.0227.0A89 WCDB_CHANGE: 1 wcm: Client 1 m_vlan 80
Radio iif id 0xdf0f4000000005 bssid iif id 0xcd248000000015, bssid
64D8.146F.E5A0
*Sep 19 07:00:21.424: 6470.0227.0A89 WCDB_AUTH: 1 wcm: Adding opt82 len 0
*Sep 19 07:00:21.425: 6470.0227.0A89 WCDB_LLM: 1 wcm: NoRun Prev Mob 1, Curr
Mob 1 llmReq 5, return True
*Sep 19 07:00:21.425: 6470.0227.0A89 auth state 0 mob state 1 setWme 0 wme 1
roam_sent 0
1 wcm: rn True
*Sep 19 07:00:21.425: 6470.0227.0A89 WCDB_CHANGE: 1 wcm: auth=ASSOCIATION(0)
vlan 80 radio 0 client_id 0xde51c000000021 mobility=Local(1) src_int
0xd7844000000004 dst_int 0x0 ackflag 2 reassoc_client 0 llm_notif 1 ip
192.168.80.100 ip_learn_type ARP
*Sep 19 07:00:21.425: 6470.0227.0A89 192.168.80.100 START (0) Initializing
policy 1 wcm: 0 client_id 0xde51c000000021 mobility=Local(1) src_int
0xd7844000000004 dst_int 0x0 ackflag 2 reassoc_client 0 llm_notif 1 ip
192.168.80.100 ip_learn_type ARP
*Sep 19 07:00:21.425: PEM recv processing msg Del SCB(4) 1 wcm: T (0)
Initializing policy
*Sep 19 07:00:21.425: 6470.0227.0A89 192.168.80.100 START (0) Change state
to AUTHCHECK (2) last state RUN (20)
1 wcm: bility=Local(1) src_int 0xd7844000000004 dst_int 0x0 ackflag 2
```



```
reassoc_client 0 llm_notif 1 ip 192.168.80.100 ip_learn_type ARP
*Sep 19 07:00:21.425: 6470.0227.0A89 192.168.80.100 AUTHCHECK (2) Change
state to 8021X_REQD (3) last state RUN (20)
1 wcm: y=Local(1) src_int 0xd7844000000004 dst_int 0x0 ackflag 2
reassoc_client 0 llm_notif 1 ip 192.168.80.100 ip_learn_type ARP
*Sep 19 07:00:21.425: 6470.0227.0A89 192.168.80.100 8021X_REQD (3) DHCP
required on AP 64D8.146F.E5A0 vapId 1 apVapId 1for this client 1 wcm:
0xd7844000000004 dst_int 0x0 ackflag 2 reassoc_client 0 llm_notif 1 ip
192.168.80.100 ip_learn_type ARP
*Sep 19 07:00:21.425: 6470.0227.0A89 Not Using WMM Compliance code qosCap 00
1 wcm: uired on AP 64D8.146F.E5A0 vapId 1 apVapId 1for this client
*Sep 19 07:00:21.425: 6470.0227.0A89 192.168.80.100 8021X_REQD (3) Plumbed
mobile LWAPP rule on AP 64D8.146F.E5A0 vapId 1 apVapId 1 1 wcm: nt
*Sep 19 07:00:21.425: 6470.0227.0A89 apfPemAddUser2 (apf_policy.c: 1 wcm:161)
Changing state for mobile 6470.0227.0A89 on AP 64D8.146F.E5A0 from
Associated to Associated
*Sep 19 07:00:21.426: 6470.0227.0A89 Stopping deletion of Mobile Station: 1
wcm: (callerId: 48)
*Sep 19 07:00:21.426: 6470.0227.0A89 Ms Timeout = 0, Session Timeout = 1800
1 wcm: llerId: 48)
*Sep 19 07:00:21.426: 6470.0227.0A89 Sending Assoc Response to station on
BSSID 64D8.146F.E5A0 (status 0) ApVapId 1 Slot 0 1 wcm: .146F.E5A0 from
Associated to Associated
*Sep 19 07:00:21.426: 6470.0227.0A89 apfProcessAssocReq (apf_80211.c: 1 wcm:
5260) Changing state for mobile 6470.0227.0A89 on AP 64D8.146F.E5A0 from
Associated to Associated
*Sep 19 07:00:21.426: 6470.0227.0A89 192.168.80.100 8021X_REQD (3) Handling
pemDelScb Event skipping delete 1 wcm: 7.0A89 on AP 64D8.146F.E5A0 from
Associated to Associated
*Sep 19 07:00:21.435: dot1x-sm:[6470.0227.0a89, Ca0] Posting RESTART on
Client 0x60000009
*Sep 19 07:00:21.435: dot1x_auth Ca0: during state auth_authenticated,
got event 13(restart)
*Sep 19 07:00:21.435: @@@ dot1x_auth Ca0: auth_authenticated -> auth_restart
*Sep 19 07:00:21.435: dot1x-sm:[6470.0227.0a89, Ca0] 0x60000009:exiting
authenticated state
*Sep 19 07:00:21.435: dot1x-sm:[6470.0227.0a89, Ca0] 0x60000009:
entering restart
*Sep 19 07:00:21.435: dot1x-ev:[6470.0227.0a89, Ca0] Override cfg -
MAC 6470.0227.0a89 - profile PEAPProfile
*Sep 19 07:00:21.435: dot1x-ev:[6470.0227.0a89, Ca0] Override cfg -
SuppTimeout 30s, ReAuthMax 2, MaxReq 2, TxPeriod 30s
*Sep 19 07:00:21.435: dot1x-ev:[6470.0227.0a89, Ca0] Sending create new
context event to EAP for 0x60000009 (6470.0227.0a89)
*Sep 19 07:00:21.435: EAP-EVENT: Received context create from LL
(Dot1x-Authenticator) (0x60000009)
*Sep 19 07:00:21.436: EAP-AUTH-EVENT: Received AAA ID 0x0000001F from LL
*Sep 19 07:00:21.436: EAP-AUTH-AAA-EVENT: Assigning AAA ID 0x0000001F
*Sep 19 07:00:21.436: EAP-AUTH-EVENT: Received Session ID
"c0a82104523aa0a30000001f" from LL
*Sep 19 07:00:21.436: EAP-AUTH-EVENT: Setting authentication mode:
Passthrough
*Sep 19 07:00:21.436: EAP-EVENT: Using EAP profile "PEAPProfile"
(handle 0x26000052)
*Sep 19 07:00:21.436: eap_authen : initial state eap_auth_initialize
has enter
*Sep 19 07:00:21.436: EAP-EVENT: Allocated new EAP context
(handle = 0x26000052)
*Sep 19 07:00:21.436: dot1x-sm:[6470.0227.0a89, Ca0] Posting
!EAP_RESTART on Client 0x60000009
*Sep 19 07:00:21.436: dot1x_auth Ca0: during state auth_restart, got
event 6(no_eapRestart)
*Sep 19 07:00:21.436: @@@ dot1x_auth Ca0: auth_restart -> auth_connecting
*Sep 19 07:00:21.436: dot1x-sm:[6470.0227.0a89, Ca0] 0x60000009:enter
```

```
connecting state
*Sep 19 07:00:21.436: dot1x-sm:[6470.0227.0a89, Ca0] 0x60000009: restart
connecting
*Sep 19 07:00:21.436: EAP-EVENT: Received EAP event
'EAP_AUTHENTICATOR_START' on handle 0x26000052
*Sep 19 07:00:21.436: eap_authen : during state eap_auth_initialize,
got event 25(eapStartTmo)
*Sep 19 07:00:21.436: @@@ eap_authen : eap_auth_initialize ->
eap_auth_select_action
*Sep 19 07:00:21.436: eap_authen : during state eap_auth_select_action,
got event 20(eapDecisionPropose)
*Sep 19 07:00:21.436: @@@ eap_authen : eap_auth_select_action ->
eap_auth_propose_method
*Sep 19 07:00:21.436: eap_authen : idle during state
eap_auth_propose_method
*Sep 19 07:00:21.436: @@@ eap_authen : eap_auth_propose_method ->
eap_auth_method_request
*Sep 19 07:00:21.436: eap_authen : idle during state
eap_auth_method_request
*Sep 19 07:00:21.436: @@@ eap_authen : eap_auth_method_request ->
eap_auth_tx_packet
*Sep 19 07:00:21.436: EAP-AUTH-EVENT: Current method = Identity
*Sep 19 07:00:21.436: EAP-EVENT: Sending LL (Dot1x-Authenticator) event
'EAP_CUSTOMIZE_ID_REQUEST' on handle 0x26000052
*Sep 19 07:00:21.436: eap_authen : idle during state eap_auth_tx_packet
*Sep 19 07:00:21.437: @@@ eap_authen : eap_auth_tx_packet -> eap_auth_idle
*Sep 19 07:00:21.437: EAP-AUTH-TX-PAK: Code:REQUEST ID:0xA Length:0x0047
Type:IDENTITY
*Sep 19 07:00:21.437: Payload: 006E6574776F726B69643D546961676F ...
*Sep 19 07:00:21.437: EAP-EVENT: Started 'Authenticator ReqId Retransmit'
timer (30s) for EAP sesion handle 0x26000052
*Sep 19 07:00:21.437: EAP-EVENT: Started EAP tick timer
*Sep 19 07:00:21.437: EAP-EVENT: Sending LL (Dot1x-Authenticator) event
'EAP_TX_PACKET' on handle 0x26000052
*Sep 19 07:00:21.437: dot1x-sm:[6470.0227.0a89, Ca0] Posting RX_REQ on Client
0x60000009
*Sep 19 07:00:21.437: dot1x_auth Ca0: during state auth_connecting, got
event 10(eapReq_no_reAuthMax)
*Sep 19 07:00:21.437: @@@ dot1x_auth Ca0: auth_connecting ->
auth_authenticating
*Sep 19 07:00:21.437: dot1x-sm:[6470.0227.0a89, Ca0] 0x60000009:
authenticating state entered
*Sep 19 07:00:21.437: dot1x-sm:[6470.0227.0a89, Ca0] 0x60000009:connecting
authenticating action
*Sep 19 07:00:21.437: dot1x-sm:[6470.0227.0a89, Ca0] Posting AUTH_START for
0x60000009
*Sep 19 07:00:21.437: dot1x_auth_bend Ca0: during state auth_bend_idle,
got event 4(eapReq_authStart)
*Sep 19 07:00:21.437: @@@ dot1x_auth_bend Ca0: auth_bend_idle ->
auth_bend_request
*Sep 19 07:00:21.437: dot1x-sm:[6470.0227.0a89, Ca0] 0x60000009:entering
request state
*Sep 19 07:00:21.437: dot1x-ev:[6470.0227.0a89, Ca0] Sending EAPOL packet
*Sep 19 07:00:21.437: dot1x-packet:[6470.0227.0a89, Ca0] Platform changed
src mac of EAPOL packet
*Sep 19 07:00:21.438: dot1x-registry:registry:dot1x_ether_macaddr called
*Sep 19 07:00:21.438: dot1x-packet:EAPOL pak Tx - Ver: 0x3 type: 0x0
*Sep 19 07:00:21.438: dot1x-packet: length: 0x0047
*Sep 19 07:00:21.438: dot1x-packet:EAP code: 0x1 id: 0xA length: 0x0047
*Sep 19 07:00:21.438: dot1x-packet: type: 0x1
*Sep 19 07:00:21.438: dot1x-packet:[6470.0227.0a89, Ca0] EAPOL packet sent
to client 0x60000009
*Sep 19 07:00:21.438: dot1x-sm:[6470.0227.0a89, Ca0] 0x60000009:idle request
action
```

*Sep 19 07:00:22.149: dot1x-packet:[6470.0227.0a89, Ca0] Queuing an EAPOL
pkt on Authenticator Q

*Sep 19 07:00:22.149: dot1x-packet:EAPOL pak rx - Ver: 0x3 type: 0x0

*Sep 19 07:00:22.149: dot1x-packet: length: 0x000A

*Sep 19 07:00:22.149: dot1x-ev:[Ca0] Dequeued pkt: Int Ca0 CODE= 2,TYPE= 1,
LEN= 10

*Sep 19 07:00:22.149: dot1x-ev:[Ca0] Received pkt saddr =6470.0227.0a89,
daddr = 64d8.146f.e5a0, pae-ether-type = 888e.0300.000a

*Sep 19 07:00:22.149: dot1x-packet:EAPOL pak rx - Ver: 0x3 type: 0x0

*Sep 19 07:00:22.150: dot1x-packet: length: 0x000A

*Sep 19 07:00:22.150: dot1x-sm:[6470.0227.0a89, Ca0] Posting EAPOL_EAP for
0x60000009

*Sep 19 07:00:22.150: dot1x_auth_bend Ca0: during state
auth_bend_request, got event 6(eapolEap)

*Sep 19 07:00:22.150: @@@ dot1x_auth_bend Ca0: auth_bend_request ->
auth_bend_response

*Sep 19 07:00:22.150: dot1x-sm:[6470.0227.0a89, Ca0] 0x60000009:entering
response state

*Sep 19 07:00:22.150: dot1x-ev:[6470.0227.0a89, Ca0] Response sent to the
server from 0x60000009

*Sep 19 07:00:22.150: dot1x-sm:[6470.0227.0a89, Ca0] 0x60000009:request
response action

*Sep 19 07:00:22.150: EAP-EVENT: Received LL (Dot1x-Authenticator) event
'EAP_RX_PACKET' on handle 0x26000052

*Sep 19 07:00:22.150: EAP-AUTH-RX-PAK: Code:RESPONSE ID:0xA Length:0x000A
Type:IDENTITY

*Sep 19 07:00:22.150: Payload: 746961676F

*Sep 19 07:00:22.150: eap_authen : during state eap_auth_idle, got
event 1(eapRxPacket)

*Sep 19 07:00:22.150: @@@ eap_authen : eap_auth_idle -> eap_auth_received

*Sep 19 07:00:22.150: EAP-AUTH-EVENT: EAP Response received by context
0x26000052

*Sep 19 07:00:22.150: EAP-AUTH-EVENT: EAP Response type = Identity

*Sep 19 07:00:22.150: EAP-EVENT: Stopping 'Authenticator ReqId Retransmit'
timer for EAP sesion handle 0x26000052

*Sep 19 07:00:22.150: eap_authen : during state eap_auth_received, got
event 10(eapMethodData)

*Sep 19 07:00:22.150: @@@ eap_authen : eap_auth_received ->
eap_auth_method_response

*Sep 19 07:00:22.151: EAP-AUTH-EVENT: Received peer identity: tiago

*Sep 19 07:00:22.151: EAP-EVENT: Sending LL (Dot1x-Authenticator) event
'EAP_IDENTITY' on handle 0x26000052

*Sep 19 07:00:22.151: eap_authen : during state
eap_auth_method_response, got event 13(eapMethodEnd)

*Sep 19 07:00:22.151: @@@ eap_authen : eap_auth_method_response ->
eap_auth_select_action

*Sep 19 07:00:22.151: eap_authen : during state eap_auth_select_action,
got event 19(eapDecisionPass)

*Sep 19 07:00:22.151: @@@ eap_authen : eap_auth_select_action ->
eap_auth_passthru_init

*Sep 19 07:00:22.151: eap_authen : during state eap_auth_passthru_init,
got event 22(eapPthruIdentity)

*Sep 19 07:00:22.151: @@@ eap_authen : eap_auth_passthru_init ->
eap_auth_aaa_req

*Sep 19 07:00:22.151: EAP-EVENT: Sending LL (Dot1x-Authenticator) event
'EAP_GET_PEER_MAC_ADDRESS' on handle 0x26000052

*Sep 19 07:00:22.151: EAP-AUTH-AAA-EVENT: Adding Audit-Session-ID
"c0a82104523aa0a30000001f" to RADIUS Req

*Sep 19 07:00:22.151: EAP-AUTH-AAA-EVENT: Added Audit-Session-ID

*Sep 19 07:00:22.151: EAP-AUTH-AAA-EVENT: Adding IDB "0x38167B5C" to
RADIUS Req

*Sep 19 07:00:22.151: EAP-AUTH-AAA-EVENT: Added IDB

*Sep 19 07:00:22.151: EAP-AUTH-AAA-EVENT: Adding EAP profile name

"PEAPProfile" to RADIUS Req

*Sep 19 07:00:22.151: EAP-AUTH-AAA-EVENT: Added EAP profile name to request

*Sep 19 07:00:22.151: EAP-EVENT: Sending LL (Dot1x-Authenticator) event 'EAP_CUSTOMIZE_AAA_REQUEST' on handle 0x26000052

*Sep 19 07:00:22.151: EAP-AUTH-AAA-EVENT: eap_auth_aaa_authen_request_shim aaa_service 19, eap aaa_list handle 0, mlist handle 0

*Sep 19 07:00:22.151: EAP-AUTH-AAA-EVENT: Request sent successfully

*Sep 19 07:00:22.151: eap_authen : during state eap_auth_aaa_req, got event 24(eapAAAReqOk)

*Sep 19 07:00:22.151: @@@ eap_authen : eap_auth_aaa_req -> eap_auth_aaa_idle

*Sep 19 07:00:22.152: EAP-EVENT: Received context create from LL (AAA_LOCAL_EAP) (0x00000019)

*Sep 19 07:00:22.152: EAP-AUTH-EVENT: Setting authentication mode: Local

*Sep 19 07:00:22.152: EAP-EVENT: Using EAP profile "PEAPProfile" (handle 0xCE000053)

*Sep 19 07:00:22.152: eap_authen : initial state eap_auth_initialize has enter

*Sep 19 07:00:22.152: eap_authen : during state eap_auth_initialize, got event 25(eapStartTmo)

*Sep 19 07:00:22.152: @@@ eap_authen : eap_auth_initialize -> eap_auth_select_action

*Sep 19 07:00:22.152: eap_authen : during state eap_auth_select_action, got event 20(eapDecisionPropose)

*Sep 19 07:00:22.152: @@@ eap_authen : eap_auth_select_action -> eap_auth_propose_method

*Sep 19 07:00:22.152: eap_authen : idle during state eap_auth_propose_method

*Sep 19 07:00:22.152: @@@ eap_authen : eap_auth_propose_method -> eap_auth_method_request

*Sep 19 07:00:22.152: eap_authen : during state eap_auth_method_request, got event 21(eapDecisionWait)

*Sep 19 07:00:22.152: @@@ eap_authen : eap_auth_method_request -> eap_auth_idle

*Sep 19 07:00:22.152: EAP-EVENT: Allocated new EAP context (handle = 0xCE000053)

***Sep 19 07:00:22.152: EAP-EVENT: Received LL (AAA_LOCAL_EAP) event 'EAP_RX_PACKET' on handle 0xCE000053**

*Sep 19 07:00:22.152: EAP-AUTH-RX-PAK: Code:RESPONSE ID:0xA Length:0x000A Type:IDENTITY

*Sep 19 07:00:22.152: Payload: 746961676F

*Sep 19 07:00:22.152: eap_authen : during state eap_auth_idle, got event 1(eapRxPacket)

*Sep 19 07:00:22.152: @@@ eap_authen : eap_auth_idle -> eap_auth_received

*Sep 19 07:00:22.152: EAP-AUTH-EVENT: EAP Response received by context 0xCE000053

*Sep 19 07:00:22.152: EAP-AUTH-EVENT: EAP Response type = Identity

*Sep 19 07:00:22.152: eap_authen : during state eap_auth_received, got event 10(eapMethodData)

*Sep 19 07:00:22.152: @@@ eap_authen : eap_auth_received -> eap_auth_method_response

*Sep 19 07:00:22.152: EAP-AUTH-EVENT: Received peer identity: tiago

*Sep 19 07:00:22.153: eap_authen : during state eap_auth_method_response got event 13(eapMethodEnd)

*Sep 19 07:00:22.153: @@@ eap_authen : eap_auth_method_response -> eap_auth_select_action

*Sep 19 07:00:22.153: EAP-AUTH-EVENT: Using authentication mode: Local

***Sep 19 07:00:22.153: EAP-EVENT: Local methods by EAP type: [025 026]**

*Sep 19 07:00:22.153: eap_authen : during state eap_auth_select_action, got event 20(eapDecisionPropose)

*Sep 19 07:00:22.153: @@@ eap_authen : eap_auth_select_action -> eap_auth_propose_method

*Sep 19 07:00:22.153: eap_authen : idle during state eap_auth_propose_method

```
*Sep 19 07:00:22.153: @@@ eap_authen : eap_auth_propose_method ->
eap_auth_method_request
*Sep 19 07:00:22.153: EAP-AUTH-EVENT: Maximum EAP packet size: 1456
*Sep 19 07:00:22.153: EAP-EVENT: Sending method (PEAP) event 'New Context'
on handle 0xCE000053
*Sep 19 07:00:22.153: EAP-EVENT: Sending method (PEAP) event 'Receive Packet'
on handle 0xCE000053
*Sep 19 07:00:22.153: EAP-AUTH-EVENT: Waiting for asynchronous reply from
method (PEAP)
*Sep 19 07:00:22.153: eap_authen : during state eap_auth_method_request,
got event 15(eapMethodWaitReply)
*Sep 19 07:00:22.153: @@@ eap_authen : eap_auth_method_request ->
eap_auth_idle
*Sep 19 07:00:22.154: EAP-EVENT: Received Method (PEAP) event
'EAP_METHOD_REPLY' on handle 0xCE000053
*Sep 19 07:00:22.154: eap_authen : during state eap_auth_idle, got event
4(eapMethodReply)
*Sep 19 07:00:22.154: @@@ eap_authen : eap_auth_idle ->
eap_auth_method_response
*Sep 19 07:00:22.154: EAP-AUTH-EVENT: Handling asynchronous method response
for context 0xCE000053
*Sep 19 07:00:22.154: EAP-AUTH-EVENT: EAP method state: Continue
*Sep 19 07:00:22.154: EAP-AUTH-EVENT: EAP method decision: Unknown
*Sep 19 07:00:22.154: eap_authen : during state eap_auth_method_response,
got event 14(eapMethodContinue)
*Sep 19 07:00:22.154: @@@ eap_authen : eap_auth_method_response ->
eap_auth_method_request
*Sep 19 07:00:22.154: eap_authen : idle during state
eap_auth_method_request
*Sep 19 07:00:22.154: @@@ eap_authen : eap_auth_method_request ->
eap_auth_tx_packet
*Sep 19 07:00:22.154: EAP-AUTH-EVENT: Current method = 25
*Sep 19 07:00:22.154: eap_authen : idle during state eap_auth_tx_packet
*Sep 19 07:00:22.154: @@@ eap_authen : eap_auth_tx_packet -> eap_auth_idle
*Sep 19 07:00:22.154: EAP-AUTH-TX-PAK: Code:REQUEST ID:0xB Length:0x0006
Type:PEAP
*Sep 19 07:00:22.154: Payload: 21
*Sep 19 07:00:22.154: EAP-EVENT: Sending LL (AAA_LOCAL_EAP) event
'EAP_TX_PACKET' on handle 0xCE000053
*Sep 19 07:00:22.154: EAP-EVENT: eap_aaa_reply
*Sep 19 07:00:22.154: EAP-AUTH-AAA-EVENT: Reply received session_label
BB000020
*Sep 19 07:00:22.154: EAP-AUTH-AAA-EVENT: Response contains EAP Message,
code: 1
*Sep 19 07:00:22.155: EAP-EVENT: Received AAA event 'EAP_AAA_RX_PACKET' on
handle 0x26000052
*Sep 19 07:00:22.155: EAP-AUTH-RX-AAA-PAK: Code:REQUEST ID:0xB Length:0x0006
Type:PEAP
*Sep 19 07:00:22.155: Payload: 21
*Sep 19 07:00:22.155: eap_authen : during state eap_auth_aaa_idle, got
event 5(eapAAARxPacket)
*Sep 19 07:00:22.155: @@@ eap_authen : eap_auth_aaa_idle ->
eap_auth_aaa_resp
*Sep 19 07:00:22.155: eap_authen : idle during state eap_auth_aaa_resp
*Sep 19 07:00:22.155: @@@ eap_authen : eap_auth_aaa_resp ->
eap_auth_tx_packet2
*Sep 19 07:00:22.155: EAP-AUTH-EVENT: Current method = 25
*Sep 19 07:00:22.155: eap_authen : idle during state eap_auth_tx_packet2
*Sep 19 07:00:22.155: @@@ eap_authen : eap_auth_tx_packet2 -> eap_auth_idle2
*Sep 19 07:00:22.155: EAP-AUTH-TX-PAK: Code:REQUEST ID:0xB Length:0x0006
Type:PEAP
*Sep 19 07:00:22.155: Payload: 21
*Sep 19 07:00:22.155: EAP-EVENT: Started 'Authenticator Retransmit' timer
(30s) for EAP sesion handle 0x26000052
```

*Sep 19 07:00:22.155: EAP-EVENT: Started EAP tick timer
*Sep 19 07:00:22.155: EAP-EVENT: Sending LL (Dot1x-Authenticator) event
'EAP_TX_PACKET' on handle 0x26000052
*Sep 19 07:00:22.155: dot1x-sm:[6470.0227.0a89, Ca0] Posting EAP_REQ for
0x60000009
*Sep 19 07:00:22.155: dot1x_auth_bend Ca0: during state
auth_bend_response, got event 7(eapReq)
*Sep 19 07:00:22.155: @@@ dot1x_auth_bend Ca0: auth_bend_response ->
auth_bend_request
*Sep 19 07:00:22.155: dot1x-sm:[6470.0227.0a89, Ca0] 0x60000009:exiting
response state
*Sep 19 07:00:22.155: dot1x-sm:[6470.0227.0a89, Ca0] 0x60000009:entering
request state
*Sep 19 07:00:22.155: dot1x-ev:[6470.0227.0a89, Ca0] Sending EAPOL packet
*Sep 19 07:00:22.155: dot1x-packet:[6470.0227.0a89, Ca0] Platform changed
src mac of EAPOL packet
*Sep 19 07:00:22.155: dot1x-registry:registry:dot1x_ether_macaddr called
*Sep 19 07:00:22.155: dot1x-packet:EAPOL pak Tx - Ver: 0x3 type: 0x0
*Sep 19 07:00:22.155: dot1x-packet: length: 0x0006
*Sep 19 07:00:22.155: dot1x-packet:EAP code: 0x1 id: 0xB length: 0x0006
*Sep 19 07:00:22.155: dot1x-packet: type: 0x19
*Sep 19 07:00:22.156: dot1x-packet:[6470.0227.0a89, Ca0] EAPOL packet sent
to client 0x60000009
*Sep 19 07:00:22.156: dot1x-sm:[6470.0227.0a89, Ca0] 0x60000009:response
request action
*Sep 19 07:00:22.395: dot1x-packet:[6470.0227.0a89, Ca0] Queuing an EAPOL
pkt on Authenticator Q
*Sep 19 07:00:22.395: dot1x-packet:EAPOL pak rx - Ver: 0x3 type: 0x0
*Sep 19 07:00:22.395: dot1x-packet: length: 0x0098
*Sep 19 07:00:22.395: dot1x-ev:[Ca0] Dequeued pkt: Int Ca0 CODE= 2,TYPE= 25,
LEN= 152

*Sep 19 07:00:22.396: dot1x-ev:[Ca0] Received pkt saddr =6470.0227.0a89 ,
daddr = 64d8.146f.e5a0, pae-ether-type = 888e.0300.0098
*Sep 19 07:00:22.396: dot1x-packet:EAPOL pak rx - Ver: 0x3 type: 0x0
*Sep 19 07:00:22.396: dot1x-packet: length: 0x0098
*Sep 19 07:00:22.396: dot1x-sm:[6470.0227.0a89, Ca0] Posting EAPOL_EAP for
0x60000009
*Sep 19 07:00:22.396: dot1x_auth_bend Ca0: during state
auth_bend_request, got event 6(eapolEap)
*Sep 19 07:00:22.396: @@@ dot1x_auth_bend Ca0: auth_bend_request ->
auth_bend_response
*Sep 19 07:00:22.396: dot1x-sm:[6470.0227.0a89, Ca0] 0x60000009:entering
response state
*Sep 19 07:00:22.396: dot1x-ev:[6470.0227.0a89, Ca0] Response sent to the
server from 0x60000009
*Sep 19 07:00:22.396: dot1x-sm:[6470.0227.0a89, Ca0] 0x60000009:request
response action
*Sep 19 07:00:22.396: EAP-EVENT: Received LL (Dot1x-Authenticator) event
'EAP_RX_PACKET' on handle 0x26000052
*Sep 19 07:00:22.396: EAP-AUTH-RX-PAK: Code:RESPONSE ID:0xB Length:0x0098
Type:PEAP
*Sep 19 07:00:22.396: Payload: 810000008E1603010089010000850301 ...
*Sep 19 07:00:22.396: eap_authen : during state eap_auth_idle2, got
event 1(eapRxPacket)
*Sep 19 07:00:22.396: @@@ eap_authen : eap_auth_idle2 -> eap_auth_received2
*Sep 19 07:00:22.396: EAP-AUTH-EVENT: EAP Response received by context
0x26000052
*Sep 19 07:00:22.396: EAP-AUTH-EVENT: EAP Response type = Method (25)
*Sep 19 07:00:22.396: EAP-EVENT: Stopping 'Authenticator Retransmit' timer
for EAP sesion handle 0x26000052
*Sep 19 07:00:22.396: eap_authen : during state eap_auth_received2, got
event 10(eapMethodData)
*Sep 19 07:00:22.397: @@@ eap_authen : eap_auth_received2->eap_auth_aaa_req

```
*Sep 19 07:00:22.397: EAP-AUTH-AAA-EVENT: Adding Audit-Session-ID
"c0a82104523aa0a30000001f" to RADIUS Req
*Sep 19 07:00:22.397: EAP-AUTH-AAA-EVENT: Added Audit-Session-ID
*Sep 19 07:00:22.397: EAP-AUTH-AAA-EVENT: Adding IDB "0x38167B5C" to
RADIUS Req
*Sep 19 07:00:22.397: EAP-AUTH-AAA-EVENT: Added IDB
*Sep 19 07:00:22.397: EAP-AUTH-AAA-EVENT: Adding EAP profile name
"PEAPProfile" to RADIUS Req
*Sep 19 07:00:22.397: EAP-AUTH-AAA-EVENT: Added EAP profile name to request
*Sep 19 07:00:22.397: EAP-EVENT: Sending LL (Dot1x-Authenticator) event
'EAP_CUSTOMIZE_AAA_REQUEST' on handle 0x26000052
*Sep 19 07:00:22.397: EAP-AUTH-AAA-EVENT: eap_auth_aaa_authen_request_shim
aaa_service 19, eap aaa_list handle 0, mlist handle 0
*Sep 19 07:00:22.397: EAP-AUTH-AAA-EVENT: Request sent successfully
*Sep 19 07:00:22.397: eap_authen : during state eap_auth_aaa_req, got
event 24(eapAAAReqOk)
*Sep 19 07:00:22.397: @@@ eap_authen : eap_auth_aaa_req -> eap_auth_aaa_idle
*Sep 19 07:00:22.397: EAP-EVENT: Received LL (AAA_LOCAL_EAP) event
'EAP_RX_PACKET' on handle 0xCE000053
*Sep 19 07:00:22.398: EAP-AUTH-RX-PAK: Code:RESPONSE ID:0xB Length:0x0098
Type:PEAP
*Sep 19 07:00:22.398: Payload: 810000008E1603010089010000850301 ...
*Sep 19 07:00:22.398: eap_authen : during state eap_auth_idle, got event
1(eapRxPacket)
*Sep 19 07:00:22.398: @@@ eap_authen : eap_auth_idle -> eap_auth_received
*Sep 19 07:00:22.398: EAP-AUTH-EVENT: EAP Response received by context
0xCE000053
*Sep 19 07:00:22.398: EAP-AUTH-EVENT: EAP Response type = Method (25)
*Sep 19 07:00:22.398: eap_authen : during state eap_auth_received, got
event 10(eapMethodData)
*Sep 19 07:00:22.398: @@@ eap_authen : eap_auth_received ->
eap_auth_method_response
*Sep 19 07:00:22.398: EAP-EVENT: Sending method (PEAP) event 'Receive Packet'
on handle 0xCE000053
*Sep 19 07:00:22.398: EAP-AUTH-EVENT: Waiting for asynchronous reply from
method (PEAP)
*Sep 19 07:00:22.398: eap_authen : during state eap_auth_method_response,
got event 15(eapMethodWaitReply)
*Sep 19 07:00:22.398: @@@ eap_authen : eap_auth_method_response ->
eap_auth_idle
*Sep 19 07:00:22.399: EAP-EVENT: Received Method (PEAP) event
'EAP_METHOD_REPLY' on handle 0xCE000053
*Sep 19 07:00:22.399: eap_authen : during state eap_auth_idle, got event
4(eapMethodReply)
*Sep 19 07:00:22.399: @@@ eap_authen : eap_auth_idle ->
eap_auth_method_response
*Sep 19 07:00:22.399: EAP-AUTH-EVENT: Handling asynchronous method response
for context 0xCE000053
*Sep 19 07:00:22.399: EAP-AUTH-EVENT: EAP method state: Continue
*Sep 19 07:00:22.399: EAP-AUTH-EVENT: EAP method decision: Unknown
*Sep 19 07:00:22.399: eap_authen : during state eap_auth_method_response,
got event 14(eapMethodContinue)
*Sep 19 07:00:22.399: @@@ eap_authen : eap_auth_method_response ->
eap_auth_method_request
*Sep 19 07:00:22.399: eap_authen : idle during state
eap_auth_method_request
*Sep 19 07:00:22.399: @@@ eap_authen : eap_auth_method_request ->
eap_auth_tx_packet
*Sep 19 07:00:22.399: EAP-AUTH-EVENT: Current method = 25
*Sep 19 07:00:22.399: eap_authen : idle during state eap_auth_tx_packet
*Sep 19 07:00:22.399: @@@ eap_authen : eap_auth_tx_packet -> eap_auth_idle
*Sep 19 07:00:22.399: EAP-AUTH-TX-PAK: Code:REQUEST ID:0xC Length:0x02B1
Type:PEAP
*Sep 19 07:00:22.399: Payload: 81000002A7160301004A020000460301 ...
```

*Sep 19 07:00:22.399: EAP-EVENT: Sending LL (AAA_LOCAL_EAP) event
'EAP_TX_PACKET' on handle 0xCE000053

*Sep 19 07:00:22.399: EAP-EVENT: eap_aaa_reply

*Sep 19 07:00:22.400: EAP-AUTH-AAA-EVENT: Reply received session_label
BB000020

*Sep 19 07:00:22.400: EAP-AUTH-AAA-EVENT: Response contains EAP Message,
code: 1

*Sep 19 07:00:22.400: EAP-EVENT: Received AAA event 'EAP_AAA_RX_PACKET' on
handle 0x26000052

*Sep 19 07:00:22.400: EAP-AUTH-RX-AAA-PAK: Code:REQUEST ID:0xC Length:0x02B1
Type:PEAP

*Sep 19 07:00:22.400: Payload: 81000002A7160301004A020000460301 ...

*Sep 19 07:00:22.400: eap_authen : during state eap_auth_aaa_idle, got
event 5(eapAAARxPacket)

*Sep 19 07:00:22.400: @@@ eap_authen : eap_auth_aaa_idle ->
eap_auth_aaa_resp

*Sep 19 07:00:22.400: eap_authen : idle during state eap_auth_aaa_resp

*Sep 19 07:00:22.400: @@@ eap_authen : eap_auth_aaa_resp ->
eap_auth_tx_packet2

*Sep 19 07:00:22.400: EAP-AUTH-EVENT: Current method = 25

*Sep 19 07:00:22.400: eap_authen : idle during state eap_auth_tx_packet2

*Sep 19 07:00:22.400: @@@ eap_authen : eap_auth_tx_packet2 -> eap_auth_idle2

*Sep 19 07:00:22.400: EAP-AUTH-TX-PAK: Code:REQUEST ID:0xC Length:0x02B1
Type:PEAP

*Sep 19 07:00:22.400: Payload: 81000002A7160301004A020000460301 ...

*Sep 19 07:00:22.400: EAP-EVENT: Started 'Authenticator Retransmit' timer
(30s) for EAP sesion handle 0x26000052

*Sep 19 07:00:22.400: EAP-EVENT: Started EAP tick timer

*Sep 19 07:00:22.400: EAP-EVENT: Sending LL (Dot1x-Authenticator) event
'EAP_TX_PACKET' on handle 0x26000052

*Sep 19 07:00:22.400: dot1x-sm:[6470.0227.0a89, Ca0] Posting EAP_REQ for
0x60000009

*Sep 19 07:00:22.400: dot1x_auth_bend Ca0: during state
auth_bend_response, got event 7(eapReq)

*Sep 19 07:00:22.400: @@@ dot1x_auth_bend Ca0: auth_bend_response ->
auth_bend_request

*Sep 19 07:00:22.400: dot1x-sm:[6470.0227.0a89, Ca0] 0x60000009:exiting
response state

*Sep 19 07:00:22.400: dot1x-sm:[6470.0227.0a89, Ca0] 0x60000009:entering
request state

*Sep 19 07:00:22.400: dot1x-ev:[6470.0227.0a89, Ca0] Sending EAPOL packet

*Sep 19 07:00:22.401: dot1x-packet:[6470.0227.0a89, Ca0] Platform changed
src mac of EAPOL packet

*Sep 19 07:00:22.401: dot1x-registry:registry:dot1x_ether_macaddr called

*Sep 19 07:00:22.401: dot1x-packet:EAPOL pak Tx - Ver: 0x3 type: 0x0

*Sep 19 07:00:22.401: dot1x-packet: length: 0x02B1

*Sep 19 07:00:22.401: dot1x-packet:EAP code: 0x1 id: 0xC length: 0x02B1

*Sep 19 07:00:22.401: dot1x-packet: type: 0x19

*Sep 19 07:00:22.401: dot1x-packet:[6470.0227.0a89, Ca0] EAPOL packet sent
to client 0x60000009

*Sep 19 07:00:22.401: dot1x-sm:[6470.0227.0a89, Ca0] 0x60000009:response
request action

*Sep 19 07:00:22.646: dot1x-packet:[6470.0227.0a89, Ca0] Queuing an EAPOL
pkt on Authenticator Q

*Sep 19 07:00:22.646: dot1x-packet:EAPOL pak rx - Ver: 0x3 type: 0x0

*Sep 19 07:00:22.646: dot1x-packet: length: 0x00C8

*Sep 19 07:00:22.646: dot1x-ev:[Ca0] Dequeued pkt: Int Ca0 CODE= 2,TYPE= 25,
LEN= 200

*Sep 19 07:00:22.646: dot1x-ev:[Ca0] Received pkt saddr =6470.0227.0a89 ,
daddr = 64d8.146f.e5a0, pae-ether-type = 888e.0300.00c8

*Sep 19 07:00:22.646: dot1x-packet:EAPOL pak rx - Ver: 0x3 type: 0x0

*Sep 19 07:00:22.646: dot1x-packet: length: 0x00C8

*Sep 19 07:00:22.647: dot1x-sm:[6470.0227.0a89, Ca0] Posting EAPOL_EAP for

0x60000009

*Sep 19 07:00:22.647: dot1x_auth_bend Ca0: during state auth_bend_request, got event 6(eapolEap)

*Sep 19 07:00:22.647: @@@ dot1x_auth_bend Ca0: auth_bend_request -> auth_bend_response

*Sep 19 07:00:22.647: dot1x-sm:[6470.0227.0a89, Ca0] 0x60000009:entering response state

*Sep 19 07:00:22.647: dot1x-ev:[6470.0227.0a89, Ca0] Response sent to the server from 0x60000009

*Sep 19 07:00:22.647: dot1x-sm:[6470.0227.0a89, Ca0] 0x60000009:request response action

*Sep 19 07:00:22.647: EAP-EVENT: Received LL (Dot1x-Authenticator) event 'EAP_RX_PACKET' on handle 0x26000052

*Sep 19 07:00:22.647: EAP-AUTH-RX-PAK: Code:RESPONSE ID:0xC Length:0x00C8 Type:PEAP

*Sep 19 07:00:22.647: Payload: 81000000BE1603010086100000820080 ...

*Sep 19 07:00:22.647: eap_authen : during state eap_auth_idle2, got event 1(eapRxPacket)

*Sep 19 07:00:22.647: @@@ eap_authen : eap_auth_idle2 -> eap_auth_received2

*Sep 19 07:00:22.647: EAP-AUTH-EVENT: EAP Response received by context 0x26000052

*Sep 19 07:00:22.647: EAP-AUTH-EVENT: EAP Response type = Method (25)

*Sep 19 07:00:22.647: EAP-EVENT: Stopping 'Authenticator Retransmit' timer for EAP sesion handle 0x26000052

*Sep 19 07:00:22.647: eap_authen : during state eap_auth_received2, got event 10(eapMethodData)

*Sep 19 07:00:22.647: @@@ eap_authen : eap_auth_received2 -> eap_auth_aaa_req

*Sep 19 07:00:22.647: EAP-AUTH-AAA-EVENT: Adding Audit-Session-ID "c0a82104523aa0a30000001f" to RADIUS Req

*Sep 19 07:00:22.647: EAP-AUTH-AAA-EVENT: Added Audit-Session-ID

*Sep 19 07:00:22.647: EAP-AUTH-AAA-EVENT: Adding IDB "0x38167B5C" to RADIUS Req

*Sep 19 07:00:22.647: EAP-AUTH-AAA-EVENT: Added IDB

*Sep 19 07:00:22.648: EAP-AUTH-AAA-EVENT: Adding EAP profile name "PEAPProfile" to RADIUS Req

*Sep 19 07:00:22.648: EAP-AUTH-AAA-EVENT: Added EAP profile name to request

*Sep 19 07:00:22.648: EAP-EVENT: Sending LL (Dot1x-Authenticator) event 'EAP_CUSTOMIZE_AAA_REQUEST' on handle 0x26000052

*Sep 19 07:00:22.648: EAP-AUTH-AAA-EVENT: eap_auth_aaa_authen_request_shim aaa_service 19, eap aaa_list handle 0, mlist handle 0

*Sep 19 07:00:22.648: EAP-AUTH-AAA-EVENT: Request sent successfully

*Sep 19 07:00:22.648: eap_authen : during state eap_auth_aaa_req, got event 24(eapAAAReqOk)

*Sep 19 07:00:22.648: @@@ eap_authen : eap_auth_aaa_req -> eap_auth_aaa_idle

*Sep 19 07:00:22.648: EAP-EVENT: Received LL (AAA_LOCAL_EAP) event 'EAP_RX_PACKET' on handle 0xCE000053

*Sep 19 07:00:22.648: EAP-AUTH-RX-PAK: Code:RESPONSE ID:0xC Length:0x00C8 Type:PEAP

*Sep 19 07:00:22.648: Payload: 81000000BE1603010086100000820080 ...

*Sep 19 07:00:22.648: eap_authen : during state eap_auth_idle, got event 1(eapRxPacket)

*Sep 19 07:00:22.648: @@@ eap_authen : eap_auth_idle -> eap_auth_received

*Sep 19 07:00:22.648: EAP-AUTH-EVENT: EAP Response received by context 0xCE000053

*Sep 19 07:00:22.648: EAP-AUTH-EVENT: EAP Response type = Method (25)

*Sep 19 07:00:22.649: eap_authen : during state eap_auth_received, got event 10(eapMethodData)

*Sep 19 07:00:22.649: @@@ eap_authen : eap_auth_received -> eap_auth_method_response

*Sep 19 07:00:22.649: EAP-EVENT: Sending method (PEAP) event 'Receive Packet' on handle 0xCE000053

*Sep 19 07:00:22.649: EAP-AUTH-EVENT: Waiting for asynchronous reply from method (PEAP)

```
*Sep 19 07:00:22.649:      eap_authen : during state eap_auth_method_response,
got event 15(eapMethodWaitReply)
*Sep 19 07:00:22.649: @@@ eap_authen : eap_auth_method_response ->
eap_auth_idle
*Sep 19 07:00:22.675: EAP-EVENT: Received Method (PEAP) event
'EAP_METHOD_REPLY' on handle 0xCE000053
*Sep 19 07:00:22.675:      eap_authen : during state eap_auth_idle, got
event 4(eapMethodReply)
*Sep 19 07:00:22.675: @@@ eap_authen : eap_auth_idle ->
eap_auth_method_response
*Sep 19 07:00:22.675: EAP-AUTH-EVENT: Handling asynchronous method response
for context 0xCE000053
*Sep 19 07:00:22.675: EAP-AUTH-EVENT: EAP method state: Continue
*Sep 19 07:00:22.675: EAP-AUTH-EVENT: EAP method decision: Unknown
*Sep 19 07:00:22.675:      eap_authen : during state eap_auth_method_response,
got event 14(eapMethodContinue)
*Sep 19 07:00:22.675: @@@ eap_authen : eap_auth_method_response ->
eap_auth_method_request
*Sep 19 07:00:22.675:      eap_authen : idle during state
eap_auth_method_request
*Sep 19 07:00:22.675: @@@ eap_authen : eap_auth_method_request ->
eap_auth_tx_packet
*Sep 19 07:00:22.675: EAP-AUTH-EVENT: Current method = 25
*Sep 19 07:00:22.675:      eap_authen : idle during state eap_auth_tx_packet
*Sep 19 07:00:22.675: @@@ eap_authen : eap_auth_tx_packet -> eap_auth_idle
*Sep 19 07:00:22.675: EAP-AUTH-TX-PAK: Code:REQUEST ID:0xD Length:0x003D
Type:PEAP
*Sep 19 07:00:22.676:      Payload: 81000000331403010001011603010028 ...
*Sep 19 07:00:22.676: EAP-EVENT: Sending LL (AAA_LOCAL_EAP) event
'EAP_TX_PACKET' on handle 0xCE000053
*Sep 19 07:00:22.676: EAP-EVENT: eap_aaa_reply
*Sep 19 07:00:22.676: EAP-AUTH-AAA-EVENT: Reply received session_label
BB000020
*Sep 19 07:00:22.676: EAP-AUTH-AAA-EVENT: Response contains EAP Message,
code: 1
*Sep 19 07:00:22.676: EAP-EVENT: Received AAA event 'EAP_AAA_RX_PACKET' on
handle 0x26000052
*Sep 19 07:00:22.676: EAP-AUTH-RX-AAA-PAK: Code:REQUEST ID:0xD Length:0x003D
Type:PEAP
*Sep 19 07:00:22.676:      Payload: 81000000331403010001011603010028 ...
*Sep 19 07:00:22.676:      eap_authen : during state eap_auth_aaa_idle, got
event 5(eapAAARxPacket)
*Sep 19 07:00:22.676: @@@ eap_authen : eap_auth_aaa_idle ->
eap_auth_aaa_resp
*Sep 19 07:00:22.676:      eap_authen : idle during state eap_auth_aaa_resp
*Sep 19 07:00:22.676: @@@ eap_authen : eap_auth_aaa_resp ->
eap_auth_tx_packet2
*Sep 19 07:00:22.676: EAP-AUTH-EVENT: Current method = 25
*Sep 19 07:00:22.676:      eap_authen : idle during state eap_auth_tx_packet2
*Sep 19 07:00:22.676: @@@ eap_authen : eap_auth_tx_packet2 -> eap_auth_idle2
*Sep 19 07:00:22.676: EAP-AUTH-TX-PAK: Code:REQUEST ID:0xD Length:0x003D
Type:PEAP
*Sep 19 07:00:22.676:      Payload: 81000000331403010001011603010028 ...
*Sep 19 07:00:22.676: EAP-EVENT: Started 'Authenticator Retransmit' timer
(30s) for EAP sesion handle 0x26000052
*Sep 19 07:00:22.676: EAP-EVENT: Started EAP tick timer
*Sep 19 07:00:22.676: EAP-EVENT: Sending LL (Dot1x-Authenticator) event
'EAP_TX_PACKET' on handle 0x26000052
*Sep 19 07:00:22.677: dot1x-sm:[6470.0227.0a89, Ca0] Posting EAP_REQ for
0x60000009
*Sep 19 07:00:22.677:      dot1x_auth_bend Ca0: during state
auth_bend_response, got event 7(eapReq)
*Sep 19 07:00:22.677: @@@ dot1x_auth_bend Ca0: auth_bend_response ->
auth_bend_request
```

*Sep 19 07:00:22.677: dot1x-sm:[6470.0227.0a89, Ca0] 0x60000009:exiting response state

*Sep 19 07:00:22.677: dot1x-sm:[6470.0227.0a89, Ca0] 0x60000009:entering request state

*Sep 19 07:00:22.677: dot1x-ev:[6470.0227.0a89, Ca0] Sending EAPOL packet

*Sep 19 07:00:22.677: dot1x-packet:[6470.0227.0a89, Ca0] Platform changed src mac of EAPOL packet

*Sep 19 07:00:22.677: dot1x-registry:registry:dot1x_ether_macaddr called

*Sep 19 07:00:22.677: dot1x-packet:EAPOL pak Tx - Ver: 0x3 type: 0x0

*Sep 19 07:00:22.677: dot1x-packet: length: 0x003D

*Sep 19 07:00:22.677: dot1x-packet:EAP code: 0x1 id: 0xD length: 0x003D

*Sep 19 07:00:22.677: dot1x-packet: type: 0x19

*Sep 19 07:00:22.677: dot1x-packet:[6470.0227.0a89, Ca0] EAPOL packet sent to client 0x60000009

*Sep 19 07:00:22.677: dot1x-sm:[6470.0227.0a89, Ca0] 0x60000009:response request action

*Sep 19 07:00:22.902: dot1x-packet:[6470.0227.0a89, Ca0] Queuing an EAPOL pkt on Authenticator Q

*Sep 19 07:00:22.903: dot1x-packet:EAPOL pak rx - Ver: 0x3 type: 0x0

*Sep 19 07:00:22.903: dot1x-packet: length: 0x0006

*Sep 19 07:00:22.903: dot1x-ev:[Ca0] Dequeued pkt: Int Ca0 CODE= 2,TYPE= 25, LEN= 6

*Sep 19 07:00:22.903: dot1x-ev:[Ca0] Received pkt saddr =6470.0227.0a89 , daddr = 64d8.146f.e5a0, pae-ether-type = 888e.0300.0006

*Sep 19 07:00:22.903: dot1x-packet:EAPOL pak rx - Ver: 0x3 type: 0x0

*Sep 19 07:00:22.903: dot1x-packet: length: 0x0006

*Sep 19 07:00:22.903: dot1x-sm:[6470.0227.0a89, Ca0] Posting EAPOL_EAP for 0x60000009

*Sep 19 07:00:22.903: dot1x_auth_bend Ca0: during state auth_bend_request, got event 6(eapolEap)

*Sep 19 07:00:22.903: @@@ dot1x_auth_bend Ca0: auth_bend_request -> auth_bend_response

*Sep 19 07:00:22.903: dot1x-sm:[6470.0227.0a89, Ca0] 0x60000009:entering response state

*Sep 19 07:00:22.903: dot1x-ev:[6470.0227.0a89, Ca0] Response sent to the server from 0x60000009

*Sep 19 07:00:22.903: dot1x-sm:[6470.0227.0a89, Ca0] 0x60000009:request response action

*Sep 19 07:00:22.904: EAP-EVENT: Received LL (Dot1x-Authenticator) event 'EAP_RX_PACKET' on handle 0x26000052

*Sep 19 07:00:22.904: EAP-AUTH-RX-PAK: Code:RESPONSE ID:0xD Length:0x0006 Type:PEAP

*Sep 19 07:00:22.904: Payload: 01

*Sep 19 07:00:22.904: eap_authen : during state eap_auth_idle2, got event 1(eapRxPacket)

*Sep 19 07:00:22.904: @@@ eap_authen : eap_auth_idle2 -> eap_auth_received2

*Sep 19 07:00:22.904: EAP-AUTH-EVENT: EAP Response received by context 0x26000052

*Sep 19 07:00:22.904: EAP-AUTH-EVENT: EAP Response type = Method (25)

*Sep 19 07:00:22.904: EAP-EVENT: Stopping 'Authenticator Retransmit' timer for EAP sesion handle 0x26000052

*Sep 19 07:00:22.904: eap_authen : during state eap_auth_received2, got event 10(eapMethodData)

*Sep 19 07:00:22.904: @@@ eap_authen : eap_auth_received2 -> eap_auth_aaa_req

*Sep 19 07:00:22.904: EAP-AUTH-AAA-EVENT: Adding Audit-Session-ID "c0a82104523aa0a30000001f" to RADIUS Req

*Sep 19 07:00:22.904: EAP-AUTH-AAA-EVENT: Added Audit-Session-ID

*Sep 19 07:00:22.904: EAP-AUTH-AAA-EVENT: Adding IDB "0x38167B5C" to RADIUS Req

*Sep 19 07:00:22.904: EAP-AUTH-AAA-EVENT: Added IDB

*Sep 19 07:00:22.904: **EAP-AUTH-AAA-EVENT: Adding EAP profile name "PEAPProfile" to RADIUS Req**

*Sep 19 07:00:22.904: EAP-AUTH-AAA-EVENT: Added EAP profile name to request

*Sep 19 07:00:22.904: EAP-EVENT: Sending LL (Dot1x-Authenticator) event
'EAP_CUSTOMIZE_AAA_REQUEST' on handle 0x26000052

*Sep 19 07:00:22.904: EAP-AUTH-AAA-EVENT: eap_auth_aaa_authen_request_shim
aaa_service 19, eap aaa_list handle 0, mlist handle 0

*Sep 19 07:00:22.905: EAP-AUTH-AAA-EVENT: Request sent successfully

*Sep 19 07:00:22.905: eap_authen : during state eap_auth_aaa_req, got
event 24(eapAAAReqOk)

*Sep 19 07:00:22.905: @@@ eap_authen : eap_auth_aaa_req -> eap_auth_aaa_idle

*Sep 19 07:00:22.905: EAP-EVENT: Received LL (AAA_LOCAL_EAP) event
'EAP_RX_PACKET' on handle 0xCE000053

*Sep 19 07:00:22.905: EAP-AUTH-RX-PAK: Code:RESPONSE ID:0xD Length:0x0006
Type:PEAP

*Sep 19 07:00:22.905: Payload: 01

*Sep 19 07:00:22.905: eap_authen : during state eap_auth_idle, got event
1(eapRxPacket)

*Sep 19 07:00:22.905: @@@ eap_authen : eap_auth_idle -> eap_auth_received

*Sep 19 07:00:22.905: EAP-AUTH-EVENT: EAP Response received by context
0xCE000053

*Sep 19 07:00:22.905: EAP-AUTH-EVENT: EAP Response type = Method (25)

*Sep 19 07:00:22.905: eap_authen : during state eap_auth_received, got
event 10(eapMethodData)

*Sep 19 07:00:22.905: @@@ eap_authen : eap_auth_received ->
eap_auth_method_response

*Sep 19 07:00:22.905: EAP-EVENT: Sending method (PEAP) event 'Receive Packet'
on handle 0xCE000053

*Sep 19 07:00:22.905: EAP-EVENT: Received context create from LL (PEAP)
(0x69000006)

*Sep 19 07:00:22.905: EAP-AUTH-EVENT: Setting authentication mode: Local

*Sep 19 07:00:22.905: EAP-EVENT: Using EAP profile "PEAP Inner Method EAP
Profile" (handle 0x99000054)

*Sep 19 07:00:22.905: eap_authen : initial state eap_auth_initialize has
enter

*Sep 19 07:00:22.905: EAP-EVENT: Allocated new EAP context
(handle = 0x99000054)

*Sep 19 07:00:22.906: EAP-AUTH-EVENT: Waiting for asynchronous reply from
method (PEAP)

*Sep 19 07:00:22.906: eap_authen : during state eap_auth_method_response,
got event 15(eapMethodWaitReply)

*Sep 19 07:00:22.906: @@@ eap_authen : eap_auth_method_response ->
eap_auth_idle

*Sep 19 07:00:22.906: EAP-EVENT: Received EAP event 'EAP_AUTHENTICATOR_START'
on handle 0x99000054

*Sep 19 07:00:22.906: eap_authen : during state eap_auth_initialize, got
event 25(eapStartTmo)

*Sep 19 07:00:22.906: @@@ eap_authen : eap_auth_initialize ->
eap_auth_select_action

*Sep 19 07:00:22.906: eap_authen : during state eap_auth_select_action,
got event 20(eapDecisionPropose)

*Sep 19 07:00:22.906: @@@ eap_authen : eap_auth_select_action ->
eap_auth_propose_method

*Sep 19 07:00:22.906: eap_authen : idle during state
eap_auth_propose_method

*Sep 19 07:00:22.906: @@@ eap_authen : eap_auth_propose_method ->
eap_auth_method_request

*Sep 19 07:00:22.908: dot1x-sm:[6470.0227.0a89, Ca0] 0x60000009:response
request action

*Sep 19 07:00:23.148: dot1x-packet:[6470.0227.0a89, Ca0] Queuing an EAPOL pkt
on Authenticator Q

*Sep 19 07:00:23.148: dot1x-packet:EAPOL pak rx - Ver: 0x3 type: 0x0

*Sep 19 07:00:23.148: dot1x-packet: length: 0x0048

*Sep 19 07:00:23.148: dot1x-ev:[Ca0] Dequeued pkt: Int Ca0 CODE= 2,TYPE= 25,
LEN= 72

*Sep 19 07:00:23.148: dot1x-ev:[Ca0] Received pkt saddr =6470.0227.0a89 ,

daddr = 64d8.146f.e5a0, pae-ether-type = 888e.0300.0048

*Sep 19 07:00:23.148: dot1x-packet:EAPOL pak rx - Ver: 0x3 type: 0x0

*Sep 19 07:00:23.148: dot1x-packet: length: 0x0048

*Sep 19 07:00:23.148: dot1x-sm:[6470.0227.0a89, Ca0] Posting EAPOL_EAP for 0x60000009

*Sep 19 07:00:23.148: dot1x_auth_bend Ca0: during state auth_bend_request, got event 6(eapolEap)

*Sep 19 07:00:23.148: @@@ dot1x_auth_bend Ca0: auth_bend_request -> auth_bend_response

*Sep 19 07:00:23.148: dot1x-sm:[6470.0227.0a89, Ca0] 0x60000009:entering response state

*Sep 19 07:00:23.148: dot1x-ev:[6470.0227.0a89, Ca0] Response sent to the server from 0x60000009

*Sep 19 07:00:23.148: dot1x-sm:[6470.0227.0a89, Ca0] 0x60000009:request response action

*Sep 19 07:00:23.149: EAP-EVENT: Received LL (Dot1x-Authenticator) event 'EAP_RX_PACKET' on handle 0x26000052

*Sep 19 07:00:23.149: EAP-AUTH-RX-PAK: Code:RESPONSE ID:0xE Length:0x0048 Type:PEAP

*Sep 19 07:00:23.149: Payload: 011703010018E5BC67F95BDE2D2BF45C ...

*Sep 19 07:00:23.149: eap_authen : during state eap_auth_idle2, got event 1(eapRxPacket)

*Sep 19 07:00:23.149: @@@ eap_authen : eap_auth_idle2 -> eap_auth_received2

*Sep 19 07:00:23.149: EAP-AUTH-EVENT: EAP Response received by context 0x26000052

*Sep 19 07:00:23.149: EAP-AUTH-EVENT: EAP Response type = Method (25)

*Sep 19 07:00:23.149: EAP-EVENT: Stopping 'Authenticator Retransmit' timer for EAP sesion handle 0x26000052

*Sep 19 07:00:23.149: eap_authen : during state eap_auth_received2, got event 10(eapMethodData)

*Sep 19 07:00:23.149: @@@ eap_authen : eap_auth_received2 -> eap_auth_aaa_req

*Sep 19 07:00:23.149: EAP-AUTH-AAA-EVENT: Adding Audit-Session-ID "c0a82104523aa0a30000001f" to RADIUS Req

*Sep 19 07:00:23.149: EAP-AUTH-AAA-EVENT: Added Audit-Session-ID

*Sep 19 07:00:23.149: EAP-AUTH-AAA-EVENT: Adding IDB "0x38167B5C" to RADIUS Req

*Sep 19 07:00:23.149: EAP-AUTH-AAA-EVENT: Added IDB

*Sep 19 07:00:23.149: EAP-AUTH-AAA-EVENT: Adding EAP profile name "PEAPProfile" to RADIUS Req

*Sep 19 07:00:23.149: EAP-AUTH-AAA-EVENT: Added EAP profile name to request

*Sep 19 07:00:23.149: EAP-EVENT: Sending LL (Dot1x-Authenticator) event 'EAP_CUSTOMIZE_AAA_REQUEST' on handle 0x26000052

*Sep 19 07:00:23.149: EAP-AUTH-AAA-EVENT: eap_auth_aaa_authen_request_shim aaa_service 19, eap aaa_list handle 0, mlist handle 0

*Sep 19 07:00:23.150: EAP-AUTH-AAA-EVENT: Request sent successfully

*Sep 19 07:00:23.150: eap_authen : during state eap_auth_aaa_req, got event 24(eapAAReqOk)

*Sep 19 07:00:23.150: @@@ eap_authen : eap_auth_aaa_req -> eap_auth_aaa_idle

*Sep 19 07:00:23.150: EAP-EVENT: Received LL (AAA_LOCAL_EAP) event 'EAP_RX_PACKET' on handle 0xCE000053

*Sep 19 07:00:23.150: EAP-AUTH-RX-PAK: Code:RESPONSE ID:0xE Length:0x0048 Type:PEAP

*Sep 19 07:00:23.150: Payload: 011703010018E5BC67F95BDE2D2BF45C ...

*Sep 19 07:00:23.150: eap_authen : during state eap_auth_idle, got event 1(eapRxPacket)

*Sep 19 07:00:23.150: @@@ eap_authen : eap_auth_idle -> eap_auth_received

*Sep 19 07:00:23.150: EAP-AUTH-EVENT: EAP Response received by context 0xCE000053

*Sep 19 07:00:23.150: EAP-AUTH-EVENT: EAP Response type = Method (25)

*Sep 19 07:00:23.150: eap_authen : during state eap_auth_received, got event 10(eapMethodData)

*Sep 19 07:00:23.150: @@@ eap_authen : eap_auth_received -> eap_auth_method_response

*Sep 19 07:00:23.150: EAP-EVENT: Sending method (PEAP) event 'Receive Packet'

```
on handle 0xCE000053
*Sep 19 07:00:23.150: EAP-AUTH-EVENT: Waiting for asynchronous reply from
method (PEAP)
*Sep 19 07:00:23.150:      eap_authen : during state eap_auth_method_response,
got event 15(eapMethodWaitReply)
*Sep 19 07:00:23.150: @@@ eap_authen : eap_auth_method_response ->
eap_auth_idle
*Sep 19 07:00:23.151: EAP-EVENT: Received LL (PEAP) event 'EAP_RX_PACKET' on
handle 0x99000054
*Sep 19 07:00:23.151: EAP-AUTH-RX-PAK: Code:RESPONSE ID:0xE Length:0x000A
Type:IDENTITY
*Sep 19 07:00:23.151:      Payload:  746961676F
*Sep 19 07:00:23.151:      eap_authen : during state eap_auth_idle, got event
1(eapRxPacket)
*Sep 19 07:00:23.151: @@@ eap_authen : eap_auth_idle -> eap_auth_received
*Sep 19 07:00:23.151: EAP-AUTH-EVENT: EAP Response received by context
0x99000054
*Sep 19 07:00:23.151: EAP-AUTH-EVENT: EAP Response type = Identity
*Sep 19 07:00:23.151:      eap_authen : during state eap_auth_received, got
event 10(eapMethodData)
*Sep 19 07:00:23.151: @@@ eap_authen : eap_auth_received ->
eap_auth_method_response
*Sep 19 07:00:23.151: EAP-AUTH-EVENT: Received peer identity: tiago
*Sep 19 07:00:23.151:      eap_authen : during state eap_auth_method_response,
got event 13(eapMethodEnd)
*Sep 19 07:00:23.151: @@@ eap_authen : eap_auth_method_response ->
eap_auth_select_action
*Sep 19 07:00:23.151: EAP-AUTH-EVENT: Using authentication mode: Local
*Sep 19 07:00:23.151: EAP-EVENT: Sending LL (PEAP) event
'EAP_GET_CREDENTIAL_PROFILE_FROM_USERNAME' on handle 0x99000054
*Sep 19 07:00:23.151: EAP-EVENT: Sending LL (AAA_LOCAL_EAP) event
'EAP_GET_CREDENTIAL_PROFILE_FROM_USERNAME' on handle 0xCE000053
*Sep 19 07:00:23.151: EAP-AUTH-EVENT: Waiting for asynchronous reply from LL
(AAA_LOCAL_EAP)
*Sep 19 07:00:23.151: EAP-AUTH-EVENT: Waiting for asynchronous reply from LL
(PEAP)
*Sep 19 07:00:23.152: EAP-EVENT: Local methods by EAP type: [006 026]
*Sep 19 07:00:23.152:      eap_authen : during state eap_auth_select_action,
got event 21(eapDecisionWait)
*Sep 19 07:00:23.152: @@@ eap_authen : eap_auth_select_action ->
eap_auth_idle
*Sep 19 07:00:23.152: EAP-EVENT: Received LL (AAA_LOCAL_EAP) event
'EAP_LL_REPLY' on handle 0xCE000053
*Sep 19 07:00:23.152: EAP-AUTH-EVENT: Relaying LL response for context
0xCE000053
*Sep 19 07:00:23.152: EAP-AUTH-EVENT: Using credential profile name: tiago
(0xCE000053)
*Sep 19 07:00:23.152: EAP-EVENT: Sending method (PEAP) event 'LL Response'
on handle 0xCE000053
*Sep 19 07:00:23.152: EAP-EVENT: Received LL (PEAP) event 'EAP_LL_REPLY' on
handle 0x99000054
*Sep 19 07:00:23.152:      eap_authen : during state eap_auth_idle, got event
2(eapLLReply)
*Sep 19 07:00:23.152: @@@ eap_authen : eap_auth_idle ->
eap_auth_select_action
*Sep 19 07:00:23.152: EAP-AUTH-EVENT: Using credential profile name: tiago
(0x99000054)
*Sep 19 07:00:23.152:      eap_authen : during state eap_auth_select_action,
got event 20(eapDecisionPropose)
*Sep 19 07:00:23.152: @@@ eap_authen : eap_auth_select_action ->
eap_auth_propose_method
*Sep 19 07:00:23.152:      eap_authen : idle during state
eap_auth_propose_method
*Sep 19 07:00:23.152: @@@ eap_authen : eap_auth_propose_method ->
```

```
eap_auth_method_request
*Sep 19 07:00:23.152: EAP-AUTH-EVENT: Maximum EAP packet size: 1464
*Sep 19 07:00:23.152: EAP-EVENT: Sending method (GTC) event 'New Context' on
handle 0x99000054
*Sep 19 07:00:23.153: EAP-EVENT: Sending method (GTC) event 'Receive Packet'
on handle 0x99000054
*Sep 19 07:00:23.153: EAP-AUTH-EVENT: Method (GTC) state: Continue
*Sep 19 07:00:23.153: EAP-AUTH-EVENT: Method (GTC) decision: Unknown
*Sep 19 07:00:23.153: eap_authen : idle during state
eap_auth_method_request
*Sep 19 07:00:23.153: @@@ eap_authen : eap_auth_method_request ->
eap_auth_tx_packet
*Sep 19 07:00:23.153: EAP-AUTH-EVENT: Current method = 6
*Sep 19 07:00:23.153: eap_authen : idle during state
eap_auth_tx_packet
*Sep 19 07:00:23.153: @@@ eap_authen : eap_auth_tx_packet -> eap_auth_idle
*Sep 19 07:00:23.153: EAP-AUTH-TX-PAK: Code:REQUEST ID:0xF Length:0x0005
Type:GTC
*Sep 19 07:00:23.153: EAP-EVENT: Sending LL (PEAP) event 'EAP_TX_PACKET' on
handle 0x99000054
*Sep 19 07:00:23.153: EAP-EVENT: Received Method (PEAP) event
'EAP_METHOD_REPLY' on handle 0xCE000053
*Sep 19 07:00:23.153: eap_authen : during state eap_auth_idle, got event
4(eapMethodReply)
*Sep 19 07:00:23.153: @@@ eap_authen : eap_auth_idle ->
eap_auth_method_response
*Sep 19 07:00:23.153: EAP-AUTH-EVENT: Handling asynchronous method response
for context 0xCE000053
*Sep 19 07:00:23.153: EAP-AUTH-EVENT: EAP method state: Continue
*Sep 19 07:00:23.153: EAP-AUTH-EVENT: EAP method decision: Unknown
*Sep 19 07:00:23.153: eap_authen : during state eap_auth_method_response,
got event 14(eapMethodContinue)
*Sep 19 07:00:23.153: @@@ eap_authen : eap_auth_method_response ->
eap_auth_method_request
*Sep 19 07:00:23.153: eap_authen : idle during state
eap_auth_method_request
*Sep 19 07:00:23.153: @@@ eap_authen : eap_auth_method_request ->
eap_auth_tx_packet
*Sep 19 07:00:23.153: EAP-AUTH-EVENT: Current method = 25
*Sep 19 07:00:23.153: eap_authen : idle during state eap_auth_tx_packet
*Sep 19 07:00:23.153: @@@ eap_authen : eap_auth_tx_packet -> eap_auth_idle
*Sep 19 07:00:23.153: EAP-AUTH-TX-PAK: Code:REQUEST ID:0xF Length:0x002B
Type:PEAP
Payload: 011703010020377AEA34B95C78A82976 ...
*Sep 19 07:00:23.153: EAP-EVENT: Sending LL (AAA_LOCAL_EAP) event
'EAP_TX_PACKET' on handle 0xCE000053
*Sep 19 07:00:23.154: EAP-EVENT: eap_aaa_reply
*Sep 19 07:00:23.154: EAP-AUTH-AAA-EVENT: Reply received session_label
BB000020
*Sep 19 07:00:23.154: EAP-AUTH-AAA-EVENT: Response contains EAP Message,
code: 1
*Sep 19 07:00:23.154: EAP-EVENT: Received AAA event 'EAP_AAA_RX_PACKET' on
handle 0x26000052
*Sep 19 07:00:23.154: EAP-AUTH-RX-AAA-PAK: Code:REQUEST ID:0xF Length:0x002B
Type:PEAP
Payload: 011703010020377AEA34B95C78A82976 ...
*Sep 19 07:00:23.154: eap_authen : during state eap_auth_aaa_idle, got
event 5(eapAAARxPacket)
*Sep 19 07:00:23.154: @@@ eap_authen : eap_auth_aaa_idle -> eap_auth_aaa_resp
*Sep 19 07:00:23.154: eap_authen : idle during state eap_auth_aaa_resp
*Sep 19 07:00:23.154: @@@ eap_authen : eap_auth_aaa_resp ->
eap_auth_tx_packet2
*Sep 19 07:00:23.154: EAP-AUTH-EVENT: Current method = 25
*Sep 19 07:00:23.154: eap_authen : idle during state eap_auth_tx_packet2
```

```
*Sep 19 07:00:23.154: @@@ eap_authen : eap_auth_tx_packet2 -> eap_auth_idle2
*Sep 19 07:00:23.154: EAP-AUTH-TX-PAK: Code:REQUEST ID:0xF Length:0x002B
Type:PEAP
*Sep 19 07:00:23.154: Payload: 011703010020377AEA34B95C78A82976 ...
*Sep 19 07:00:23.154: EAP-EVENT: Started 'Authenticator Retransmit' timer
(30s) for EAP sesion handle 0x26000052
*Sep 19 07:00:23.154: EAP-EVENT: Started EAP tick timer
*Sep 19 07:00:23.154: EAP-EVENT: Sending LL (Dot1x-Authenticator) event
'EAP_TX_PACKET' on handle 0x26000052
*Sep 19 07:00:23.154: dot1x-sm:[6470.0227.0a89, Ca0] Posting EAP_REQ for
0x60000009
*Sep 19 07:00:23.154: dot1x_auth_bend Ca0: during state auth_bend_response,
got event 7(eapReq)
*Sep 19 07:00:23.154: @@@ dot1x_auth_bend Ca0: auth_bend_response ->
auth_bend_request
*Sep 19 07:00:23.154: dot1x-sm:[6470.0227.0a89, Ca0] 0x60000009:exiting
response state
*Sep 19 07:00:23.871: dot1x-sm:[6470.0227.0a89, Ca0] 0x60000009:response
request action
*Sep 19 07:00:24.114: dot1x-packet:[6470.0227.0a89, Ca0] Queuing an EAPOL pkt
on Authenticator Q
*Sep 19 07:00:24.114: dot1x-packet:EAPOL pak rx - Ver: 0x3 type: 0x0
*Sep 19 07:00:24.114: dot1x-packet: length: 0x0048
*Sep 19 07:00:24.114: dot1x-ev:[Ca0] Dequeued pkt: Int Ca0 CODE= 2,TYPE= 25,
LEN= 72

*Sep 19 07:00:24.114: dot1x-ev:[Ca0] Received pkt saddr =6470.0227.0a89 ,
daddr = 64d8.146f.e5a0, pae-ether-type = 888e.0300.0048
*Sep 19 07:00:24.115: dot1x-packet:EAPOL pak rx - Ver: 0x3 type: 0x0
*Sep 19 07:00:24.115: dot1x-packet: length: 0x0048
*Sep 19 07:00:24.115: dot1x-sm:[6470.0227.0a89, Ca0] Posting EAPOL_EAP for
0x60000009
*Sep 19 07:00:24.115: dot1x_auth_bend Ca0: during state auth_bend_request,
got event 6(eapolEap)
*Sep 19 07:00:24.115: @@@ dot1x_auth_bend Ca0: auth_bend_request ->
auth_bend_response
*Sep 19 07:00:24.115: dot1x-sm:[6470.0227.0a89, Ca0] 0x60000009:entering
response state
*Sep 19 07:00:24.115: dot1x-ev:[6470.0227.0a89, Ca0] Response sent to the
server from 0x60000009
*Sep 19 07:00:24.115: dot1x-sm:[6470.0227.0a89, Ca0] 0x60000009:request
response action
*Sep 19 07:00:24.115: EAP-EVENT: Received LL (Dot1x-Authenticator) event
'EAP_RX_PACKET' on handle 0x26000052
*Sep 19 07:00:24.115: EAP-AUTH-RX-PAK: Code:RESPONSE ID:0x12 Length:0x0048
Type:PEAP
*Sep 19 07:00:24.115: Payload: 0117030100186DEF131BC85E44CBDD50 ...
*Sep 19 07:00:24.115: eap_authen : during state eap_auth_idle2, got
event 1(eapRxPacket)
*Sep 19 07:00:24.115: @@@ eap_authen : eap_auth_idle2 -> eap_auth_received2
*Sep 19 07:00:24.115: EAP-AUTH-EVENT: EAP Response received by context
0x26000052
*Sep 19 07:00:24.115: EAP-AUTH-EVENT: EAP Response type = Method (25)
*Sep 19 07:00:24.115: EAP-EVENT: Stopping 'Authenticator Retransmit' timer
for EAP sesion handle 0x26000052
*Sep 19 07:00:24.115: eap_authen : during state eap_auth_received2, got
event 10(eapMethodData)
*Sep 19 07:00:24.115: @@@ eap_authen : eap_auth_received2 -> eap_auth_aaa_req
*Sep 19 07:00:24.116: EAP-AUTH-AAA-EVENT: Adding Audit-Session-ID
"c0a82104523aa0a30000001f" to RADIUS Req
*Sep 19 07:00:24.116: EAP-AUTH-AAA-EVENT: Added Audit-Session-ID
*Sep 19 07:00:24.116: EAP-AUTH-AAA-EVENT: Adding IDB "0x38167B5C" to
RADIUS Req
*Sep 19 07:00:24.116: EAP-AUTH-AAA-EVENT: Added IDB
```


*Sep 19 07:00:24.116: EAP-AUTH-AAA-EVENT: Adding EAP profile name
"PEAPProfile" to RADIUS Req

*Sep 19 07:00:24.116: EAP-AUTH-AAA-EVENT: Added EAP profile name to request

*Sep 19 07:00:24.116: EAP-EVENT: Sending LL (Dot1x-Authenticator) event
'EAP_CUSTOMIZE_AAA_REQUEST' on handle 0x26000052

*Sep 19 07:00:24.116: EAP-AUTH-AAA-EVENT: eap_auth_aaa_authen_request_shim
aaa_service 19, eap aaa_list handle 0, mlist handle 0

*Sep 19 07:00:24.116: EAP-AUTH-AAA-EVENT: Request sent successfully

*Sep 19 07:00:24.116: eap_authen : during state eap_auth_aaa_req, got
event 24(eapAAAReqOk)

*Sep 19 07:00:24.116: @@@ eap_authen : eap_auth_aaa_req -> eap_auth_aaa_idle

*Sep 19 07:00:24.116: EAP-EVENT: Received LL (AAA_LOCAL_EAP) event
'EAP_RX_PACKET' on handle 0xCE000053

*Sep 19 07:00:24.116: EAP-AUTH-RX-PAK: Code:RESPONSE ID:0x12 Length:0x0048
Type:PEAP

*Sep 19 07:00:24.117: Payload: 0117030100186DEF131BC85E44CBDD50 ...

*Sep 19 07:00:24.117: eap_authen : during state eap_auth_idle, got event
1(eapRxPacket)

*Sep 19 07:00:24.117: @@@ eap_authen : eap_auth_idle -> eap_auth_received

*Sep 19 07:00:24.117: EAP-AUTH-EVENT: EAP Response received by context
0xCE000053

*Sep 19 07:00:24.117: EAP-AUTH-EVENT: EAP Response type = Method (25)

*Sep 19 07:00:24.117: eap_authen : during state eap_auth_received, got
event 10(eapMethodData)

*Sep 19 07:00:24.117: @@@ eap_authen : eap_auth_received ->
eap_auth_method_response

*Sep 19 07:00:24.117: EAP-EVENT: Sending method (PEAP) event 'Receive Packet'
on handle 0xCE000053

*Sep 19 07:00:24.117: EAP-AUTH-EVENT: Waiting for asynchronous reply from
method (PEAP)

*Sep 19 07:00:24.117: eap_authen : during state eap_auth_method_response,
got event 15(eapMethodWaitReply)

*Sep 19 07:00:24.117: @@@ eap_authen : eap_auth_method_response ->
eap_auth_idle

*Sep 19 07:00:24.118: EAP-EVENT: Received Method (PEAP) event
'EAP_METHOD_REPLY' on handle 0xCE000053

*Sep 19 07:00:24.118: eap_authen : during state eap_auth_idle, got event
4(eapMethodReply)

*Sep 19 07:00:24.118: @@@ eap_authen : eap_auth_idle ->
eap_auth_method_response

*Sep 19 07:00:24.118: EAP-AUTH-EVENT: Handling asynchronous method response
for context 0xCE000053

*Sep 19 07:00:24.118: EAP-EVENT: Sending LL (AAA_LOCAL_EAP) event
'EAP_KEY_AVAILABLE' on handle 0xCE000053

*Sep 19 07:00:24.118: EAP-AUTH-EVENT: EAP method state: Done

*Sep 19 07:00:24.118: EAP-AUTH-EVENT: EAP method decision: Unconditional
Success

*Sep 19 07:00:24.118: eap_authen : during state eap_auth_method_response,
got event 13(eapMethodEnd)

*Sep 19 07:00:24.118: @@@ eap_authen : eap_auth_method_response ->
eap_auth_select_action

*Sep 19 07:00:24.118: eap_authen : during state eap_auth_select_action,
got event 18(eapDecisionSuccess)

*Sep 19 07:00:24.118: @@@ eap_authen : eap_auth_select_action ->
eap_auth_success

*Sep 19 07:00:24.118: EAP-EVENT: Received get canned status from lower layer
(0xCE000053)

*Sep 19 07:00:24.118: EAP-AUTH-TX-PAK: Code:SUCCESS ID:0x12 Length:0x0004

*Sep 19 07:00:24.118: EAP-EVENT: Sending method (PEAP) event 'Free Context'
on handle 0xCE000053

*Sep 19 07:00:24.119: EAP-EVENT: Sending LL (AAA_LOCAL_EAP) event
'EAP_SUCCESS' on handle 0xCE000053

*Sep 19 07:00:24.119: EAP-EVENT: Received free context (0xCE000053) from LL
(AAA_LOCAL_EAP)

*Sep 19 07:00:24.119: EAP-EVENT: eap_aaa_reply
*Sep 19 07:00:24.119: EAP-AUTH-AAA-EVENT: Reply received session_label
BB000020
*Sep 19 07:00:24.119: EAP-AUTH-AAA-EVENT: Response contains EAP Message,
code: 3
*Sep 19 07:00:24.119: EAP-AUTH-AAA-EVENT: Response contains MS MPPE Send Key,
length:139
*Sep 19 07:00:24.119: EAP-AUTH-AAA-EVENT: Response contains MS MPPE Recv Key,
length:97
*Sep 19 07:00:24.119: EAP-EVENT: Sending LL (Dot1x-Authenticator) event
'EAP_KEY_AVAILABLE' on handle 0x26000052
*Sep 19 07:00:24.119: EAP-AUTH-AAA-EVENT: Authorization not required for
this context
*Sep 19 07:00:24.119: EAP-EVENT: Received LL (AAA_LOCAL_EAP) event
'EAP_DELETE' on handle 0xCE000053
*Sep 19 07:00:24.119: EAP-AUTH-AAA-ERROR: Failed to delete aaa coord
transaction for 0xCE000053
*Sep 19 07:00:24.119: EAP-AUTH-EVENT: Freed EAP auth context
*Sep 19 07:00:24.119: EAP-EVENT: Freed EAP context
***Sep 19 07:00:24.120: EAP-EVENT: Received AAA event 'EAP_AAA_SUCCESS' on
handle 0x26000052**
*Sep 19 07:00:24.120: eap_authen : during state eap_auth_aaa_idle, got
event 7(eapAAASuccess)
*Sep 19 07:00:24.120: @@@ eap_authen : eap_auth_aaa_idle -> eap_auth_success
*Sep 19 07:00:24.120: EAP-AUTH-TX-PAK: Code:SUCCESS ID:0x12 Length:0x0004
*Sep 19 07:00:24.120: EAP-AUTH-EVENT: SUCCESS for EAP method ID: 25, name:
PEAP, on handle 0x26000052
*Sep 19 07:00:24.120: EAP-EVENT: Sending LL (Dot1x-Authenticator) event
'EAP_SUCCESS' on handle 0x26000052
*Sep 19 07:00:24.120: dot1x-packet:[6470.0227.0a89, Ca0] Received an EAP
Success
*Sep 19 07:00:24.120: dot1x-sm:[6470.0227.0a89, Ca0] Posting EAP_SUCCESS for
0x60000009
*Sep 19 07:00:24.120: dot1x_auth_bend Ca0: during state
auth_bend_response, got event 11(eapSuccess)
*Sep 19 07:00:24.120: @@@ dot1x_auth_bend Ca0: auth_bend_response ->
auth_bend_success
*Sep 19 07:00:24.120: dot1x-sm:[6470.0227.0a89, Ca0] 0x60000009:exiting
response state
*Sep 19 07:00:24.120: dot1x-sm:[6470.0227.0a89, Ca0] 0x60000009:entering
success state
*Sep 19 07:00:24.120: dot1x-sm:[6470.0227.0a89, Ca0] 0x60000009:response
success action
*Sep 19 07:00:24.120: dot1x_auth_bend Ca0: idle during state
auth_bend_success
*Sep 19 07:00:24.121: @@@ dot1x_auth_bend Ca0: auth_bend_success ->
auth_bend_idle
*Sep 19 07:00:24.121: dot1x-sm:[6470.0227.0a89, Ca0] 0x60000009:entering
idle state
*Sep 19 07:00:24.121: dot1x-sm:[6470.0227.0a89, Ca0] Posting AUTH_SUCCESS on
Client 0x60000009
*Sep 19 07:00:24.121: dot1x_auth Ca0: during state auth_authenticating,
got event 12(authSuccess_portValid)
*Sep 19 07:00:24.121: @@@ dot1x_auth Ca0: auth_authenticating ->
auth_authc_result
*Sep 19 07:00:24.121: dot1x-sm:[6470.0227.0a89, Ca0] 0x60000009:exiting
authenticating state
*Sep 19 07:00:24.121: dot1x-sm:[6470.0227.0a89, Ca0] 0x60000009:entering
authc result state
*Sep 19 07:00:24.121: dot1x-ev:[6470.0227.0a89, Ca0] Sending EAPOL success
immediately
*Sep 19 07:00:24.121: dot1x-ev:[6470.0227.0a89, Ca0] Sending EAPOL packet
*Sep 19 07:00:24.121: dot1x-packet:[6470.0227.0a89, Ca0] Platform changed
src mac of EAPOL packet

*Sep 19 07:00:24.121: dot1x-registry:registry:dot1x_ether_macaddr called
*Sep 19 07:00:24.121: dot1x-packet:EAPOL pak Tx - Ver: 0x3 type: 0x0
*Sep 19 07:00:24.121: dot1x-packet: length: 0x0004
*Sep 19 07:00:24.121: dot1x-packet:EAP code: 0x3 id: 0x12 length: 0x0004
*Sep 19 07:00:24.121: dot1x-packet:[6470.0227.0a89, Ca0] EAPOL packet sent
to client 0x60000009
*Sep 19 07:00:24.122: dot1x-ev:[6470.0227.0a89, Ca0] Received Authz Success
for the client 0x60000009 (6470.0227.0a89)
***Sep 19 07:00:24.122: dot1x-sm:[6470.0227.0a89, Ca0] Posting AUTHZ_SUCCESS
on Client 0x60000009**
*Sep 19 07:00:24.122: dot1x_auth Ca0: during state auth_authc_result,
got event 23(authzSuccess)
*Sep 19 07:00:24.122: @@@ dot1x_auth Ca0: auth_authc_result ->
auth_authenticated
*Sep 19 07:00:24.122: dot1x-sm:[6470.0227.0a89, Ca0] 0x60000009:entering
authenticated state
*Sep 19 07:00:24.122: dot1x-ev:[6470.0227.0a89, Ca0] EAPOL success packet
was sent earlier.
*Sep 19 07:00:24.122: EAP-EVENT: Received free context (0x26000052) from LL
(Dot1x-Authenticator)
*Sep 19 07:00:24.122: EAP-EVENT: Received LL (Dot1x-Authenticator) event
'EAP_DELETE' on handle 0x26000052
*Sep 19 07:00:24.123: EAP-AUTH-AAA-ERROR: Failed to delete aaa coord
transaction for 0x26000052
*Sep 19 07:00:24.123: EAP-AUTH-EVENT: Freed EAP auth context
*Sep 19 07:00:24.123: EAP-EVENT: Freed EAP context
*Sep 19 07:00:24.122: 6470.0227.0A89
client incoming attribute size are 304 1 wcm: pemDelScb Event skipping
delete
***Sep 19 07:00:24.636: 6470.0227.0A89 192.168.80.100 8021X_REQD (3) Change
state to L2AUTHCOMPLETE (4) last state RUN (20)**
1 wcm: ^K4D8.146F.E5A
*Sep 19 07:00:24.636: 6470.0227.0A89 WCDB_CHANGE: 1 wcm: Client 1 m_vlan 80
Radio iif id 0xdf0f4000000005 bssid iif id 0xcd248000000015,
bssid 64D8.146F.E5A0
*Sep 19 07:00:24.636: 6470.0227.0A89 WCDB_AUTH: 1 wcm: Adding opt82 len 0
*Sep 19 07:00:24.636: 6470.0227.0A89 WCDB_CHANGE: 1 wcm: Suppressing SPI
(L2 Auth for reassoc) pemstate 4 state L2_AUTH(1) vlan 80 client_id
0xde51c000000021 mob 1 ackflag 2 dropd 0
*Sep 19 07:00:24.636: 6470.0227.0A89 192.168.80.100 L2AUTHCOMPLETE (4)
pemAdvanceState2: 1 wcm: MOBILITY-COMPLETE with state 4.
*Sep 19 07:00:24.636: 6470.0227.0A89 Send request to EPM 1 wcm: UTHCOMPLETE
(4) pemAdvanceState2: MOBILITY-COMPLETE with state 4.
*Sep 19 07:00:24.649: 6470.0227.0A89 Received _EPM_SPI_STATUS_SUCCESS for
request sent for client 1 wcm: for client
*Sep 19 07:00:24.649: 6470.0227.0A89 Post-auth policy ACK recvd from EPM,
unset flag on MSCB 1 wcm: ient
*Sep 19 07:00:24.907: EAP-EVENT: Stopped EAP tick timer