

# 如何从档案mbox提取电子邮件注册电子邮件安全工具？

## Contents

[Introduction](#)

[如何从档案mbox提取电子邮件注册ESA？](#)

[Related Information](#)

## Introduction

本文描述如何从电子邮件安全工具创建的归档日志提取电子邮件(ESA)。

## 如何从档案mbox提取电子邮件注册ESA？

1. 检索您会提取电子邮件从的档案mbox日志。 如何检索档案mbox是可用的在提供的 [条款](#)。  
(<https://www.cisco.com/c/en/us/support/docs/security/email-security-appliance/118315-technote-esa-00.html>)
2. 使用文本编辑，打开归档文件。使用 *Notepad++*，下面的示例显示。
3. 识别您希望提取在归档日志外面的电子邮件。每个电子邮件在档案从从<address>将开始。
4. 复制单个电子邮件的内容到一个新的文本文件并且保存它作为 .eml 扩展名。
5. 打开在您的邮件客户端的提取的电子邮件，例如Outlook查看内容。

**Note:** 档案mbox日志可能包含多个电子邮件。

示例在归档日志内的电子邮件来源：

1 2 3 4 5 7

```
From test1@cisco.com Mon Jan 15 08:31:54 2018
X-IronPort-RCPT-TO: test2@cisco.com
Authentication-Results: ironport.example.com; spf=None
smtp.pra=test1@cisco.com; spf=SoftFail smtp.mailfrom=test1
@cisco.com; spf=None smtp.helo=postmaster@L1B1VARG-6622F
Received-SPF: None (ironport.example.com: no sender authenticity
information available from domain of test1@cisco.com)
identity-pra; client-ip=10.196.112.18;
receiver=ironport.example.com;
envelope-from="test1@cisco.com"; x-sender="test1@cisco.com";
x-conformance-sidf_compatible
Received-SPF: SoftFail (ironport.example.com: domain of
test1@cisco.com is inclined to not designate 10.196.112.18 as
permitted sender) identity-mailfrom; client-ip=10.196.112.18;
receiver=ironport.example.com;
envelope-from="test1@cisco.com"; x-sender="test1@cisco.com";
x-conformance-sidf_compatible; x-record-type="v-spf1"
Received-SPF: None (ironport.example.com: no sender authenticity
information available from domain of
postmaster@L1B1VARG-6622F) identity-helo;
client-ip=10.196.112.18; receiver=ironport.example.com;
envelope-from="test1@cisco.com";
x-sender="postmaster@L1B1VARG-6622F";
x-conformance-sidf_compatible
Received: from unknown (HELO L1B1VARG-6622F) [10.196.112.18]
by ironport.example.com with ESMTP; 15 Jan 2018 08:31:54 +0530
MIME-Version: 1.0
From: test1@cisco.com
To: test2@cisco.com
Date: 15 Jan 2018 11:16:23 +0530
Subject: Test archive filter
Content-Type: multipart/mixed; boundary="--boundary_0_
05c6bfa8-119c-40df-b0e9-917b1ffc110e
```

```
-----boundary_0_05c6bfa8-119c-40df-b0e9-917b1ffc110e
Content-Type: text/plain; charset=us-ascii
Content-Transfer-Encoding: quoted-printable
```


This is a test email. Please ignore. Or don't.

```
-----boundary_0_05c6bfa8-119c-40df-b0e9-917b1ffc110e
Content-Type: application/octet-stream; name=onward.pdf
Content-Transfer-Encoding: base64
```

```
Q29udGVudC10eXB1018tdRkx0aXBhcnQvcvV0YXR12DaNC1B1b3V0PyeT91LS0tLT1
fThV4
dFBhcnRf00cw0Tcx040Mz0wMj0xMD12NT11DQpYLU1zLzJNaW110LB0cnV1DQpYLU01
zLzJN
aW11LUNnaWVudC178WJtaXQtVU1t2TogTW9uLCAwOCBKYW4gMjAxOC0xMz0yMDowKSA
tMDEw
```

```
KtUqv
S301Tk400ytc03hugkJDQ0NH80VFSXEraStFcTN10GRt0Xc9C1Y1Q3110GNPaZVPd3Z
ubzPS
DQ03NFVas8NNeWa19G9EhbHhFV1hRcXNaV0dtVGJ42n1LUNNEWJ8zS1Qw005L8K1tYWN
xYjdN
aF1b0FE9ckJBNKEvbGdaXdbqnc3VGH1SkkySVNTN2dDd25L53V1d1BtRJA0V3RQRnV
TVV2p
SFhEz3BkZ2doaEJ0Q31EK01YezdaNcp0d08YQ2YNCJ21ZU9Hb3ezazBaeUd3SR1n6Wa
y8a75
V016R1R0MEpZVU3SFhBNGdR0sd2W2nh02EkevR0JN7y90N09oa2228K4eFF1cXJ67hp
zUnIN
CjJY22g371V5c1ZV8GorQaR02T0KREaQ1hXLL10M058V1pL5StvR1dJN1p6cFFx7RE
BR0VP
RULJ5V1T7Xkvbns8pbF2R11kYsh1bnk9Cax0M01K71p8a3N0029xa2x2MjFo8G1n7Hp
n8Kax
TV2td01T5VAJ2F1H80N3ZERwgaeybctx0EyyQjdMeCayLz4d73V1M01Dsk10RzANcd
1T2cz
8a42N1p300xyd1BaY2N2709HhJucPhJbkQ1QkFna2bCgkNDQ09v5XYaeUhaaGNL1J
LY2Va
72cTa1VvQXVNE50M4Q1WFc9CaFMjhnY0pQ2dk02tvYzVx4BBqa0RDY1QweG43N1V
nb1qy
S2UyZ3B08ndEdWpa2k2b0nFw8zJaMnF1Ma04a08v8zBfc0x5VaE3dKNC1dYH01QMj2
RntD
d01p2jA5a8DUNGtNTzNPNKR0zdrYzhV73F1VEpLQ04FR0VJSU110a23VnpQmLaQ0P
KexdJ
SUX171N4KcawRD0NcaJLL0VgRvIy2DjuYaAydU5w7G1aMGP1Q0N7VUxKcPh0G9Q1J
V5jfo
dE40YnU1b3F0SKZ1bVpE7Xh2K1RxbFy1Vz10rjR4b6wyb1YNCjQwTjBhM0x1b01R02c
2N3B0
NE9YWTN0cKX2M1p0M09M2bdQa0Z2Y2P0caJm1RM028K22hoGkJDQ0NTL0J2N0Kva0x
DT1hY
QjF1d2c0Cn1FN0pVYz21dF1R0VFn22hoGkJDeUJQ0M2v2mp6N211cDVAeV11ZaxuqkJ
DQ0NH
R0VPTe1w1B07Hv12aNO2n2xd111tem4vcK1CgkM9CkND00VFR0aJv191ZEx12M21R2R
XN1Fr
dJy0VFRZ2doaEJ0Q32vWTN1c8B00Wdna2bCgkNDQ09v5nJ5Y00uS01JWVFS0WdnaEw
0YVgN
CaMwS01JWVFR0Wdna2VMMHdJazRJSV1R0VFn22hoZ8d2MH0SK1ZUFRZ2doaEp8Mhc
4c2VJ
WVFR0WdnaGhCRH12bae1SjR0VFn22ghCahCgkNY23d2NTR0VFn22hoGkJDeU12aDV
ad1FR
Z2doaEJ0Q0NTa3h2SndUOWdna2bCgkNDQ09V2aHBke1Fn22hoGkJDQ0NTa3haQaxMC1R
n32bo
qkJDQ0NB0X2CaQV622toaeJ0Q0ND0R0V2a25Z10VMY8r2z8yanVz00o2ckf6Q0f88Wx
GUGt7
dVFTQ0M8c10TL80tLT1f7hV4dFBhcnRf0Dew0TcaM40HzUwMjUxMDI2NT11LQ0K
---boundary_0_05e4bf4a0-119c-40df-b0e9-917b1ffc118e---
```

在Outlook提取和打开的示例电子邮件：

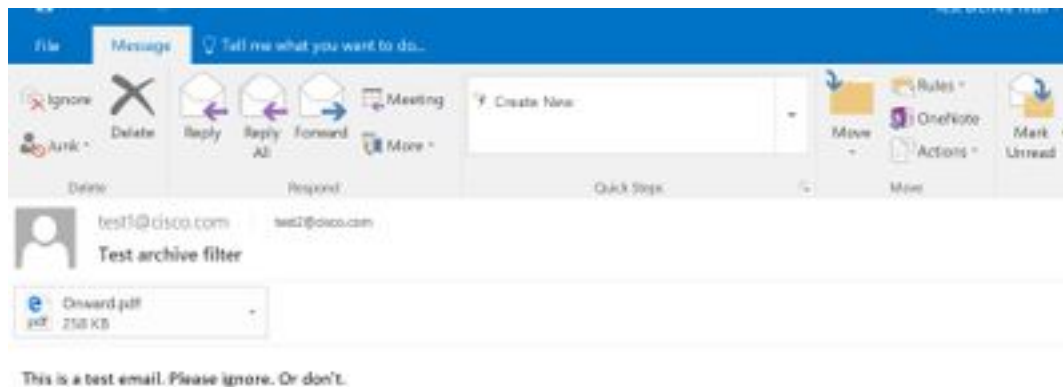

## Related Information

- [Cisco电子邮件安全工具-终端用户指南](#)
- [Technical Support & Documentation - Cisco Systems](#)
- [什么是UNIX mbox \(邮箱\)格式？](#)
- [日志在哪里如何存储在Cisco电子邮件安全工具\(ESA\)，并且访问他们？](#)
- [如何归档在电子邮件安全工具\(ESA\)上的电子邮件](#)