

配置CTB的NSG流日志

目录

[简介](#)

[先决条件](#)

[要求](#)

[使用的组件](#)

[配置步骤](#)

[配置存储帐户](#)

[创建NSG流日志](#)

[将NSG流日志输入配置为CTB](#)

[验证](#)

[故障排除](#)

简介

本文档介绍如何将NSG日志配置为思科遥测代理(CTB)的数据输入。

先决条件

要求

- 具有创建存储帐户、网络安全组(NSG)流日志权限的Azure云门户访问。
- 任何位置的Azure资源组。
- CTB，带有一个管理器以及至少一个代理节点。

使用的组件

- CTB(v.2.2.1)
- Azure


本文档中的信息都是基于特定实验室环境中的设备编写的。本文档中使用的所有设备最初均采用原始（默认）配置。如果您的网络处于活动状态，请确保您了解所有命令的潜在影响。

配置步骤

配置存储帐户


在同一Azure位置中创建存储帐户和资源。

步骤 1：从控制面板搜索栏导航到Resource group。

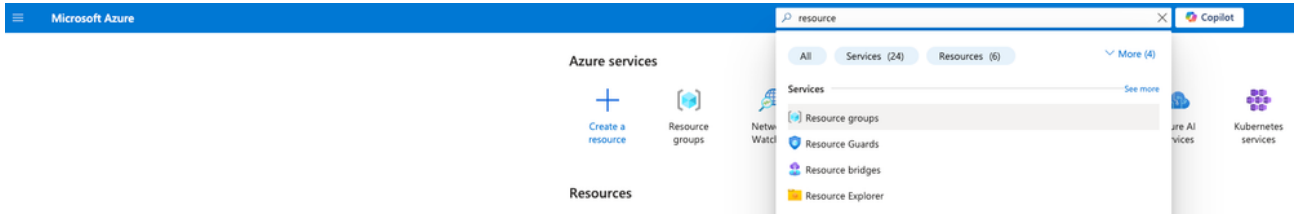


Azure-UI — 资源组

步骤 2：找到Resource组并选中Location列。

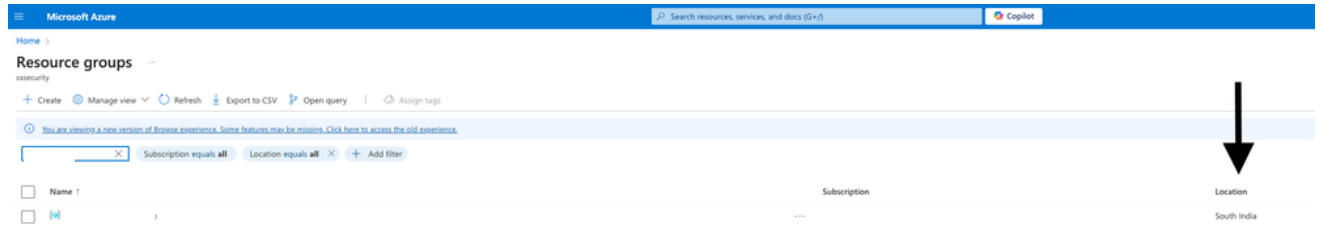


带位置的Azure-UI资源组

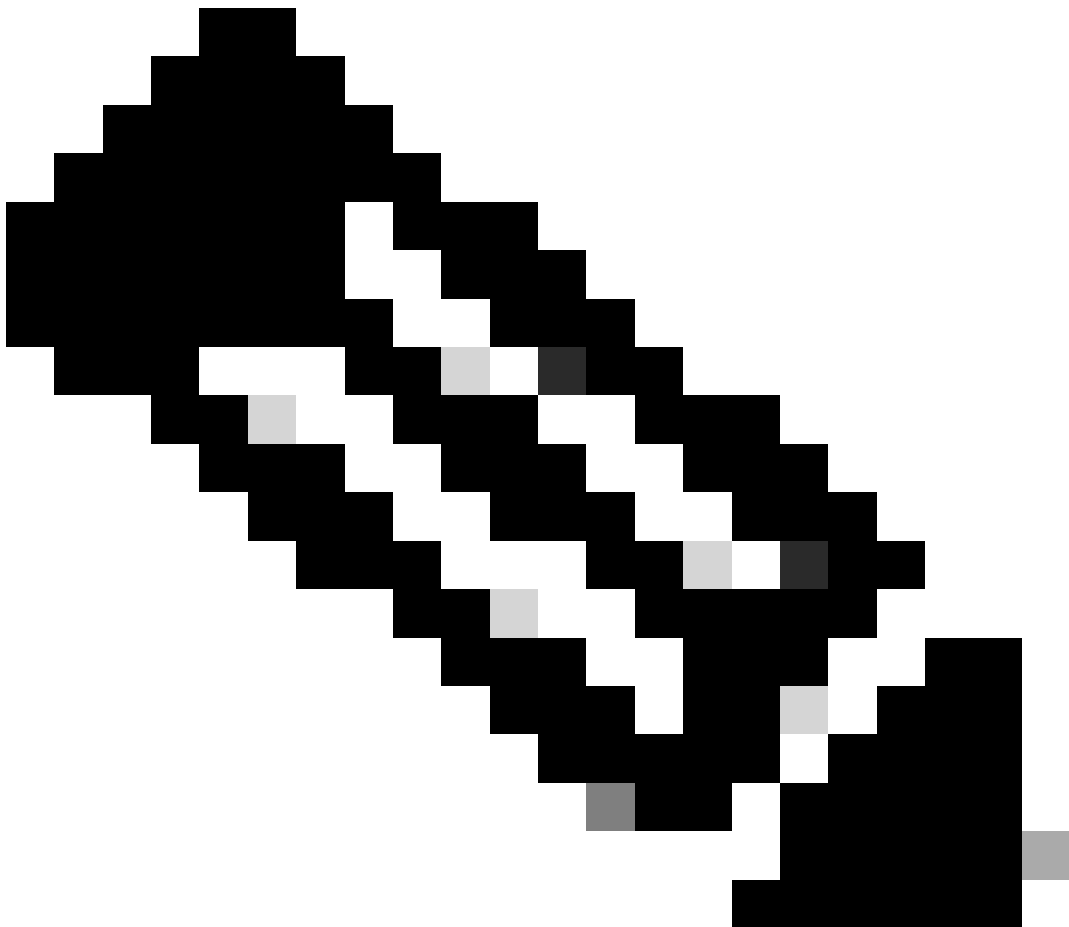

注意：由于资源组位于南印度位置，因此存储帐户也位于南印度位置。

步骤 3：通过控制面板搜索栏导航到Storage account。

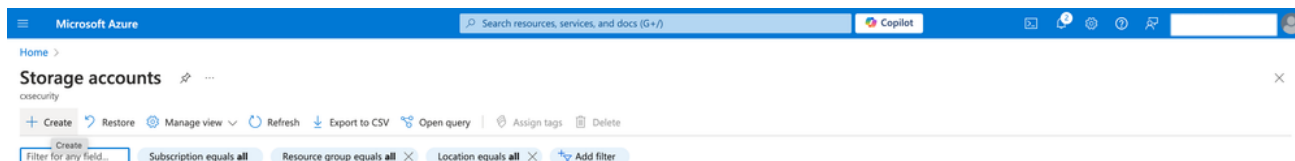

Azure-UI存储帐户

步骤 4：选择Resource group，分配Storage accountname，然后选择Region。

Microsoft Azure

Search resources, services, and docs (G+J)

Copilot

Home > Storage accounts

Storage accounts

+ Create Restore Manage view Refresh Export to CSV Open query Assign tags Delete

Create Filter for any field... Subscription equals all Resource group equals all Location equals all Add filter

Home > Storage accounts >

Create a storage account

Basics Advanced Networking Data protection Encryption Tags Review + create

Azure Storage is a Microsoft-managed service providing cloud storage that is highly available, secure, durable, scalable, and redundant. Azure Storage includes Azure Blobs (objects), Azure Data Lake Storage Gen2, Azure Files, Azure Queues, and Azure Tables. The cost of your storage account depends on the usage and the options you choose below. [Learn more about Azure storage accounts](#)

Project details

Select the subscription in which to create the new storage account. Choose a new or existing resource group to organize and manage your storage account together with other resources.

Subscription *

Resource group * [Create new](#)

Instance details

Storage account name *

Region * [Deploy to an Azure Extended Zone](#)

Performance * ☒ Standard: Recommended for most scenarios (general-purpose v2 account)
☐ Premium: Recommended for scenarios that require low latency.

Redundancy *

☒ Make read access to data available in the event of regional unavailability.

Previous Next Review + create

Microsoft Azure

Search resources, services, and documents

[Home](#) > [Storage accounts](#) >

Create a storage account

Basics

Advanced

Networking

Data protection

Encryption

Tags

Review + create

[View automation template](#)

Basics

Subscription	
Resource group	
Location	South India
Storage account name	
Performance	Standard
Replication	Read-access geo-redundant storage (RA-GRS)

Advanced

Enable hierarchical namespace	Disabled
Enable SFTP	Disabled
Enable network file system v3	Disabled
Allow cross-tenant replication	Disabled
Access tier	Hot
Enable large file shares	Enabled


Security

Secure transfer	Enabled
Blob anonymous access	Disabled
Allow storage account key access	Enabled
Default to Microsoft Entra authorization in	Disabled

Previous

Next

Create

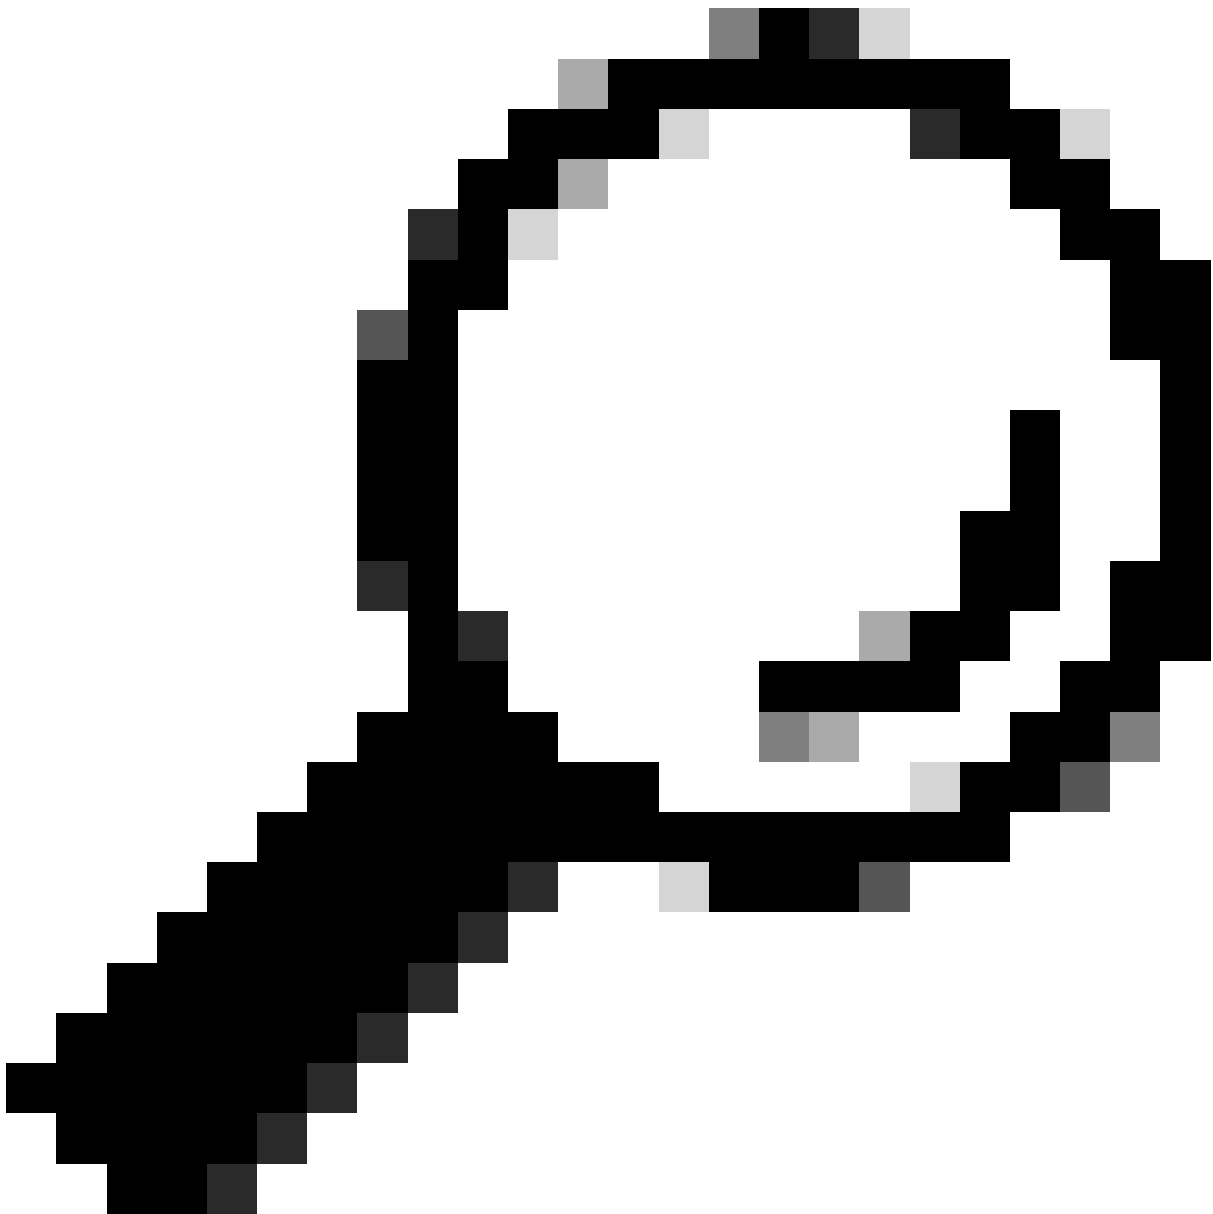


提示：如果无需对存储帐户进行进一步自定义，您可以直接查看和创建存储帐户。（保留天数、加密类型等）。

创建NSG流日志

创建NSG流日志的步骤。

步骤 1：从搜索栏导航到Network Watcher。

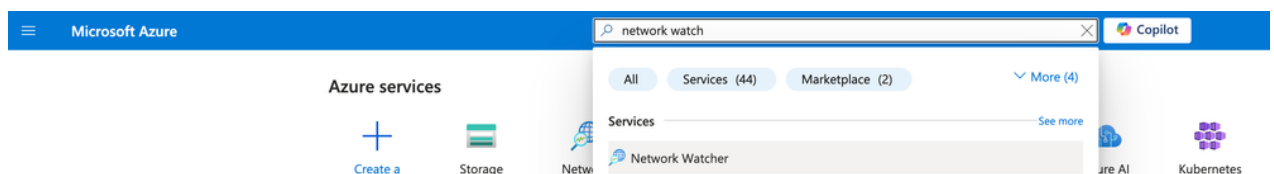

步骤 2：展开左侧的Logs文件夹，然后单击Flow logs。



[Home](#) >



Network Watcher



Microsoft



Overview



Get started



Monitoring



Network diagnostic tools



Metrics



Logs



Flow logs



Migrate flow logs

关于此翻译

思科采用人工翻译与机器翻译相结合的方式将此文档翻译成不同语言，希望全球的用户都能通过各自的语言得到支持性的内容。

请注意：即使是最好的机器翻译，其准确度也不及专业翻译人员的水平。

Cisco Systems, Inc. 对于翻译的准确性不承担任何责任，并建议您总是参考英文原始文档（已提供链接）。