

在Cisco VPN Client for Linux和VPN 3000集中器之間配置IPSec隧道

目錄

[簡介](#)

[開始之前](#)

[慣例](#)

[必要條件](#)

[採用元件](#)

[網路圖表](#)

[組態](#)

[工作](#)

[配置VPN 3000集中器](#)

[配置Linux客戶端](#)

[驗證](#)

[疑難排解](#)

[開啟VPN客戶端登入](#)

[開啟VPN 3000集中器上的日誌記錄](#)

[良好調試](#)

[可能出錯的地方](#)

[相關資訊](#)

簡介

本文檔介紹如何從運行Cisco VPN客戶端的基於Linux的PC到Cisco VPN 3000系列集中器形成IPSec隧道，以便您可以安全地訪問集中器內的網路。

開始之前

慣例

如需文件慣例的詳細資訊，請參閱[思科技術提示慣例](#)。

必要條件

本檔案會使用以下設定：

- [配置VPN 3000集中器](#)
- [配置Linux客戶端](#)

採用元件

本文中的資訊係根據以下軟體和硬體版本：


- Cisco VPN 3000 Concentrator版本3.x
- Cisco VPN使用者端版本3.0.8
- 採用2.4.7-10核心的Red Hat Linux® 7.2版

注意：VPN客戶端3.6.2a及更高版本提供對RedHat8的支援。註冊客戶可通過研究錯誤ID [CSCdy49082](#)(僅限註冊客戶)來獲得特定資訊。

本文中的資訊是根據特定實驗室環境內的裝置所建立。文中使用到的所有裝置皆從已清除(預設)的組態來啟動。如果您在即時網路中工作，請確保在使用任何命令之前瞭解其潛在影響。

網路圖表

本文檔使用下圖所示的網路設定。

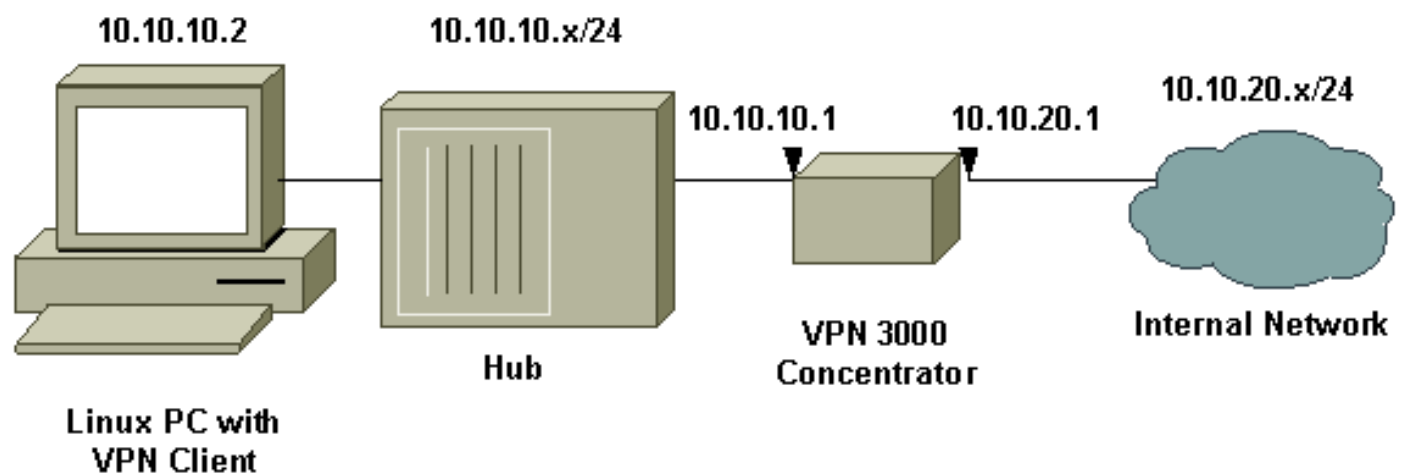

組態

工作

本節提供用於設定本文件中所述功能的資訊。

配置VPN 3000集中器

使用以下步驟配置VPN 3000集中器。

1. 連線到VPN集中器控制檯埠，並驗證是否有IP地址分配給了專用(內部)和公共(外部)介面。此外，請確認是否已指派預設閘道，以便集中器可以將它不知道的目的地封包轉送到預設閘道。**注意：**預設設定通常是Internet網關路由器。

- 1) Configuration
- 2) Administration
- 3) Monitoring
- 4) Save changes to Config file
- 5) Help Information
- 6) Exit

Main -> 1

- 1) Interface Configuration
- 2) System Management
- 3) User Management
- 4) Policy Management
- 5) Back

Config -> 1

此表顯示了當前IP地址。

Interface	IP Address/Subnet Mask	MAC Address
Ethernet 1 - Private	10.10.20.1/255.255.255.0	00.90.A4.00.16.54
Ethernet 2 - Public	10.10.10.1/255.255.255.0	00.90.A4.00.16.55
Ethernet 3 - External	0.0.0.0/0.0.0.0	

- 1) Configure Ethernet #1 (Private)
- 2) Configure Ethernet #2 (Public)
- 3) Configure Ethernet #3 (External)
- 4) Configure Power Supplies
- 5) Configure Expansion Cards
- 6) Back

Interfaces -> 6

- 1) Interface Configuration
- 2) System Management
- 3) User Management
- 4) Policy Management
- 5) Back

Config -> 2

- 1) Servers (Authentication, Accounting, etc.)
- 2) Address Management
- 3) Tunneling Protocols (PPTP, L2TP, etc.)
- 4) IP Routing (static routes, OSPF, etc.)
- 5) Management Protocols (Telnet, TFTP, FTP, etc.)
- 6) Event Configuration
- 7) General Config (system name, time, etc.)
- 8) Back

System -> 4

- 1) Static Routes
- 2) Default Gateways
- 3) OSPF
- 4) OSPF Areas
- 5) DHCP
- 6) Redundancy
- 7) Back

Routing -> 1


Static Routes

Destination	Mask	Metric	Destination
0.0.0.0	0.0.0.0	1	10.10.10.1

- 1) Add Static Route
- 2) Modify Static Route
- 3) Delete Static Route

4) Back

2. 要分配可用的IP地址範圍，請將瀏覽器指向VPN 3000集中器的內部介面，然後轉到 **Configuration > System > Address Management > Pools > Add**。指定與內部網路上的任何其他裝置不衝突的IP地址範圍。

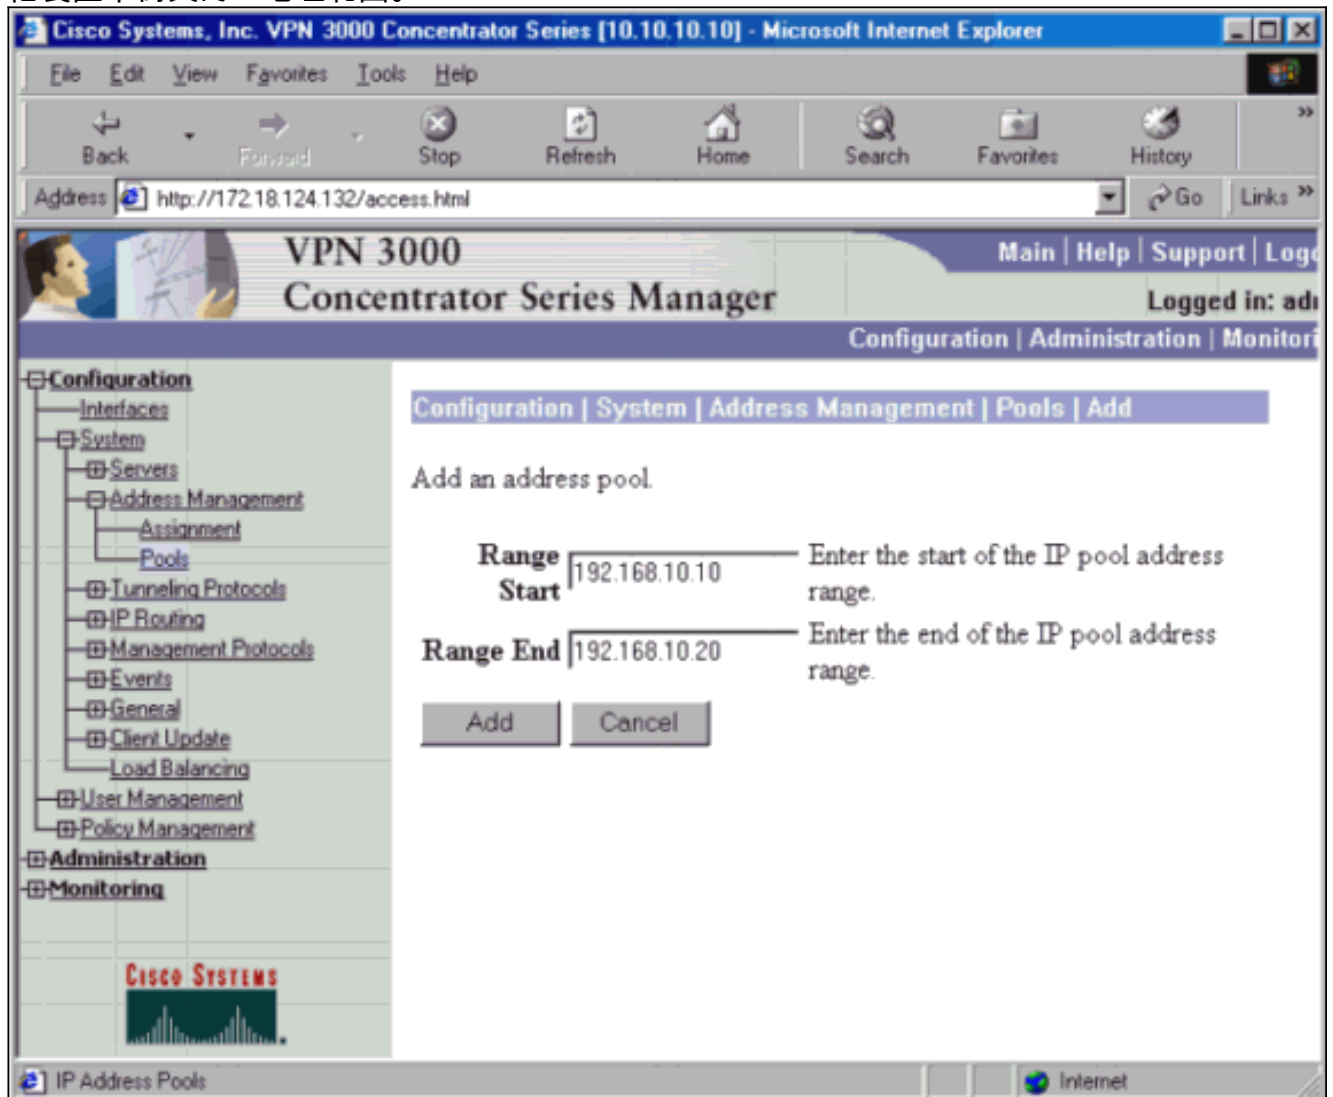

3. 要指示VPN集中器使用地址池，請轉到**Configuration > System > Address Management > Assignment**，然後選中Use Address Pools框。

Cisco Systems, Inc. VPN 3000 Concentrator Series [10.10.10.10] - Microsoft Internet Explorer

File Edit View Favorites Tools Help

Back Forward Stop Refresh Home Search Favorites History

Address http://172.18.124.132/access.html Go Links

VPN 3000 Concentrator Series Manager

Main | Help | Support | Log

Logged in: ad

Configuration | Administration | Monitor

Configuration | System | Address Management | Assignment

This section presents Address Assignment options. Each of the following methods are tried, in order, until an address is found.

Use Client Address Check to use the IP address supplied by the client. This can be overridden by user/group configuration.

Use Address from Authentication Server Check to use an IP address retrieved from an authentication server for the client.

Use DHCP Check to use DHCP to obtain an IP address for the client.

Use Address Pools Check to use internal address pool configuration to obtain an IP address for the client.

Apply Cancel

System-Wide Configuration Internet

4. 通過轉至 Configuration > User Management > Groups > Add 並定義組名稱和密碼，為使用者配置 IPsec 組。以下示例使用組名「ipsecgroup」，密碼/驗證為「cisco123」。

Cisco Systems, Inc. VPN 3000 Concentrator Series [10.10.10.10] - Microsoft Internet Explorer

File Edit View Favorites Tools Help

Back Forward Stop Refresh Home Search Favorites History

Address http://172.18.124.132/access.html Go Links

VPN 3000 Concentrator Series Manager Main | Help | Support | Log

Configuration | Administration | Monitor

you want to default to the base group value. Uncheck the **Inherit?** box and enter a new value to override base group values.

Identity General IPsec PPTP/L2TP

Identity Parameters

Attribute	Value	Description
Group Name	ipseccgroup	Enter a unique name for the group.
Password	*****	Enter the password for the group.
Verify	*****	Verify the group's password.
Type	Internal	<i>External groups</i> are configured on an external authentication server (e.g. RADIUS). <i>Internal groups</i> are configured on the VPN 3000 Concentrator Series's Internal Database.

Add Cancel

User/Group Management Internet

5. 在Groups General頁籤上，選擇IPSec。

Cisco Systems, Inc. VPN 3000 Concentrator Series [10.10.10.10] - Microsoft Internet Explorer

File Edit View Favorites Tools Help

Back Forward Stop Refresh Home Search Favorites History

Address http://172.18.124.132/access.html Go Links

VPN 3000 Concentrator Series Manager

Main | Help | Support | Logg

Logged in: ad

Configuration | Administration | Monitor

Configuration

- Interfaces
- System
 - Servers
 - Address Management
 - Assignment
 - Pools
 - Tunneling Protocols
 - IP Routing
 - Management Protocols
 - Events
 - General
 - Client Update
 - Load Balancing
- User Management
 - Base Group
 - Groups
 - Users
- Policy Management

Administration

CISCO SYSTEMS

			server.
Primary WINS	<input type="text"/>	<input checked="" type="checkbox"/>	Enter the IP address of the primary WINS server.
Secondary WINS	<input type="text"/>	<input checked="" type="checkbox"/>	Enter the IP address of the secondary WINS server.
SEP Card Assignment	<input checked="" type="checkbox"/> SEP 1 <input checked="" type="checkbox"/> SEP 2 <input checked="" type="checkbox"/> SEP 3 <input checked="" type="checkbox"/> SEP 4	<input checked="" type="checkbox"/>	Select the SEP cards this group can be assigned to.
Tunneling Protocols	<input type="checkbox"/> PPTP <input type="checkbox"/> L2TP <input checked="" type="checkbox"/> IPsec <input type="checkbox"/> L2TP over IPsec	<input type="checkbox"/>	Select the tunneling protocols this group can connect with.
Strip Realm	<input type="checkbox"/>	<input checked="" type="checkbox"/>	Check to remove the realm qualifier of the user name during authentication.

Group Parameters Internet

6. 在Groups IPsec頁籤上，將身份驗證設定為Internal。

Cisco Systems, Inc. VPN 3000 Concentrator Series [10.10.10.10] - Microsoft Internet Explorer

File Edit View Favorites Tools Help

Back Forward Stop Refresh Home Search Favorites History

Address http://172.18.124.132/access.html Go Links

VPN 3000 Concentrator Series Manager

Main | Help | Support | Logg

Logged in: ad

Configuration | Administration | Monitor

Configuration

- Interfaces
- System
- Servers
- Address Management
 - Assignment
 - Pools
- Tunneling Protocols
- IP Routing
- Management Protocols
- Events
- General
- Client Update
- Load Balancing
- User Management
- Administration

Remote Access Parameters

Group Lock	<input type="checkbox"/>	<input checked="" type="checkbox"/>	Loc into grou
Authentication	Internal	<input checked="" type="checkbox"/>	Sele auth meth user grou
IPComp	None	<input checked="" type="checkbox"/>	Sele meth Con for r of th
			Che initia exch Mo

Group Parameters Internet

7. 轉到 Configuration > User Management > Users > Add，將使用者新增到先前定義的組。在以下示例中，使用者是「ipsecuser」，在組「ipsecgroup」中使用口令「xyz12345」。

Identity Parameters

Attribute	Value	Description
User Name	ipsecuser	Enter a unique user name.
Password	*****	Enter the user's password. The password must satisfy the group password requirements.
Verify	*****	Verify the user's password
Group	ipsecgroup	Enter the group to which this user belongs.
IP Address		Enter the IP address assigned to this user.
Subnet Mask		Enter the subnet mask assigned to this user.

Add Cancel

配置Linux客戶端

請遵循以下步驟：

1. 導航到儲存VPN連線配置檔案的/etc/CiscoSystemsVPNClient/Profiles目錄。

```
Telnet - 192.168.10.41
Connect Edit Terminal Help
Red Hat Linux release 7.2 (Enigma)
Kernel 2.4.7-10 on an i686
login: jbiersba
Password:
Last login: Mon Nov  5 12:46:38 from 192.168.10.42
[jbiersba@dhcppc1 jbiersba]$ su
Password:
[root@dhcppc1 jbiersba]# cd /etc/CiscoSystemsUPNClient/
[root@dhcppc1 CiscoSystemsUPNClient]# ls
Certificates Profiles vpnclient.ini
[root@dhcppc1 CiscoSystemsUPNClient]# cd /etc/CiscoSystemsUPNClient/Profiles
[root@dhcppc1 Profiles]# ls
sample.pcf
[root@dhcppc1 Profiles]#
```

2. 通過將示例配置檔案複製到新名稱或從頭開始建立配置檔案來開啟新的配置檔案。在下面的示例中，複製、重新命名和編輯了示例.pcf檔案。

```
Telnet - 192.168.10.41
Connect Edit Terminal Help
Red Hat Linux release 7.2 (Enigma)
Kernel 2.4.7-10 on an i686
login: jbiersba
Password:
Last login: Mon Nov  5 12:46:38 from 192.168.10.42
[jbiersba@dhcppc1 jbiersba]$ su
Password:
[root@dhcppc1 jbiersba]# cd /etc/CiscoSystemsUPNClient/
[root@dhcppc1 CiscoSystemsUPNClient]# ls
Certificates Profiles vpnclient.ini
[root@dhcppc1 CiscoSystemsUPNClient]# cd /etc/CiscoSystemsUPNClient/Profiles
[root@dhcppc1 Profiles]# ls
sample.pcf
[root@dhcppc1 Profiles]# cp sample.pcf ipsec.pcf
[root@dhcppc1 Profiles]# ls
ipsec.pcf sample.pcf
[root@dhcppc1 Profiles]#
```

3. 編輯新命名的.pcf檔案以包含以下資訊。用於標識連線的新說明新的主機IP地址，它將是VPN 3000集中器的公共介面的IP地址需要與VPN 3000組設定中配置的組匹配的新組名稱新使用者名稱，與VPN 3000集中器上配置的使用者名稱相同，與集中器上的VPN組一致儲存檔案並退出。

目前沒有適用於此組態的驗證程序。


疑難排解

本節提供的資訊可用於對組態進行疑難排解。

開啟VPN客戶端登入

以下是與此組態相關的疑難排解資訊。請按照以下說明對配置進行故障排除。

1. 如果/etc/CiscoSystemsVPNClient/目錄中尚不存在全域性配置檔案，則建立全域性配置檔案。全域性配置檔案應如下例所示。

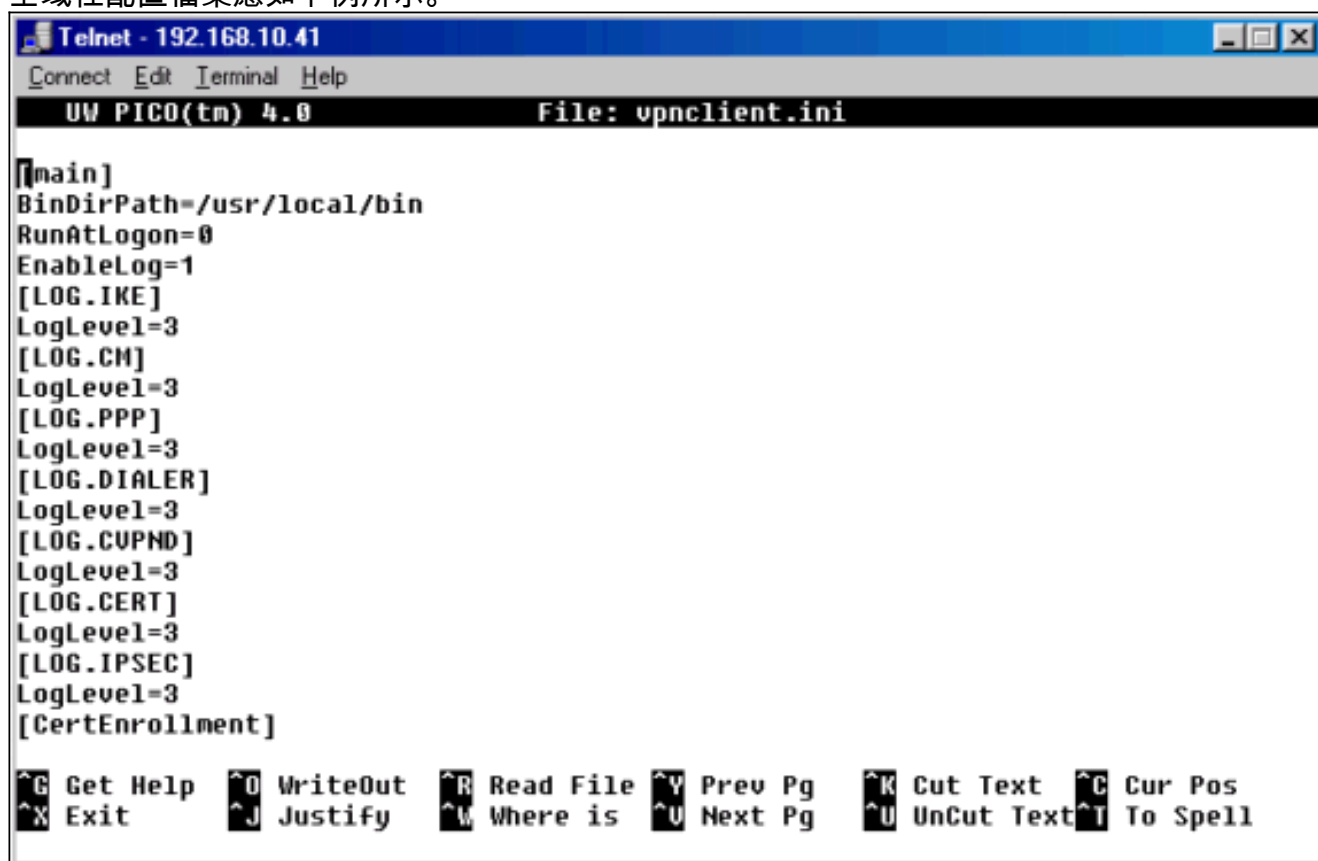

```
Telnet - 192.168.10.41
Connect Edit Terminal Help
UW PICO(tm) 4.0 File: vpnclient.ini

[main]
BinDirPath=/usr/local/bin
RunAtLogon=0
EnableLog=1
[LOG.IKE]
LogLevel=3
[LOG.CH]
LogLevel=3
[LOG.PPP]
LogLevel=3
[LOG.DIALER]
LogLevel=3
[LOG.CUPND]
LogLevel=3
[LOG.CERT]
LogLevel=3
[LOG.IPSEC]
LogLevel=3
[CertEnrollment]

^G Get Help ^O WriteOut ^R Read File ^Y Prev Pg ^K Cut Text ^C Cur Pos
^X Exit ^J Justify ^W Where is ^U Next Pg ^U UnCut Text ^T To Spell
```

注意：驗證每個日誌級別是否設定為「3」；這將確保實現最高級別的日誌記錄。

2. 在命令提示符下，使用/usr/local/bin/ipseclog命令啟動IPSec日誌實用程式並將該日誌中的資訊移動到您選擇的目錄和檔案中。在此示例中，該檔名為clientlog.txt，位於/etc/CiscoSystemsVPNClient目錄中
：

```
Telnet - 192.168.10.41
Connect Edit Terminal Help
[LOG.DIALER]
LogLevel=3
[LOG.CUPND]
LogLevel=3
[LOG.CERT]
LogLevel=3
[LOG.IPSEC]
LogLevel=3
[CertEnrollment]

[root@dhcpcpc1 CiscoSystemsUPNClient]# usr/local/bin/ipseclog /etc/CiscoSystemsU
PNClient/clientlog.txt
bash: usr/local/bin/ipseclog: No such file or directory
[root@dhcpcpc1 CiscoSystemsUPNClient]# ./usr/local/bin/ipseclog /etc/CiscoSystem
sUPNClient/clientlog.txt
bash: ./usr/local/bin/ipseclog: No such file or directory
[root@dhcpcpc1 CiscoSystemsUPNClient]# /usr/local/bin/ipseclog /etc/CiscoSystems
UPNClient/clientlog.txt
Cisco Systems UPN Client Version 3.0.8
Copyright (C) 1998-2001 Cisco Systems, Inc. All Rights Reserved.
Client Type(s): Linux
Running on: Linux 2.4.7-10 #1 Thu Sep 6 17:27:27 EDT 2001 i686
```


3. 在單獨的視窗中，使用tail -f (對於檔名) 命令獲取不斷更新的clientlog.txt檔案快照，同時連線以收集調試資訊。

```
Telnet - 192.168.10.41
Connect Edit Terminal Help
Red Hat Linux release 7.2 (Enigma)
Kernel 2.4.7-10 on an i686
login: jbiersba
Password:
Last login: Mon Nov 5 13:19:53 from 192.168.10.42
[jbiersba@dhcpcpc1 jbiersba]$ u
bash: u: command not found
[jbiersba@dhcpcpc1 jbiersba]$ su
Password:
[root@dhcpcpc1 jbiersba]# cd /etc/CiscoSystemsUPNClient/
[root@dhcpcpc1 CiscoSystemsUPNClient]# ls
Certificates clientlog.txt Profiles upnclient.ini
[root@dhcpcpc1 CiscoSystemsUPNClient]# tail -f clientlog.txt
```


[開啟VPN 3000集中器上的日誌記錄](#)

請按照以下說明對配置進行故障排除。

1. 如果發生事件連線失敗，請轉到**Configuration > System > Events > Classes**以開啟以下調試。
AUTH — 日誌嚴重性1-13AUTHDBG — 日誌嚴重性1-13IKE — 日誌嚴重性1-13IKEDBG — 日誌嚴重性1-13IPSEC — 日誌嚴重性1-13IPSECDBG — 日誌嚴重性1-13注意：如有必要，可以稍後新增AUTHDECODE、IKEDECODE和IPSECDECODE。

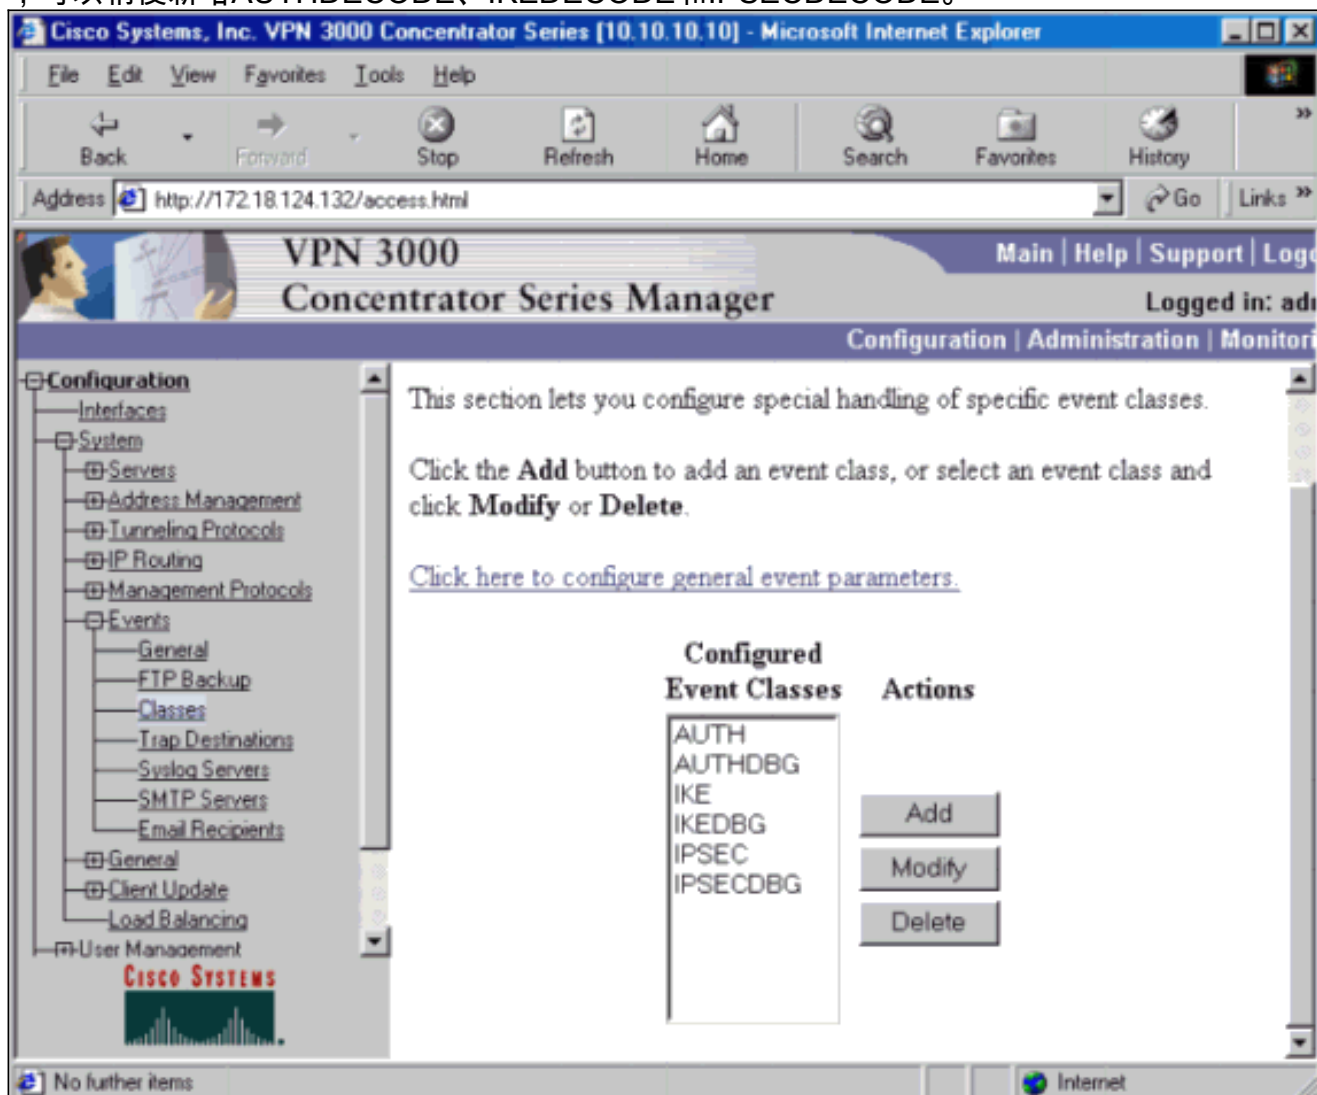

2. 您可以轉至**Monitoring > Filterable Event Log**檢視日誌。

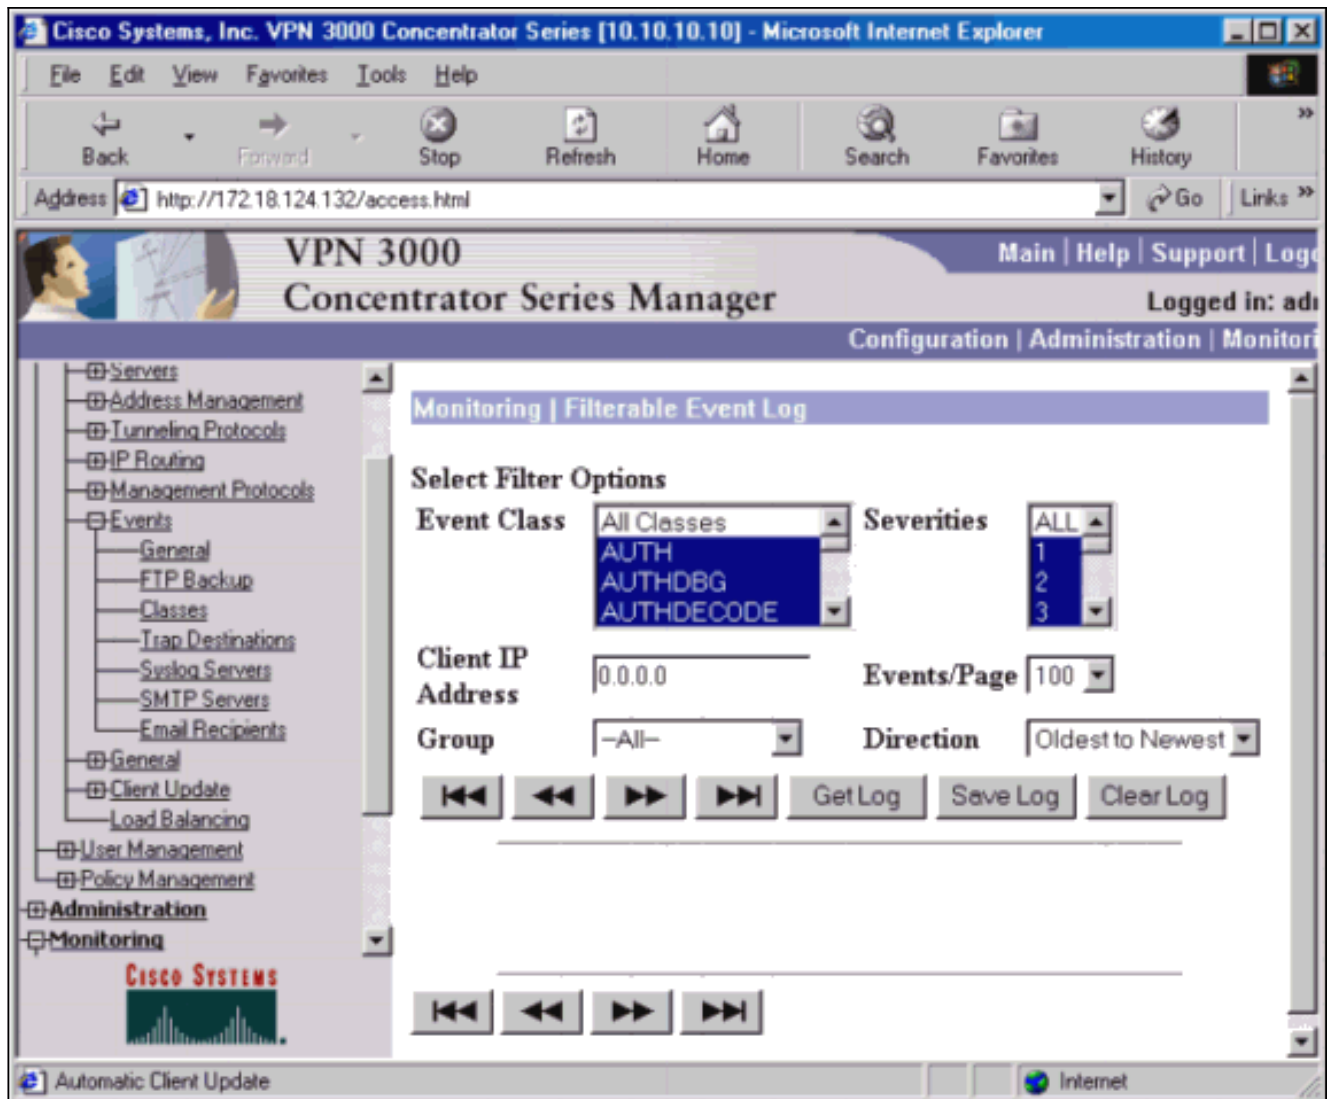

良好調試

- [VPN使用者端](#)
- [VPN 3000 Concentrator](#)

VPN使用者端

```
1 14:02:24.118 11/05/2001 Sev=Info/4 CVPND/0x4340000F
```

```
Started cvpnd:
```

```
Cisco Systems VPN Client Version 3.0.8
```

```
Copyright (C) 1998-2001 Cisco Systems, Inc. All Rights Reserved.
```

```
Client Type(s): Linux
```

```
Running on: Linux 2.4.7-10 #1 Thu Sep 6 17:27:27 EDT 2001 i686
```

```
2 14:02:24.118 11/05/2001 Sev=Info/4 IPSEC/0x43700013
```

```
Delete internal key with SPI=0xcfa58e9f
```

```
3 14:02:24.118 11/05/2001 Sev=Info/4 IPSEC/0x4370000C
```

Key deleted by SPI 0xcfa58e9f

4 14:02:24.118 11/05/2001 Sev=Info/4 IPSEC/0x43700013

Delete internal key with SPI=0x3a21bb45

5 14:02:24.118 11/05/2001 Sev=Info/4 IPSEC/0x4370000C

Key deleted by SPI 0x3a21bb45

6 14:02:24.118 11/05/2001 Sev=Info/4 IPSEC/0x43700013

Delete internal key with SPI=0xc76d7f87

7 14:02:24.118 11/05/2001 Sev=Info/4 IPSEC/0x4370000C

Key deleted by SPI 0xc76d7f87

8 14:02:24.118 11/05/2001 Sev=Info/4 IPSEC/0x43700013

Delete internal key with SPI=0x8fd46a6a

9 14:02:24.118 11/05/2001 Sev=Info/4 IPSEC/0x4370000C

Key deleted by SPI 0x8fd46a6a

10 14:02:24.119 11/05/2001 Sev=Info/4 IPSEC/0x43700014

Deleted all keys

11 14:02:24.119 11/05/2001 Sev=Info/4 IPSEC/0x43700014

Deleted all keys

12 14:02:24.119 11/05/2001 Sev=Info/4 IPSEC/0x4370000A

IPSec driver successfully stopped

13 14:02:24.119 11/05/2001 Sev=Info/4 IPSEC/0x43700014

Deleted all keys

14 14:02:24.119 11/05/2001 Sev=Info/4 IPSEC/0x43700008

IPSec driver successfully started

15 14:02:24.119 11/05/2001 Sev=Info/4 IPSEC/0x43700014

Deleted all keys

16 14:02:24.119 11/05/2001 Sev=Info/4 IPSEC/0x4370000D

Key(s) deleted by Interface (192.168.10.41)

17 14:02:24.960 11/05/2001 Sev=Info/4 CM/0x43100002

Begin connection process

18 14:02:24.963 11/05/2001 Sev=Info/4 CM/0x43100004

Establish secure connection using Ethernet

19 14:02:24.963 11/05/2001 Sev=Info/4 CM/0x43100026

Attempt connection with server "rtp-vpn-cluster.cisco.com"

20 14:02:24.980 11/05/2001 Sev=Info/6 IKE/0x4300003B

Attempting to establish a connection with 161.44.127.194.

21 14:02:25.136 11/05/2001 Sev=Debug/7 IKE/0x4300000A

Sending ID me = ID_KEY ciscovpncluster-nat.

22 14:02:25.136 11/05/2001 Sev=Info/4 IKE/0x43000013

SENDING >>> ISAKMP OAK AG (SA, KE, NON, ID, VID, VID, VID) to 161.44.127.194

23 14:02:25.139 11/05/2001 Sev=Decode/11 IKE/0x43000001

ISAKMP Header

Initiator COOKIE: ACD9BE3AC57BBE35

Responder COOKIE: 0000000000000000

Next Payload: Security Association

Ver: 10

Exchange Type: Aggressive Mode

Flags: (none)

MessageID: 00000000

Length: 469762048

Payload Security Association

Next Payload: Key Exchange

Reserved: 0000

Payload Length: 308

DOI: IPsec

Situation:(SIT_IDENTITY_ONLY)

Payload Proposal

Next Payload: None

Reserved: 0000

Payload Length: 296

Proposal #: 1

Protocol-Id: PROTO_ISAKMP

SPI Size: 0

of transforms: 8

SPI:

Payload Transform

Next Payload: Transform

Reserved: 0000

Payload Length: 36

Transform #: 1

Transform-Id: KEY_IKE

Reserved2: 0000

Encryption Algorithm: 3DES-CBC

Hash Algorithm: SHA1

Group Description: Group 2

Authentication Method: XAUTHInitPreShared

Life Type: seconds

Life Duration (Hex): 9BC42000

Payload Transform

Next Payload: Transform

Reserved: 0000

Payload Length: 36

Transform #: 2

Transform-Id: KEY_IKE

Reserved2: 0000

Encryption Algorithm: 3DES-CBC

Hash Algorithm: MD5

Group Description: Group 2

Authentication Method: XAUTHInitPreShared

Life Type: seconds

Life Duration (Hex): 9BC42000

Payload Transform

Next Payload: Transform

Reserved: 0000

Payload Length: 36

Transform #: 3

Transform-Id: KEY_IKE

Reserved2: 0000

Encryption Algorithm: 3DES-CBC

Hash Algorithm: SHA1

Group Description: Group 2

Authentication Method: Preshared key

Life Type: seconds

Life Duration (Hex): 9BC42000

Payload Transform

Next Payload: Transform

Reserved: 0000

Payload Length: 36

Transform #: 4

Transform-Id: KEY_IKE

Reserved2: 0000

Encryption Algorithm: 3DES-CBC

Hash Algorithm: MD5

Group Description: Group 2

Authentication Method: Preshared key

Life Type: seconds

Life Duration (Hex): 9BC42000

Payload Transform

Next Payload: Transform

Reserved: 0000

Payload Length: 36

Transform #: 5

Transform-Id: KEY_IKE

Reserved2: 0000

Encryption Algorithm: DES-CBC

Hash Algorithm: SHA1

Group Description: Group 2

Authentication Method: XAUTHInitPreShared

Life Type: seconds

Life Duration (Hex): 9BC42000

Payload Transform

Next Payload: Transform

Reserved: 0000

Payload Length: 36

Transform #: 6

Transform-Id: KEY_IKE

Reserved2: 0000

Encryption Algorithm: DES-CBC

Hash Algorithm: MD5

Group Description: Group 2

Authentication Method: XAUTHInitPreShared

Life Type: seconds

Life Duration (Hex): 9BC42000

Payload Transform

Next Payload: Transform

Reserved: 0000

Payload Length: 36

Transform #: 7

Transform-Id: KEY_IKE

Reserved2: 0000

Encryption Algorithm: DES-CBC

Hash Algorithm: SHA1

Group Description: Group 2

Authentication Method: Preshared key

Life Type: seconds

Life Duration (Hex): 9BC42000

Payload Transform

Next Payload: None

Reserved: 0000

Payload Length: 36

Transform #: 8

Transform-Id: KEY_IKE

Reserved2: 0000

Encryption Algorithm: DES-CBC

Hash Algorithm: MD5

Group Description: Group 2

Authentication Method: Preshared key

Life Type: seconds

Life Duration (Hex): 9BC42000

Payload Key Exchange

Next Payload: Nonce

Reserved: 0000

Payload Length: 132

Data: 14B9E06FB0742252C9CDA9C0E1045036FCE13E88E84A868EE895743
287DBD865FF938F144197B85865F39D6ED5BF7B16CBE49EA64DF07CE6840D
4105D800CE463CB310BF85D145CF63659CD9F7403CF486C27C37D086A4A57
5AE655F547DF9FF1DAC0F5ECE37FA5D91DC58F3B1C3331D78C6D711C316A1
70A8515219147FB0C405000018

Payload Nonce

Next Payload: Identification

Reserved: 0000

Payload Length: 24

Data: 18ADE217264969EBC698E5742FDAE5A6F1E8555F0D00001B

Payload Identification

Next Payload: Vendor ID

Reserved: 0000

Payload Length: 27

ID Type: ID_KEY_ID

Protocol ID (UDP/TCP, etc...): 17

Port: 500

ID Data: ciscovpncluster-nat

Payload Vendor ID

Next Payload: Vendor ID

Reserved: 0000

Payload Length: 12

Data (In Hex): 09002689DFD6B712

Payload Vendor ID

Next Payload: Vendor ID

Reserved: 0000

Payload Length: 20

Data (In Hex): AFCAD71368A1F1C96B8696FC77570100

Payload Vendor ID

Next Payload: None

Reserved: 0000

Payload Length: 20

Data (In Hex): 12F5F28C457168A9702D9FE274CC0100

24 14:02:25.140 11/05/2001 Sev=Info/4 IPSEC/0x43700014

Deleted all keys

25 14:02:25.140 11/05/2001 Sev=Info/4 IPSEC/0x4370000D

Key(s) deleted by Interface (192.168.10.41)

26 14:02:25.341 11/05/2001 Sev=Info/5 IKE/0x4300002F

Received ISAKMP packet: peer = 161.44.127.194

27 14:02:25.343 11/05/2001 Sev=Decode/11 IKE/0x43000001

ISAKMP Header

Initiator COOKIE: ACD9BE3AC57BBE35

Responder COOKIE: F8D106BDD3A6236D

Next Payload: Security Association

Ver: 10

Exchange Type: Aggressive Mode

Flags: (none)

MessageID: 00000000

Length: 344

Payload Security Association

Next Payload: Key Exchange

Reserved: 0000

Payload Length: 56

DOI: IPsec

Situation:(SIT_IDENTITY_ONLY)

Payload Proposal

Next Payload: None

Reserved: 0000

Payload Length: 44

Proposal #: 1

Protocol-Id: PROTO_ISAKMP

SPI Size: 0

of transforms: 1

SPI:

Payload Transform

Next Payload: None

Reserved: 0000

Payload Length: 36

Transform #: 2

Transform-Id: KEY_IKE

Reserved2: 0000

Encryption Algorithm: 3DES-CBC

Hash Algorithm: MD5

Group Description: Group 2

Authentication Method: XAUTHInitPreShared

Life Type: seconds

Life Duration (Hex): 9BC42000

Payload Key Exchange

Next Payload: Nonce

Reserved: 0000

Payload Length: 132

Data: 0F428F30FAD939D04BB301934BD24252585691E9A5AA30DF3
E67B04A2BAF010C5B0F890D422AD68592AA11F0AD8DCA20766AF42C
F93850EC73526CFE91B953CF6A5B38A051CB6D7673A6F69E15ACE9D
7793FFC2A89B88135EA5DE187961E64869787008EFCBE1BEF40C34F
AE1A278F1BEE8DF3BA873DCDA9A33DC14FBE59D77605000018

Payload Nonce

Next Payload: Identification

Reserved: 0000

Payload Length: 24

Data: B466B5297839DDB8D45177EE87DABC1463EB8D4C0800000C

Payload Identification

Next Payload: Hash

Reserved: 0000

Payload Length: 12

ID Type: IPv4 Address

Protocol ID (UDP/TCP, etc...): 17

Port: 500

ID Data: 161.44.127.194

Payload Hash

Next Payload: Vendor ID

Reserved: 0000

Payload Length: 20

Data: E1F2B6C63282B7091A0DA4F1F9C056E30D000014

Payload Vendor ID

Next Payload: Vendor ID

Reserved: 0000

Payload Length: 20

Data (In Hex): 12F5F28C457168A9702D9FE274CC0100

Payload Vendor ID

Next Payload: Vendor ID

Reserved: 0000

Payload Length: 12

Data (In Hex): 09002689DFD6B712

Payload Vendor ID

Next Payload: Vendor ID

Reserved: 0000

Payload Length: 20

Data (In Hex): AFCAD71368A1F1C96B8696FC77570100

Payload Vendor ID

Next Payload: None

Reserved: 0000

Payload Length: 20

Data (In Hex): 1F07F70EAA6514D3B0FA96542A500300

28 14:02:25.344 11/05/2001 Sev=Info/4 IKE/0x43000014

RECEIVING <<< ISAKMP OAK AG (SA, KE, NON, ID, HASH, VID,
VID, VID, VID) from 161.44.127.194

29 14:02:25.344 11/05/2001 Sev=Info/5 IKE/0x43000059

Vendor ID payload = 12F5F28C457168A9702D9FE274CC0100

30 14:02:25.344 11/05/2001 Sev=Info/5 IKE/0x43000001

Peer is a Cisco-Unity compliant peer

31 14:02:25.344 11/05/2001 Sev=Info/5 IKE/0x43000059

Vendor ID payload = 09002689DFD6B712

32 14:02:25.344 11/05/2001 Sev=Info/5 IKE/0x43000059

Vendor ID payload = AFCAD71368A1F1C96B8696FC77570100

33 14:02:25.344 11/05/2001 Sev=Info/5 IKE/0x43000001

Peer supports DPD

34 14:02:25.344 11/05/2001 Sev=Info/5 IKE/0x43000059

Vendor ID payload = 1F07F70EAA6514D3B0FA96542A500300

35 14:02:25.480 11/05/2001 Sev=Info/4 IKE/0x43000013

SENDING >>> ISAKMP OAK AG *(HASH, NOTIFY:STATUS_INITIAL_CONTACT)
to 161.44.127.194

36 14:02:25.483 11/05/2001 Sev=Decode/11 IKE/0x43000001

ISAKMP Header

Initiator COOKIE: ACD9BE3AC57BBE35

Responder COOKIE: F8D106BDD3A6236D

Next Payload: Hash

Ver: 10

Exchange Type: Aggressive Mode

Flags: (Encryption)

MessageID: 00000000

Length: 469762048

Payload Hash

Next Payload: Notification

Reserved: 0000

Payload Length: 20

Data: CFCFC21977456B8B6BA6D39AB4EB14B20000001C

Payload Notification

Next Payload: None

Reserved: 0000

Payload Length: 28

DOI: IPsec

Protocol-ID: PROTO_ISAKMP

Spi Size: 16

Notify Type: STATUS_INITIAL_CONTACT

SPI: ACD9BE3AC57BBE35F8D106BDD3A6236D

Data:

37 14:02:25.524 11/05/2001 Sev=Info/5 IKE/0x4300002F

Received ISAKMP packet: peer = 161.44.127.194

38 14:02:25.524 11/05/2001 Sev=Debug/7 IKE/0x43000022

Crypto READY becoming ACTIVE

39 14:02:25.527 11/05/2001 Sev=Decode/11 IKE/0x43000001

ISAKMP Header

Initiator COOKIE: ACD9BE3AC57BBE35

Responder COOKIE: F8D106BDD3A6236D

Next Payload: Hash

Ver: 10

Exchange Type: Informational

Flags: (Encryption)

MessageID: 9A429435

Length: 84

Payload Hash

Next Payload: Notification

Reserved: 0000

Payload Length: 20

Data: 09ED923D74F93C252C056B96F374E80900000020

Payload Notification

Next Payload: None

Reserved: 0000

Payload Length: 32

DOI: IPsec

Protocol-ID: PROTO_ISAKMP

Spi Size: 16

Notify Type: NOTIFY_STATUS_LOAD_BALANCE

SPI: ACD9BE3AC57BBE35F8D106BDD3A6236D

Data: A12C7FC4

40 14:02:25.527 11/05/2001 Sev=Info/4 IKE/0x43000014

RECEIVING <<< ISAKMP OAK INFO *(HASH, NOTIFY:LOAD_BALANCE)
from 161.44.127.194

41 14:02:25.527 11/05/2001 Sev=Info/4 CM/0x4310001B

Received alternative server address "161.44.127.196" from
primary server

42 14:02:25.527 11/05/2001 Sev=Debug/8 IKE/0x4300004C

Stopping DPD timer for IKE SA* 0817FC98

43 14:02:25.528 11/05/2001 Sev=Info/4 IKE/0x43000013

SENDING >>> ISAKMP OAK INFO *(HASH, DEL) to 161.44.127.194

44 14:02:25.530 11/05/2001 Sev=Decode/11 IKE/0x43000001

ISAKMP Header

Initiator COOKIE: ACD9BE3AC57BBE35

Responder COOKIE: F8D106BDD3A6236D

Next Payload: Hash

Ver: 10

Exchange Type: Informational

Flags: (Encryption)

MessageID: D3B8CE2C

Length: 469762048

Payload Hash

Next Payload: Delete

Reserved: 0000

Payload Length: 20

Data: D1461180C869DA6D6A7BDE0A34CE7D030000001C

Payload Delete

Next Payload: None

Reserved: 0000

Payload Length: 28

DOI: Isakmp

Protocol-ID: PROTO_ISAKMP

Spi Size: 16

of SPIs: 1

SPI (Hex dump): ACD9BE3AC57BBE35F8D106BDD3A6236D

45 14:02:25.531 11/05/2001 Sev=Info/4 CM/0x43100014

Unable to establish Phase 1 SA with server
"rtp-vpn-cluster.cisco.com" because of "DEL_REASON_LOAD_BALANCING"

46 14:02:25.531 11/05/2001 Sev=Info/4 CM/0x43100010

Try alternative server "161.44.127.196" given by the
primary server

47 14:02:25.531 11/05/2001 Sev=Info/4 CM/0x43100026

Attempt connection with server "161.44.127.196"

48 14:02:25.531 11/05/2001 Sev=Info/6 IKE/0x4300003B

Attempting to establish a connection with 161.44.127.196.

49 14:02:25.678 11/05/2001 Sev=Debug/7 IKE/0x4300000A

Sending ID me = ID_KEY ciscovpncluster-nat.

50 14:02:25.678 11/05/2001 Sev=Info/4 IKE/0x43000013

SENDING >>> ISAKMP OAK AG (SA, KE, NON, ID, VID, VID, VID)
to 161.44.127.196

51 14:02:25.681 11/05/2001 Sev=Decode/11 IKE/0x43000001

ISAKMP Header

Initiator COOKIE: DACB1B32139742E7

Responder COOKIE: 0000000000000000

Next Payload: Security Association

Ver: 10

Exchange Type: Aggressive Mode

Flags: (none)

MessageID: 00000000

Length: 469762048

Payload Security Association

Next Payload: Key Exchange

Reserved: 0000

Payload Length: 308

DOI: IPsec

Situation:(SIT_IDENTITY_ONLY)

Payload Proposal

Next Payload: None

Reserved: 0000

Payload Length: 296

Proposal #: 1

Protocol-Id: PROTO_ISAKMP

SPI Size: 0

of transforms: 8

SPI:

Payload Transform

Next Payload: Transform

Reserved: 0000

Payload Length: 36

Transform #: 1

Transform-Id: KEY_IKE

Reserved2: 0000

Encryption Algorithm: 3DES-CBC

Hash Algorithm: SHA1
Group Description: Group 2
Authentication Method: XAUTHInitPreShared
Life Type: seconds
Life Duration (Hex): 9BC42000
Payload Transform
Next Payload: Transform
Reserved: 0000
Payload Length: 36
Transform #: 2
Transform-Id: KEY_IKE
Reserved2: 0000
Encryption Algorithm: 3DES-CBC
Hash Algorithm: MD5
Group Description: Group 2
Authentication Method: XAUTHInitPreShared
Life Type: seconds
Life Duration (Hex): 9BC42000
Payload Transform
Next Payload: Transform
Reserved: 0000
Payload Length: 36
Transform #: 3
Transform-Id: KEY_IKE
Reserved2: 0000
Encryption Algorithm: 3DES-CBC
Hash Algorithm: SHA1
Group Description: Group 2
Authentication Method: Preshared key
Life Type: seconds
Life Duration (Hex): 9BC42000
Payload Transform

Next Payload: Transform

Reserved: 0000

Payload Length: 36

Transform #: 4

Transform-Id: KEY_IKE

Reserved2: 0000

Encryption Algorithm: 3DES-CBC

Hash Algorithm: MD5

Group Description: Group 2

Authentication Method: Preshared key

Life Type: seconds

Life Duration (Hex): 9BC42000

Payload Transform

Next Payload: Transform

Reserved: 0000

Payload Length: 36

Transform #: 5

Transform-Id: KEY_IKE

Reserved2: 0000

Encryption Algorithm: DES-CBC

Hash Algorithm: SHA1

Group Description: Group 2

Authentication Method: XAUTHInitPreShared

Life Type: seconds

Life Duration (Hex): 9BC42000

Payload Transform

Next Payload: Transform

Reserved: 0000

Payload Length: 36

Transform #: 6

Transform-Id: KEY_IKE

Reserved2: 0000

Encryption Algorithm: DES-CBC

Hash Algorithm: MD5

Group Description: Group 2

Authentication Method: XAUTHInitPreShared

Life Type: seconds

Life Duration (Hex): 9BC42000

Payload Transform

Next Payload: Transform

Reserved: 0000

Payload Length: 36

Transform #: 7

Transform-Id: KEY_IKE

Reserved2: 0000

Encryption Algorithm: DES-CBC

Hash Algorithm: SHA1

Group Description: Group 2

Authentication Method: Preshared key

Life Type: seconds

Life Duration (Hex): 9BC42000

Payload Transform

Next Payload: None

Reserved: 0000

Payload Length: 36

Transform #: 8

Transform-Id: KEY_IKE

Reserved2: 0000

Encryption Algorithm: DES-CBC

Hash Algorithm: MD5

Group Description: Group 2

Authentication Method: Preshared key

Life Type: seconds

Life Duration (Hex): 9BC42000

Payload Key Exchange

Next Payload: Nonce

Reserved: 0000

Payload Length: 132

Data: 7F445582B28E0DA53D4D7C42E50582503B5771C46C357F98
4DCB7A9549F5F6789E05016095F4FEFD3C2B1206CBCE63681AF2D5
5BEED5524D989636C22523665E58F7D338DFD7D7F838CF4A0514C7
F3F87BECB053E257D08B8A2AD988AABB63B692852FFE4E550C4020
A0A3058170F6CA53C3C2BEC27045FD8B7C724E2ED1BD3405000018

Payload Nonce

Next Payload: Identification

Reserved: 0000

Payload Length: 24

Data: 5A57FF12D4D74824EB0103E3E2D7C3A5403BDA0F0D00001B

Payload Identification

Next Payload: Vendor ID

Reserved: 0000

Payload Length: 27

ID Type: ID_KEY_ID

Protocol ID (UDP/TCP, etc...): 17

Port: 500

ID Data: ciscovpncluster-nat

Payload Vendor ID

Next Payload: Vendor ID

Reserved: 0000

Payload Length: 12

Data (In Hex): 09002689DFD6B712

Payload Vendor ID

Next Payload: Vendor ID

Reserved: 0000

Payload Length: 20

Data (In Hex): AFCAD71368A1F1C96B8696FC77570100

Payload Vendor ID

Next Payload: None

Reserved: 0000

Payload Length: 20

Data (In Hex): 12F5F28C457168A9702D9FE274CC0100

52 14:02:25.682 11/05/2001 Sev=Debug/8 IKE/0x4300004C

Stopping DPD timer for IKE SA* 0817FC98

53 14:02:25.682 11/05/2001 Sev=Info/5 IKE/0x4300002F

Received ISAKMP packet: peer = 161.44.127.194

54 14:02:25.682 11/05/2001 Sev=Warning/2 IKE/0xC3000080

Received an IKE packet from someone other than the
Concentrator that we are currently connected to... discarding packet.

55 14:02:25.883 11/05/2001 Sev=Info/5 IKE/0x4300002F

Received ISAKMP packet: peer = 161.44.127.196

56 14:02:25.886 11/05/2001 Sev=Decode/11 IKE/0x43000001

ISAKMP Header

Initiator COOKIE: DACB1B32139742E7

Responder COOKIE: 630E88F067C1B0B5

Next Payload: Security Association

Ver: 10

Exchange Type: Aggressive Mode

Flags: (none)

MessageID: 00000000

Length: 344

Payload Security Association

Next Payload: Key Exchange

Reserved: 0000

Payload Length: 56

DOI: IPsec

Situation:(SIT_IDENTITY_ONLY)

Payload Proposal

Next Payload: None

Reserved: 0000

Payload Length: 44

Proposal #: 1

Protocol-Id: PROTO_ISAKMP

SPI Size: 0

of transforms: 1

SPI:

Payload Transform

Next Payload: None

Reserved: 0000

Payload Length: 36

Transform #: 2

Transform-Id: KEY_IKE

Reserved2: 0000

Encryption Algorithm: 3DES-CBC

Hash Algorithm: MD5

Group Description: Group 2

Authentication Method: XAUTHInitPreShared

Life Type: seconds

Life Duration (Hex): 9BC42000

Payload Key Exchange

Next Payload: Nonce

Reserved: 0000

Payload Length: 132

Data: 71A75D31C3251028E8B893C8268A3CBF626ADCC4BE8A550F
C2EFFAD981C25B68145B42F554E505CD90C1309F46335EF4E1E064
9A54C5D1E0496E5A169690B1FAA8AFE69271C09D9189EFE993CBD5
BECB9FF304F00BA8CD6509551FC7D5BB3AB97FF3464E4E29400232
88BBF1E698C3E0C58BCAD5D69E881F47981CCA00E221DA05000018

Payload Nonce

Next Payload: Identification

Reserved: 0000

Payload Length: 24

Data: 392387EED0F758D660D57DF42F937AD1EE2A80AF0800000C

Payload Identification

Next Payload: Hash

Reserved: 0000

Payload Length: 12

ID Type: IPv4 Address

Protocol ID (UDP/TCP, etc...): 17

Port: 500

ID Data: 161.44.127.196

Payload Hash

Next Payload: Vendor ID

Reserved: 0000

Payload Length: 20

Data: FD17C6600A11AB661CF746CA2B9BB0CE0D000014

Payload Vendor ID

Next Payload: Vendor ID

Reserved: 0000

Payload Length: 20

Data (In Hex): 12F5F28C457168A9702D9FE274CC0100

Payload Vendor ID

Next Payload: Vendor ID

Reserved: 0000

Payload Length: 12

Data (In Hex): 09002689DFD6B712

Payload Vendor ID

Next Payload: Vendor ID

Reserved: 0000

Payload Length: 20

Data (In Hex): AFCAD71368A1F1C96B8696FC77570100

Payload Vendor ID

Next Payload: None

Reserved: 0000

Payload Length: 20

Data (In Hex): 1F07F70EAA6514D3B0FA96542A500300

57 14:02:25.887 11/05/2001 Sev=Info/4 IKE/0x43000014

RECEIVING <<< ISAKMP OAK AG (SA, KE, NON, ID, HASH, VID,
VID, VID, VID) from 161.44.127.196

58 14:02:25.887 11/05/2001 Sev=Info/5 IKE/0x43000059

Vendor ID payload = 12F5F28C457168A9702D9FE274CC0100

59 14:02:25.887 11/05/2001 Sev=Info/5 IKE/0x43000001

Peer is a Cisco-Unity compliant peer

60 14:02:25.887 11/05/2001 Sev=Info/5 IKE/0x43000059

Vendor ID payload = 09002689DFD6B712

61 14:02:25.887 11/05/2001 Sev=Info/5 IKE/0x43000059

Vendor ID payload = AFCAD71368A1F1C96B8696FC77570100

62 14:02:25.887 11/05/2001 Sev=Info/5 IKE/0x43000001

Peer supports DPD

63 14:02:25.887 11/05/2001 Sev=Info/5 IKE/0x43000059

Vendor ID payload = 1F07F70EAA6514D3B0FA96542A500300

64 14:02:26.036 11/05/2001 Sev=Info/4 IKE/0x43000013

SENDING >>> ISAKMP OAK AG *(HASH, NOTIFY:STATUS_INITIAL_CONTACT)
to 161.44.127.196

65 14:02:26.039 11/05/2001 Sev=Decode/11 IKE/0x43000001

ISAKMP Header

Initiator COOKIE: DACB1B32139742E7

Responder COOKIE: 630E88F067C1B0B5

Next Payload: Hash

Ver: 10

Exchange Type: Aggressive Mode

Flags: (Encryption)

MessageID: 00000000

Length: 469762048

Payload Hash

Next Payload: Notification

Reserved: 0000

Payload Length: 20

Data: 09E5321B10682CCF4C87EDE7EC41E3810000001C

Payload Notification

Next Payload: None

Reserved: 0000

Payload Length: 28

DOI: IPsec

Protocol-ID: PROTO_ISAKMP

Spi Size: 16

Notify Type: STATUS_INITIAL_CONTACT

SPI: DACB1B32139742E7630E88F067C1B0B5

Data:

66 14:02:26.081 11/05/2001 Sev=Info/5 IKE/0x4300002F

Received ISAKMP packet: peer = 161.44.127.196

67 14:02:26.081 11/05/2001 Sev=Debug/7 IKE/0x43000022

Crypto READY becoming ACTIVE

68 14:02:26.084 11/05/2001 Sev=Decode/11 IKE/0x43000001

ISAKMP Header

Initiator COOKIE: DACB1B32139742E7

Responder COOKIE: 630E88F067C1B0B5

Next Payload: Hash

Ver: 10

Exchange Type: Transaction

Flags: (Encryption)

MessageID: D16C4008

Length: 100

Payload Hash

Next Payload: Attributes

Reserved: 0000

Payload Length: 20

Data: EFB8FABB63311D72DDB7F15A809215B700000034

Payload Attributes

Next Payload: None

Reserved: 0000

Payload Length: 52

type: ISAKMP_CFG_REQUEST

Reserved: 00

Identifier: 0000

XAUTH Type: RADIUS-CHAP

XAUTH User Name: (empty)

XAUTH User Password: (empty)

XAUTH Message: (data not displayed)

69 14:02:26.084 11/05/2001 Sev=Info/4 IKE/0x43000014

RECEIVING <<< ISAKMP OAK TRANS *(HASH, ATTR) from
161.44.127.196

70 14:02:26.084 11/05/2001 Sev=Info/4 CM/0x43100015

Launch xAuth application

71 14:02:27.098 11/05/2001 Sev=Info/4 IPSEC/0x43700012

Delete all keys associated with peer 161.44.127.194

72 14:02:27.098 11/05/2001 Sev=Info/4 IPSEC/0x43700014

Deleted all keys

73 14:02:27.098 11/05/2001 Sev=Info/4 IPSEC/0x4370000D

Key(s) deleted by Interface (192.168.10.41)

74 14:02:42.971 11/05/2001 Sev=Info/4 CM/0x43100017

xAuth application returned

75 14:02:42.971 11/05/2001 Sev=Info/4 IKE/0x43000013

SENDING >>> ISAKMP OAK TRANS *(HASH, ATTR) to 161.44.127.196

76 14:02:42.974 11/05/2001 Sev=Decode/11 IKE/0x43000001

ISAKMP Header

Initiator COOKIE: DACB1B32139742E7

Responder COOKIE: 630E88F067C1B0B5

Next Payload: Hash

Ver: 10

Exchange Type: Transaction

Flags: (Encryption)

MessageID: 08406CD1

Length: 469762048

Payload Hash

Next Payload: Attributes

Reserved: 0000

Payload Length: 20

Data: 0E26F47ABBA0AF052EA3B9DC6E34C9B300000024

Payload Attributes

Next Payload: None

Reserved: 0000

Payload Length: 36

type: ISAKMP_CFG_REPLY

Reserved: 00

Identifier: 0000

XAUTH Type: RADIUS-CHAP

XAUTH User Name: (data not displayed)

XAUTH User Password: (data not displayed)

77 14:02:43.819 11/05/2001 Sev=Info/5 IKE/0x4300002F

Received ISAKMP packet: peer = 161.44.127.196

78 14:02:43.822 11/05/2001 Sev=Decode/11 IKE/0x43000001

ISAKMP Header

Initiator COOKIE: DACB1B32139742E7

Responder COOKIE: 630E88F067C1B0B5

Next Payload: Hash

Ver: 10

Exchange Type: Transaction

Flags: (Encryption)

MessageID: 4D49FD67

Length: 60

Payload Hash

Next Payload: Attributes

Reserved: 0000

Payload Length: 20

Data: 20516C85949FEB6061853707A36B730D0000000C

Payload Attributes

Next Payload: None

Reserved: 0000

Payload Length: 12

type: ISAKMP_CFG_SET

Reserved: 00

Identifier: 0000

XAUTH Status: Pass

79 14:02:43.822 11/05/2001 Sev=Info/4 IKE/0x43000014

RECEIVING <<< ISAKMP OAK TRANS *(HASH, ATTR) from
161.44.127.196

80 14:02:43.822 11/05/2001 Sev=Info/4 CM/0x4310000E

Established Phase 1 SA. 1 Phase 1 SA in the system

81 14:02:43.825 11/05/2001 Sev=Info/4 IKE/0x43000013

SENDING >>> ISAKMP OAK TRANS *(HASH, ATTR) to 161.44.127.196

82 14:02:43.828 11/05/2001 Sev=Decode/11 IKE/0x43000001

ISAKMP Header

Initiator COOKIE: DACB1B32139742E7

Responder COOKIE: 630E88F067C1B0B5

Next Payload: Hash

Ver: 10

Exchange Type: Transaction

Flags: (Encryption)

MessageID: 67FD494D

Length: 469762048

Payload Hash

Next Payload: Attributes

Reserved: 0000

Payload Length: 20

Data: 80AEFC5EA1F421789068A21B520A1E7700000008

Payload Attributes

Next Payload: None

Reserved: 0000

Payload Length: 8

type: ISAKMP_CFG_ACK

Reserved: 00

Identifier: 0000

83 14:02:43.829 11/05/2001 Sev=Info/4 IKE/0x43000013

SENDING >>> ISAKMP OAK TRANS *(HASH, ATTR) to 161.44.127.196

84 14:02:43.831 11/05/2001 Sev=Decode/11 IKE/0x43000001

ISAKMP Header

Initiator COOKIE: DACB1B32139742E7

Responder COOKIE: 630E88F067C1B0B5

Next Payload: Hash

Ver: 10

Exchange Type: Transaction

Flags: (Encryption)

MessageID: 19973167

Length: 469762048

Payload Hash

Next Payload: Attributes

Reserved: 0000

Payload Length: 20

Data: 9309A365C01503CB0B89B888D530494500000056

Payload Attributes

Next Payload: None

Reserved: 0000

Payload Length: 86

type: ISAKMP_CFG_REQUEST

Reserved: 00

Identifier: 0000

IPv4 Address: (empty)

IPv4 Netmask: (empty)

IPv4 DNS: (empty)

IPv4 NBNS (WINS): (empty)

Address Expiry: (empty)

Application Version: Cisco Systems VPN Client 3.0.8

Cisco extension: Banner: (empty)

Cisco extension: Save PWD: (empty)

Cisco extension: Default Domain Name: (empty)

Cisco extension: Split Include: (empty)

Cisco extension: Do PFS: (empty)

Cisco extension: NAT traversal UDP Port: (empty)

85 14:02:43.832 11/05/2001 Sev=Debug/8 IKE/0x4300004B

Starting DPD timer for IKE SA* 081801C8, sa->state = 4,
sa->dpd_peer_enabled = 1, sa->dpd_timer = 081803FC,
sa->dpd.worry_freq = 5000

86 14:02:43.879 11/05/2001 Sev=Info/5 IKE/0x4300002F

Received ISAKMP packet: peer = 161.44.127.196

87 14:02:43.882 11/05/2001 Sev=Decode/11 IKE/0x43000001

ISAKMP Header

Initiator COOKIE: DACB1B32139742E7

Responder COOKIE: 630E88F067C1B0B5

Next Payload: Hash

Ver: 10

Exchange Type: Transaction

Flags: (Encryption)

MessageID: 67319719

Length: 236

Payload Hash

Next Payload: Attributes

Reserved: 0000

Payload Length: 20

Data: 8722B4CDB825174DAB03CBC052241CC6000000B7

Payload Attributes

Next Payload: None

Reserved: 0000

Payload Length: 183

type: ISAKMP_CFG_REPLY

Reserved: 00

Identifier: 0000

IPv4 Address: 4.0.0.0

IPv4 DNS: 4.0.0.0

IPv4 DNS: 4.0.0.0

IPv4 NBNS (WINS): 4.0.0.0

IPv4 NBNS (WINS): 4.0.0.0

Cisco extension: Banner: rtp-vpn-cluster-2-nat:
Cisco Systems Inc.

UNAUTHORIZED ACCESS TO THIS NETWORK DEVICE IS PROHIBITED.

Cisco extension: Save PWD: No

Cisco extension: Default Domain Name: cisco.com

Cisco extension: NAT traversal UDP Port: 3221200488

Cisco extension: Do PFS: No

88 14:02:43.882 11/05/2001 Sev=Info/4 IKE/0x43000014

RECEIVING <<< ISAKMP OAK TRANS *(HASH, ATTR) from
161.44.127.196

89 14:02:43.883 11/05/2001 Sev=Info/5 IKE/0x43000010

MODE_CFG_REPLY: Attribute = INTERNAL_IPV4_ADDRESS: ,
value = 10.82.240.214

90 14:02:43.883 11/05/2001 Sev=Info/5 IKE/0x43000010

MODE_CFG_REPLY: Attribute = INTERNAL_IPV4_DNS(1): ,
value = 64.102.6.247

91 14:02:43.883 11/05/2001 Sev=Info/5 IKE/0x43000010

MODE_CFG_REPLY: Attribute = INTERNAL_IPV4_DNS(2): ,

value = 171.68.226.120

92 14:02:43.883 11/05/2001 Sev=Info/5 IKE/0x43000010

MODE_CFG_REPLY: Attribute = INTERNAL_IPV4_NBNS(1)
(a.k.a. WINS) : , value = 64.102.2.124

93 14:02:43.883 11/05/2001 Sev=Info/5 IKE/0x43000010

MODE_CFG_REPLY: Attribute = INTERNAL_IPV4_NBNS(2)
(a.k.a. WINS): , value = 171.68.235.228

94 14:02:43.883 11/05/2001 Sev=Info/5 IKE/0x4300000E

MODE_CFG_REPLY: Attribute = MODECFG_UNITY_BANNER,
value = rtp-vpn-cluster-2-nat: Cisco Systems Inc.

UNAUTHORIZED ACCESS TO THIS NETWORK DEVICE IS PROHIBITED.

95 14:02:43.883 11/05/2001 Sev=Info/5 IKE/0x4300000D

MODE_CFG_REPLY: Attribute = MODECFG_UNITY_SAVEPWD: ,
value = 0x00000000

96 14:02:43.883 11/05/2001 Sev=Info/5 IKE/0x4300000E

MODE_CFG_REPLY: Attribute = MODECFG_UNITY_DEFDOMAIN: ,
value = cisco.com

97 14:02:43.883 11/05/2001 Sev=Info/5 IKE/0x4300000D

MODE_CFG_REPLY: Attribute = MODECFG_UNITY_UDP_NAT_PORT,
value = 0x00002710

98 14:02:43.883 11/05/2001 Sev=Info/5 IKE/0x4300000D

MODE_CFG_REPLY: Attribute = MODECFG_UNITY_PFS: ,
value = 0x00000000

99 14:02:43.899 11/05/2001 Sev=Info/4 CM/0x43100019

Mode Config data received

100 14:03:03.938 11/05/2001 Sev=Info/5 IKE/0x43000055

Received a key request from Driver for IP address
161.44.127.196, GW IP = 161.44.127.196

101 14:03:03.939 11/05/2001 Sev=Info/4 IKE/0x43000013

SENDING >>> ISAKMP OAK QM *(HASH, SA, NON, ID, ID)
to 161.44.127.196

102 14:03:03.942 11/05/2001 Sev=Decode/11 IKE/0x43000001

ISAKMP Header

Initiator COOKIE: DACB1B32139742E7

Responder COOKIE: 630E88F067C1B0B5

Next Payload: Hash

Ver: 10

Exchange Type: Quick Mode

Flags: (Encryption)

MessageID: 371035BB

Length: 469762048

Payload Hash

Next Payload: Security Association

Reserved: 0000

Payload Length: 20

Data: C4134662EC838D6032DC22393A14ECA90A0002B8

Payload Security Association

Next Payload: Nonce

Reserved: 0000

Payload Length: 696

DOI: IPsec

Situation:(SIT_IDENTITY_ONLY)

Payload Proposal

Next Payload: Proposal

Reserved: 0000

Payload Length: 40

Proposal #: 1

Protocol-Id: PROTO_IPSEC_ESP

SPI Size: 4

of transforms: 1

SPI: 76AF9EAA

Payload Transform

Next Payload: None

Reserved: 0000

Payload Length: 28

Transform #: 1

Transform-Id: ESP_3DES

Reserved2: 0000

Authentication Algorithm: MD5

Encapsulation Mode: Tunnel

Life Type: Seconds

Life Duration (Hex): 0020C49B

Payload Proposal

Next Payload: Proposal

Reserved: 0000

Payload Length: 34

Proposal #: 1

Protocol-Id: PROTO_IPCOMP

SPI Size: 2

of transforms: 1

SPI: 11B2

Payload Transform

Next Payload: None

Reserved: 0000

Payload Length: 24

Transform #: 1

Transform-Id: IPCOMP_LZS

Reserved2: 0000

Encapsulation Mode: Tunnel

Life Type: Seconds

Life Duration (Hex): 0020C49B

Payload Proposal

Next Payload: Proposal

Reserved: 0000

Payload Length: 40

Proposal #: 2

Protocol-Id: PROTO_IPSEC_ESP

SPI Size: 4

of transforms: 1

SPI: 76AF9EAA

Payload Transform

Next Payload: None

Reserved: 0000

Payload Length: 28

Transform #: 1

Transform-Id: ESP_3DES

Reserved2: 0000

Authentication Algorithm: SHA1

Encapsulation Mode: Tunnel

Life Type: Seconds

Life Duration (Hex): 0020C49B

Payload Proposal

Next Payload: Proposal

Reserved: 0000

Payload Length: 34

Proposal #: 2

Protocol-Id: PROTO_IPCOMP

SPI Size: 2

of transforms: 1

SPI: 2AC8

Payload Transform

Next Payload: None

Reserved: 0000

Payload Length: 24

Transform #: 1

Transform-Id: IPCOMP_LZS

Reserved2: 0000

Encapsulation Mode: Tunnel

Life Type: Seconds

Life Duration (Hex): 0020C49B

Payload Proposal

Next Payload: Proposal

Reserved: 0000

Payload Length: 40

Proposal #: 3

Protocol-Id: PROTO_IPSEC_ESP

SPI Size: 4

of transforms: 1

SPI: 76AF9EAA

Payload Transform

Next Payload: None

Reserved: 0000

Payload Length: 28

Transform #: 1

Transform-Id: ESP_3DES

Reserved2: 0000

Authentication Algorithm: MD5

Encapsulation Mode: Tunnel

Life Type: Seconds

Life Duration (Hex): 0020C49B

Payload Proposal

Next Payload: Proposal

Reserved: 0000

Payload Length: 40

Proposal #: 4

Protocol-Id: PROTO_IPSEC_ESP

SPI Size: 4

of transforms: 1

SPI: 76AF9EAA

Payload Transform

Next Payload: None

Reserved: 0000

Payload Length: 28

Transform #: 1

Transform-Id: ESP_3DES

Reserved2: 0000

Authentication Algorithm: SHA1

Encapsulation Mode: Tunnel

Life Type: Seconds

Life Duration (Hex): 0020C49B

Payload Proposal

Next Payload: Proposal

Reserved: 0000

Payload Length: 40

Proposal #: 5

Protocol-Id: PROTO_IPSEC_ESP

SPI Size: 4

of transforms: 1

SPI: 76AF9EAA

Payload Transform

Next Payload: None

Reserved: 0000

Payload Length: 28

Transform #: 1

Transform-Id: ESP_DES

Reserved2: 0000

Authentication Algorithm: MD5

Encapsulation Mode: Tunnel

Life Type: Seconds

Life Duration (Hex): 0020C49B

Payload Proposal

Next Payload: Proposal

Reserved: 0000

Payload Length: 34

Proposal #: 5

Protocol-Id: PROTO_IPCOMP

SPI Size: 2

of transforms: 1

SPI: 2A25

Payload Transform

Next Payload: None

Reserved: 0000

Payload Length: 24

Transform #: 1

Transform-Id: IPCOMP_LZS

Reserved2: 0000

Encapsulation Mode: Tunnel

Life Type: Seconds

Life Duration (Hex): 0020C49B

Payload Proposal

Next Payload: Proposal

Reserved: 0000

Payload Length: 40

Proposal #: 6

Protocol-Id: PROTO_IPSEC_ESP

SPI Size: 4

of transforms: 1

SPI: 76AF9EAA

Payload Transform

Next Payload: None

Reserved: 0000

Payload Length: 28

Transform #: 1

Transform-Id: ESP_DES

Reserved2: 0000

Authentication Algorithm: SHA1

Encapsulation Mode: Tunnel

Life Type: Seconds

Life Duration (Hex): 0020C49B

Payload Proposal

Next Payload: Proposal

Reserved: 0000

Payload Length: 34

Proposal #: 6

Protocol-Id: PROTO_IPCOMP

SPI Size: 2

of transforms: 1

SPI: B7EB

Payload Transform

Next Payload: None

Reserved: 0000

Payload Length: 24

Transform #: 1

Transform-Id: IPCOMP_LZS

Reserved2: 0000

Encapsulation Mode: Tunnel

Life Type: Seconds

Life Duration (Hex): 0020C49B

Payload Proposal

Next Payload: Proposal

Reserved: 0000

Payload Length: 40

Proposal #: 7

Protocol-Id: PROTO_IPSEC_ESP

SPI Size: 4

of transforms: 1

SPI: 76AF9EAA

Payload Transform

Next Payload: None

Reserved: 0000

Payload Length: 28

Transform #: 1

Transform-Id: ESP_DES

Reserved2: 0000

Authentication Algorithm: MD5

Encapsulation Mode: Tunnel

Life Type: Seconds

Life Duration (Hex): 0020C49B

Payload Proposal

Next Payload: Proposal

Reserved: 0000

Payload Length: 40

Proposal #: 8

Protocol-Id: PROTO_IPSEC_ESP

SPI Size: 4

of transforms: 1

SPI: 76AF9EAA

Payload Transform

Next Payload: None

Reserved: 0000

Payload Length: 28

Transform #: 1

Transform-Id: ESP_DES

Reserved2: 0000

Authentication Algorithm: SHA1

Encapsulation Mode: Tunnel

Life Type: Seconds

Life Duration (Hex): 0020C49B

Payload Proposal

Next Payload: Proposal

Reserved: 0000

Payload Length: 40

Proposal #: 9

Protocol-Id: PROTO_IPSEC_ESP

SPI Size: 4

of transforms: 1

SPI: 76AF9EAA

Payload Transform

Next Payload: None

Reserved: 0000

Payload Length: 28

Transform #: 1

Transform-Id: ESP_NULL

Reserved2: 0000

Authentication Algorithm: MD5

Encapsulation Mode: Tunnel

Life Type: Seconds

Life Duration (Hex): 0020C49B

Payload Proposal

Next Payload: Proposal

Reserved: 0000

Payload Length: 34

Proposal #: 9

Protocol-Id: PROTO_IPCOMP

SPI Size: 2

of transforms: 1

SPI: 9637

Payload Transform

Next Payload: None

Reserved: 0000

Payload Length: 24

Transform #: 1

Transform-Id: IPCOMP_LZS

Reserved2: 0000

Encapsulation Mode: Tunnel
Life Type: Seconds
Life Duration (Hex): 0020C49B
Payload Proposal
Next Payload: Proposal
Reserved: 0000
Payload Length: 40
Proposal #: 10
Protocol-Id: PROTO_IPSEC_ESP
SPI Size: 4
of transforms: 1
SPI: 76AF9EAA
Payload Transform
Next Payload: None
Reserved: 0000
Payload Length: 28
Transform #: 1
Transform-Id: ESP_NULL
Reserved2: 0000
Authentication Algorithm: SHA1
Encapsulation Mode: Tunnel
Life Type: Seconds
Life Duration (Hex): 0020C49B
Payload Proposal
Next Payload: Proposal
Reserved: 0000
Payload Length: 34
Proposal #: 10
Protocol-Id: PROTO_IPCOMP
SPI Size: 2
of transforms: 1
SPI: 68E9

Payload Transform

Next Payload: None

Reserved: 0000

Payload Length: 24

Transform #: 1

Transform-Id: IPCOMP_LZS

Reserved2: 0000

Encapsulation Mode: Tunnel

Life Type: Seconds

Life Duration (Hex): 0020C49B

Payload Proposal

Next Payload: Proposal

Reserved: 0000

Payload Length: 40

Proposal #: 11

Protocol-Id: PROTO_IPSEC_ESP

SPI Size: 4

of transforms: 1

SPI: 76AF9EAA

Payload Transform

Next Payload: None

Reserved: 0000

Payload Length: 28

Transform #: 1

Transform-Id: ESP_NULL

Reserved2: 0000

Authentication Algorithm: MD5

Encapsulation Mode: Tunnel

Life Type: Seconds

Life Duration (Hex): 0020C49B

Payload Proposal

Next Payload: None

Reserved: 0000

Payload Length: 40

Proposal #: 12

Protocol-Id: PROTO_IPSEC_ESP

SPI Size: 4

of transforms: 1

SPI: 76AF9EAA

Payload Transform

Next Payload: None

Reserved: 0000

Payload Length: 28

Transform #: 1

Transform-Id: ESP_NULL

Reserved2: 0000

Authentication Algorithm: SHA1

Encapsulation Mode: Tunnel

Life Type: Seconds

Life Duration (Hex): 0020C49B

Payload Nonce

Next Payload: Identification

Reserved: 0000

Payload Length: 24

Data: B63EA44802CE0827FDEEEEC71751188416F73CE30500000C

Payload Identification

Next Payload: Identification

Reserved: 0000

Payload Length: 12

ID Type: IPv4 Address

Protocol ID (UDP/TCP, etc...): 0

Port: 0

ID Data: 10.82.240.214

Payload Identification

Next Payload: None

Reserved: 0000

Payload Length: 12

ID Type: IPv4 Address

Protocol ID (UDP/TCP, etc...): 0

Port: 0

ID Data: 161.44.127.196

103 14:03:03.943 11/05/2001 Sev=Info/5 IKE/0x43000055

Received a key request from Driver for IP address
10.10.10.255, GW IP = 161.44.127.196

104 14:03:03.944 11/05/2001 Sev=Info/4 IKE/0x43000013

SENDING >>> ISAKMP OAK QM *(HASH, SA, NON, ID, ID)
to 161.44.127.196

105 14:03:03.947 11/05/2001 Sev=Decode/11 IKE/0x43000001

ISAKMP Header

Initiator COOKIE: DACB1B32139742E7

Responder COOKIE: 630E88F067C1B0B5

Next Payload: Hash

Ver: 10

Exchange Type: Quick Mode

Flags: (Encryption)

MessageID: F94C749C

Length: 469762048

Payload Hash

Next Payload: Security Association

Reserved: 0000

Payload Length: 20

Data: 7FEE58A44DA5DC279D9DE7D1C8651ED80A0002B8

Payload Security Association

Next Payload: Nonce

Reserved: 0000

Payload Length: 696

DOI: IPsec

Situation:(SIT_IDENTITY_ONLY)

Payload Proposal

Next Payload: Proposal

Reserved: 0000

Payload Length: 40

Proposal #: 1

Protocol-Id: PROTO_IPSEC_ESP

SPI Size: 4

of transforms: 1

SPI: 47269429

Payload Transform

Next Payload: None

Reserved: 0000

Payload Length: 28

Transform #: 1

Transform-Id: ESP_3DES

Reserved2: 0000

Authentication Algorithm: MD5

Encapsulation Mode: Tunnel

Life Type: Seconds

Life Duration (Hex): 0020C49B

Payload Proposal

Next Payload: Proposal

Reserved: 0000

Payload Length: 34

Proposal #: 1

Protocol-Id: PROTO_IPCOMP

SPI Size: 2

of transforms: 1

SPI: 37A9

Payload Transform

Next Payload: None

Reserved: 0000

Payload Length: 24

Transform #: 1

Transform-Id: IPCOMP_LZS

Reserved2: 0000

Encapsulation Mode: Tunnel

Life Type: Seconds

Life Duration (Hex): 0020C49B

Payload Proposal

Next Payload: Proposal

Reserved: 0000

Payload Length: 40

Proposal #: 2

Protocol-Id: PROTO_IPSEC_ESP

SPI Size: 4

of transforms: 1

SPI: 47269429

Payload Transform

Next Payload: None

Reserved: 0000

Payload Length: 28

Transform #: 1

Transform-Id: ESP_3DES

Reserved2: 0000

Authentication Algorithm: SHA1

Encapsulation Mode: Tunnel

Life Type: Seconds

Life Duration (Hex): 0020C49B

Payload Proposal

Next Payload: Proposal

Reserved: 0000

Payload Length: 34

Proposal #: 2

Protocol-Id: PROTO_IPCOMP

SPI Size: 2

of transforms: 1

SPI: D8C8

Payload Transform

Next Payload: None

Reserved: 0000

Payload Length: 24

Transform #: 1

Transform-Id: IPCOMP_LZS

Reserved2: 0000

Encapsulation Mode: Tunnel

Life Type: Seconds

Life Duration (Hex): 0020C49B

Payload Proposal

Next Payload: Proposal

Reserved: 0000

Payload Length: 40

Proposal #: 3

Protocol-Id: PROTO_IPSEC_ESP

SPI Size: 4

of transforms: 1

SPI: 47269429

Payload Transform

Next Payload: None

Reserved: 0000

Payload Length: 28

Transform #: 1

Transform-Id: ESP_3DES

Reserved2: 0000

Authentication Algorithm: MD5

Encapsulation Mode: Tunnel

Life Type: Seconds

Life Duration (Hex): 0020C49B

Payload Proposal

Next Payload: Proposal

Reserved: 0000

Payload Length: 40

Proposal #: 4

Protocol-Id: PROTO_IPSEC_ESP

SPI Size: 4

of transforms: 1

SPI: 47269429

Payload Transform

Next Payload: None

Reserved: 0000

Payload Length: 28

Transform #: 1

Transform-Id: ESP_3DES

Reserved2: 0000

Authentication Algorithm: SHA1

Encapsulation Mode: Tunnel

Life Type: Seconds

Life Duration (Hex): 0020C49B

Payload Proposal

Next Payload: Proposal

Reserved: 0000

Payload Length: 40

Proposal #: 5

Protocol-Id: PROTO_IPSEC_ESP

SPI Size: 4

of transforms: 1

SPI: 47269429

Payload Transform

Next Payload: None

Reserved: 0000

Payload Length: 28

Transform #: 1

Transform-Id: ESP_DES

Reserved2: 0000

Authentication Algorithm: MD5

Encapsulation Mode: Tunnel

Life Type: Seconds

Life Duration (Hex): 0020C49B

Payload Proposal

Next Payload: Proposal

Reserved: 0000

Payload Length: 34

Proposal #: 5

Protocol-Id: PROTO_IPCOMP

SPI Size: 2

of transforms: 1

SPI: B4AA

Payload Transform

Next Payload: None

Reserved: 0000

Payload Length: 24

Transform #: 1

Transform-Id: IPCOMP_LZS

Reserved2: 0000

Encapsulation Mode: Tunnel

Life Type: Seconds

Life Duration (Hex): 0020C49B

Payload Proposal

Next Payload: Proposal

Reserved: 0000

Payload Length: 40

Proposal #: 6

Protocol-Id: PROTO_IPSEC_ESP

SPI Size: 4

of transforms: 1

SPI: 47269429

Payload Transform

Next Payload: None

Reserved: 0000

Payload Length: 28

Transform #: 1

Transform-Id: ESP_DES

Reserved2: 0000

Authentication Algorithm: SHA1

Encapsulation Mode: Tunnel

Life Type: Seconds

Life Duration (Hex): 0020C49B

Payload Proposal

Next Payload: Proposal

Reserved: 0000

Payload Length: 34

Proposal #: 6

Protocol-Id: PROTO_IPCOMP

SPI Size: 2

of transforms: 1

SPI: 10D5

Payload Transform

Next Payload: None

Reserved: 0000

Payload Length: 24

Transform #: 1

Transform-Id: IPCOMP_LZS

Reserved2: 0000

Encapsulation Mode: Tunnel

Life Type: Seconds

Life Duration (Hex): 0020C49B

Payload Proposal

Next Payload: Proposal

Reserved: 0000

Payload Length: 40

Proposal #: 7

Protocol-Id: PROTO_IPSEC_ESP

SPI Size: 4

of transforms: 1

SPI: 47269429

Payload Transform

Next Payload: None

Reserved: 0000

Payload Length: 28

Transform #: 1

Transform-Id: ESP_DES

Reserved2: 0000

Authentication Algorithm: MD5

Encapsulation Mode: Tunnel

Life Type: Seconds

Life Duration (Hex): 0020C49B

Payload Proposal

Next Payload: Proposal

Reserved: 0000

Payload Length: 40

Proposal #: 8

Protocol-Id: PROTO_IPSEC_ESP

SPI Size: 4
of transforms: 1
SPI: 47269429
Payload Transform
Next Payload: None
Reserved: 0000
Payload Length: 28
Transform #: 1
Transform-Id: ESP_DES
Reserved2: 0000
Authentication Algorithm: SHA1
Encapsulation Mode: Tunnel
Life Type: Seconds
Life Duration (Hex): 0020C49B
Payload Proposal
Next Payload: Proposal
Reserved: 0000
Payload Length: 40
Proposal #: 9
Protocol-Id: PROTO_IPSEC_ESP
SPI Size: 4
of transforms: 1
SPI: 47269429
Payload Transform
Next Payload: None
Reserved: 0000
Payload Length: 28
Transform #: 1
Transform-Id: ESP_NULL
Reserved2: 0000
Authentication Algorithm: MD5
Encapsulation Mode: Tunnel

Life Type: Seconds

Life Duration (Hex): 0020C49B

Payload Proposal

Next Payload: Proposal

Reserved: 0000

Payload Length: 34

Proposal #: 9

Protocol-Id: PROTO_IPCOMP

SPI Size: 2

of transforms: 1

SPI: 6A1B

Payload Transform

Next Payload: None

Reserved: 0000

Payload Length: 24

Transform #: 1

Transform-Id: IPCOMP_LZS

Reserved2: 0000

Encapsulation Mode: Tunnel

Life Type: Seconds

Life Duration (Hex): 0020C49B

Payload Proposal

Next Payload: Proposal

Reserved: 0000

Payload Length: 40

Proposal #: 10

Protocol-Id: PROTO_IPSEC_ESP

SPI Size: 4

of transforms: 1

SPI: 47269429

Payload Transform

Next Payload: None

Reserved: 0000

Payload Length: 28

Transform #: 1

Transform-Id: ESP_NULL

Reserved2: 0000

Authentication Algorithm: SHA1

Encapsulation Mode: Tunnel

Life Type: Seconds

Life Duration (Hex): 0020C49B

Payload Proposal

Next Payload: Proposal

Reserved: 0000

Payload Length: 34

Proposal #: 10

Protocol-Id: PROTO_IPCOMP

SPI Size: 2

of transforms: 1

SPI: 784E

Payload Transform

Next Payload: None

Reserved: 0000

Payload Length: 24

Transform #: 1

Transform-Id: IPCOMP_LZS

Reserved2: 0000

Encapsulation Mode: Tunnel

Life Type: Seconds

Life Duration (Hex): 0020C49B

Payload Proposal

Next Payload: Proposal

Reserved: 0000

Payload Length: 40

Proposal #: 11

Protocol-Id: PROTO_IPSEC_ESP

SPI Size: 4

of transforms: 1

SPI: 47269429

Payload Transform

Next Payload: None

Reserved: 0000

Payload Length: 28

Transform #: 1

Transform-Id: ESP_NULL

Reserved2: 0000

Authentication Algorithm: MD5

Encapsulation Mode: Tunnel

Life Type: Seconds

Life Duration (Hex): 0020C49B

Payload Proposal

Next Payload: None

Reserved: 0000

Payload Length: 40

Proposal #: 12

Protocol-Id: PROTO_IPSEC_ESP

SPI Size: 4

of transforms: 1

SPI: 47269429

Payload Transform

Next Payload: None

Reserved: 0000

Payload Length: 28

Transform #: 1

Transform-Id: ESP_NULL

Reserved2: 0000

Authentication Algorithm: SHA1

Encapsulation Mode: Tunnel

Life Type: Seconds

Life Duration (Hex): 0020C49B

Payload Nonce

Next Payload: Identification

Reserved: 0000

Payload Length: 24

Data: DCDE51C03B32B7694D2125080EFD647FADD61DDC0500000C

Payload Identification

Next Payload: Identification

Reserved: 0000

Payload Length: 12

ID Type: IPv4 Address

Protocol ID (UDP/TCP, etc...): 0

Port: 0

ID Data: 10.82.240.214

Payload Identification

Next Payload: None

Reserved: 0000

Payload Length: 16

ID Type: IPv4 Subnet

Protocol ID (UDP/TCP, etc...): 0

Port: 0

ID Data: 0.0.0.0/0.0.0.0

106 14:03:03.948 11/05/2001 Sev=Debug/8 IKE/0x4300004B

Starting DPD timer for IKE SA* 081801C8, sa->state = 4,
sa->dpd_peer_enabled = 1, sa->dpd_timer = 081803FC,
sa->dpd.worry_freq = 5000

107 14:03:03.948 11/05/2001 Sev=Info/5 IKE/0x4300002F

Received ISAKMP packet: peer = 161.44.127.196

108 14:03:03.951 11/05/2001 Sev=Decode/11 IKE/0x43000001

ISAKMP Header

Initiator COOKIE: DACB1B32139742E7

Responder COOKIE: 630E88F067C1B0B5

Next Payload: Hash

Ver: 10

Exchange Type: Transaction

Flags: (Encryption)

MessageID: 67319719

Length: 236

PACKET MAY BE CORRUPT... RESERVED FIELD NOT SET TO ZERO

109 14:03:03.952 11/05/2001 Sev=Info/4 IKE/0x43000014

RECEIVING <<< ISAKMP OAK TRANS *(HASH,) from 161.44.127.196

110 14:03:03.952 11/05/2001 Sev=Warning/3 IKE/0x83000057

Received malformed message or negotiation no longer active
(message id: 0x67319719)

111 14:03:03.952 11/05/2001 Sev=Info/5 IKE/0x4300002F

Received ISAKMP packet: peer = 161.44.127.196

112 14:03:03.955 11/05/2001 Sev=Decode/11 IKE/0x43000001

ISAKMP Header

Initiator COOKIE: DACB1B32139742E7

Responder COOKIE: 630E88F067C1B0B5

Next Payload: Hash

Ver: 10

Exchange Type: Transaction

Flags: (Encryption)

MessageID: 67319719

Length: 236

PACKET MAY BE CORRUPT... RESERVED FIELD NOT SET TO ZERO

113 14:03:03.955 11/05/2001 Sev=Info/4 IKE/0x43000014

RECEIVING <<< ISAKMP OAK TRANS *(HASH,) from 161.44.127.196

114 14:03:03.955 11/05/2001 Sev=Warning/3 IKE/0x83000057

Received malformed message or negotiation no longer active
(message id: 0x67319719)

115 14:03:03.955 11/05/2001 Sev=Info/4 IPSEC/0x43700014

Deleted all keys

116 14:03:03.955 11/05/2001 Sev=Info/4 IPSEC/0x43700010

Created a new key structure

117 14:03:03.955 11/05/2001 Sev=Info/5 IKE/0x43000055

Received a key request from Driver for IP address 24.93.67.64,
GW IP = 161.44.127.196

118 14:03:03.955 11/05/2001 Sev=Warning/3 IKE/0xC3000002

Function initialize_qm failed with an error code of 0x00000000
(INITIATE:805)

119 14:03:03.990 11/05/2001 Sev=Info/5 IKE/0x4300002F

Received ISAKMP packet: peer = 161.44.127.196

120 14:03:03.993 11/05/2001 Sev=Decode/11 IKE/0x43000001

ISAKMP Header

Initiator COOKIE: DACB1B32139742E7

Responder COOKIE: 630E88F067C1B0B5

Next Payload: Hash

Ver: 10

Exchange Type: Informational

Flags: (Encryption)

MessageID: D10A6912

Length: 92

Payload Hash

Next Payload: Notification

Reserved: 0000

Payload Length: 20

Data: 52138C38D364E77DB5980565F7A8C8EF00000028

Payload Notification

Next Payload: None

Reserved: 0000

Payload Length: 40

DOI: IPsec

Protocol-ID: PROTO_ISAKMP

Spi Size: 16

Notify Type: STATUS_RESP_LIFETIME

SPI: DACB1B32139742E7630E88F067C1B0B5

Data: 800B0001000C000400015180

121 14:03:03.994 11/05/2001 Sev=Info/4 IKE/0x43000014

RECEIVING <<< ISAKMP OAK INFO *(HASH, NOTIFY:STATUS_RESP_LIFETIME)
from 161.44.127.196

122 14:03:03.994 11/05/2001 Sev=Info/5 IKE/0x43000044

RESPONDER-LIFETIME notify has value of 86400 seconds

123 14:03:03.994 11/05/2001 Sev=Info/5 IKE/0x43000046

This SA has already been alive for 38 seconds, setting expiry to
86362 seconds from now

124 14:03:03.994 11/05/2001 Sev=Info/5 IKE/0x4300002F

Received ISAKMP packet: peer = 161.44.127.196

125 14:03:03.997 11/05/2001 Sev=Decode/11 IKE/0x43000001

ISAKMP Header

Initiator COOKIE: DACB1B32139742E7

Responder COOKIE: 630E88F067C1B0B5

Next Payload: Hash

Ver: 10

Exchange Type: Quick Mode

Flags: (Encryption)

MessageID: BB351037

Length: 172

Payload Hash

Next Payload: Security Association

Reserved: 0000

Payload Length: 20

Data: 3A6CD2078E1F4CF6ACC2810A77A88BF90A000034

Payload Security Association

Next Payload: Nonce

Reserved: 0000

Payload Length: 52

DOI: IPsec

Situation:(SIT_IDENTITY_ONLY)

Payload Proposal

Next Payload: None

Reserved: 0000

Payload Length: 40

Proposal #: 1

Protocol-Id: PROTO_IPSEC_ESP

SPI Size: 4

of transforms: 1

SPI: 0C38AE25

Payload Transform

Next Payload: None

Reserved: 0000

Payload Length: 28

Transform #: 1

Transform-Id: ESP_3DES

Reserved2: 0000

Life Type: Seconds

Life Duration (Hex): 0020C49B

Encapsulation Mode: Tunnel

Authentication Algorithm: MD5

Payload Nonce

Next Payload: Identification

Reserved: 0000

Payload Length: 24

Data: 57184AEFF363B10FC00D05A543D6B0B01067274F0500000C

Payload Identification

Next Payload: Identification

Reserved: 0000

Payload Length: 12

ID Type: IPv4 Address

Protocol ID (UDP/TCP, etc...): 0

Port: 0

ID Data: 10.82.240.214

Payload Identification

Next Payload: Notification

Reserved: 0000

Payload Length: 12

ID Type: IPv4 Address

Protocol ID (UDP/TCP, etc...): 0

Port: 0

ID Data: 161.44.127.196

Payload Notification

Next Payload: None

Reserved: 0000

Payload Length: 24

DOI: IPsec

Protocol-ID: PROTO_IPSEC_ESP

Spi Size: 4

Notify Type: STATUS_RESP_LIFETIME

SPI: 0C38AE25

Data: 8001000180027080

126 14:03:03.997 11/05/2001 Sev=Info/4 IKE/0x43000014

RECEIVING <<< ISAKMP OAK QM *(HASH, SA, NON, ID, ID,
NOTIFY:STATUS_RESP_LIFETIME) from 161.44.127.196

127 14:03:03.997 11/05/2001 Sev=Info/5 IKE/0x43000044

RESPONDER-LIFETIME notify has value of 28800 seconds

128 14:03:03.997 11/05/2001 Sev=Info/4 IKE/0x43000013

SENDING >>> ISAKMP OAK QM *(HASH) to 161.44.127.196

129 14:03:03.1000 11/05/2001 Sev=Decode/11 IKE/0x43000001

ISAKMP Header

Initiator COOKIE: DACB1B32139742E7

Responder COOKIE: 630E88F067C1B0B5

Next Payload: Hash

Ver: 10

Exchange Type: Quick Mode

Flags: (Encryption)

MessageID: 371035BB

Length: 469762048

Payload Hash

Next Payload: None

Reserved: 0000

Payload Length: 20

Data: C2456940045DC9C608E0D4D6FA62822400000000

130 14:03:03.1000 11/05/2001 Sev=Info/5 IKE/0x43000058

Loading IPsec SA (Message ID = 0xBB351037 OUTBOUND SPI =
0x0C38AE25 INBOUND SPI = 0x76AF9EAA)

131 14:03:04.001 11/05/2001 Sev=Info/5 IKE/0x43000025

Loaded OUTBOUND ESP SPI: 0x0C38AE25

132 14:03:04.001 11/05/2001 Sev=Info/5 IKE/0x43000026

Loaded INBOUND ESP SPI: 0x76AF9EAA

133 14:03:04.001 11/05/2001 Sev=Info/4 CM/0x4310001A

One secure connection established

134 14:03:04.007 11/05/2001 Sev=Info/5 IKE/0x4300002F

Received ISAKMP packet: peer = 161.44.127.196

135 14:03:04.010 11/05/2001 Sev=Decode/11 IKE/0x43000001

ISAKMP Header

Initiator COOKIE: DACB1B32139742E7

Responder COOKIE: 630E88F067C1B0B5

Next Payload: Hash

Ver: 10

Exchange Type: Quick Mode

Flags: (Encryption)

MessageID: 9C744CF9

Length: 180

Payload Hash

Next Payload: Security Association

Reserved: 0000

Payload Length: 20

Data: 4591C989262C4F863FD2DC911E7DBA900A000034

Payload Security Association

Next Payload: Nonce

Reserved: 0000

Payload Length: 52

DOI: IPsec

Situation:(SIT_IDENTITY_ONLY)

Payload Proposal

Next Payload: None

Reserved: 0000

Payload Length: 40

Proposal #: 1

Protocol-Id: PROTO_IPSEC_ESP

SPI Size: 4

of transforms: 1

SPI: 503F4CC5

Payload Transform

Next Payload: None

Reserved: 0000

Payload Length: 28

Transform #: 1

Transform-Id: ESP_3DES

Reserved2: 0000

Life Type: Seconds

Life Duration (Hex): 0020C49B

Encapsulation Mode: Tunnel

Authentication Algorithm: MD5

Payload Nonce

Next Payload: Identification

Reserved: 0000

Payload Length: 24

Data: 4DD4873137DD4765208FFCE6087D30A48FA9634F0500000C

Payload Identification

Next Payload: Identification

Reserved: 0000

Payload Length: 12

ID Type: IPv4 Address

Protocol ID (UDP/TCP, etc...): 0

Port: 0

ID Data: 10.82.240.214

Payload Identification

Next Payload: Notification

Reserved: 0000

Payload Length: 16

ID Type: IPv4 Subnet

Protocol ID (UDP/TCP, etc...): 0

Port: 0

ID Data: 0.0.0.0/0.0.0.0

Payload Notification

Next Payload: None

Reserved: 0000

Payload Length: 24

DOI: IPsec

Protocol-ID: PROTO_IPSEC_ESP

Spi Size: 4

Notify Type: STATUS_RESP_LIFETIME

SPI: 503F4CC5

Data: 8001000180027080

136 14:03:04.011 11/05/2001 Sev=Info/4 IKE/0x43000014
RECEIVING <<< ISAKMP OAK QM *(HASH, SA, NON, ID, ID,
NOTIFY:STATUS_RESP_LIFETIME) from 161.44.127.196

137 14:03:04.011 11/05/2001 Sev=Info/5 IKE/0x43000044
RESPONDER-LIFETIME notify has value of 28800 seconds

138 14:03:04.011 11/05/2001 Sev=Info/4 IKE/0x43000013
SENDING >>> ISAKMP OAK QM *(HASH) to 161.44.127.196

139 14:03:04.014 11/05/2001 Sev=Decode/11 IKE/0x43000001
ISAKMP Header
Initiator COOKIE: DACB1B32139742E7
Responder COOKIE: 630E88F067C1B0B5
Next Payload: Hash
Ver: 10
Exchange Type: Quick Mode
Flags: (Encryption)
MessageID: F94C749C
Length: 469762048
Payload Hash
Next Payload: None
Reserved: 0000
Payload Length: 20
Data: 8AF3A2608A24AB1FB8C8ECA82B2CC99200000000

140 14:03:04.014 11/05/2001 Sev=Info/5 IKE/0x43000058
Loading IPsec SA (Message ID = 0x9C744CF9 OUTBOUND SPI =
0x503F4CC5 INBOUND SPI = 0x47269429)

141 14:03:04.015 11/05/2001 Sev=Info/5 IKE/0x43000025
Loaded OUTBOUND ESP SPI: 0x503F4CC5

142 14:03:04.015 11/05/2001 Sev=Info/5 IKE/0x43000026
Loaded INBOUND ESP SPI: 0x47269429

143 14:03:04.015 11/05/2001 Sev=Info/4 CM/0x43100022
Additional Phase 2 SA established.

144 14:03:05.018 11/05/2001 Sev=Info/4 IPSEC/0x43700010
Created a new key structure

145 14:03:05.018 11/05/2001 Sev=Info/4 IPSEC/0x4370000F
Added key with SPI=0x25ae380c into key list

146 14:03:05.018 11/05/2001 Sev=Info/4 IPSEC/0x43700010
Created a new key structure

147 14:03:05.018 11/05/2001 Sev=Info/4 IPSEC/0x4370000F
Added key with SPI=0xaa9eaf76 into key list

148 14:03:05.018 11/05/2001 Sev=Info/4 IPSEC/0x4370000F
Added key with SPI=0xc54c3f50 into key list

149 14:03:05.019 11/05/2001 Sev=Info/4 IPSEC/0x43700010
Created a new key structure

150 14:03:05.019 11/05/2001 Sev=Info/4 IPSEC/0x4370000F
Added key with SPI=0x29942647 into key list

151 14:03:55.528 11/05/2001 Sev=Info/6 IKE/0x4300003D
Sending DPD request to 161.44.127.196, seq# = 1153554501

152 14:03:55.529 11/05/2001 Sev=Info/4 IKE/0x43000013
SENDING >>> ISAKMP OAK INFO *(HASH, NOTIFY:DPD_REQUEST)
to 161.44.127.196

153 14:03:55.531 11/05/2001 Sev=Decode/11 IKE/0x43000001
ISAKMP Header
Initiator COOKIE: DACB1B32139742E7
Responder COOKIE: 630E88F067C1B0B5
Next Payload: Hash
Ver: 10
Exchange Type: Informational
Flags: (Encryption)
MessageID: 791ED04C
Length: 469762048
Payload Hash
Next Payload: Notification
Reserved: 0000
Payload Length: 20
Data: C0E66CDA100E9C77C75A46AD3AECA51C00000020

Payload Notification

Next Payload: None

Reserved: 0000

Payload Length: 32

DOI: IPsec

Protocol-ID: PROTO_ISAKMP

Spi Size: 16

Notify Type: DPD_R_U_THERE

SPI: DACB1B32139742E7630E88F067C1B0B5

Data: 44C1D845

154 14:03:55.532 11/05/2001 Sev=Info/4 IKE/0x43000013

SENDING >>> ISAKMP OAK INFO *(HASH, NOTIFY:HEARTBEAT)
to 161.44.127.196

155 14:03:55.535 11/05/2001 Sev=Decode/11 IKE/0x43000001

ISAKMP Header

Initiator COOKIE: DACB1B32139742E7

Responder COOKIE: 630E88F067C1B0B5

Next Payload: Hash

Ver: 10

Exchange Type: Informational

Flags: (Encryption)

MessageID: 68218ECF

Length: 469762048

Payload Hash

Next Payload: Notification

Reserved: 0000

Payload Length: 20

Data: E705E1CE2854A92CA7DEC4C04AB6654B0000001C

Payload Notification

Next Payload: None

Reserved: 0000

Payload Length: 28

DOI: IPsec

Protocol-ID: PROTO_ISAKMP

Spi Size: 16

Notify Type: STATUS_ALTIGA_KEEPALIVE

SPI: DACB1B32139742E7630E88F067C1B0B5

Data:

156 14:03:55.535 11/05/2001 Sev=Info/6 IKE/0x43000052

Sent a ping on the IKE SA

157 14:03:55.575 11/05/2001 Sev=Info/5 IKE/0x4300002F

Received ISAKMP packet: peer = 161.44.127.196

158 14:03:55.578 11/05/2001 Sev=Decode/11 IKE/0x43000001

ISAKMP Header

Initiator COOKIE: DACB1B32139742E7

Responder COOKIE: 630E88F067C1B0B5

Next Payload: Hash

Ver: 10

Exchange Type: Informational

Flags: (Encryption)

MessageID: E63FE567

Length: 84

Payload Hash

Next Payload: Notification

Reserved: 0000

Payload Length: 20

Data: FD8DA190626611087DD2B8DC3DDDE72900000020

Payload Notification

Next Payload: None

Reserved: 0000

Payload Length: 32

DOI: IPsec

Protocol-ID: PROTO_ISAKMP

Spi Size: 16

Notify Type: DPD_R_U_THERE_ACK

SPI: DACB1B32139742E7630E88F067C1B0B5

Data: 44C1D845

159 14:03:55.579 11/05/2001 Sev=Info/4 IKE/0x43000014

RECEIVING <<< ISAKMP OAK INFO *(HASH, NOTIFY:DPD_ACK)
from 161.44.127.196

160 14:03:55.579 11/05/2001 Sev=Info/5 IKE/0x4300003F

Received DPD ACK from 161.44.127.196, seq# received =
1153554501, seq# expected = 1153554501

VPN 3000 Concentrator

1 11/05/2001 14:18:18.630 SEV=8 IKEDBG/0 RPT=199 172.18.124.241

RECEIVED Message (msgid=0) with payloads :
HDR + SA (1) + KE (4) + NONCE (10) + ID (5) + VENDOR (13)
+ VENDOR (13) + VENDOR
(13) + NONE (0) ... total length : 562

4 11/05/2001 14:18:18.630 SEV=9 IKEDBG/0 RPT=200 172.18.124.241

processing SA payload

5 11/05/2001 14:18:18.630 SEV=9 IKEDBG/0 RPT=201 172.18.124.241

processing ke payload

6 11/05/2001 14:18:18.630 SEV=9 IKEDBG/0 RPT=202 172.18.124.241

processing ISA_KE

7 11/05/2001 14:18:18.630 SEV=9 IKEDBG/1 RPT=59 172.18.124.241

processing nonce payload

8 11/05/2001 14:18:18.630 SEV=9 IKEDBG/1 RPT=60 172.18.124.241

Processing ID

9 11/05/2001 14:18:18.630 SEV=9 IKEDBG/47 RPT=38 172.18.124.241

processing VID payload

10 11/05/2001 14:18:18.630 SEV=9 IKEDBG/49 RPT=37 172.18.124.241

Received xauth V6 VID

11 11/05/2001 14:18:18.630 SEV=9 IKEDBG/47 RPT=39 172.18.124.241

processing VID payload

12 11/05/2001 14:18:18.630 SEV=9 IKEDBG/49 RPT=38 172.18.124.241

Received DPD VID

13 11/05/2001 14:18:18.630 SEV=9 IKEDBG/47 RPT=40 172.18.124.241

processing VID payload

14 11/05/2001 14:18:18.630 SEV=9 IKEDBG/49 RPT=39 172.18.124.241

Received Cisco Unity client VID

15 11/05/2001 14:18:18.630 SEV=9 IKEDBG/23 RPT=12 172.18.124.241

Starting group lookup for peer 172.18.124.241

16 11/05/2001 14:18:18.630 SEV=8 AUTHDBG/1 RPT=4
AUTH_Open() returns 3

17 11/05/2001 14:18:18.630 SEV=7 AUTH/12 RPT=4
Authentication session opened: handle = 3

18 11/05/2001 14:18:18.630 SEV=8 AUTHDBG/3 RPT=6
AUTH_PutAttrTable(3, 61ea34)

19 11/05/2001 14:18:18.630 SEV=8 AUTHDBG/6 RPT=3
AUTH_GroupAuthenticate(3, 51a88f0, 431480)

20 11/05/2001 14:18:18.630 SEV=8 AUTHDBG/59 RPT=6
AUTH_BindServer(511a7bc, 0, 0)

21 11/05/2001 14:18:18.630 SEV=9 AUTHDBG/69 RPT=6
Auth Server e3199c has been bound to ACB 511a7bc,
sessions = 1

22 11/05/2001 14:18:18.630 SEV=8 AUTHDBG/65 RPT=6
AUTH_CreateTimer(511a7bc, 0, 0)

23 11/05/2001 14:18:18.630 SEV=9 AUTHDBG/72 RPT=6
Reply timer created: handle = 340017

24 11/05/2001 14:18:18.630 SEV=8 AUTHDBG/61 RPT=6
AUTH_BuildMsg(511a7bc, 0, 0)

25 11/05/2001 14:18:18.630 SEV=8 AUTHDBG/64 RPT=6
AUTH_StartTimer(511a7bc, 0, 0)

26 11/05/2001 14:18:18.630 SEV=9 AUTHDBG/73 RPT=6
Reply timer started: handle = 340017, timestamp = 97010941,
timeout = 30000

27 11/05/2001 14:18:18.630 SEV=8 AUTHDBG/62 RPT=6
AUTH_SndRequest(511a7bc, 0, 0)

28 11/05/2001 14:18:18.630 SEV=8 AUTHDBG/50 RPT=11
IntDB_Decode(37f34d0, 115)

29 11/05/2001 14:18:18.630 SEV=8 AUTHDBG/47 RPT=11
IntDB_Xmt(511a7bc)

30 11/05/2001 14:18:18.630 SEV=9 AUTHDBG/71 RPT=6
xmit_cnt = 1

31 11/05/2001 14:18:18.630 SEV=8 AUTHDBG/47 RPT=12
IntDB_Xmt(511a7bc)

32 11/05/2001 14:18:18.730 SEV=8 AUTHDBG/49 RPT=6
IntDB_Match(511a7bc, 2f1a854)

33 11/05/2001 14:18:18.730 SEV=8 AUTHDBG/63 RPT=6
AUTH_RcvReply(511a7bc, 0, 0)

34 11/05/2001 14:18:18.730 SEV=8 AUTHDBG/50 RPT=12
IntDB_Decode(2f1a854, 104)

35 11/05/2001 14:18:18.730 SEV=8 AUTHDBG/48 RPT=6
IntDB_Rcv(511a7bc)

36 11/05/2001 14:18:18.730 SEV=8 AUTHDBG/66 RPT=6
AUTH_DeleteTimer(511a7bc, 0, 0)

37 11/05/2001 14:18:18.730 SEV=9 AUTHDBG/74 RPT=6
Reply timer stopped: handle = 340017, timestamp = 97010951

38 11/05/2001 14:18:18.730 SEV=8 AUTHDBG/58 RPT=6
AUTH_Callback(511a7bc, 0, 0)

39 11/05/2001 14:18:18.730 SEV=6 AUTH/39 RPT=5 172.18.124.241
Authentication successful: handle = 3, server = Internal,
group = ipsecgroup

40 11/05/2001 14:18:18.730 SEV=7 IKEDBG/0 RPT=203 172.18.124.241
Group [ipsecgroup]
Found Phase 1 Group (ipsecgroup)

41 11/05/2001 14:18:18.730 SEV=8 AUTHDBG/4 RPT=4
AUTH_GetAttrTable(3, 61ea7c)

42 11/05/2001 14:18:18.730 SEV=7 IKEDBG/14 RPT=4 172.18.124.241
Group [ipsecgroup]
Authentication configured for Internal

43 11/05/2001 14:18:18.730 SEV=8 AUTHDBG/2 RPT=4
AUTH_Close(3)

44 11/05/2001 14:18:18.730 SEV=9 IKEDBG/0 RPT=204 172.18.124.241
Group [ipsecgroup]
processing IKE SA

45 11/05/2001 14:18:18.730 SEV=8 IKEDBG/0 RPT=205 172.18.124.241
Group [ipsecgroup]
Proposal # 1, Transform # 1, Type ISAKMP, Id IKE
Parsing received transform:
Phase 1 failure against global IKE proposal # 1:
Mismatched attr types for class Hash Alg:
Rcv'd: SHA
Cfg'd: MD5

50 11/05/2001 14:18:18.730 SEV=8 IKEDBG/0 RPT=206 172.18.124.241
Group [ipsecgroup]
Phase 1 failure against global IKE proposal # 2:
Mismatched attr types for class Hash Alg:
Rcv'd: SHA
Cfg'd: MD5

53 11/05/2001 14:18:18.730 SEV=8 IKEDBG/0 RPT=207 172.18.124.241
Group [ipsecgroup]
Phase 1 failure against global IKE proposal # 3:
Mismatched attr types for class Hash Alg:

Rcv'd: SHA
Cfg'd: MD5

56 11/05/2001 14:18:18.730 SEV=8 IKEDBG/0 RPT=208 172.18.124.241
Group [ipsecgroup]
Phase 1 failure against global IKE proposal # 4:
Mismatched attr types for class DH Group:
Rcv'd: Oakley Group 2
Cfg'd: Oakley Group 1

60 11/05/2001 14:18:18.730 SEV=8 IKEDBG/0 RPT=209 172.18.124.241
Group [ipsecgroup]
Phase 1 failure against global IKE proposal # 5:
Mismatched attr types for class DH Group:
Rcv'd: Oakley Group 2
Cfg'd: Oakley Group 1

64 11/05/2001 14:18:18.730 SEV=8 IKEDBG/0 RPT=210 172.18.124.241
Group [ipsecgroup]
Phase 1 failure against global IKE proposal # 6:
Mismatched attr types for class DH Group:
Rcv'd: Oakley Group 2
Cfg'd: Oakley Group 7

68 11/05/2001 14:18:18.730 SEV=7 IKEDBG/28 RPT=4 172.18.124.241
Group [ipsecgroup]
IKE SA Proposal # 1, Transform # 2 acceptable
Matches global IKE entry # 1

70 11/05/2001 14:18:18.730 SEV=8 AUTHDBG/60 RPT=6
AUTH_UnbindServer(511a7bc, 0, 0)

71 11/05/2001 14:18:18.730 SEV=9 AUTHDBG/70 RPT=6
Auth Server e3199c has been unbound from ACB 511a7bc, sessions = 0

72 11/05/2001 14:18:18.730 SEV=8 AUTHDBG/10 RPT=4
AUTH_Int_FreeAuthCB(511a7bc)

73 11/05/2001 14:18:18.730 SEV=9 AUTHDBG/19 RPT=4
instance = 4, clone_instance = 0

74 11/05/2001 14:18:18.730 SEV=7 AUTH/13 RPT=4
Authentication session closed: handle = 3

75 11/05/2001 14:18:18.760 SEV=9 IKEDBG/0 RPT=211 172.18.124.241
Group [ipsecgroup]
constructing ISA_SA for isakmp

76 11/05/2001 14:18:18.760 SEV=9 IKEDBG/0 RPT=212 172.18.124.241
Group [ipsecgroup]
constructing ke payload

77 11/05/2001 14:18:18.760 SEV=9 IKEDBG/1 RPT=61 172.18.124.241
Group [ipsecgroup]
constructing nonce payload

78 11/05/2001 14:18:18.760 SEV=9 IKE/0 RPT=5 172.18.124.241
Group [ipsecgroup]
Generating keys for Responder...

79 11/05/2001 14:18:18.760 SEV=9 IKEDBG/1 RPT=62 172.18.124.241
Group [ipsecgroup]
constructing ID

80 11/05/2001 14:18:18.760 SEV=9 IKEDBG/0 RPT=213
Group [ipsecgroup]
construct hash payload

81 11/05/2001 14:18:18.760 SEV=9 IKEDBG/0 RPT=214 172.18.124.241
Group [ipsecgroup]
computing hash

82 11/05/2001 14:18:18.760 SEV=9 IKEDBG/46 RPT=12 172.18.124.241
Group [ipsecgroup]
constructing Cisco Unity VID payload

83 11/05/2001 14:18:18.760 SEV=9 IKEDBG/46 RPT=13 172.18.124.241
Group [ipsecgroup]
constructing xauth V6 VID payload

84 11/05/2001 14:18:18.760 SEV=9 IKEDBG/46 RPT=14 172.18.124.241
Group [ipsecgroup]
constructing dpd vid payload

85 11/05/2001 14:18:18.760 SEV=9 IKEDBG/46 RPT=15 172.18.124.241
Group [ipsecgroup]
constructing VID payload

86 11/05/2001 14:18:18.760 SEV=9 IKEDBG/48 RPT=5 172.18.124.241
Group [ipsecgroup]
Send Altiga GW VID

87 11/05/2001 14:18:18.760 SEV=8 IKEDBG/0 RPT=215 172.18.124.241
SENDING Message (msgid=0) with payloads :
HDR + SA (1) ... total length : 344

88 11/05/2001 14:18:18.790 SEV=8 IKEDBG/0 RPT=216 172.18.124.241
RECEIVED Message (msgid=0) with payloads :
HDR + HASH (8) + NOTIFY (11) + NONE (0) ... total length : 76

90 11/05/2001 14:18:18.790 SEV=9 IKEDBG/0 RPT=217 172.18.124.241
Group [ipsecgroup]
processing hash

91 11/05/2001 14:18:18.790 SEV=9 IKEDBG/0 RPT=218 172.18.124.241
Group [ipsecgroup]
computing hash

92 11/05/2001 14:18:18.790 SEV=9 IKEDBG/0 RPT=219 172.18.124.241
Group [ipsecgroup]
Processing Notify payload

93 11/05/2001 14:18:18.790 SEV=9 IKEDBG/0 RPT=220 172.18.124.241
Group [ipsecgroup]
constructing blank hash

94 11/05/2001 14:18:18.790 SEV=9 IKEDBG/0 RPT=221 172.18.124.241
Group [ipsecgroup]
constructing qm hash

95 11/05/2001 14:18:18.790 SEV=8 IKEDBG/0 RPT=222 172.18.124.241
SENDING Message (msgid=6ea8e2bc) with payloads :
HDR + HASH (8) ... total length : 100

97 11/05/2001 14:18:23.290 SEV=8 IKEDBG/0 RPT=223 172.18.124.241
RECEIVED Message (msgid=6ea8e2bc) with payloads :
HDR + HASH (8) + ATTR (14) + NONE (0) ... total length : 85

99 11/05/2001 14:18:23.290 SEV=9 IKEDBG/1 RPT=63
process_attr(): Enter!

100 11/05/2001 14:18:23.290 SEV=9 IKEDBG/1 RPT=64
Processing cfg reply attributes.

101 11/05/2001 14:18:23.290 SEV=8 AUTHDBG/1 RPT=5
AUTH_Open() returns 4

102 11/05/2001 14:18:23.290 SEV=7 AUTH/12 RPT=5
Authentication session opened: handle = 4

103 11/05/2001 14:18:23.290 SEV=8 AUTHDBG/3 RPT=7
AUTH_PutAttrTable(4, 61ea34)

104 11/05/2001 14:18:23.290 SEV=8 AUTHDBG/5 RPT=2
AUTH_Authenticate(4, 2f1b480, 460ec0)

105 11/05/2001 14:18:23.290 SEV=8 AUTHDBG/59 RPT=7
AUTH_BindServer(511760c, 0, 0)

106 11/05/2001 14:18:23.290 SEV=9 AUTHDBG/69 RPT=7
Auth Server e3199c has been bound to ACB 511760c,
sessions = 1

107 11/05/2001 14:18:23.290 SEV=8 AUTHDBG/65 RPT=7
AUTH_CreateTimer(511760c, 0, 0)

108 11/05/2001 14:18:23.290 SEV=9 AUTHDBG/72 RPT=7
Reply timer created: handle = 360014

109 11/05/2001 14:18:23.290 SEV=8 AUTHDBG/61 RPT=7
AUTH_BuildMsg(511760c, 0, 0)

110 11/05/2001 14:18:23.290 SEV=8 AUTHDBG/64 RPT=7
AUTH_StartTimer(511760c, 0, 0)

111 11/05/2001 14:18:23.290 SEV=9 AUTHDBG/73 RPT=7
Reply timer started: handle = 360014, timestamp =
97011407, timeout = 30000

112 11/05/2001 14:18:23.290 SEV=8 AUTHDBG/62 RPT=7
AUTH_SndRequest(511760c, 0, 0)

113 11/05/2001 14:18:23.290 SEV=8 AUTHDBG/50 RPT=13
IntDB_Decode(37f34d0, 102)

114 11/05/2001 14:18:23.290 SEV=8 AUTHDBG/47 RPT=13
IntDB_Xmt(511760c)

115 11/05/2001 14:18:23.290 SEV=9 AUTHDBG/71 RPT=7
xmit_cnt = 1

116 11/05/2001 14:18:23.290 SEV=8 AUTHDBG/47 RPT=14
IntDB_Xmt(511760c)

117 11/05/2001 14:18:23.390 SEV=8 AUTHDBG/49 RPT=7
IntDB_Match(511760c, 2f1bb8c)

118 11/05/2001 14:18:23.390 SEV=8 AUTHDBG/63 RPT=7
AUTH_RcvReply(511760c, 0, 0)

119 11/05/2001 14:18:23.390 SEV=8 AUTHDBG/50 RPT=14
IntDB_Decode(2f1bb8c, 116)

120 11/05/2001 14:18:23.390 SEV=8 AUTHDBG/48 RPT=7
IntDB_Rcv(511760c)

121 11/05/2001 14:18:23.390 SEV=8 AUTHDBG/66 RPT=7
AUTH_DeleteTimer(511760c, 0, 0)

122 11/05/2001 14:18:23.390 SEV=9 AUTHDBG/74 RPT=7
Reply timer stopped: handle = 360014, timestamp = 97011417

123 11/05/2001 14:18:23.390 SEV=8 AUTHDBG/58 RPT=7
AUTH_Callback(511760c, 0, 0)

124 11/05/2001 14:18:23.390 SEV=6 AUTH/4 RPT=2 172.18.124.241
Authentication successful: handle = 4, server =
Internal, user = ipsecuser

125 11/05/2001 14:18:23.390 SEV=8 AUTHDBG/3 RPT=8
AUTH_PutAttrTable(4, f0d688)

126 11/05/2001 14:18:23.390 SEV=8 AUTHDBG/60 RPT=7
AUTH_UnbindServer(511760c, 0, 0)

127 11/05/2001 14:18:23.390 SEV=9 AUTHDBG/70 RPT=7
Auth Server e3199c has been unbound from ACB 511760c,
sessions = 0

128 11/05/2001 14:18:23.390 SEV=8 AUTHDBG/59 RPT=8
AUTH_BindServer(511760c, 0, 0)

129 11/05/2001 14:18:23.390 SEV=9 AUTHDBG/69 RPT=8
Auth Server e3199c has been bound to ACB 511760c,
sessions = 1

130 11/05/2001 14:18:23.390 SEV=8 AUTHDBG/65 RPT=8
AUTH_CreateTimer(511760c, 0, 0)

131 11/05/2001 14:18:23.390 SEV=9 AUTHDBG/72 RPT=8
Reply timer created: handle = 370014

132 11/05/2001 14:18:23.390 SEV=8 AUTHDBG/61 RPT=8
AUTH_BuildMsg(511760c, 0, 0)

133 11/05/2001 14:18:23.390 SEV=8 AUTHDBG/64 RPT=8
AUTH_StartTimer(511760c, 0, 0)

134 11/05/2001 14:18:23.390 SEV=9 AUTHDBG/73 RPT=8
Reply timer started: handle = 370014, timestamp =
97011417, timeout = 30000

135 11/05/2001 14:18:23.390 SEV=8 AUTHDBG/62 RPT=8
AUTH_SndRequest(511760c, 0, 0)

136 11/05/2001 14:18:23.390 SEV=8 AUTHDBG/50 RPT=15
IntDB_Decode(1f9d5b8, 44)

137 11/05/2001 14:18:23.390 SEV=8 AUTHDBG/47 RPT=15
IntDB_Xmt(511760c)

138 11/05/2001 14:18:23.390 SEV=9 AUTHDBG/71 RPT=8
xmit_cnt = 1

139 11/05/2001 14:18:23.390 SEV=8 AUTHDBG/47 RPT=16
IntDB_Xmt(511760c)

140 11/05/2001 14:18:23.490 SEV=8 AUTHDBG/49 RPT=8
IntDB_Match(511760c, 2flaf60)

141 11/05/2001 14:18:23.490 SEV=8 AUTHDBG/63 RPT=8
AUTH_RcvReply(511760c, 0, 0)

142 11/05/2001 14:18:23.490 SEV=8 AUTHDBG/50 RPT=16
IntDB_Decode(2flaf60, 104)

143 11/05/2001 14:18:23.490 SEV=8 AUTHDBG/48 RPT=8
IntDB_Rcv(511760c)

144 11/05/2001 14:18:23.490 SEV=8 AUTHDBG/66 RPT=8
AUTH_DeleteTimer(511760c, 0, 0)

145 11/05/2001 14:18:23.490 SEV=9 AUTHDBG/74 RPT=8
Reply timer stopped: handle = 370014, timestamp =
97011427

146 11/05/2001 14:18:23.490 SEV=8 AUTHDBG/58 RPT=8
AUTH_Callback(511760c, 0, 0)

147 11/05/2001 14:18:23.490 SEV=6 AUTH/39 RPT=6
172.18.124.241
Authentication successful: handle = 4, server =
Internal, group = ipsecgroup

148 11/05/2001 14:18:23.490 SEV=8 AUTHDBG/3 RPT=9
AUTH_PutAttrTable(4, f0d688)

149 11/05/2001 14:18:23.490 SEV=8 AUTHDBG/60 RPT=8
AUTH_UnbindServer(511760c, 0, 0)

150 11/05/2001 14:18:23.490 SEV=9 AUTHDBG/70 RPT=8
Auth Server e3199c has been unbound from ACB 511760c,
sessions = 0

151 11/05/2001 14:18:23.490 SEV=8 AUTHDBG/59 RPT=9
AUTH_BindServer(511760c, 0, 0)

152 11/05/2001 14:18:23.490 SEV=9 AUTHDBG/69 RPT=9
Auth Server e3199c has been bound to ACB 511760c,
sessions = 1

153 11/05/2001 14:18:23.490 SEV=8 AUTHDBG/65 RPT=9
AUTH_CreateTimer(511760c, 0, 0)

154 11/05/2001 14:18:23.490 SEV=9 AUTHDBG/72 RPT=9
Reply timer created: handle = 380014

155 11/05/2001 14:18:23.490 SEV=8 AUTHDBG/61 RPT=9
AUTH_BuildMsg(511760c, 0, 0)

156 11/05/2001 14:18:23.490 SEV=8 AUTHDBG/64 RPT=9
AUTH_StartTimer(511760c, 0, 0)

157 11/05/2001 14:18:23.490 SEV=9 AUTHDBG/73 RPT=9
Reply timer started: handle = 380014, timestamp =
97011427, timeout = 30000

158 11/05/2001 14:18:23.490 SEV=8 AUTHDBG/62 RPT=9
AUTH_SndRequest(511760c, 0, 0)

159 11/05/2001 14:18:23.490 SEV=8 AUTHDBG/50 RPT=17
IntDB_Decode(1fe8cc0, 44)

160 11/05/2001 14:18:23.490 SEV=8 AUTHDBG/47 RPT=17
IntDB_Xmt(511760c)

161 11/05/2001 14:18:23.490 SEV=9 AUTHDBG/71 RPT=9
xmit_cnt = 1

162 11/05/2001 14:18:23.490 SEV=8 AUTHDBG/47 RPT=18
IntDB_Xmt(511760c)

163 11/05/2001 14:18:23.590 SEV=8 AUTHDBG/49 RPT=9
IntDB_Match(511760c, 2f1a99c)

164 11/05/2001 14:18:23.590 SEV=8 AUTHDBG/63 RPT=9
AUTH_RcvReply(511760c, 0, 0)

165 11/05/2001 14:18:23.590 SEV=8 AUTHDBG/50 RPT=18
IntDB_Decode(2f1a99c, 104)

166 11/05/2001 14:18:23.590 SEV=8 AUTHDBG/48 RPT=9
IntDB_Rcv(511760c)

167 11/05/2001 14:18:23.590 SEV=8 AUTHDBG/66 RPT=9
AUTH_DeleteTimer(511760c, 0, 0)

168 11/05/2001 14:18:23.590 SEV=9 AUTHDBG/74 RPT=9
Reply timer stopped: handle = 380014, timestamp =
97011437

169 11/05/2001 14:18:23.590 SEV=8 AUTHDBG/58 RPT=9
AUTH_Callback(511760c, 0, 0)

170 11/05/2001 14:18:23.590 SEV=6 AUTH/39 RPT=7
172.18.124.241
Authentication successful: handle = 4, server =
Internal, group = ipsecgroup

171 11/05/2001 14:18:23.590 SEV=8 AUTHDBG/4 RPT=5
AUTH_GetAttrTable(4, 61ea7c)

172 11/05/2001 14:18:23.590 SEV=7 IKEDBG/14 RPT=5
172.18.124.241
Group [ipsecgroup] User [ipsecuser]
Authentication configured for Internal

173 11/05/2001 14:18:23.590 SEV=8 AUTHDBG/2 RPT=5
AUTH_Close(4)

174 11/05/2001 14:18:23.590 SEV=4 IKE/52 RPT=2
172.18.124.241
Group [ipsecgroup] User [ipsecuser]
User (ipsecuser) authenticated.

175 11/05/2001 14:18:23.590 SEV=9 IKEDBG/0 RPT=224
172.18.124.241
Group [ipsecgroup] User [ipsecuser]
constructing blank hash

176 11/05/2001 14:18:23.590 SEV=9 IKEDBG/0 RPT=225
172.18.124.241
Group [ipsecgroup] User [ipsecuser]
constructing qm hash

177 11/05/2001 14:18:23.590 SEV=8 IKEDBG/0 RPT=226
172.18.124.241
SENDING Message (msgid=938074b7) with payloads :
HDR + HASH (8) ... total length : 60

179 11/05/2001 14:18:23.590 SEV=8 AUTHDBG/60 RPT=9
AUTH_UnbindServer(511760c, 0, 0)

180 11/05/2001 14:18:23.590 SEV=9 AUTHDBG/70 RPT=9
Auth Server e3199c has been unbound from ACB 511760c,
sessions = 0

181 11/05/2001 14:18:23.590 SEV=8 AUTHDBG/10 RPT=5
AUTH_Int_FreeAuthCB(511760c)

182 11/05/2001 14:18:23.590 SEV=9 AUTHDBG/19 RPT=5
instance = 5, clone_instance = 0

183 11/05/2001 14:18:23.590 SEV=7 AUTH/13 RPT=5
Authentication session closed: handle = 4

184 11/05/2001 14:18:23.600 SEV=8 IKEDBG/0 RPT=227
172.18.124.241
RECEIVED Message (msgid=938074b7) with payloads :
HDR + HASH (8) + ATTR (14) + NONE (0) ... total length : 56

186 11/05/2001 14:18:23.600 SEV=9 IKEDBG/1 RPT=65
process_attr(): Enter!

187 11/05/2001 14:18:23.600 SEV=9 IKEDBG/1 RPT=66
Processing cfg ACK attributes

188 11/05/2001 14:18:23.600 SEV=8 IKEDBG/0 RPT=228
172.18.124.241
RECEIVED Message (msgid=c06b6315) with payloads :
HDR + HASH (8) + ATTR (14) + NONE (0) ... total length : 138

190 11/05/2001 14:18:23.600 SEV=9 IKEDBG/1 RPT=67
process_attr(): Enter!

191 11/05/2001 14:18:23.600 SEV=9 IKEDBG/1 RPT=68
Processing cfg Request attributes

192 11/05/2001 14:18:23.600 SEV=9 IKEDBG/1 RPT=69
Received IPV4 address request!

193 11/05/2001 14:18:23.600 SEV=9 IKEDBG/1 RPT=70
Received IPV4 net mask request!

194 11/05/2001 14:18:23.600 SEV=9 IKEDBG/1 RPT=71
Received DNS server address request!

195 11/05/2001 14:18:23.600 SEV=9 IKEDBG/1 RPT=72
Received WINS server address request!

196 11/05/2001 14:18:23.600 SEV=6 IKE/130 RPT=3
172.18.124.241
Group [ipsecgroup] User [ipsecuser]
Received unsupported transaction mode attribute: 5

198 11/05/2001 14:18:23.600 SEV=6 IKE/130 RPT=4
172.18.124.241
Group [ipsecgroup] User [ipsecuser]

Received unsupported transaction mode attribute: 7

200 11/05/2001 14:18:23.600 SEV=9 IKEDBG/1 RPT=73
Received Banner request!

201 11/05/2001 14:18:23.600 SEV=9 IKEDBG/1 RPT=74
Received Save PW request!

202 11/05/2001 14:18:23.600 SEV=9 IKEDBG/1 RPT=75
Received Default Domain request!

203 11/05/2001 14:18:23.600 SEV=9 IKEDBG/1 RPT=76
Received Split Tunnel Include request!

204 11/05/2001 14:18:23.600 SEV=9 IKEDBG/1 RPT=77
Received PFS request!

205 11/05/2001 14:18:23.600 SEV=9 IKEDBG/1 RPT=78
Received UDP Port request!

206 11/05/2001 14:18:23.600 SEV=9 IKEDBG/31 RPT=2
172.18.124.241
Group [ipsecgroup] User [ipsecuser]
Obtained IP addr (192.168.10.10) prior to initiating
Mode Cfg (XAuth enabled)

208 11/05/2001 14:18:23.600 SEV=9 IKEDBG/0 RPT=229
172.18.124.241
Group [ipsecgroup] User [ipsecuser]
constructing blank hash

209 11/05/2001 14:18:23.600 SEV=9 IKEDBG/0 RPT=230
172.18.124.241
0000: 00010004 C0A80A0A F0010000 F0070000

210 11/05/2001 14:18:23.600 SEV=9 IKEDBG/0 RPT=231
172.18.124.241
Group [ipsecgroup] User [ipsecuser]
constructing qm hash

211 11/05/2001 14:18:23.600 SEV=8 IKEDBG/0 RPT=232
172.18.124.241
SENDING Message (msgid=c06b6315) with payloads :
HDR + HASH (8) ... total length : 72

213 11/05/2001 14:18:23.640 SEV=9 IKEDBG/21 RPT=2
172.18.124.241
Group [ipsecgroup] User [ipsecuser]
Delay Quick Mode processing, Cert/Trans Exch/RM
DSID in progress

215 11/05/2001 14:18:23.640 SEV=4 AUTH/21 RPT=33
User ipsecuser connected

216 11/05/2001 14:18:23.640 SEV=7 IKEDBG/22 RPT=2
172.18.124.241
Group [ipsecgroup] User [ipsecuser]
Resume Quick Mode processing, Cert/Trans Exch/RM
DSID completed

218 11/05/2001 14:18:23.640 SEV=4 IKE/119 RPT=2
172.18.124.241
Group [ipsecgroup] User [ipsecuser]
PHASE 1 COMPLETED

219 11/05/2001 14:18:23.640 SEV=6 IKE/121 RPT=2
172.18.124.241
Keep-alive type for this connection: DPD

220 11/05/2001 14:18:23.640 SEV=7 IKEDBG/0 RPT=233
172.18.124.241
Group [ipsecgroup] User [ipsecuser]
Starting phase 1 rekey timer: 73440000 (ms)

221 11/05/2001 14:18:23.640 SEV=9 IKEDBG/0 RPT=234
172.18.124.241
Group [ipsecgroup] User [ipsecuser]
sending notify message

222 11/05/2001 14:18:23.640 SEV=9 IKEDBG/0 RPT=235
172.18.124.241
Group [ipsecgroup] User [ipsecuser]
constructing blank hash

223 11/05/2001 14:18:23.640 SEV=9 IKEDBG/0 RPT=236
172.18.124.241
Group [ipsecgroup] User [ipsecuser]
constructing qm hash

224 11/05/2001 14:18:23.640 SEV=8 IKEDBG/0 RPT=237
172.18.124.241
SENDING Message (msgid=2899decd) with payloads :
HDR + HASH (8) ... total length : 88

226 11/05/2001 14:18:23.640 SEV=8 IKEDBG/0 RPT=238
172.18.124.241
RECEIVED Message (msgid=7551d208) with payloads :
HDR + HASH (8) + SA (1) + NONCE (10) + ID (5) +
ID (5) + NONE (0) ... total leng
th : 792

229 11/05/2001 14:18:23.640 SEV=9 IKEDBG/0 RPT=239
172.18.124.241
Group [ipsecgroup] User [ipsecuser]
processing hash

230 11/05/2001 14:18:23.640 SEV=9 IKEDBG/0 RPT=240
172.18.124.241
Group [ipsecgroup] User [ipsecuser]
processing SA payload

231 11/05/2001 14:18:23.640 SEV=9 IKEDBG/1 RPT=79
172.18.124.241
Group [ipsecgroup] User [ipsecuser]
processing nonce payload

232 11/05/2001 14:18:23.640 SEV=9 IKEDBG/1 RPT=80
172.18.124.241
Group [ipsecgroup] User [ipsecuser]
Processing ID

233 11/05/2001 14:18:23.640 SEV=5 IKE/25 RPT=3
172.18.124.241
Group [ipsecgroup] User [ipsecuser]
Received remote Proxy Host data in ID Payload:
Address 192.168.10.10, Protocol 0, Port 0

236 11/05/2001 14:18:23.640 SEV=9 IKEDBG/1 RPT=81

172.18.124.241
Group [ipsecgroup] User [ipsecuser]
Processing ID

237 11/05/2001 14:18:23.640 SEV=5 IKE/24 RPT=2
172.18.124.241
Group [ipsecgroup] User [ipsecuser]
Received local Proxy Host data in ID Payload:
Address 172.18.124.132, Protocol 0, Port 0

240 11/05/2001 14:18:23.640 SEV=8 IKEDBG/0 RPT=241
QM IsRekeyed old sa not found by addr

241 11/05/2001 14:18:23.640 SEV=5 IKE/66 RPT=3
172.18.124.241
Group [ipsecgroup] User [ipsecuser]
IKE Remote Peer configured for SA: ESP-3DES-MD5

243 11/05/2001 14:18:23.640 SEV=9 IKEDBG/0 RPT=242
172.18.124.241
Group [ipsecgroup] User [ipsecuser]
processing IPSEC SA

244 11/05/2001 14:18:23.650 SEV=8 IKEDBG/0 RPT=243
Proposal # 2, Transform # 1, Type ESP, Id Triple-DES
Parsing received transform:
Phase 2 failure:
Mismatched attr types for class HMAC Algorithm:
Rcv'd: SHA
Cfg'd: MD5

248 11/05/2001 14:18:23.650 SEV=7 IKEDBG/27 RPT=3
172.18.124.241
Group [ipsecgroup] User [ipsecuser]
IPSec SA Proposal # 3, Transform # 1 acceptable

250 11/05/2001 14:18:23.650 SEV=7 IKEDBG/0 RPT=244
172.18.124.241
Group [ipsecgroup] User [ipsecuser]
IKE: requesting SPI!

251 11/05/2001 14:18:23.650 SEV=9 IPSECDBG/6 RPT=11
IPSEC key message parse - msgtype 6, len 192, vers 1,
pid 00000000, seq 3, err 0
, type 2, mode 0, state 32, label 0, pad 0, spi 00000000,
encrKeyLen 0, hashKeyL
en 0, ivlen 0, alg 0, hmacAlg 0, lifetype 0, lifetime1
7762996, lifetime2 0, dsI
d 300

255 11/05/2001 14:18:23.650 SEV=9 IPSECDBG/1 RPT=38
Processing KEY_GETSPI msg!

256 11/05/2001 14:18:23.650 SEV=7 IPSECDBG/13 RPT=3
Reserved SPI 1910411637

257 11/05/2001 14:18:23.650 SEV=8 IKEDBG/6 RPT=3
IKE got SPI from key engine: SPI = 0x71de9175

258 11/05/2001 14:18:23.650 SEV=9 IKEDBG/0 RPT=245
172.18.124.241
Group [ipsecgroup] User [ipsecuser]
oakley constucting quick mode

259 11/05/2001 14:18:23.650 SEV=9 IKEDBG/0 RPT=246
172.18.124.241
Group [ipsecgroup] User [ipsecuser]
constructing blank hash

260 11/05/2001 14:18:23.650 SEV=9 IKEDBG/0 RPT=247
172.18.124.241
Group [ipsecgroup] User [ipsecuser]
constructing ISA_SA for ipsec

261 11/05/2001 14:18:23.650 SEV=5 IKE/75 RPT=3
172.18.124.241
Group [ipsecgroup] User [ipsecuser]
Overriding Initiator's IPSec rekeying duration from
2147483 to 28800 seconds

263 11/05/2001 14:18:23.650 SEV=9 IKEDBG/1 RPT=82
172.18.124.241
Group [ipsecgroup] User [ipsecuser]
constructing ipsec nonce payload

264 11/05/2001 14:18:23.650 SEV=9 IKEDBG/1 RPT=83
172.18.124.241
Group [ipsecgroup] User [ipsecuser]
constructing proxy ID

265 11/05/2001 14:18:23.650 SEV=7 IKEDBG/0 RPT=248
172.18.124.241
Group [ipsecgroup] User [ipsecuser]
Transmitting Proxy Id:
Remote host: 192.168.10.10 Protocol 0 Port 0
Local host: 172.18.124.132 Protocol 0 Port 0

269 11/05/2001 14:18:23.650 SEV=7 IKEDBG/0 RPT=249
172.18.124.241
Group [ipsecgroup] User [ipsecuser]
Sending RESPONDER LIFETIME notification to Initiator

271 11/05/2001 14:18:23.650 SEV=9 IKEDBG/0 RPT=250
172.18.124.241
Group [ipsecgroup] User [ipsecuser]
constructing qm hash

272 11/05/2001 14:18:23.650 SEV=8 IKEDBG/0 RPT=251 172.18.124.241
SENDING Message (msgid=7551d208) with payloads :
HDR + HASH (8) ... total length : 172

274 11/05/2001 14:18:23.650 SEV=8 IKEDBG/0 RPT=252 172.18.124.241
RECEIVED Message (msgid=6c034bb1) with payloads :
HDR + HASH (8) + SA (1) + NONCE (10) + ID (5) + ID (5) +
NONE (0) ... total leng
th : 796

277 11/05/2001 14:18:23.650 SEV=9 IKEDBG/0 RPT=253
172.18.124.241
Group [ipsecgroup] User [ipsecuser]
processing hash

278 11/05/2001 14:18:23.650 SEV=9 IKEDBG/0 RPT=254
172.18.124.241
Group [ipsecgroup] User [ipsecuser]
processing SA payload

279 11/05/2001 14:18:23.650 SEV=9 IKEDBG/1 RPT=84

172.18.124.241
Group [ipsecgroup] User [ipsecuser]
processing nonce payload

280 11/05/2001 14:18:23.650 SEV=9 IKEDBG/1 RPT=85
172.18.124.241
Group [ipsecgroup] User [ipsecuser]
Processing ID

281 11/05/2001 14:18:23.650 SEV=5 IKE/25 RPT=4
172.18.124.241
Group [ipsecgroup] User [ipsecuser]
Received remote Proxy Host data in ID Payload:
Address 192.168.10.10, Protocol 0, Port 0

284 11/05/2001 14:18:23.650 SEV=9 IKEDBG/1 RPT=86
172.18.124.241
Group [ipsecgroup] User [ipsecuser]
Processing ID

285 11/05/2001 14:18:23.650 SEV=5 IKE/34 RPT=2
172.18.124.241
Group [ipsecgroup] User [ipsecuser]
Received local IP Proxy Subnet data in ID Payload:
Address 0.0.0.0, Mask 0.0.0.0, Protocol 0, Port 0

288 11/05/2001 14:18:23.650 SEV=8 IKEDBG/0 RPT=255
QM IsRekeyed old sa not found by addr

289 11/05/2001 14:18:23.650 SEV=5 IKE/66 RPT=4
172.18.124.241
Group [ipsecgroup] User [ipsecuser]
IKE Remote Peer configured for SA: ESP-3DES-MD5

291 11/05/2001 14:18:23.650 SEV=9 IKEDBG/0 RPT=256 172.18.124.241
Group [ipsecgroup] User [ipsecuser]
processing IPSEC SA

292 11/05/2001 14:18:23.660 SEV=8 IKEDBG/0 RPT=257
Proposal # 2, Transform # 1, Type ESP, Id Triple-DES
Parsing received transform:
Phase 2 failure:
Mismatched attr types for class HMAC Algorithm:
Rcv'd: SHA
Cfg'd: MD5

296 11/05/2001 14:18:23.660 SEV=7 IKEDBG/27 RPT=4
172.18.124.241
Group [ipsecgroup] User [ipsecuser]
IPSec SA Proposal # 3, Transform # 1 acceptable

298 11/05/2001 14:18:23.660 SEV=7 IKEDBG/0 RPT=258
172.18.124.241
Group [ipsecgroup] User [ipsecuser]
IKE: requesting SPI!

299 11/05/2001 14:18:23.660 SEV=9 IPSECDBG/6 RPT=12
IPSEC key message parse - msgtype 6, len 192, vers 1,
pid 00000000, seq 4, err 0, type 2, mode 0, state 32,
label 0, pad 0, spi 00000000, encrKeyLen 0, hashKeyLen 0,
ivlen 0, alg 0, hmacAlg 0, lifetype 0, lifetime1 7764576,
lifetime2 0, dsId 300

303 11/05/2001 14:18:23.660 SEV=9 IPSECDBG/1 RPT=39
Processing KEY_GETSPI msg!

304 11/05/2001 14:18:23.660 SEV=7 IPSECDBG/13 RPT=4
Reserved SPI 1940396912

305 11/05/2001 14:18:23.660 SEV=8 IKEDBG/6 RPT=4
IKE got SPI from key engine: SPI = 0x73a81b70

306 11/05/2001 14:18:23.660 SEV=9 IKEDBG/0 RPT=259 172.18.124.241
Group [ipsecgroup] User [ipsecuser]
oakley constructing quick mode

307 11/05/2001 14:18:23.660 SEV=9 IKEDBG/0 RPT=260 172.18.124.241
Group [ipsecgroup] User [ipsecuser]
constructing blank hash

308 11/05/2001 14:18:23.660 SEV=9 IKEDBG/0 RPT=261 172.18.124.241
Group [ipsecgroup] User [ipsecuser]
constructing ISA_SA for ipsec

309 11/05/2001 14:18:23.660 SEV=5 IKE/75 RPT=4 172.18.124.241
Group [ipsecgroup] User [ipsecuser]
Overriding Initiator's IPsec rekeying duration from
2147483 to 28800 seconds

311 11/05/2001 14:18:23.660 SEV=9 IKEDBG/1 RPT=87 172.18.124.241
Group [ipsecgroup] User [ipsecuser]
constructing ipsec nonce payload

312 11/05/2001 14:18:23.660 SEV=9 IKEDBG/1 RPT=88 172.18.124.241
Group [ipsecgroup] User [ipsecuser]
constructing proxy ID

313 11/05/2001 14:18:23.660 SEV=7 IKEDBG/0 RPT=262 172.18.124.241
Group [ipsecgroup] User [ipsecuser]
Transmitting Proxy Id:
Remote host: 192.168.10.10 Protocol 0 Port 0
Local subnet: 0.0.0.0 mask 0.0.0.0 Protocol 0 Port 0

317 11/05/2001 14:18:23.660 SEV=7 IKEDBG/0 RPT=263 172.18.124.241
Group [ipsecgroup] User [ipsecuser]
Sending RESPONDER LIFETIME notification to Initiator

319 11/05/2001 14:18:23.660 SEV=9 IKEDBG/0 RPT=264 172.18.124.241
Group [ipsecgroup] User [ipsecuser]
constructing qm hash

320 11/05/2001 14:18:23.660 SEV=8 IKEDBG/0 RPT=265 172.18.124.241
SENDING Message (msgid=6c034bb1) with payloads :
HDR + HASH (8) ... total length : 176

322 11/05/2001 14:18:23.660 SEV=8 IKEDBG/0 RPT=266 172.18.124.241
RECEIVED Message (msgid=7551d208) with payloads :
HDR + HASH (8) + NONE (0) ... total length : 48

324 11/05/2001 14:18:23.660 SEV=9 IKEDBG/0 RPT=267 172.18.124.241
Group [ipsecgroup] User [ipsecuser]
processing hash

325 11/05/2001 14:18:23.660 SEV=9 IKEDBG/0 RPT=268 172.18.124.241
Group [ipsecgroup] User [ipsecuser]
loading all IPSEC SAs

326 11/05/2001 14:18:23.660 SEV=9 IKEDBG/1 RPT=89 172.18.124.241
Group [ipsecgroup] User [ipsecuser]
Generating Quick Mode Key!

327 11/05/2001 14:18:23.660 SEV=9 IKEDBG/1 RPT=90 172.18.124.241
Group [ipsecgroup] User [ipsecuser]
Generating Quick Mode Key!

328 11/05/2001 14:18:23.670 SEV=7 IKEDBG/0 RPT=269 172.18.124.241
Group [ipsecgroup] User [ipsecuser]
Loading host:
Dst: 172.18.124.132
Src: 192.168.10.10

330 11/05/2001 14:18:23.670 SEV=4 IKE/49 RPT=3 172.18.124.241
Group [ipsecgroup] User [ipsecuser]
Security negotiation complete for User (ipsecuser)
Responder, Inbound SPI = 0x71de9175, Outbound SPI = 0x2081f1c4

333 11/05/2001 14:18:23.670 SEV=9 IPSECDBG/6 RPT=13
IPSEC key message parse - msgtype 1, len 608, vers 1,
pid 00000000, seq 0, err 0, type 2, mode 1, state 64,
label 0, pad 0, spi 2081f1c4, encrKeyLen 24, hashKeyLen 16,
ivlen 8, alg 2, hmacAlg 3, lifetype 0, lifetime1 7764576,
lifetime2 0, dsId 0

337 11/05/2001 14:18:23.670 SEV=9 IPSECDBG/1 RPT=40
Processing KEY_ADD msg!

338 11/05/2001 14:18:23.670 SEV=9 IPSECDBG/1 RPT=41
key_msghdr2secassoc(): Enter

339 11/05/2001 14:18:23.670 SEV=7 IPSECDBG/1 RPT=42
No USER filter configured

340 11/05/2001 14:18:23.670 SEV=9 IPSECDBG/1 RPT=43
KeyProcessAdd: Enter

341 11/05/2001 14:18:23.670 SEV=8 IPSECDBG/1 RPT=44
KeyProcessAdd: Adding outbound SA

342 11/05/2001 14:18:23.670 SEV=8 IPSECDBG/1 RPT=45
KeyProcessAdd: src 172.18.124.132 mask 0.0.0.0, dst
192.168.10.10 mask 0.0.0.0

343 11/05/2001 14:18:23.670 SEV=8 IPSECDBG/1 RPT=46
KeyProcessAdd: FilterIpsecAddIkeSa success

344 11/05/2001 14:18:23.670 SEV=9 IPSECDBG/6 RPT=14
IPSEC key message parse - msgtype 3, len 328, vers 1,
pid 00000000, seq 0, err 0, type 2, mode 1, state 32,
label 0, pad 0, spi 71de9175, encrKeyLen 24, hashKeyLen 16,
ivlen 8, alg 2, hmacAlg 3, lifetype 0, lifetime1 7762996,
lifetime2 0, dsId 0

348 11/05/2001 14:18:23.670 SEV=9 IPSECDBG/1 RPT=47
Processing KEY_UPDATE msg!

349 11/05/2001 14:18:23.670 SEV=9 IPSECDBG/1 RPT=48
Update inbound SA addresses

350 11/05/2001 14:18:23.670 SEV=9 IPSECDBG/1 RPT=49
key_msghdr2secassoc(): Enter

351 11/05/2001 14:18:23.670 SEV=7 IPSECDBG/1 RPT=50
No USER filter configured

352 11/05/2001 14:18:23.670 SEV=9 IPSECDBG/1 RPT=51
KeyProcessUpdate: Enter

353 11/05/2001 14:18:23.670 SEV=8 IPSECDBG/1 RPT=52
KeyProcessUpdate: success

354 11/05/2001 14:18:23.670 SEV=8 IKEDBG/7 RPT=3
IKE got a KEY_ADD msg for SA: SPI = 0x2081f1c4

355 11/05/2001 14:18:23.670 SEV=8 IKEDBG/0 RPT=270
pitcher: rcv KEY_UPDATE, spi 0x71de9175

356 11/05/2001 14:18:23.670 SEV=4 IKE/120 RPT=3 172.18.124.241
Group [ipsecgroup] User [ipsecuser]
PHASE 2 COMPLETED (msgid=7551d208)

357 11/05/2001 14:18:23.690 SEV=8 IKEDBG/0 RPT=271 172.18.124.241
RECEIVED Message (msgid=6c034bb1) with payloads :
HDR + HASH (8) + NONE (0) ... total length : 48

359 11/05/2001 14:18:23.690 SEV=9 IKEDBG/0 RPT=272 172.18.124.241
Group [ipsecgroup] User [ipsecuser]
processing hash

360 11/05/2001 14:18:23.690 SEV=9 IKEDBG/0 RPT=273 172.18.124.241
Group [ipsecgroup] User [ipsecuser]
loading all IPSEC SAs

361 11/05/2001 14:18:23.690 SEV=9 IKEDBG/1 RPT=91 172.18.124.241
Group [ipsecgroup] User [ipsecuser]
Generating Quick Mode Key!

362 11/05/2001 14:18:23.690 SEV=9 IKEDBG/1 RPT=92 172.18.124.241
Group [ipsecgroup] User [ipsecuser]
Generating Quick Mode Key!

363 11/05/2001 14:18:23.690 SEV=7 IKEDBG/0 RPT=274 172.18.124.241
Group [ipsecgroup] User [ipsecuser]
Loading subnet:
Dst: 0.0.0.0 mask: 0.0.0.0
Src: 192.168.10.10

365 11/05/2001 14:18:23.690 SEV=4 IKE/49 RPT=4 172.18.124.241
Group [ipsecgroup] User [ipsecuser]
Security negotiation complete for User (ipsecuser)
Responder, Inbound SPI = 0x73a81b70, Outbound SPI = 0xaf8534c2

368 11/05/2001 14:18:23.690 SEV=9 IPSECDBG/6 RPT=15
IPSEC key message parse - msgtype 1, len 608, vers 1,
pid 00000000, seq 0, err 0, type 2, mode 1, state 64,
label 0, pad 0, spi af8534c2, encrKeyLen 24, hashKeyLen 16,
ivlen 8, alg 2, hmacAlg 3, lifetype 0, lifetime1 7764576,
lifetime2 0, dsId 0

372 11/05/2001 14:18:23.690 SEV=9 IPSECDBG/1 RPT=53
Processing KEY_ADD msg!

373 11/05/2001 14:18:23.690 SEV=9 IPSECDBG/1 RPT=54
key_msghdr2secassoc(): Enter

374 11/05/2001 14:18:23.690 SEV=7 IPSECDBG/1 RPT=55

```
No USER filter configured

375 11/05/2001 14:18:23.690 SEV=9 IPSECDBG/1 RPT=56
KeyProcessAdd: Enter

376 11/05/2001 14:18:23.690 SEV=8 IPSECDBG/1 RPT=57
KeyProcessAdd: Adding outbound SA

377 11/05/2001 14:18:23.690 SEV=8 IPSECDBG/1 RPT=58
KeyProcessAdd: src 0.0.0.0 mask 255.255.255.255, dst
192.168.10.10 mask 0.0.0.0

378 11/05/2001 14:18:23.690 SEV=8 IPSECDBG/1 RPT=59
KeyProcessAdd: FilterIpssecAddIkeSa success

379 11/05/2001 14:18:23.690 SEV=9 IPSECDBG/6 RPT=16
IPSEC key message parse - msgtype 3, len 328, vers 1,
pid 00000000, seq 0, err 0, type 2, mode 1, state 32,
label 0, pad 0, spi 73a81b70, encrKeyLen 24, hashKeyLen 16,
ivlen 8, alg 2, hmacAlg 3, lifetype 0, lifetime1 7762996,
lifetime2 0, dsId 0

383 11/05/2001 14:18:23.690 SEV=9 IPSECDBG/1 RPT=60
Processing KEY_UPDATE msg!

384 11/05/2001 14:18:23.690 SEV=9 IPSECDBG/1 RPT=61
Update inbound SA addresses

385 11/05/2001 14:18:23.690 SEV=9 IPSECDBG/1 RPT=62
key_msghdr2secassoc(): Enter

386 11/05/2001 14:18:23.690 SEV=7 IPSECDBG/1 RPT=63
No USER filter configured

387 11/05/2001 14:18:23.690 SEV=9 IPSECDBG/1 RPT=64
KeyProcessUpdate: Enter

388 11/05/2001 14:18:23.690 SEV=8 IPSECDBG/1 RPT=65
KeyProcessUpdate: success

389 11/05/2001 14:18:23.690 SEV=8 IKEDBG/7 RPT=4
IKE got a KEY_ADD msg for SA: SPI = 0xaf8534c2

390 11/05/2001 14:18:23.690 SEV=8 IKEDBG/0 RPT=275
pitcher: rcv KEY_UPDATE, spi 0x73a81b70

391 11/05/2001 14:18:23.690 SEV=4 IKE/120 RPT=4 172.18.124.241
Group [ipsecgroup] User [ipsecuser]
PHASE 2 COMPLETED (msgid=6c034bb1)
```

可能出錯的地方

- [無法協商IPSec或主機未響應](#)
- [使用者無法連線](#)
- [沒有VPN 3000 Concentrator調試，使用者無法連線](#)

無法協商IPSec或主機未響應

VPN 3000集中器調試顯示以下內容：

14 02/20/2001 08:59:29.100 SEV=4 IKE/22 RPT=5 64.102.55.139
No Group found matching badgroup for Pre-shared key peer 64.102.55.139

此問題的通常原因是使用者嘗試使用未配置的組名進行連線。

[使用者無法連線](#)

如果無法連線，可能會出現幾個問題。

- **缺少篩選器**VPN 3000集中器調試顯示以下內容：

```
Filter missing on interface 2, IKE data from Peer x.x.x.x dropped
```

此問題的通常原因是公用介面缺少篩選器。它通常是公共過濾器(但可以是私有過濾器；「無」無效)。前往**Configuration > Interfaces > Ethernet 2 > Filter**，將過濾器設為「public」或其他值(而不是「none」)。

- **未選擇IPSec**錯誤消息如下：

```
Unable to negotiate IPSec or host did not respond.
```

VPN 3000集中器調試顯示以下內容：

```
Terminating connection attempt: IPSEC not permitted for group <group>
```

此問題的常見原因是未在組上選擇IPSec。轉到**Configuration > User Management > Groups > <group>>Modify > General**頁籤，驗證是否已在Tunneling Protocols下選擇了IPSec。

- **使用者不在資料庫中**錯誤消息如下：

```
User Authentication Failed
```

VPN 3000集中器調試顯示以下內容：

```
Authentication rejected: Reason = User was not found handle = 14,  
server = Internal, user = <user>
```

此問題的通常原因是使用者資料庫中不存在該使用者。確保在顯示使用者身份驗證螢幕時輸入正確的使用者名稱。

- **缺少預設路由**VPN 3000集中器調試顯示以下內容：

```
Filter missing on interface 0, IKE data from Peer x.x.x.x dropped
```

此問題的通常原因是缺少預設路由。確保配置中有預設路由。前往**Configuration > System > IP routing > Default Gateway**以指定預設閘道。

- **無IP地址選項**錯誤消息如下：

```
Your IPSec connection has been terminated by the remote peer.
```

VPN 3000集中器調試顯示以下內容：

```
User [ >user< ]  
IKE rcv'd FAILED IP Addr status!
```

此問題的常見原因是未選中為客戶端提供IP地址的選項。轉至**Configuration > System > Address Management > Address Assignment**以選擇一個選項。

- **不同的密碼**錯誤消息如下：

```
User authentication failed
```

VPN 3000集中器調試顯示以下內容：

```
The calculated HASH doesn't match the received value
```

此問題的常見原因是客戶端上的組密碼不同於集中器上配置的密碼。檢查客戶端和集中器上的密碼。

[沒有VPN 3000 Concentrator調試，使用者無法連線](#)

預設集中器公共過濾器包含允許以下流量的規則：

```
Protocol = UDP, port = 500  
Protocol = UDP, port = 10000  
Protocol = ESP  
Protocol = AH
```

如果VPN 3000集中器的過濾器允許此流量，則客戶端與集中器之間的裝置可能會阻止這些埠中的某些埠（可能是防火牆）。要進行驗證，請嘗試從緊鄰集中器外部的網路連線到集中器。如果正常工作，則客戶端PC和集中器之間的裝置阻止流量。

[相關資訊](#)

- [Cisco VPN 3000 Concentrator支援頁面](#)
- [Cisco VPN使用者端支援頁面](#)
- [IPSec支援頁面](#)
- [VPN客戶端軟體下載](#)
- [技術支援與文件 - Cisco Systems](#)