

Track Task Routing Events in a CCE Environment Integrated with Webex Connect

Contents

[Introduction](#)

[Prerequisites](#)

[Requirements:](#)

[Component Used:](#)

[Background](#)

[Deployment Architecture](#)

[Logs](#)

[Webex Connect Portal](#)

[Cloud Connect - Digital Routing](#)

[Router](#)

[PG](#)

[Browser Console](#)

[Related Information](#)

Introduction

This document describes the message flow for a new task routed to an agent in a Contact Center Enterprise solution integrated with Webex Connect.

Prerequisites

Requirements:

Cisco recommends that you have knowledge of these topics:

- Cisco Packaged Contact Center Enterprise (PCCE)
- Cisco Unified Contact Center Enterprise (UCCE)
- Webex Connect

Component Used:

The information in this document is based on these software and hardware versions:

- ICM Version: 12.6(2)
- Finesse Version: 12.6(2)
- Webex Control Hub
- Webex Connect Portal
- Webex Engage Portal



The information in this document was created from the devices in a specific lab environment. All of the devices used in this document started with a cleared (default) configuration. If your network is live, ensure

that you understand the potential impact of any command.


Background

Webex Connect allows the Contact Center business and its customers to interact using digital channels such as email, chat, and SMS. The Contact Center Enterprise (CCE) solution integrates with Webex Connect to create a seamless omnichannel experience for customers. This integration helps customers to interact across voice and digital channels of communication. Webex Connect offers a rich self-service and bot integration to empower customers to get answers to some common questions. It provides a unified solution for integrated routing, Agent Desktop, and reporting service. Webex Connect provides a simplified framework that helps partners and customers interact through digital channels.

Deployment Architecture

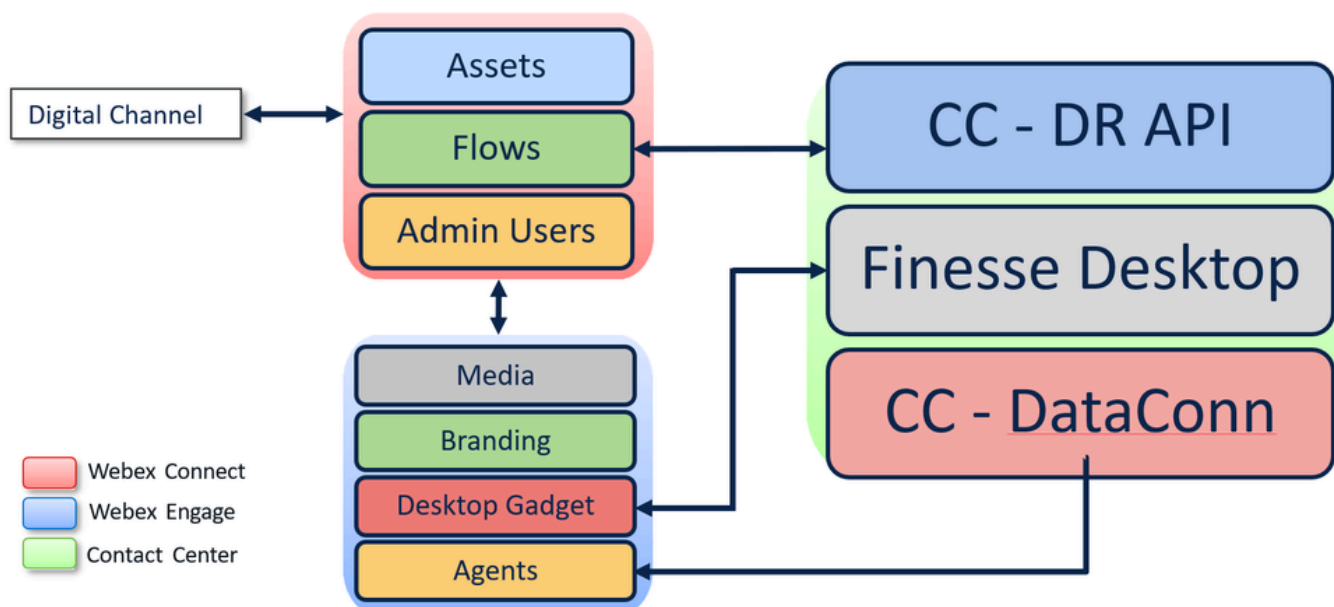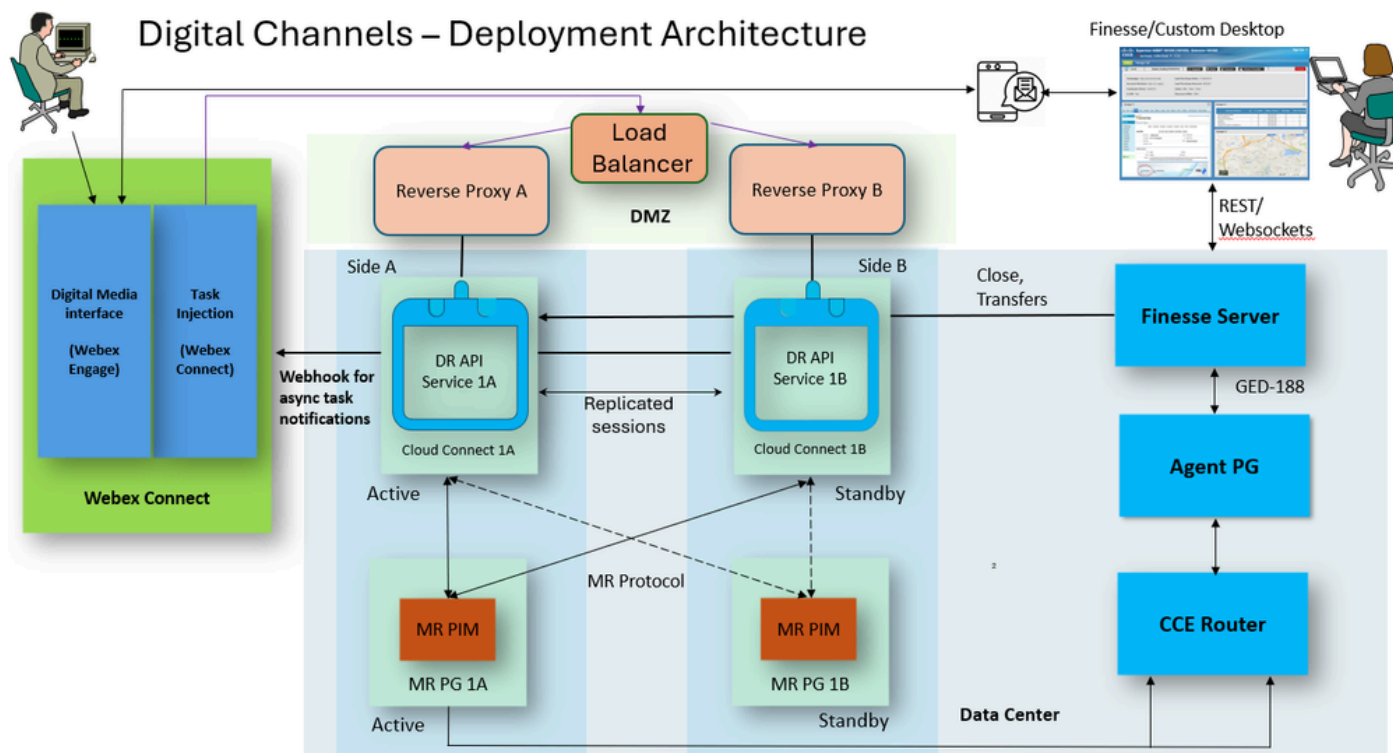

Activity Routing

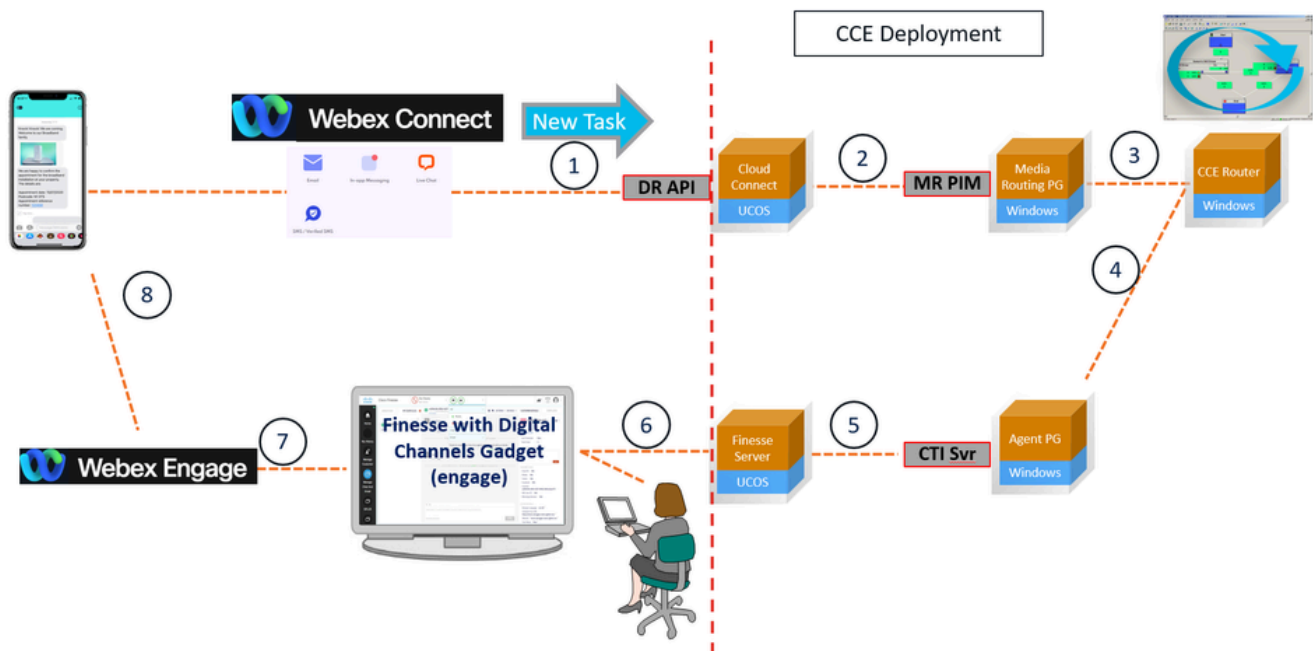

Logs

Webex Connect Portal

Node - Configure APP Event

- This node is the start point in the flow. The logs for this node show details such as the App Entry Point configured on the Webex Connect portal, the URL where the chat form was initiated from, and so on.

TRANSACTION LOGS 22be296b-bc6b-4a6f-af6d-a84c0fb67a01_30408_158393 X

Trans ID : 22be296b-bc6b-4a6f-af6d-a84c0fb67a01_30408_158393 Time Elapsed (HH:mm:ss.SSS) : 00 : 00 : 25 . 966 Invoked by : Rule 30408

NODE ID	NODE	OUTCOME	TIME TAKEN(HH:mm:ss.SSS)	DETAILS
2	Configure APP Event	onBegin	00 : 00 : 00 . 001	Node Trans ID : 6ad93c92-39de-4ea5-934b-e86b71657a55 Description : success App : AChatEntryPoint Channel : Mobile & Web App Event : MO Data : <pre>{ "inappmessaging.message.customTags": "", "inappmessaging.pciInfo.isPCICompliance": "true", "inappmessaging.pciInfo.nonPCIComplianceReason": "{ \"text\": \"\" }", "inappmessaging.extras": "", "inappmessaging.threadStatus": "", "inappmessaging.message.extras": "{ \"hasprechatform\": \"0\", \"Webpage\": \"https://attachuk.imi.chat/widget/widgetloader.html?docwidth=1280&id=BE33E549-9326-4F60-9427-7A9FAA22EBD0&org=#\", \"initiatedon\": \"\", \"useragent\": \"Mozilla/5.0 (Windows NT 10.0; rv:109.0) Gecko/20100101 Firefox/118.0\", \"Website\": \"hungry-glittery-terrier.glitch.me\", \"browserfingerprint\": \"976b22d6-1e7b-4702-9a39-9de1d7024884\", \"customprofileparams\": \"xJO5vPgYt83k/gWcBZBmj9Pg3dZ+f/UvLWE2SEVX+yKOk2Lagxbf6KK+gtHACFK\", \"website_id\": \"809\", \"Initiated from URL\": \"https://hungry-glittery-terrier.glitch.me/\", \"proactive_id\": \"0\", \"Browser language\": \"en-US\" }", "inappmessaging.securityscaninfo.securityFailedReason": "{ \"text\": \"\" }", }</pre>
9	Evaluate	success	00 : 00 : 00 . 001	
2245	Search Conversation	noConversationFound	00 : 00 : 00 . 053	
2252	Create Conversation	waiting	00 : 00 : 00 . 047	
2252	Create Conversation	onConversationCreated	00 : 00 : 00 . 433	
1333	Pre-chat form	onSuccess	00 : 00 : 00 . 012	
38	Receive	app.onformresponse	00 : 00 : 24 . 229	
2256	Append Conversation	waiting	00 : 00 : 00 . 039	
2256	Append Conversation	onAppendMessageSuccess	00 : 00 : 00 . 335	
2374	CCE Create Task	Successfully Created	00 : 00 : 00 . 771	
2260	Update Conversation	Success	00 : 00 : 00 . 041	
2393	End	Success	00 : 00 : 00 . 004	

Node - Pre-chat form

- The logs for this node shows the questions loaded from the chat template created on the Webex Connect portal.

TRANSACTION LOGS 22be296b-bc6b-4a6f-af6d-a84c0fb67a01_30408_158393 X

Trans ID : 22be296b-bc6b-4a6f-af6d-a84c0fb67a01_30408_158393 Time Elapsed (HH:mm:ss.SSS) : 00 : 00 : 25 . 966 Invoked by : Rule 30408

NODE ID	NODE	OUTCOME	TIME TAKEN(HH:mm:ss.SSS)	DETAILS
2	Configure APP Event	onBegin	00 : 00 : 00 . 001	<pre>- "fields": { - { "type": "name", "name": "Name", "label": "Name", "description": "", "mandatory": true }, - { "type": "email", "name": "Email", "label": "Email", "description": "", "mandatory": false }, - { "type": "text", "name": "Question", "label": "How can we help", "description": "How can we help", "mandatory": false } }</pre>
9	Evaluate	success	00 : 00 : 00 . 001	
2245	Search Conversation	noConversationFound	00 : 00 : 00 . 053	
2252	Create Conversation	waiting	00 : 00 : 00 . 047	
2252	Create Conversation	onConversationCreated	00 : 00 : 00 . 433	
1333	Pre-chat form	onSuccess	00 : 00 : 00 . 012	
38	Receive	app.onformresponse	00 : 00 : 24 . 229	
2256	Append Conversation	waiting	00 : 00 : 00 . 039	
2256	Append Conversation	onAppendMessageSuccess	00 : 00 : 00 . 335	
2374	CCE Create Task	Successfully Created	00 : 00 : 00 . 771	
2260	Update Conversation	Success	00 : 00 : 00 . 041	
2393	End	Success	00 : 00 : 00 . 004	

Node - Receive

- The logs for this node shows the responses provided to the questions loaded from the chat template.

TRANSACTION LOGS					22be296b-bc6b-4a6f-af6d-a84c0fb67a01_30408_158393	X	HELP
Trans ID : 22be296b-bc6b-4a6f-af6d-a84c0fb67a01_30408_158393					Time Elapsed (HH:mm:ss.SSS) : 00 : 00 : 25 . 966		Invoked by : Rule 30408
NODE ID	NODE	OUTCOME	TIME TAKEN(HH:mm:ss.SSS)	DETAILS			
2	Configure APP Event	onBegin	00 : 00 : 00 . 001	<pre> "Channel": "APP", "appid": "AA02142539", "from": "976b22d6-1e7b-4702-9a39-9de1d7024884", - "events": [- { "Event": "OnFormResponse" }] } </pre>			
9	Evaluate	success	00 : 00 : 00 . 001				
2245	Search Conversation	noConversationFound	00 : 00 : 00 . 053				
2252	Create Conversation	waiting	00 : 00 : 00 . 047				
2252	Create Conversation	onConversationCreated	00 : 00 : 00 . 433				
1333	Pre-chat form	onSuccess	00 : 00 : 00 . 012				
38	Receive	app.onformresponse	00 : 00 : 24 . 229				
2256	Append Conversation	waiting	00 : 00 : 00 . 039				
2256	Append Conversation	onAppendMessageSuccess	00 : 00 : 00 . 335				
2374	CCE Create Task	Successfully Created	00 : 00 : 00 . 771				
2260	Update Conversation	Success	00 : 00 : 00 . 041	<pre> Wait start ti : 2024-07-11T18:05:20.755Z me timeoutValu : 300 e (Sec) timeout : false message : Wait end tim : 2024-07-11T18:05:44.984Z e Custom logs : 1003 → {"title":"Welcome","fields":[{"name":"Name","descriptio n":"","label":"Name","type":"name","value":"Customer","mandatory":tr ue},{name":"Email","description":"","label":"Email","type":"email","val ue":"customer@company.com","mandatory":false},{name":"Questio n","description":"How can we help","label":"How can we help","type":"t ext","value":"Cisco TAC","mandatory":false}}} </pre>			
2393	End	Success	00 : 00 : 00 . 004				

Node - CCE Create Task

- This node calls Contact Center Enterprise Task API to create a new Task. While configuring flows in Webex Connect, this node is needed for creating the task on Contact Center Enterprise.

TRANSACTION LOGS22be296b-bc6b-4a6f-af6d-a84c0fb67a01_30408_158393X

Trans ID : 22be296b-bc6b-4a6f-af6d-a84c0fb67a01_30408_158393Time Elapsed (HH:mm:ss.SSS) : 00 : 00 : 25 . 966Invoked by : Rule 30408

NODE ID	NODE	OUTCOME	TIME TAKEN(HH:mm:ss.SSS)	DETAILS
2	Configure APP Event	onBegin	00 : 00 : 00 . 001	Node Trans ID : a7b93115-196a-4620-9cb5-5f8801166d7c Description : edge: Successfully Created, integration :CCE Create Task, method : Create a New Task, warn : Transaction Details Resume key : - Request Timestamp : 2024-07-11T18:05:46.940Z Request URL : POST https://rp.vpod458.dc-01.com:8445/draapi/v1/tasks Request Data :<pre>{ "headers": { "x-wx-gridid": "e28ccc9b-25b7-a65b-59fa-8056d6ad0a36", "TrackingId": "WebexConnect_22be296b-bc6b-4a6f-af6d-a84c0fb67a01", "Content-Type": "application/json" } }</pre>
9	Evaluate	success	00 : 00 : 00 . 001	
2245	Search Conversation	noConversationFound	00 : 00 : 00 . 053	
2252	Create Conversation	waiting	00 : 00 : 00 . 047	
2252	Create Conversation	onConversationCreated	00 : 00 : 00 . 433	
1333	Pre-chat form	onSuccess	00 : 00 : 00 . 012	
38	Receive	app.onformresponse	00 : 00 : 24 . 229	
2256	Append Conversation	waiting	00 : 00 : 00 . 039	
2256	Append Conversation	onAppendMessageSuccess	00 : 00 : 00 . 335	
2374	CCE Create Task	Successfully Created	00 : 00 : 00 . 771	
2260	Update Conversation	Success	00 : 00 : 00 . 041	
2393	End	Success	00 : 00 : 00 . 004	

Cloud Connect - Digital Routing

```
<#root>
```

Incoming NEW_TASK request coming in from the 'CCE Create Task' node Webex Connect Flow:

```
[INFO ] 2024-07-11 14:05:45.989 [http-nio-127.0.0.1-8091-exec-9:60] [WebexConnect_22be296b-bc6b-4a6f-af6d-a84c0fb67a01_30408_158393]
[DEBUG] 2024-07-11 14:05:46.024 [TaskNotificationProcessor-3:153] [] TaskNotificationProcessor - NotificationReceived
[DEBUG] 2024-07-11 14:05:46.025 [TaskNotificationProcessor-3:153] [] NotificationRestClient - Sending notification to CCE
```

```
[DEBUG] 2024-07-11 14:05:46.025 [TaskNotificationProcessor-3:153] [] NotificationRestClient - increment
[INFO ] 2024-07-11 14:05:46.025 [http-nio-127.0.0.1-8091-exec-9:60] [WebexConnect_22be296b-bc6b-4a6f-af
[INFO ] 2024-07-11 14:05:46.031 [http-nio-127.0.0.1-8091-exec-9:60] [WebexConnect_22be296b-bc6b-4a6f-af
```

This NEW_TASK request is then sent to the MR-PIM:

```
[INFO ] 2024-07-11 14:05:46.038 [ApiRequestsProcessorThread:211] [] MrRequestProcessor - NEW_TASK Reque
[INFO ] 2024-07-11 14:05:46.038 [ApiRequestsProcessorThread:211] [] MrRequestProcessor - Sent RequestMe
[DEBUG] 2024-07-11 14:05:46.038 [ApiRequestsProcessorThread:211] [] MrRequestProcessor - Sent NewTaskV5
```

Task state is queued and then routed:

```
[INFO ] 2024-07-11 14:05:46.044 [ApiRequestsProcessorThread:211] [] RedissonQueues - Enqueued Notificat
[INFO ] 2024-07-11 14:05:46.052 [MRProcessorThread:136] [] RedissonQueues - Enqueued Notification on qu
[DEBUG] 2024-07-11 14:05:46.055 [MRProcessorThread:136] [] ServiceCounterTrace - DrapiCountersCurrentIn
[INFO ] 2024-07-11 14:05:46.540 [TaskNotificationProcessor-3:153] [] NotificationRestClient - Sending n
[DEBUG] 2024-07-11 14:05:46.542 [TaskNotificationProcessor-3:153] [] ServiceCounterTrace - DrapiCounter
[DEBUG] 2024-07-11 14:05:46.543 [TaskNotificationProcessor-3:153] [] TaskNotificationProcessor - Notifi
[DEBUG] 2024-07-11 14:05:46.543 [TaskNotificationProcessor-3:153] [] NotificationRestClient - Sending n
[INFO ] 2024-07-11 14:05:46.656 [TaskNotificationProcessor-3:153] [] NotificationRestClient - Sending n
[DEBUG] 2024-07-11 14:05:46.658 [TaskNotificationProcessor-3:153] [] ServiceCounterTrace - DrapiCounter
[DEBUG] 2024-07-11 14:05:46.659 [TaskNotificationProcessor-3:153] [] TaskNotificationProcessor - Notifi
[DEBUG] 2024-07-11 14:05:46.659 [TaskNotificationProcessor-3:153] [] NotificationRestClient - Sending n
[DEBUG] 2024-07-11 14:05:46.659 [TaskNotificationProcessor-3:153] [] NotificationRestClient - increment
[INFO ] 2024-07-11 14:05:46.764 [TaskNotificationProcessor-3:153] [] NotificationRestClient - Sending n
[DEBUG] 2024-07-11 14:05:46.765 [TaskNotificationProcessor-3:153] [] ServiceCounterTrace - DrapiCounter
.
.
.
.
```

TASK is now ended successfully:

```
[DEBUG] 2024-07-11 14:07:37.615 [http-nio-127.0.0.1-8091-exec-7:58] [] FilterChainProxy - Securing POST
[DEBUG] 2024-07-11 14:07:37.615 [http-nio-127.0.0.1-8091-exec-7:58] [] FilterChainProxy - Securing POST
[DEBUG] 2024-07-11 14:07:37.679 [http-nio-127.0.0.1-8091-exec-7:58] [FINESSE_b8526c49-5dfc-43b4-ba55-1a
[INFO ] 2024-07-11 14:07:37.679 [http-nio-127.0.0.1-8091-exec-7:58] [FINESSE_b8526c49-5dfc-43b4-ba55-1a
[INFO ] 2024-07-11 14:07:37.701 [http-nio-127.0.0.1-8091-exec-7:58] [FINESSE_b8526c49-5dfc-43b4-ba55-1a
[DEBUG] 2024-07-11 14:07:37.703 [TaskNotificationProcessor-3:153] [] NotificationRestClient - Sending n
[DEBUG] 2024-07-11 14:07:37.703 [TaskNotificationProcessor-3:153] [] NotificationRestClient - increment
[INFO ] 2024-07-11 14:07:38.171 [TaskNotificationProcessor-3:153] [] NotificationRestClient - Sending n
[DEBUG] 2024-07-11 14:07:38.173 [TaskNotificationProcessor-3:153] [] ServiceCounterTrace - DrapiCounter
```

Router

<#root>

NewCall request received from MR PG:

```
14:05:46:019 ra-rtr Trace: (14 x 0 : 0 0) NewCall: CID=(154689,2448), DN=WxConnectChat1, ANI=, CED=, RC
14:05:46:019 ra-rtr Trace: RCKSeqNum=-1, NIC_DN= ServiceRequested=0 OrigRCCallID{PhyCtrlID=0, RCID=0, D
14:05:46:019 ra-rtr Trace: ID Name Type Index Value
14:05:46:019 ra-rtr Trace: 5041 user_DR_CustomerName Scalar Customer
14:05:46:019 ra-rtr Trace: 5040 user_DR_MediaResourceID Scalar CSR4PMKEIFWI7EMX
```

14:05:46:019 ra-rtr Trace: 5038 user_DR_Primary Scalar 0cloudconnect1.dcloud.cisco.com
14:05:46:019 ra-rtr Trace: 5039 user_DR_Backup Scalar 0
14:05:46:019 ra-rtr Trace: 5042 user_DR_MediaChannelName Scalar chat

RouteComplete:

14:05:46:019 ra-rtr Trace: (14 x 0 : 0 0) RouteComplete:
14:05:46:019 ra-rtr Trace: Route: DN=WxConnectChat1, ANI=, CED=, Label=
14:05:46:019 ra-rtr Trace: Route: CID=(154689,2448), Labels=1

DeviceTargetPreCall message sent to the Agent PG with the ECC variables:

14:05:46:019 ra-rtr Trace: (14 x 0 : 0 0) DeviceTargetPreCall_V15: CID=(154689,2448), PerID=5000, SGSTI
14:05:46:019 ra-rtr Trace: DN=WxConnectChat1, ANI=, CED=, CustDBProvidedDigits=, RouteID=5039, NetworkT
14:05:46:019 ra-rtr Trace: RCKSeqNum=0, DelayQTime=0, DelayRouterTime=0, SGDelayQTime=0
14:05:46:019 ra-rtr Trace: CallGUID=, CustomerID=1 ServiceRequested=0
14:05:46:019 ra-rtr Trace: LocationParamPKID=, LocationParamName=, SIPHeader=
14:05:46:019 ra-rtr Trace: NIC_CalledPartyNumber=WxConnectChat1 ECCPayloadID=1
14:05:46:019 ra-rtr Trace: OrigRCCallID{PhyCtrlID=0, RCID=0, DlgID=0x0} OrigOperationType=0
14:05:46:019 ra-rtr Trace: PV1= PV2= PV3= PV4= PV5=
14:05:46:019 ra-rtr Trace: PV6= PV7= PV8= PV9= PV10=
14:05:46:019 ra-rtr Trace: ID Name Type Index Value
14:05:46:019 ra-rtr Trace: 5038 user_DR_Primary Scalar 0cloudconnect1.dcloud.cisco.com
14:05:46:019 ra-rtr Trace: 5039 user_DR_Backup Scalar 0
14:05:46:019 ra-rtr Trace: 5040 user_DR_MediaResourceID Scalar CSR4PMKEIFWI7EMX
14:05:46:019 ra-rtr Trace: 5041 user_DR_CustomerName Scalar Customer
14:05:46:019 ra-rtr Trace: 5042 user_DR_MediaChannelName Scalar chat

Connect Label sent to MR PG with the ECC variables:

14:05:46:019 ra-rtr Trace: (14 x 0 : 0 0) Connect: CID=(154689,2448), EventSelect=0x0, ServiceType=0, R
14:05:46:019 ra-rtr Trace: ID Name Type Index Value
14:05:46:019 ra-rtr Trace: 5038 user_DR_Primary Scalar 0cloudconnect1.dcloud.cisco.com
14:05:46:019 ra-rtr Trace: 5039 user_DR_Backup Scalar 0
14:05:46:019 ra-rtr Trace: 5040 user_DR_MediaResourceID Scalar CSR4PMKEIFWI7EMX
14:05:46:019 ra-rtr Trace: 5041 user_DR_CustomerName Scalar Customer
14:05:46:019 ra-rtr Trace: 5042 user_DR_MediaChannelName Scalar chat
14:05:46:019 ra-rtr Trace: (14 x 0 : 0 0) Deleting Dialog.

PG

MR-PG PIM

<#root>

NEW_TASK request on mr pim:

14:05:46:132 PG2A-pim5 Trace: Application->PG:
Message = NEW_TASK; Length = 280 bytes
DialogueID = (14) Hex 0000000e
SendSeqNo = (1) Hex 00000001
MRDomainID = (5016) Hex 00001398
PreviousTask = -1:-1:-1

PreferredAgent = Undefined
Service = Undefined
CiscoReserved = (0) Hex 00000000
ScriptSelector: WxConnectChat1
ApplicationString2: 22be296b-bc6b-4a6f-af6d-a84c0fb67a01
ServiceRequested = (0) Hex 00000000
QueueType = (0) Hex 00000000
QueueID = Undefined

NewCall request is now sent to the Router:

14:05:46:132 PG2A-pim5 Trace: Send INRCMSGNewCall to Router : :
NEW_CALL RCID=5007 PID=5001 DID=14 DIDRelSeq#=1 GrpDelKey=5007 CRS(RtrDate=-1,RtrCID=-1) RCKSeq#=-1 NIC

Router responds back with the Connect label:

14:05:46:132 PG2A-pim5 Trace: MR_Peripheral::On_Router_Connect:
CONNECT RCID=5007 PID=5001 DID=14 DIDRelSeq#=0 CRS(RtrDate=154689,RtrCID=2448) RCKSeq#=0 ErrorCode=0 TR

DO_THIS_WITH_TASK message sent over to WxConnect:

14:05:46:132 PG2A-pim5 Trace: PG->Application:
Message = DO_THIS_WITH_TASK; Length = 250 bytes
DialogueID = (14) Hex 0000000e
SendSeqNo = (1) Hex 00000001
IcmTaskID = 154689:2448: 1
SkillGroup = (5239) Hex 00001477
Service = Undefined
Agent = (5172) Hex 00001434
AgentInfo: 5172
Label:
ApplicationString2:
MRDID = (5016) Hex 00001398
Interruptible = (0) Hex 00000000
PrecisionQueueID = (0) Hex 00000000

MR-PG OPC

<#root>

NEW_CALL request received from the digital routing service on the Cloud Connect server, with the ECC

14:05:46:132 PG2A-opc Trace: SendINRCMessage: NEW_CALL RCID=5007 PID=5001 DID=14 DIDRelSeq#=1 GrpDelKey:
Name Type Index Value
user_DR_CustomerName Scalar Customer
user_DR_MediaResourceID Scalar CSR4PMKEIFWI7EMX
user_DR_Primary Scalar 0cloudconnect1.dcloud.cisco.com
user_DR_Backup Scalar 0
user_DR_MediaChannelName Scalar chat
14:05:46:132 PG2A-opc Trace: ProcessINRCMsgs - BEGIN Msg=8 src=48 dest=1 flag=2 size=444

CONNECT label received from router with the ECC variables:


```
14:05:46:132 PG2A-opc Trace: SendPIMINRCMessage: CONNECT RCID=5007 PID=5001 DID=14 DIDRelSeq#=0 CRS(Rtr
Name Type Index Value
user_DR_Primary          Scalar 0cloudconnect1.dcloud.cisco.com
user_DR_Backup           Scalar 0
user_DR_MediaResourceID   Scalar CSR4PMKEIFWI7EMX
user_DR_CustomerName      Scalar Customer
user_DR_MediaChannelName  Scalar chat
```

BuildClosedCallRecord after chat ends:

```
14:05:46:132 PG2A-opc Trace: BuildClosedCallRecord: CallObj=0x4473dc8 DateTime=07/11 18:05:45 IntervalD
14:05:46:132 PG2A-opc Trace: PV1=(null) PV2=(null) PV3=(null) PV4=(null) PV5=(null) PV6=(null) PV7=(nu
14:05:46:132 PG2A-opc Trace: BuildClosedCallRecord:
Name Type Index Value
user_DR_Primary          Scalar 0cloudconnect1.dcloud.cisco.com
user_DR_Backup           Scalar 0
user_DR_MediaResourceID   Scalar CSR4PMKEIFWI7EMX
user_DR_CustomerName      Scalar Customer
user_DR_MediaChannelName  Scalar chat
```

Agent PG - OPC

<#root>

Agent PG receives the Device Precall Indicator message along with the ECC variables as agent '5172' i

```
14:05:46:132 PG3A-opc Trace: ProcessARMPreCallMsg - Precall received for Agent '5172' MRDomainID '5016'
14:05:46:132 PG3A-opc Trace: callVar1 '' callVar2 '' callVar3 '' callVar4 ''
callVar5 '' callVar6 '' callVar7 '' callVar8 ''
callVar9 '' callVar10 ''
ECCDataSize '85'
14:05:46:132 PG3A-opc Trace: Name Type Index Value
14:05:46:132 PG3A-opc Trace: user_DR_Primary          Scalar 0cloudconnect1.dcloud.cisco.com
14:05:46:132 PG3A-opc Trace: user_DR_Backup           Scalar 0
14:05:46:132 PG3A-opc Trace: user_DR_MediaResourceID   Scalar CSR4PMKEIFWI7EMX
14:05:46:132 PG3A-opc Trace: user_DR_CustomerName      Scalar Customer
14:05:46:132 PG3A-opc Trace: user_DR_MediaChannelName  Scalar chat
14:05:46:132 PG3A-opc Trace: MergeECCData Task ID 154689:2448:1, Payload ID 0, New Payload 1
```

OfferTaskInd >> StartTaskInd >> EndTaskInd:

```
14:05:51:321 PG3A-opc Trace: OfferTaskInd - InvokeID = 2375719, ClientInvokeID = 2375719, MRDID = 5016,
SkillGroupID = 5239, ServiceID = -1, SessionID = 2
14:05:52:133 PG3A-opc Trace: StartTaskInd - InvokeID = 2375721, ClientInvokeID = 2375721, MRDID = 5016,
SkillGroupID = 5239, ServiceID = -1, SessionID = 2
14:07:35:168 PG3A-opc Trace: EndTaskInd - InvokeID = 2376024, ClientInvokeID = 2376024, TaskID = 154689,
WrapupData = , ApplicationData =
```

BuildTerminationRecordMsg:

```
14:07:35:168 PG3A-opc Trace: TaskObj::BuildTerminationRecordMsg - DateTime='07/11 18:07:34' Periph=5000
14:07:35:168 PG3A-opc Trace: Var1='(null)' Var2='(null)' Var3='(null)' Var4='(null)' Var5='(null)' Var6=
```

14:07:35:168 PG3A-opc Trace: AgentSessionID=5172-133650295444320000 NetworkTargetID=-1 TrunkGroupID=-1
14:07:35:168 PG3A-opc Trace: Name Type Index Value
14:07:35:168 PG3A-opc Trace: user_DR_Primary Scalar 0cloudconnect1.dcloud.cisco.com
14:07:35:168 PG3A-opc Trace: user_DR_Backup Scalar 0
14:07:35:168 PG3A-opc Trace: user_DR_MediaResourceID Scalar CSR4PMKEIFWI7EMX
14:07:35:168 PG3A-opc Trace: user_DR_CustomerName Scalar Customer
14:07:35:168 PG3A-opc Trace: user_DR_MediaChannelName Scalar chat

Browser Console

<#root>

Agent is RESERVED:

14:05:57.964 2024-07-11T14:05:57.964 -04:00: : finesse1.dcloud.cisco.com: Jul 11 2024 14:05:57.963 -0400
<data>
<media>
<description>WxConnect Chat</description>
<dialogLogoutAction>CLOSE</dialogLogoutAction>
<id>5016</id>
<interruptAction>IGNORE</interruptAction>
<interruptible>false</interruptible>
<maxDialogLimit>3</maxDialogLimit>
<name>WxConnectChat</name>
<routable>true</routable>
<state>RESERVED</state>
<stateChangeTime>2024-07-11T18:05:57.952Z</stateChangeTime>
<uri>/finesse/api/User/1080/Media/5016</uri>
</media>
</data>
<event>PUT</event>
<requestId></requestId>
<source>/finesse/api/User/1080/Media/5016</source>
</Update>
14:05:57.966 2024-07-11T14:05:57.966 -04:00: : finesse1.dcloud.cisco.com: Jul 11 2024 14:05:57.965 -0400
<data>
<media>
<description>WxConnect Chat</description>
<dialogLogoutAction>CLOSE</dialogLogoutAction>
<id>5016</id>
<interruptAction>IGNORE</interruptAction>
<interruptible>false</interruptible>
<maxDialogLimit>3</maxDialogLimit>
<name>WxConnectChat</name>
<routable>true</routable>
<state>RESERVED</state>
<stateChangeTime>2024-07-11T18:05:57.952Z</stateChangeTime>
<uri>/finesse/api/User/1080/Media/5016</uri>
</media>
</data>
<event>PUT</event>
<requestId></requestId>
<source>/finesse/api/User/1080/Media/5016</source>
</Update>
14:05:57.968 2024-07-11T14:05:57.968 -04:00: : finesse1.dcloud.cisco.com: Jul 11 2024 14:05:57.967 -0400
14:05:57.972 :: Media change a{_super: undefined, _id: '5016', _restObj: a, autoSubscribe: true, context: a}
14:05:57.972 Finesse-IMI Gadget : [useDigitalChannel Hook] [handleMediaChange] : media change event received

Agent is OFFERED the chat with the ACCEPT action available to the agent:

14:05:57.975 Finesse-IMI Gadget : [useDigitalChannel Hook] [cacheMediaStates] : final cached item : {"5
14:05:57.975 2024-07-11T14:05:57.975 -04:00: : finesse1.dcloud.cisco.com: Jul 11 2024 14:05:57.974 -040

```
<data>
<dialogs>
<Dialog>
<taskId>
<routerCallKeyDay>154689</routerCallKeyDay>
<routerCallKeyCallID>2448</routerCallKeyCallID>
<routerCallKeySequenceNum>1</routerCallKeySequenceNum>
</taskId>
<id>154689_2448_1</id>
<mediaProperties>
<mediaId>5016</mediaId>
<dialledNumber>WxConnectChat1</dialledNumber>
<callvariables>
<CallVariable>
<name>callVariable1</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable2</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable3</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable4</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable5</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable6</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable7</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable8</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable9</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable10</name>
<value></value>
</CallVariable>
<CallVariable>
<name>user_DR_Primary</name>
<value>cloudconnect1.dcloud.cisco.com</value>
```

```
</CallVariable>
<CallVariable>
<name>user_DR_Backup</name>
<value></value>
</CallVariable>
<CallVariable>
<name>user_DR_MediaResourceID</name>
<value>CSR4PMKEIFWI7EMX</value>
</CallVariable>
<CallVariable>
<name>user_DR_CustomerName</name>
<value>Customer</value>
</CallVariable>
<CallVariable>
<name>user_DR_MediaChannelName</name>
<value>chat</value>
</CallVariable>
</callvariables>
<queueNumber>11180119</queueNumber>
<queueName>WxConnectChat1</queueName>
<callKeyCallId>2448</callKeyCallId>
<callKeyPrefix>154689</callKeyPrefix>
<callKeySequenceNum>1</callKeySequenceNum>
</mediaProperties>
<mediaType>WxConnectChat</mediaType>
<mediaChannel>chat</mediaChannel>
<mediaClass>chat</mediaClass>
<participants>
<Participant>
<actions>
<action>ACCEPT</action>
</actions>
<mediaAddress>1080</mediaAddress>
<mediaAddressType></mediaAddressType>
<startTime>2024-07-11T18:05:57.955Z</startTime>
<state>OFFERED</state>
<stateCause></stateCause>
<stateChangeTime>2024-07-11T18:05:57.955Z</stateChangeTime>
</Participant>
</participants>
<state>OFFERED</state>
<uri>/finesse/api/Dialog/154689_2448_1</uri>
</Dialog>
</dialogs>
</data>
<event>POST</event>
<requestId></requestId>
<source>/finesse/api/User/1080/Media/5016/Dialogs</source>
</Update>
14:05:57.978 2024-07-11T14:05:57.978 -04:00: : finesse1.dcloud.cisco.com: Jul 11 2024 14:05:57.977 -0400
<data>
<dialogs>
<Dialog>
<taskId>
<routerCallKeyDay>154689</routerCallKeyDay>
<routerCallKeyCallID>2448</routerCallKeyCallID>
<routerCallKeySequenceNum>1</routerCallKeySequenceNum>
</taskId>
<id>154689_2448_1</id>
<mediaProperties>
<mediaId>5016</mediaId>
<dialledNumber>WxConnectChat1</dialledNumber>
```

```
<callvariables>
<CallVariable>
<name>callVariable1</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable2</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable3</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable4</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable5</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable6</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable7</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable8</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable9</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable10</name>
<value></value>
</CallVariable>
<CallVariable>
<name>user_DR_Primary</name>
<value>cloudconnect1.dcloud.cisco.com</value>
</CallVariable>
<CallVariable>
<name>user_DR_Backup</name>
<value></value>
</CallVariable>
<CallVariable>
<name>user_DR_MediaResourceID</name>
<value>CSR4PMKEIFWI7EMX</value>
</CallVariable>
<CallVariable>
<name>user_DR_CustomerName</name>
<value>Customer</value>
</CallVariable>
<CallVariable>
<name>user_DR_MediaChannelName</name>
<value>chat</value>
</CallVariable>
</callvariables>
```

```
<queueNumber>11180119</queueNumber>
<queueName>WxConnectChat1</queueName>
<callKeyCallId>2448</callKeyCallId>
<callKeyPrefix>154689</callKeyPrefix>
<callKeySequenceNum>1</callKeySequenceNum>
</mediaProperties>
<mediaType>WxConnectChat</mediaType>
<mediaChannel>chat</mediaChannel>
<mediaClass>chat</mediaClass>
<participants>
<Participant>
<actions>
<action>ACCEPT</action>
</actions>
<mediaAddress>1080</mediaAddress>
<mediaAddressType></mediaAddressType>
<startTime>2024-07-11T18:05:57.955Z</startTime>
<state>OFFERED</state>
<stateCause></stateCause>
<stateChangeTime>2024-07-11T18:05:57.955Z</stateChangeTime>
</Participant>
</participants>
<state>OFFERED</state>
<uri>/finesse/api/Dialog/154689_2448_1</uri>
</Dialog>
</dialogs>
</data>
<event>POST</event>
<requestId></requestId>
<source>/finesse/api/User/1080/Media/5016/Dialogs</source>
</Update>
14:05:57.979 2024-07-11T14:05:57.979 -04:00: : finesse1.dcloud.cisco.com: Jul 11 2024 14:05:57.978 -0400
14:05:57.979 2024-07-11T14:05:57.979 -04:00: : finesse1.dcloud.cisco.com: Jul 11 2024 14:05:57.978 -0400
14:05:57.980 2024-07-11T14:05:57.980 -04:00: : finesse1.dcloud.cisco.com: Jul 11 2024 14:05:57.979 -0400
14:05:57.981 2024-07-11T14:05:57.981 -04:00: : finesse1.dcloud.cisco.com: Jul 11 2024 14:05:57.980 -0400
14:05:57.988 :: usemediasetup processTask- a{_id: '154689_2448_1', _restObj: undefined, autoSubscribe:
14:05:57.989 ::- MediaPopover _showPopOver before popover {taskId: {...}, id: '154689_2448_1', mediaPrope
```

Agent ACCEPT's the chat:

```
14:06:00.353 2024-07-11T14:06:00.353 -04:00: : finesse1.dcloud.cisco.com: Jul 11 2024 14:06:00.352 -0400
14:06:00.354 2024-07-11T14:06:00.354 -04:00: : finesse1.dcloud.cisco.com: Jul 11 2024 14:06:00.353 -0400
14:06:00.355 ::- MediaPopover popOverCallBack:Received popover callback with response {popoverId: '940a
14:06:00.356 ::- MediaPopover _handleMedia {popoverId: '940a0c56-c305-456f-90a6-9aaf8871fcee', source:
14:06:00.358 2024-07-11T14:06:00.357 -04:00: : finesse1.dcloud.cisco.com: Jul 11 2024 14:06:00.356 -0400
14:06:00.364 ::- MediaPopover dismissPopOver before dismiss a{_super: undefined, _id: '154689_2448_1',
14:06:00.365 2024-07-11T14:06:00.365 -04:00: : finesse1.dcloud.cisco.com: Jul 11 2024 14:06:00.364 -0400
14:06:00.367 ::- MediaPopover dismissPopOver after dismiss {} {} {}
14:06:00.371 2024-07-11T14:06:00.371 -04:00: : finesse1.dcloud.cisco.com: Jul 11 2024 14:06:00.370 -0400
14:06:00.427 2024-07-11T14:06:00.427 -04:00: : finesse1.dcloud.cisco.com: Jul 11 2024 14:06:00.426 -0400
14:06:00.428 success: Could move the task to ACCEPT state {status: 202, content: null, isUnsent: false,
```

Chat state is now ACCEPTED:

```
14:06:00.543 2024-07-11T14:06:00.543 -04:00: : finesse1.dcloud.cisco.com: Jul 11 2024 14:06:00.542 -0400
<data>
<dialog>
```

```
<taskId>
<routerCallKeyDay>154689</routerCallKeyDay>
<routerCallKeyCallID>2448</routerCallKeyCallID>
<routerCallKeySequenceNum>1</routerCallKeySequenceNum>
</taskId>
<id>154689_2448_1</id>
<mediaProperties>
<mediaId>5016</mediaId>
<dialNumber>WxConnectChat1</dialNumber>
<callVariables>
<CallVariable>
<name>callVariable1</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable2</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable3</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable4</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable5</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable6</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable7</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable8</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable9</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable10</name>
<value></value>
</CallVariable>
<CallVariable>
<name>user_DR_Primary</name>
<value>cloudconnect1.dcloud.cisco.com</value>
</CallVariable>
<CallVariable>
<name>user_DR_Backup</name>
<value></value>
</CallVariable>
<CallVariable>
<name>user_DR_MediaResourceID</name>
<value>CSR4PMKEIFWI7EMX</value>
</CallVariable>
```

```
<CallVariable>
<name>user_DR_CustomerName</name>
<value>Customer</value>
</CallVariable>
<CallVariable>
<name>user_DR_MediaChannelName</name>
<value>chat</value>
</CallVariable>
</callvariables>
<queueNumber>11180119</queueNumber>
<queueName>WxConnectChat1</queueName>
<callKeyCallId>2448</callKeyCallId>
<callKeyPrefix>154689</callKeyPrefix>
<callKeySequenceNum>1</callKeySequenceNum>
</mediaProperties>
<mediaType>WxConnectChat</mediaType>
<mediaChannel>chat</mediaChannel>
<mediaClass>chat</mediaClass>
<participants>
<Participant>
<actions>
<action>UPDATE_CALL_DATA</action>
<action>TRANSFER</action>
<action>START</action>
<action>CLOSE</action>
</actions>
<mediaAddress>1080</mediaAddress>
<mediaAddressType></mediaAddressType>
<startTime>2024-07-11T18:05:57.955Z</startTime>
<state>ACCEPTED</state>
<stateCause></stateCause>
<stateChangeTime>2024-07-11T18:06:00.421Z</stateChangeTime>
</Participant>
</participants>
<state>ACCEPTED</state>
<uri>/finesse/api/Dialog/154689_2448_1</uri>
</dialog>
</data>
<event>PUT</event>
<requestId></requestId>
<source>/finesse/api/Dialog/154689_2448_1</source>
</Update>
14:06:00.546 2024-07-11T14:06:00.546 -04:00: : finesse1.dcloud.cisco.com: Jul 11 2024 14:06:00.545 -0400
<data>
<dialog>
<taskId>
<routerCallKeyDay>154689</routerCallKeyDay>
<routerCallKeyCallID>2448</routerCallKeyCallID>
<routerCallKeySequenceNum>1</routerCallKeySequenceNum>
</taskId>
<id>154689_2448_1</id>
<mediaProperties>
<mediaId>5016</mediaId>
<dialNumber>WxConnectChat1</dialNumber>
<callvariables>
<CallVariable>
<name>callVariable1</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable2</name>
<value></value>
```



```
</CallVariable>
<CallVariable>
<name>callVariable3</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable4</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable5</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable6</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable7</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable8</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable9</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable10</name>
<value></value>
</CallVariable>
<CallVariable>
<name>user_DR_Primary</name>
<value>cloudconnect1.dcloud.cisco.com</value>
</CallVariable>
<CallVariable>
<name>user_DR_Backup</name>
<value></value>
</CallVariable>
<CallVariable>
<name>user_DR_MediaResourceID</name>
<value>CSR4PMKEIFWI7EMX</value>
</CallVariable>
<CallVariable>
<name>user_DR_CustomerName</name>
<value>Customer</value>
</CallVariable>
<CallVariable>
<name>user_DR_MediaChannelName</name>
<value>chat</value>
</CallVariable>
</callvariables>
<queueNumber>11180119</queueNumber>
<queueName>WxConnectChat1</queueName>
<callKeyCallId>2448</callKeyCallId>
<callKeyPrefix>154689</callKeyPrefix>
<callKeySequenceNum>1</callKeySequenceNum>
</mediaProperties>
<mediaType>WxConnectChat</mediaType>
<mediaChannel>chat</mediaChannel>
```

```
<mediaClass>chat</mediaClass>
<participants>
<Participant>
<actions>
<action>UPDATE_CALL_DATA</action>
<action>TRANSFER</action>
<action>START</action>
<action>CLOSE</action>
</actions>
<mediaAddress>1080</mediaAddress>
<mediaAddressType></mediaAddressType>
<startTime>2024-07-11T18:05:57.955Z</startTime>
<state>ACCEPTED</state>
<stateCause></stateCause>
<stateChangeTime>2024-07-11T18:06:00.421Z</stateChangeTime>
</Participant>
</participants>
<state>ACCEPTED</state>
<uri>/finesse/api/Dialog/154689_2448_1</uri>
</dialog>
</data>
<event>PUT</event>
<requestId></requestId>
<source>/finesse/api/Dialog/154689_2448_1</source>
</Update>
14:06:00.548 2024-07-11T14:06:00.548 -04:00: : finesse1.dcloud.cisco.com: Jul 11 2024 14:06:00.547 -0400
14:06:00.548 2024-07-11T14:06:00.548 -04:00: : finesse1.dcloud.cisco.com: Jul 11 2024 14:06:00.547 -0400
14:06:00.549 2024-07-11T14:06:00.549 -04:00: : finesse1.dcloud.cisco.com: Jul 11 2024 14:06:00.548 -0400
14:06:00.549 2024-07-11T14:06:00.549 -04:00: : finesse1.dcloud.cisco.com: Jul 11 2024 14:06:00.548 -0400
14:06:00.552 :: usemediasetup processTask- a{super: undefined, _id: '154689_2448_1', _restObj: undefin
```

Chat session ended and agent is moved to the WORK_READY state:

```
14:07:32.910 moved to wrap-up state successfully
14:07:32.911 2024-07-11T14:07:32.911 -04:00: : finesse1.dcloud.cisco.com: Jul 11 2024 14:07:32.955 -0400
<data>
<media>
<description>WxConnect Chat</description>
<dialogLogoutAction>CLOSE</dialogLogoutAction>
<id>5016</id>
<interruptAction>IGNORE</interruptAction>
<interruptible>false</interruptible>
<maxDialogLimit>3</maxDialogLimit>
<name>WxConnectChat</name>
<routable>true</routable>
<state>WORK_READY</state>
<stateChangeTime>2024-07-11T18:07:32.895Z</stateChangeTime>
<uri>/finesse/api/User/1080/Media/5016</uri>
</media>
</data>
<event>PUT</event>
<requestId></requestId>
<source>/finesse/api/User/1080/Media/5016</source>
</Update>
14:07:32.914 2024-07-11T14:07:32.914 -04:00: : finesse1.dcloud.cisco.com: Jul 11 2024 14:07:32.958 -0400
<data>
<media>
<description>WxConnect Chat</description>
<dialogLogoutAction>CLOSE</dialogLogoutAction>
<id>5016</id>
```

```
<interruptAction>IGNORE</interruptAction>
<interruptible>false</interruptible>
<maxDialogLimit>3</maxDialogLimit>
<name>WxConnectChat</name>
<routable>true</routable>
<state>WORK_READY</state>
<stateChangeTime>2024-07-11T18:07:32.895Z</stateChangeTime>
<uri>/finesse/api/User/1080/Media/5016</uri>
</media>
</data>
<event>PUT</event>
<requestId></requestId>
<source>/finesse/api/User/1080/Media/5016</source>
</Update>
14:07:32.915 2024-07-11T14:07:32.915 -04:00: : finesse1.dcloud.cisco.com: Jul 11 2024 14:07:32.959 -0400
14:07:32.920 :: Media change a{_super: undefined, _id: '5016', _restObj: a, autoSubscribe: true, context: undefined}
14:07:32.920 Finesse-IMI Gadget : [useDigitalChannel Hook] [handleMediaChange] : media change event received
14:07:32.921 Finesse-IMI Gadget : [useDigitalChannel Hook] [handleMediaChange] : caching all mrd's
14:07:32.921 Finesse-IMI Gadget : [useDigitalChannel Hook] [cacheMediaStates] : mediaListToBeCached : undefined
14:07:32.922 Finesse-IMI Gadget : [useDigitalChannel Hook] [cacheMediaStates] : final cached item : {"5016": {}}
```

Chat activity is now in the WRAPPING_UP state:

```
14:07:32.924 2024-07-11T14:07:32.924 -04:00: : finesse1.dcloud.cisco.com: Jul 11 2024 14:07:32.968 -0400
<data>
<dialog>
<taskId>
<routerCallKeyDay>154689</routerCallKeyDay>
<routerCallKeyCallID>2448</routerCallKeyCallID>
<routerCallKeySequenceNum>1</routerCallKeySequenceNum>
</taskId>
<id>154689_2448_1</id>
<mediaProperties>
<mediaId>5016</mediaId>
<dialNumber>WxConnectChat1</dialNumber>
<callVariables>
<CallVariable>
<name>callVariable1</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable2</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable3</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable4</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable5</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable6</name>
<value></value>
</CallVariable>
```

```
<CallVariable>
<name>callVariable7</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable8</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable9</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable10</name>
<value></value>
</CallVariable>
<CallVariable>
<name>user_DR_Primary</name>
<value>cloudconnect1.dcloud.cisco.com</value>
</CallVariable>
<CallVariable>
<name>user_DR_Backup</name>
<value></value>
</CallVariable>
<CallVariable>
<name>user_DR_MediaResourceID</name>
<value>CSR4PMKEIFWI7EMX</value>
</CallVariable>
<CallVariable>
<name>user_DR_CustomerName</name>
<value>Customer</value>
</CallVariable>
<CallVariable>
<name>user_DR_MediaChannelName</name>
<value>chat</value>
</CallVariable>
</callvariables>
<queueNumber>11180119</queueNumber>
<queueName>WxConnectChat1</queueName>
<callKeyCallId>2448</callKeyCallId>
<callKeyPrefix>154689</callKeyPrefix>
<callKeySequenceNum>1</callKeySequenceNum>
</mediaProperties>
<mediaType>WxConnectChat</mediaType>
<mediaChannel>chat</mediaChannel>
<mediaClass>chat</mediaClass>
<participants>
<Participant>
<actions>
<action>PAUSE</action>
<action>UPDATE_CALL_DATA</action>
<action>TRANSFER</action>
<action>CLOSE</action>
</actions>
<mediaAddress>1080</mediaAddress>
<mediaAddressType></mediaAddressType>
<startTime>2024-07-11T18:05:46.096Z</startTime>
<state>WRAPPING_UP</state>
<stateCause></stateCause>
<stateChangeTime>2024-07-11T18:07:32.895Z</stateChangeTime>
</Participant>
</participants>
```

```
<state>WRAPPING_UP</state>
<uri>/finesse/api/Dialog/154689_2448_1</uri>
</dialog>
</data>
<event>PUT</event>
<requestId></requestId>
<source>/finesse/api/Dialog/154689_2448_1</source>
</Update>
14:07:32.926 2024-07-11T14:07:32.926 -04:00: : finesse1.dcloud.cisco.com: Jul 11 2024 14:07:32.970 -0400
<data>
<dialog>
<taskId>
<routerCallKeyDay>154689</routerCallKeyDay>
<routerCallKeyCallID>2448</routerCallKeyCallID>
<routerCallKeySequenceNum>1</routerCallKeySequenceNum>
</taskId>
<id>154689_2448_1</id>
<mediaProperties>
<mediaId>5016</mediaId>
<dialledNumber>WxConnectChat1</dialledNumber>
<callVariables>
<CallVariable>
<name>callVariable1</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable2</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable3</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable4</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable5</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable6</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable7</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable8</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable9</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable10</name>
<value></value>
</CallVariable>
<CallVariable>
```

```
<name>user_DR_Primary</name>
<value>cloudconnect1.dcloud.cisco.com</value>
</CallVariable>
<CallVariable>
<name>user_DR_Backup</name>
<value></value>
</CallVariable>
<CallVariable>
<name>user_DR_MediaResourceID</name>
<value>CSR4PMKEIFWI7EMX</value>
</CallVariable>
<CallVariable>
<name>user_DR_CustomerName</name>
<value>Customer</value>
</CallVariable>
<CallVariable>
<name>user_DR_MediaChannelName</name>
<value>chat</value>
</CallVariable>
</callvariables>
<queueNumber>11180119</queueNumber>
<queueName>WxConnectChat1</queueName>
<callKeyCallId>2448</callKeyCallId>
<callKeyPrefix>154689</callKeyPrefix>
<callKeySequenceNum>1</callKeySequenceNum>
</mediaProperties>
<mediaType>WxConnectChat</mediaType>
<mediaChannel>chat</mediaChannel>
<mediaClass>chat</mediaClass>
<participants>
<Participant>
<actions>
<action>PAUSE</action>
<action>UPDATE_CALL_DATA</action>
<action>TRANSFER</action>
<action>CLOSE</action>
</actions>
<mediaAddress>1080</mediaAddress>
<mediaAddressType></mediaAddressType>
<startTime>2024-07-11T18:05:46.096Z</startTime>
<state>WRAPPING_UP</state>
<stateCause></stateCause>
<stateChangeTime>2024-07-11T18:07:32.895Z</stateChangeTime>
</Participant>
</participants>
<state>WRAPPING_UP</state>
<uri>/finesse/api/Dialog/154689_2448_1</uri>
</dialog>
</data>
<event>PUT</event>
<requestId></requestId>
<source>/finesse/api/Dialog/154689_2448_1</source>
</Update>
```

Chat session is now CLOSED:

```
14:07:35.185 finesse.js:3766 2024-07-11T14:07:35.185 -04:00: : finesse1.dcloud.cisco.com: Jul 11 2024 1
<data>
<dialogs>
<Dialog>
```

```
<taskId>
<routerCallKeyDay>154689</routerCallKeyDay>
<routerCallKeyCallID>2448</routerCallKeyCallID>
<routerCallKeySequenceNum>1</routerCallKeySequenceNum>
</taskId>
<id>154689_2448_1</id>
<mediaProperties>
<mediaId>5016</mediaId>
<wrapUpReason></wrapUpReason>
<dialNumber>WxConnectChat1</dialNumber>
<callVariables>
<CallVariable>
<name>callVariable1</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable2</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable3</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable4</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable5</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable6</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable7</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable8</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable9</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable10</name>
<value></value>
</CallVariable>
<CallVariable>
<name>user_DR_Primary</name>
<value>cloudconnect1.dcloud.cisco.com</value>
</CallVariable>
<CallVariable>
<name>user_DR_Backup</name>
<value></value>
</CallVariable>
<CallVariable>
<name>user_DR_MediaResourceID</name>
<value>CSR4PMKEIFWI7EMX</value>
```

```
</CallVariable>
<CallVariable>
<name>user_DR_CustomerName</name>
<value>Customer</value>
</CallVariable>
<CallVariable>
<name>user_DR_MediaChannelName</name>
<value>chat</value>
</CallVariable>
</callvariables>
<queueNumber>11180119</queueNumber>
<queueName>WxConnectChat1</queueName>
<callKeyCallId>2448</callKeyCallId>
<callKeyPrefix>154689</callKeyPrefix>
<callKeySequenceNum>1</callKeySequenceNum>
</mediaProperties>
<mediaType>WxConnectChat</mediaType>
<mediaChannel>chat</mediaChannel>
<mediaClass>chat</mediaClass>
<participants>
<Participant>
<actions>
</actions>
<mediaAddress>1080</mediaAddress>
<mediaAddressType></mediaAddressType>
<startTime>2024-07-11T18:05:46.096Z</startTime>
<state>CLOSED</state>
<stateCause></stateCause>
<stateChangeTime>2024-07-11T18:07:35.124Z</stateChangeTime>
</Participant>
</participants>
<dispositionCode>CD_NORMAL_END_TASK</dispositionCode>
<state>CLOSED</state>
<uri>/finesse/api/Dialog/154689_2448_1</uri>
</Dialog>
</dialogs>
</data>
<event>DELETE</event>
<requestId></requestId>
<source>/finesse/api/User/1080/Media/5016/Dialogs</source>
</Update>
14:07:35.188 finesse.js:3766 2024-07-11T14:07:35.188 -04:00: : finesse1.dcloud.cisco.com: Jul 11 2024 1
<data>
<dialogs>
<Dialog>
<taskId>
<routerCallKeyDay>154689</routerCallKeyDay>
<routerCallKeyCallID>2448</routerCallKeyCallID>
<routerCallKeySequenceNum>1</routerCallKeySequenceNum>
</taskId>
<id>154689_2448_1</id>
<mediaProperties>
<mediaId>5016</mediaId>
<wrapUpReason></wrapUpReason>
<dialNumber>WxConnectChat1</dialNumber>
<callvariables>
<CallVariable>
<name>callVariable1</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable2</name>
```



```
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable3</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable4</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable5</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable6</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable7</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable8</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable9</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable10</name>
<value></value>
</CallVariable>
<CallVariable>
<name>user_DR_Primary</name>
<value>cloudconnect1.dcloud.cisco.com</value>
</CallVariable>
<CallVariable>
<name>user_DR_Backup</name>
<value></value>
</CallVariable>
<CallVariable>
<name>user_DR_MediaResourceID</name>
<value>CSR4PMKEIFWI7EMX</value>
</CallVariable>
<CallVariable>
<name>user_DR_CustomerName</name>
<value>Customer</value>
</CallVariable>
<CallVariable>
<name>user_DR_MediaChannelName</name>
<value>chat</value>
</CallVariable>
</callvariables>
<queueNumber>11180119</queueNumber>
<queueName>WxConnectChat1</queueName>
<callKeyCallId>2448</callKeyCallId>
<callKeyPrefix>154689</callKeyPrefix>
<callKeySequenceNum>1</callKeySequenceNum>
</mediaProperties>
<mediaType>WxConnectChat</mediaType>
```

```

<mediaChannel>chat</mediaChannel>
<mediaClass>chat</mediaClass>
<participants>
<Participant>
<actions>
</actions>
<mediaAddress>1080</mediaAddress>
<mediaAddressType></mediaAddressType>
<startTime>2024-07-11T18:05:46.096Z</startTime>
<state>CLOSED</state>
<stateCause></stateCause>
<stateChangeTime>2024-07-11T18:07:35.124Z</stateChangeTime>
</Participant>
</participants>
<dispositionCode>CD_NORMAL_END_TASK</dispositionCode>
<state>CLOSED</state>
<uri>/finesse/api/Dialog/154689_2448_1</uri>
</Dialog>
</dialogs>
</data>
<event>DELETE</event>
<requestId></requestId>
<source>/finesse/api/User/1080/Media/5016/Dialogs</source>
</Update>

```

```

14:07:35.188 2024-07-11T14:07:35.188 -04:00: : finesse1.dcloud.cisco.com: Jul 11 2024 14:07:35.232 -0400
14:07:35.189 2024-07-11T14:07:35.189 -04:00: : finesse1.dcloud.cisco.com: Jul 11 2024 14:07:35.233 -0400
14:07:35.189 2024-07-11T14:07:35.189 -04:00: : finesse1.dcloud.cisco.com: Jul 11 2024 14:07:35.233 -0400

```

Related Information

Features Guide - Digital Channels Integration Using Webex Connect:

- **UCCE:**
https://www.cisco.com/c/en/us/td/docs/voice_ip_comm/cust_contact/contact_center/icm_enterprise/icm_enterprise_guide-1262/rcct_m_digital-channels-integration-webexconnect_12-6-2.html
- **PCCE:**
https://www.cisco.com/c/en/us/td/docs/voice_ip_comm/cust_contact/contact_center/pcce/pcce_12_6_2/maintenance_guide-1262/rcct_m_digital-channels-integration-webexconnect_12-6-2.html

Cisco Contact Center Enterprise Manage Digital Channels Gadget User Guide:

- https://www.cisco.com/c/en/us/td/docs/voice_ip_comm/cust_contact/contact_center/finesse/finesse_1262/user_guide-digital-channels/rcct_m_1262_manage-digital-channels.html

Administration and Setup Guide for Webex Engage with Cisco Contact Center Enterprise:

- https://www.cisco.com/c/dam/en/us/td/docs/voice_ip_comm/cust_contact/contact_center/icm_enterprise/wxengage_admin_guide-1262/rcct_m_1262_manage-digital-channels.html
- **Cisco Contact Center Enterprise (CCE) integration with Webex Connect**
https://help.imiconnect.io/docs/cce_overview