

Seguimiento de eventos de routing de tareas en un entorno CCE integrado con Webex Connect

Contenido

[Introducción](#)

[Prerequisites](#)

[Requerimientos:](#)

[Componente utilizado:](#)

[Background](#)

[Arquitectura de implementación](#)

[Registros](#)

[Portal de Webex Connect](#)

[Conexión a la nube: routing digital](#)

[Router](#)

[PG](#)

[Consola del explorador](#)

[Información Relacionada](#)

Introducción

Este documento describe el flujo de mensajes para una nueva tarea enrutada a un agente en una solución Contact Center Enterprise integrada con Webex Connect.

Prerequisites

Requerimientos:

Cisco recomienda que tenga conocimiento sobre estos temas:

- Cisco Packaged Contact Center Enterprise (PCCE)
- Cisco Unified Contact Center Enterprise (UCCE)
- Conexión Webex

Componente utilizado:

La información que contiene este documento se basa en las siguientes versiones de software y hardware.

- Versión de ICM: 12.6(2)
- Versión de Finesse: 12.6(2)
- Concentrador de control Webex
- Portal de Webex Connect


- Portal de Webex Engage


La información que contiene este documento se creó a partir de los dispositivos en un ambiente de laboratorio específico. Todos los dispositivos que se utilizan en este documento se pusieron en funcionamiento con una configuración verificada (predeterminada). Si tiene una red en vivo, asegúrese de entender el posible impacto de cualquier comando.

Background

Webex Connect permite a la empresa del Contact Center y a sus clientes interactuar a través de canales digitales como correo electrónico, chat y SMS. La solución Contact Center Enterprise (CCE) se integra con Webex Connect para crear una experiencia omnicanal perfecta para los clientes. Esta integración ayuda a los clientes a interactuar a través de los canales de comunicación de voz y digitales. Webex Connect ofrece un completo autoservicio y una integración de bot para permitir a los clientes obtener respuestas a algunas preguntas comunes. Proporciona una solución unificada para el routing integrado, Agent Desktop y el servicio de informes. Webex Connect proporciona un marco simplificado que ayuda a los partners y a los clientes a interactuar a través de los canales digitales.


Arquitectura de implementación

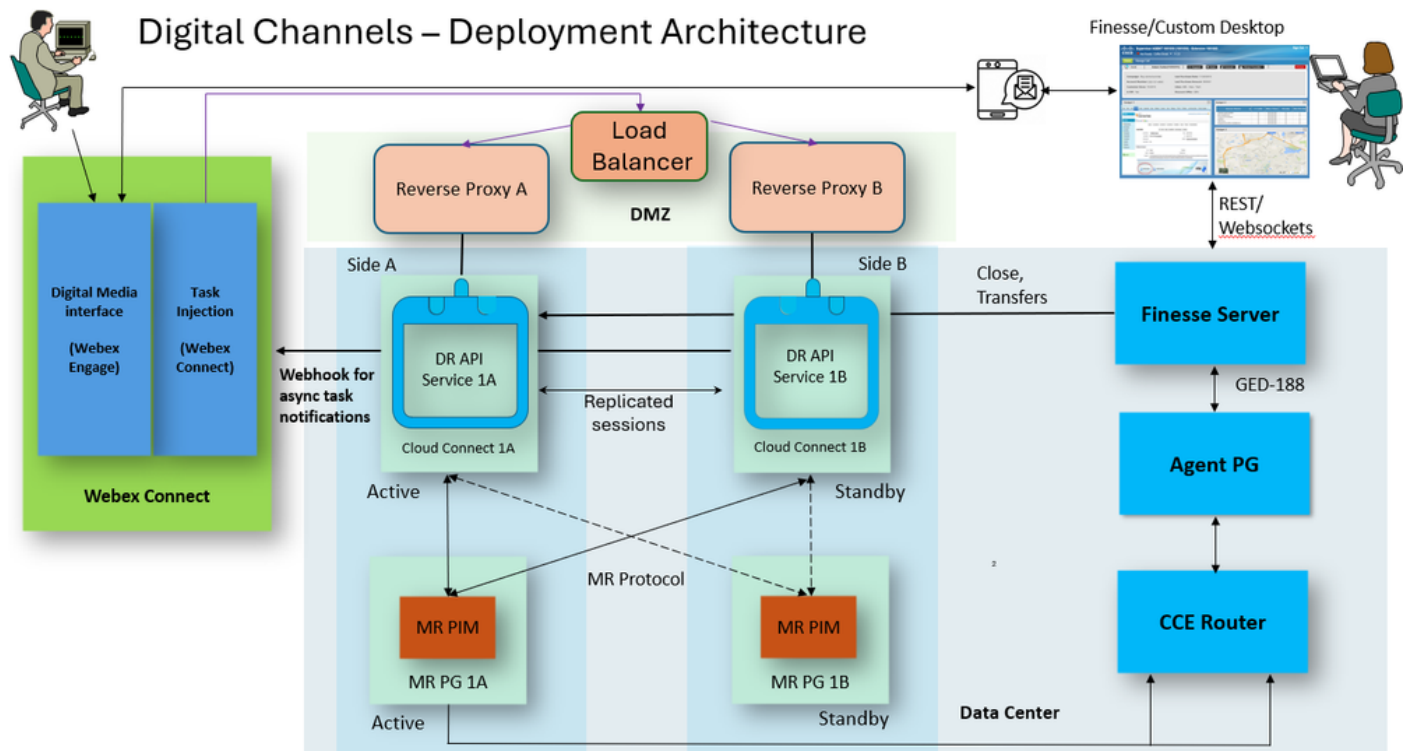

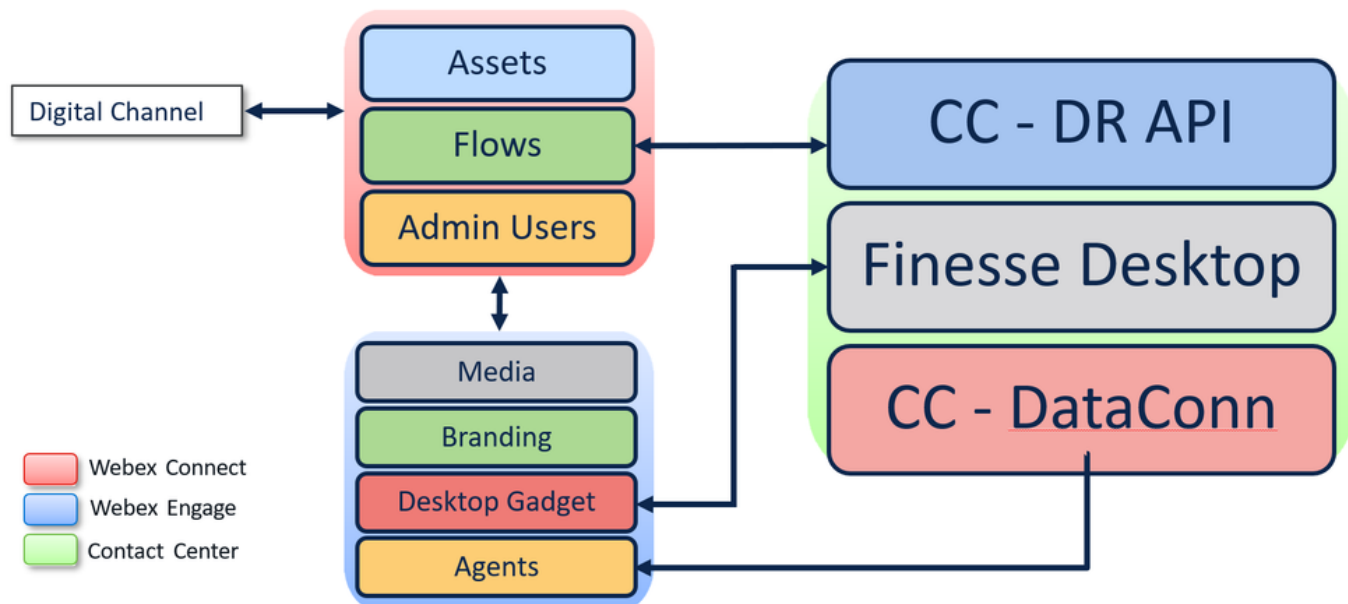

Resumen de componentes

Routing de actividad

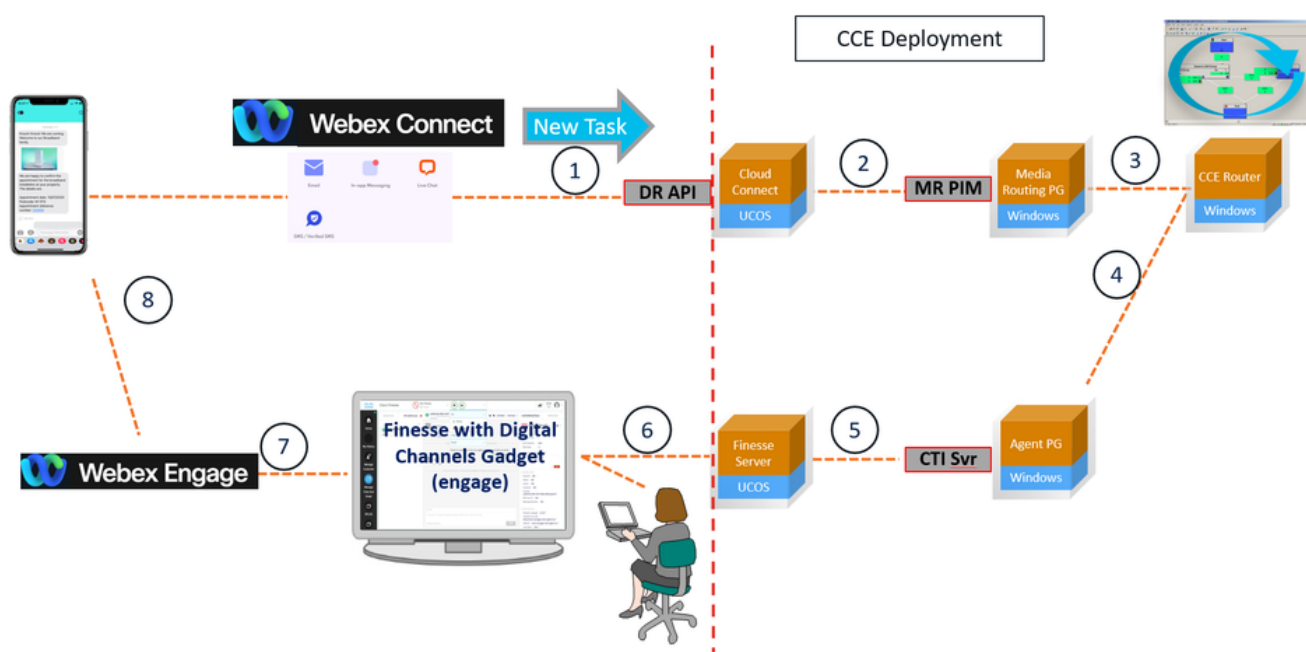

Registros

Portal de Webex Connect

Nodo - Configurar evento APP

- Este nodo es el punto inicial del flujo. Los registros de este nodo muestran detalles como el App Entry Point configurado en el portal de Webex Connect, la dirección URL desde la que se inició el formulario de chat, etc.

TRANSACTION LOGS 22be296b-bc6b-4a6f-af6d-a84c0fb67a01_30408_158393 X

Trans ID : 22be296b-bc6b-4a6f-af6d-a84c0fb67a01_30408_158393

Time Elapsed (HH:mm:ss.SSS) : 00 : 00 : 25 . 966

Invoked by : Rule 30408

NODE ID	NODE	OUTCOME	TIME TAKEN(HH:mm:ss.SSS)	DETAILS
2	Configure APP Event	onBegin	00 : 00 : 00 . 001	Node Trans ID : 6ad93c92-39de-4ea5-934b-e86b71657a55 Description : success App : AChatEntryPoint Channel : Mobile & Web App Event : MO Data : <pre>{ "inappmessaging.message.customTags": "", "inappmessaging.pciInfo.isPCICompliance": "true", "inappmessaging.pciInfo.nonPCIComplianceReason": "{ \"text\": \"\" }", "inappmessaging.extras": "", "inappmessaging.threadStatus": "", "inappmessaging.message.extras": "{ \"hasprechatform\": \"0\", \"Webpage\": \"https://attachuk.imi.chat/widget/widgetloader.html?docwidth=1280&id=BE33E549-9326-4F60-9427-7A9FAA22EBD0&org=#\", \"initiatedon\": \"\", \"useragent\": \"Mozilla/5.0 (Windows NT 10.0; rv:109.0) Gecko/20100101 Firefox/118.0\", \"Website\": \"hungry-glittery-terrier.glitch.me\", \"browserfingerprint\": \"976b22d6-1e7b-4702-9a39-9de1d7024884\", \"customprofileparams\": \"xaJO5vPgYt83k/gWcBZBmj9Pg3dZ+f/UvLWE2SEVX+yK0k2Lagxbf6KK+gtHACFK\", \"website_id\": \"809\", \"Initiated from URL\": \"https://hungry-glittery-terrier.glitch.me/\", \"proactive_id\": \"0\", \"Browser language\": \"en-US\" }", "inappmessaging.securityscaninfo.securityFailedReason": "{ \"text\": \"\" }", }</pre>
9	Evaluate	success	00 : 00 : 00 . 001	
2245	Search Conversation	noConversationFound	00 : 00 : 00 . 053	
2252	Create Conversation	waiting	00 : 00 : 00 . 047	
2252	Create Conversation	onConversationCreated	00 : 00 : 00 . 433	
1333	Pre-chat form	onSuccess	00 : 00 : 00 . 012	
38	Receive	app.onformresponse	00 : 00 : 24 . 229	
2256	Append Conversation	waiting	00 : 00 : 00 . 039	
2256	Append Conversation	onAppendMessageSuccess	00 : 00 : 00 . 335	
2374	CCE Create Task	Successfully Created	00 : 00 : 00 . 771	
2260	Update Conversation	Success	00 : 00 : 00 . 041	
2393	End	Success	00 : 00 : 00 . 004	

Nodo: formulario anterior al chat

- Los registros de este nodo muestran las preguntas cargadas desde la plantilla de chat creada en el portal de Webex Connect.

TRANSACTION LOGS 22be296b-bc6b-4a6f-af6d-a84c0fb67a01_30408_158393 X

Trans ID : 22be296b-bc6b-4a6f-af6d-a84c0fb67a01_30408_158393

Time Elapsed (HH:mm:ss.SSS) : 00 : 00 : 25 . 966

Invoked by : Rule 30408

NODE ID	NODE	OUTCOME	TIME TAKEN(HH:mm:ss.SSS)	DETAILS
2	Configure APP Event	onBegin	00 : 00 : 00 . 001	<pre>- "fields": { - { "type": "name", "name": "Name", "label": "Name", "description": "", "mandatory": true }, - { "type": "email", "name": "Email", "label": "Email", "description": "", "mandatory": false }, - { "type": "text", "name": "Question", "label": "How can we help", "description": "How can we help", "mandatory": false } }</pre>
9	Evaluate	success	00 : 00 : 00 . 001	
2245	Search Conversation	noConversationFound	00 : 00 : 00 . 053	
2252	Create Conversation	waiting	00 : 00 : 00 . 047	
2252	Create Conversation	onConversationCreated	00 : 00 : 00 . 433	
1333	Pre-chat form	onSuccess	00 : 00 : 00 . 012	
38	Receive	app.onformresponse	00 : 00 : 24 . 229	
2256	Append Conversation	waiting	00 : 00 : 00 . 039	
2256	Append Conversation	onAppendMessageSuccess	00 : 00 : 00 . 335	
2374	CCE Create Task	Successfully Created	00 : 00 : 00 . 771	
2260	Update Conversation	Success	00 : 00 : 00 . 041	
2393	End	Success	00 : 00 : 00 . 004	

Nodo - Recibir

- Los registros de este nodo muestran las respuestas proporcionadas a las preguntas

cargadas desde la plantilla de chat.

TRANSACTION LOGS					22be296b-bc6b-4a6f-af6d-a84c0fb67a01_30408_158393	X	HELP
Trans ID : 22be296b-bc6b-4a6f-af6d-a84c0fb67a01_30408_158393					Time Elapsed (HH:mm:ss.SSS) : 00 : 00 : 25 . 966		Invoked by : Rule 30408
NODE ID	NODE	OUTCOME	TIME TAKEN(HH:mm:ss.SSS)	DETAILS			
2	Configure APP Event	onBegin	00 : 00 : 00 . 001	<pre>"Channel": "APP", "appid": "AA02142539", "from": "976b22d6-1e7b-4702-9a39-9de1d7024884", - "events": [- { "Event": "OnFormResponse" }] }</pre>			
9	Evaluate	success	00 : 00 : 00 . 001				
2245	Search Conversation	noConversationFound	00 : 00 : 00 . 053				
2252	Create Conversation	waiting	00 : 00 : 00 . 047				
2252	Create Conversation	onConversationCreated	00 : 00 : 00 . 433				
1333	Pre-chat form	onSuccess	00 : 00 : 00 . 012				
38	Receive	app.onformresponse	00 : 00 : 24 . 229				
2256	Append Conversation	waiting	00 : 00 : 00 . 039				
2256	Append Conversation	onAppendMessageSuccess	00 : 00 : 00 . 335				
2374	CCE Create Task	Successfully Created	00 : 00 : 00 . 771				
2260	Update Conversation	Success	00 : 00 : 00 . 041	<pre>Wait start ti : 2024-07-11T18:05:20.755Z me timeoutValu : 300 e (Sec) timeout : false message : Wait end tim : 2024-07-11T18:05:44.984Z e Custom logs : 1003 → {"title":"Welcome","fields":[{"name":"Name","descriptio n":"","label":"Name","type":"name","value":"Customer","mandatory":tr ue},{name":"Email","description":"","label":"Email","type":"email","val ue":"customer@company.com","mandatory":false},{name":"Questio n","description":"How can we help","label":"How can we help","type":"t ext","value":"Cisco TAC","mandatory":false}]}</pre>			
2393	End	Success	00 : 00 : 00 . 004				

Nodo: tarea de creación de CCE

- Este nodo llama a la API de tareas de empresa del centro de contacto para crear una nueva tarea. Al configurar flujos en Webex Connect, este nodo es necesario para crear la tarea en Contact Center Enterprise.

TRANSACTION LOGS					22be296b-bc6b-4a6f-af6d-a84c0fb67a01_30408_158393		X		HELP		C	
Trans ID : 22be296b-bc6b-4a6f-af6d-a84c0fb67a01_30408_158393					Time Elapsed (HH:mm:ss.SSS) : 00 : 00 : 25 . 966					Invoked by : Rule 30408		
NODE ID	NODE	OUTCOME	TIME TAKEN(HH:mm:ss.SSS)	DETAILS								
2	Configure APP Event	onBegin	00 : 00 : 00 . 001	Node Trans : a7b93115-196a-4620-9cb5-5f8801166d7c								
9	Evaluate	success	00 : 00 : 00 . 001	ID								
2245	Search Conversation	noConversationFound	00 : 00 : 00 . 053	Description : edge: Successfully Created, integration :CCE Create Task, method : Create a New Task, warn :								
2252	Create Conversation	waiting	00 : 00 : 00 . 047	Transaction Details								
2252	Create Conversation	onConversationCreated	00 : 00 : 00 . 433	Resume key : -								
1333	Pre-chat form	onSuccess	00 : 00 : 00 . 012	Request Tim : 2024-07-11T18:05:46.940Z								
38	Receive	app.onformresponse	00 : 00 : 24 . 229	estamp								
2256	Append Conversation	waiting	00 : 00 : 00 . 039	Request UR : POST https://rp.vpod458.dc-01.com:8445/dra/v1/tasks								
2256	Append Conversation	onAppendMessageSuccess	00 : 00 : 00 . 335	L								
2374	CCE Create Task	Successfully Created	00 : 00 : 00 . 771	Request Dat : a								
2260	Update Conversation	Success	00 : 00 : 00 . 041	{								
2393	End	Success	00 : 00 : 00 . 004	- "headers": {								
					"x-wx-grid": "e28ccc9b-25b7-a65b-59fa-8056d6ad0a36",							
					"TrackingId": "WebexConnect_22be296b-bc6b-4a6f-af6d-a84c0fb67a01",							
					"Content-Type": "application/json"							

Conexión a la nube: routing digital

<#root>

Incoming NEW_TASK request coming in from the 'CCE Create Task' node Webex Connect Flow:

```
[INFO ] 2024-07-11 14:05:45.989 [http-nio-127.0.0.1-8091-exec-9:60] [WebexConnect_22be296b-bc6b-4a6f-af
[DEBUG] 2024-07-11 14:05:46.024 [TaskNotificationProcessor-3:153] [] TaskNotificationProcessor - Notifi
[DEBUG] 2024-07-11 14:05:46.025 [TaskNotificationProcessor-3:153] [] NotificationRestClient - Sending n
[DEBUG] 2024-07-11 14:05:46.025 [TaskNotificationProcessor-3:153] [] NotificationRestClient - increment
[INFO ] 2024-07-11 14:05:46.025 [http-nio-127.0.0.1-8091-exec-9:60] [WebexConnect_22be296b-bc6b-4a6f-af
[INFO ] 2024-07-11 14:05:46.031 [http-nio-127.0.0.1-8091-exec-9:60] [WebexConnect_22be296b-bc6b-4a6f-af
```

This NEW_TASK request is then sent to the MR-PIM:

```
[INFO ] 2024-07-11 14:05:46.038 [ApiRequestsProcessorThread:211] [] MrRequestProcessor - NEW_TASK Reque
[INFO ] 2024-07-11 14:05:46.038 [ApiRequestsProcessorThread:211] [] MrRequestProcessor - Sent RequestMe
[DEBUG] 2024-07-11 14:05:46.038 [ApiRequestsProcessorThread:211] [] MrRequestProcessor - Sent NewTaskV5
```

Task state is queued and then routed:

```
[INFO ] 2024-07-11 14:05:46.044 [ApiRequestsProcessorThread:211] [] RedissonQueues - Enqueued Notificat
[INFO ] 2024-07-11 14:05:46.052 [MRProcessorThread:136] [] RedissonQueues - Enqueued Notification on qu
[DEBUG] 2024-07-11 14:05:46.055 [MRProcessorThread:136] [] ServiceCounterTrace - DrapiCountersCurrentIn
[INFO ] 2024-07-11 14:05:46.540 [TaskNotificationProcessor-3:153] [] NotificationRestClient - Sending n
[DEBUG] 2024-07-11 14:05:46.542 [TaskNotificationProcessor-3:153] [] ServiceCounterTrace - DrapiCounter
[DEBUG] 2024-07-11 14:05:46.543 [TaskNotificationProcessor-3:153] [] TaskNotificationProcessor - Notifi
[DEBUG] 2024-07-11 14:05:46.543 [TaskNotificationProcessor-3:153] [] NotificationRestClient - Sending n
[INFO ] 2024-07-11 14:05:46.656 [TaskNotificationProcessor-3:153] [] NotificationRestClient - Sending n
[DEBUG] 2024-07-11 14:05:46.658 [TaskNotificationProcessor-3:153] [] ServiceCounterTrace - DrapiCounter
[DEBUG] 2024-07-11 14:05:46.659 [TaskNotificationProcessor-3:153] [] TaskNotificationProcessor - Notifi
[DEBUG] 2024-07-11 14:05:46.659 [TaskNotificationProcessor-3:153] [] NotificationRestClient - Sending n
[DEBUG] 2024-07-11 14:05:46.659 [TaskNotificationProcessor-3:153] [] NotificationRestClient - increment
[INFO ] 2024-07-11 14:05:46.764 [TaskNotificationProcessor-3:153] [] NotificationRestClient - Sending n
[DEBUG] 2024-07-11 14:05:46.765 [TaskNotificationProcessor-3:153] [] ServiceCounterTrace - DrapiCounter
.
.
.
.
```

TASK is now ended successfully:

```
[DEBUG] 2024-07-11 14:07:37.615 [http-nio-127.0.0.1-8091-exec-7:58] [] FilterChainProxy - Securing POST
[DEBUG] 2024-07-11 14:07:37.615 [http-nio-127.0.0.1-8091-exec-7:58] [] FilterChainProxy - Securing POST
[DEBUG] 2024-07-11 14:07:37.679 [http-nio-127.0.0.1-8091-exec-7:58] [FINESSE_b8526c49-5dfc-43b4-ba55-1a
[INFO ] 2024-07-11 14:07:37.679 [http-nio-127.0.0.1-8091-exec-7:58] [FINESSE_b8526c49-5dfc-43b4-ba55-1a
[INFO ] 2024-07-11 14:07:37.701 [http-nio-127.0.0.1-8091-exec-7:58] [FINESSE_b8526c49-5dfc-43b4-ba55-1a
[DEBUG] 2024-07-11 14:07:37.703 [TaskNotificationProcessor-3:153] [] NotificationRestClient - Sending n
[DEBUG] 2024-07-11 14:07:37.703 [TaskNotificationProcessor-3:153] [] NotificationRestClient - increment
[INFO ] 2024-07-11 14:07:38.171 [TaskNotificationProcessor-3:153] [] NotificationRestClient - Sending n
[DEBUG] 2024-07-11 14:07:38.173 [TaskNotificationProcessor-3:153] [] ServiceCounterTrace - DrapiCounter
```

Router

<#root>

NewCall request received from MR PG:

14:05:46:019 ra-rtr Trace: (14 x 0 : 0 0) NewCall: CID=(154689,2448), DN=WxConnectChat1, ANI=, CED=, RCKSeqNum=-1, NIC_DN= ServiceRequested=0 OrigRCCallID{PhyCtrlID=0, RCID=0, DlgID=0x0} OrigOperationType=0
14:05:46:019 ra-rtr Trace: RCKSeqNum=-1, NIC_DN= ServiceRequested=0 OrigRCCallID{PhyCtrlID=0, RCID=0, DlgID=0x0} OrigOperationType=0
14:05:46:019 ra-rtr Trace: ID Name Type Index Value
14:05:46:019 ra-rtr Trace: 5041 user_DR_CustomerName Scalar Customer
14:05:46:019 ra-rtr Trace: 5040 user_DR_MediaResourceID Scalar CSR4PMKEIFWI7EMX
14:05:46:019 ra-rtr Trace: 5038 user_DR_Primary Scalar 0cloudconnect1.dcloud.cisco.com
14:05:46:019 ra-rtr Trace: 5039 user_DR_Backup Scalar 0
14:05:46:019 ra-rtr Trace: 5042 user_DR_MediaChannelName Scalar chat

RouteComplete:

14:05:46:019 ra-rtr Trace: (14 x 0 : 0 0) RouteComplete:
14:05:46:019 ra-rtr Trace: Route: DN=WxConnectChat1, ANI=, CED=, Label=
14:05:46:019 ra-rtr Trace: Route: CID=(154689,2448), Labels=1

DeviceTargetPreCall message sent to the Agent PG with the ECC variables:

14:05:46:019 ra-rtr Trace: (14 x 0 : 0 0) DeviceTargetPreCall_V15: CID=(154689,2448), PerID=5000, SGSTID=0, DN=WxConnectChat1, ANI=, CED=, CustDBProvidedDigits=, RouteID=5039, NetworkType=0, RCKSeqNum=0, DelayQTime=0, DelayRouterTime=0, SGDelayQTime=0
14:05:46:019 ra-rtr Trace: DN=WxConnectChat1, ANI=, CED=, CustDBProvidedDigits=, RouteID=5039, NetworkType=0, RCKSeqNum=0, DelayQTime=0, DelayRouterTime=0, SGDelayQTime=0
14:05:46:019 ra-rtr Trace: RCKSeqNum=0, DelayQTime=0, DelayRouterTime=0, SGDelayQTime=0
14:05:46:019 ra-rtr Trace: CallGUID=, CustomerID=1 ServiceRequested=0
14:05:46:019 ra-rtr Trace: LocationParamPKID=, LocationParamName=, SIPHeader=
14:05:46:019 ra-rtr Trace: NIC_CalledPartyNumber=WxConnectChat1 ECCPayloadID=1
14:05:46:019 ra-rtr Trace: OrigRCCallID{PhyCtrlID=0, RCID=0, DlgID=0x0} OrigOperationType=0
14:05:46:019 ra-rtr Trace: PV1= PV2= PV3= PV4= PV5=
14:05:46:019 ra-rtr Trace: PV6= PV7= PV8= PV9= PV10=
14:05:46:019 ra-rtr Trace: ID Name Type Index Value
14:05:46:019 ra-rtr Trace: 5038 user_DR_Primary Scalar 0cloudconnect1.dcloud.cisco.com
14:05:46:019 ra-rtr Trace: 5039 user_DR_Backup Scalar 0
14:05:46:019 ra-rtr Trace: 5040 user_DR_MediaResourceID Scalar CSR4PMKEIFWI7EMX
14:05:46:019 ra-rtr Trace: 5041 user_DR_CustomerName Scalar Customer
14:05:46:019 ra-rtr Trace: 5042 user_DR_MediaChannelName Scalar chat

Connect Label sent to MR PG with the ECC variables:

14:05:46:019 ra-rtr Trace: (14 x 0 : 0 0) Connect: CID=(154689,2448), EventSelect=0x0, ServiceType=0, RCKSeqNum=0, DelayQTime=0, DelayRouterTime=0, SGDelayQTime=0
14:05:46:019 ra-rtr Trace: ID Name Type Index Value
14:05:46:019 ra-rtr Trace: 5038 user_DR_Primary Scalar 0cloudconnect1.dcloud.cisco.com
14:05:46:019 ra-rtr Trace: 5039 user_DR_Backup Scalar 0
14:05:46:019 ra-rtr Trace: 5040 user_DR_MediaResourceID Scalar CSR4PMKEIFWI7EMX
14:05:46:019 ra-rtr Trace: 5041 user_DR_CustomerName Scalar Customer
14:05:46:019 ra-rtr Trace: 5042 user_DR_MediaChannelName Scalar chat
14:05:46:019 ra-rtr Trace: (14 x 0 : 0 0) Deleting Dialog.

PG

MR-PG PIM

<#root>

NEW_TASK request on mr pim:

14:05:46:132 PG2A-pim5 Trace: Application->PG:
Message = NEW_TASK; Length = 280 bytes
DialogueID = (14) Hex 0000000e
SendSeqNo = (1) Hex 00000001
MRDomainID = (5016) Hex 00001398
PreviousTask = -1:-1:-1
PreferredAgent = Undefined
Service = Undefined
CiscoReserved = (0) Hex 00000000
ScriptSelector: WxConnectChat1
ApplicationString2: 22be296b-bc6b-4a6f-af6d-a84c0fb67a01
ServiceRequested = (0) Hex 00000000
QueueType = (0) Hex 00000000
QueueID = Undefined

NewCall request is now sent to the Router:

14:05:46:132 PG2A-pim5 Trace: Send INRCMSGNewCall to Router : :
NEW_CALL RCID=5007 PID=5001 DID=14 DIDRelSeq#=1 GrpDelKey=5007 CRS(RtrDate=-1,RtrCID=-1) RCKSeq#=-1 NIC

Router responds back with the Connect label:

14:05:46:132 PG2A-pim5 Trace: MR_Peripheral::On_Router_Connect:
CONNECT RCID=5007 PID=5001 DID=14 DIDRelSeq#=0 CRS(RtrDate=154689,RtrCID=2448) RCKSeq#=0 ErrorCode=0 TR

DO_THIS_WITH_TASK message sent over to WxConnect:

14:05:46:132 PG2A-pim5 Trace: PG->Application:
Message = DO_THIS_WITH_TASK; Length = 250 bytes
DialogueID = (14) Hex 0000000e
SendSeqNo = (1) Hex 00000001
IcmTaskID = 154689:2448: 1
SkillGroup = (5239) Hex 00001477
Service = Undefined
Agent = (5172) Hex 00001434
AgentInfo: 5172
Label:
ApplicationString2:
MRDID = (5016) Hex 00001398
Interruptible = (0) Hex 00000000
PrecisionQueueID = (0) Hex 00000000

MR-PG OPC

<#root>

NEW_CALL request received from the digital routing service on the Cloud Connect server, with the ECC

14:05:46:132 PG2A-opc Trace: SendINRCMessage: NEW_CALL RCID=5007 PID=5001 DID=14 DIDRelSeq#=1 GrpDelKey:
Name Type Index Value
user_DR_CustomerName Scalar Customer
user_DR_MediaResourceID Scalar CSR4PMKEIFWI7EMX
user_DR_Primary Scalar 0cloudconnect1.dcloud.cisco.com

```
user_DR_Backup          Scalar  0
user_DR_MediaChannelName Scalar  chat
14:05:46:132 PG2A-opc Trace: ProcessINRCMsgs - BEGIN Msg=8 src=48 dest=1 flag=2 size=444
```

CONNECT label received from router with the ECC variables:

```
14:05:46:132 PG2A-opc Trace: SendPIMINRCMessage: CONNECT RCID=5007 PID=5001 DID=14 DIDRelSeq#=0 CRS(Rtr
Name Type Index Value
user_DR_Primary          Scalar  0cloudconnect1.dcloud.cisco.com
user_DR_Backup           Scalar  0
user_DR_MediaResourceID   Scalar  CSR4PMKEIFWI7EMX
user_DR_CustomerName      Scalar  Customer
user_DR_MediaChannelName  Scalar  chat
```

BuildClosedCallRecord after chat ends:

```
14:05:46:132 PG2A-opc Trace: BuildClosedCallRecord: CallObj=0x4473dc8 DateTime=07/11 18:05:45 IntervalD
14:05:46:132 PG2A-opc Trace: PV1=(null) PV2=(null) PV3=(null) PV4=(null) PV5=(null) PV6=(null) PV7=(null)
14:05:46:132 PG2A-opc Trace: BuildClosedCallRecord:
Name Type Index Value
user_DR_Primary          Scalar  0cloudconnect1.dcloud.cisco.com
user_DR_Backup           Scalar  0
user_DR_MediaResourceID   Scalar  CSR4PMKEIFWI7EMX
user_DR_CustomerName      Scalar  Customer
user_DR_MediaChannelName  Scalar  chat
```

PG de agente - OPC

<#root>

Agent PG receives the Device Precall Indicator message along with the ECC variables as agent '5172' i

```
14:05:46:132 PG3A-opc Trace: ProcessARMPrecallMsg - Precall received for Agent '5172' MRDomainID '5016'
14:05:46:132 PG3A-opc Trace: callVar1 '' callVar2 '' callVar3 '' callVar4 ''
callVar5 '' callVar6 '' callVar7 '' callVar8 ''
callVar9 '' callVar10 ''
ECCDataSize '85'
14:05:46:132 PG3A-opc Trace: Name Type Index Value
14:05:46:132 PG3A-opc Trace: user_DR_Primary          Scalar  0cloudconnect1.dcloud.cisco.com
14:05:46:132 PG3A-opc Trace: user_DR_Backup           Scalar  0
14:05:46:132 PG3A-opc Trace: user_DR_MediaResourceID   Scalar  CSR4PMKEIFWI7EMX
14:05:46:132 PG3A-opc Trace: user_DR_CustomerName      Scalar  Customer
14:05:46:132 PG3A-opc Trace: user_DR_MediaChannelName  Scalar  chat
14:05:46:132 PG3A-opc Trace: MergeECCData Task ID 154689:2448:1, Payload ID 0, New Payload 1
```

OfferTaskInd >> StartTaskInd >> EndTaskInd:

```
14:05:51:321 PG3A-opc Trace: OfferTaskInd - InvokeID = 2375719, ClientInvokeID = 2375719, MRDID = 5016,
SkillGroupID = 5239, ServiceID = -1, SessionID = 2
14:05:52:133 PG3A-opc Trace: StartTaskInd - InvokeID = 2375721, ClientInvokeID = 2375721, MRDID = 5016,
SkillGroupID = 5239, ServiceID = -1, SessionID = 2
14:07:35:168 PG3A-opc Trace: EndTaskInd - InvokeID = 2376024, ClientInvokeID = 2376024, TaskID = 154689,
WrapupData = , ApplicationData =
```

BuildTerminationRecordMsg:

```
14:07:35:168 PG3A-opc Trace: TaskObj::BuildTerminationRecordMsg - DateTime='07/11 18:07:34' Periph=5000
14:07:35:168 PG3A-opc Trace: Var1='(null)' Var2='(null)' Var3='(null)' Var4='(null)' Var5='(null)' Var6
14:07:35:168 PG3A-opc Trace: AgentSessionID=5172-133650295444320000 NetworkTargetID=-1 TrunkGroupID=-1
14:07:35:168 PG3A-opc Trace: Name Type Index Value
14:07:35:168 PG3A-opc Trace: user_DR_Primary Scalar 0cloudconnect1.dcloud.cisco.com
14:07:35:168 PG3A-opc Trace: user_DR_Backup Scalar 0
14:07:35:168 PG3A-opc Trace: user_DR_MediaResourceID Scalar CSR4PMKEIFWI7EMX
14:07:35:168 PG3A-opc Trace: user_DR_CustomerName Scalar Customer
14:07:35:168 PG3A-opc Trace: user_DR_MediaChannelName Scalar chat
```

Consola del explorador

<#root>

Agent is RESERVED:

```
14:05:57.964 2024-07-11T14:05:57.964 -04:00: : finesse1.dcloud.cisco.com: Jul 11 2024 14:05:57.963 -0400
<data>
<media>
<description>WxConnect Chat</description>
<dialogLogoutAction>CLOSE</dialogLogoutAction>
<id>5016</id>
<interruptAction>IGNORE</interruptAction>
<interruptible>>false</interruptible>
<maxDialogLimit>3</maxDialogLimit>
<name>WxConnectChat</name>
<routable>>true</routable>
<state>RESERVED</state>
<stateChangeTime>2024-07-11T18:05:57.952Z</stateChangeTime>
<uri>/finesse/api/User/1080/Media/5016</uri>
</media>
</data>
<event>PUT</event>
<requestId></requestId>
<source>/finesse/api/User/1080/Media/5016</source>
</Update>
14:05:57.966 2024-07-11T14:05:57.966 -04:00: : finesse1.dcloud.cisco.com: Jul 11 2024 14:05:57.965 -0400
<data>
<media>
<description>WxConnect Chat</description>
<dialogLogoutAction>CLOSE</dialogLogoutAction>
<id>5016</id>
<interruptAction>IGNORE</interruptAction>
<interruptible>>false</interruptible>
<maxDialogLimit>3</maxDialogLimit>
<name>WxConnectChat</name>
<routable>>true</routable>
<state>RESERVED</state>
<stateChangeTime>2024-07-11T18:05:57.952Z</stateChangeTime>
<uri>/finesse/api/User/1080/Media/5016</uri>
</media>
</data>
<event>PUT</event>
```

```
<requestId></requestId>
<source>/finesse/api/User/1080/Media/5016</source>
</Update>
14:05:57.968 2024-07-11T14:05:57.968 -04:00: : finesse1.dcloud.cisco.com: Jul 11 2024 14:05:57.967 -0400
14:05:57.972 :: Media change a{_super: undefined, _id: '5016', _restObj: a, autoSubscribe: true, context: {}
14:05:57.972 Finesse-IMI Gadget : [useDigitalChannel Hook] [handleMediaChange] : media change event received
```

Agent is OFFERED the chat with the ACCEPT action available to the agent:

```
14:05:57.975 Finesse-IMI Gadget : [useDigitalChannel Hook] [cacheMediaStates] : final cached item : {"5016": {
14:05:57.975 2024-07-11T14:05:57.975 -04:00: : finesse1.dcloud.cisco.com: Jul 11 2024 14:05:57.974 -0400
<data>
<dialogs>
<Dialog>
<taskId>
<routerCallKeyDay>154689</routerCallKeyDay>
<routerCallKeyCallID>2448</routerCallKeyCallID>
<routerCallKeySequenceNum>1</routerCallKeySequenceNum>
</taskId>
<id>154689_2448_1</id>
<mediaProperties>
<mediaId>5016</mediaId>
<dialNumber>WxConnectChat1</dialNumber>
<callVariables>
<CallVariable>
<name>callVariable1</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable2</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable3</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable4</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable5</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable6</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable7</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable8</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable9</name>
<value></value>
</CallVariable>
```

```
<CallVariable>
<name>callVariable10</name>
<value></value>
</CallVariable>
<CallVariable>
<name>user_DR_Primary</name>
<value>cloudconnect1.dcloud.cisco.com</value>
</CallVariable>
<CallVariable>
<name>user_DR_Backup</name>
<value></value>
</CallVariable>
<CallVariable>
<name>user_DR_MediaResourceID</name>
<value>CSR4PMKEIFWI7EMX</value>
</CallVariable>
<CallVariable>
<name>user_DR_CustomerName</name>
<value>Customer</value>
</CallVariable>
<CallVariable>
<name>user_DR_MediaChannelName</name>
<value>chat</value>
</CallVariable>
</callvariables>
<queueNumber>11180119</queueNumber>
<queueName>WxConnectChat1</queueName>
<callKeyCallId>2448</callKeyCallId>
<callKeyPrefix>154689</callKeyPrefix>
<callKeySequenceNum>1</callKeySequenceNum>
</mediaProperties>
<mediaType>WxConnectChat</mediaType>
<mediaChannel>chat</mediaChannel>
<mediaClass>chat</mediaClass>
<participants>
<Participant>
<actions>
<action>ACCEPT</action>
</actions>
<mediaAddress>1080</mediaAddress>
<mediaAddressType></mediaAddressType>
<startTime>2024-07-11T18:05:57.955Z</startTime>
<state>OFFERED</state>
<stateCause></stateCause>
<stateChangeTime>2024-07-11T18:05:57.955Z</stateChangeTime>
</Participant>
</participants>
<state>OFFERED</state>
<uri>/finesse/api/Dialog/154689_2448_1</uri>
</Dialog>
</dialogs>
</data>
<event>POST</event>
<requestId></requestId>
<source>/finesse/api/User/1080/Media/5016/Dialogs</source>
</Update>
14:05:57.978 2024-07-11T14:05:57.978 -04:00: : finesse1.dcloud.cisco.com: Jul 11 2024 14:05:57.977 -0400
<data>
<dialogs>
<Dialog>
<taskId>
<routerCallKeyDay>154689</routerCallKeyDay>
```

```
<routerCallKeyCallID>2448</routerCallKeyCallID>
<routerCallKeySequenceNum>1</routerCallKeySequenceNum>
</taskId>
<id>154689_2448_1</id>
<mediaProperties>
<mediaId>5016</mediaId>
<dialNumber>WxConnectChat1</dialNumber>
<callVariables>
<CallVariable>
<name>callVariable1</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable2</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable3</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable4</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable5</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable6</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable7</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable8</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable9</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable10</name>
<value></value>
</CallVariable>
<CallVariable>
<name>user_DR_Primary</name>
<value>cloudconnect1.dcloud.cisco.com</value>
</CallVariable>
<CallVariable>
<name>user_DR_Backup</name>
<value></value>
</CallVariable>
<CallVariable>
<name>user_DR_MediaResourceID</name>
<value>CSR4PMKEIFWI7EMX</value>
</CallVariable>
<CallVariable>
<name>user_DR_CustomerName</name>
```

```
<value>Customer</value>
</CallVariable>
<CallVariable>
<name>user_DR_MediaChannelName</name>
<value>chat</value>
</CallVariable>
</callvariables>
<queueNumber>11180119</queueNumber>
<queueName>WxConnectChat1</queueName>
<callKeyCallId>2448</callKeyCallId>
<callKeyPrefix>154689</callKeyPrefix>
<callKeySequenceNum>1</callKeySequenceNum>
</mediaProperties>
<mediaType>WxConnectChat</mediaType>
<mediaChannel>chat</mediaChannel>
<mediaClass>chat</mediaClass>
<participants>
<Participant>
<actions>
<action>ACCEPT</action>
</actions>
<mediaAddress>1080</mediaAddress>
<mediaAddressType></mediaAddressType>
<startTime>2024-07-11T18:05:57.955Z</startTime>
<state>OFFERED</state>
<stateCause></stateCause>
<stateChangeTime>2024-07-11T18:05:57.955Z</stateChangeTime>
</Participant>
</participants>
<state>OFFERED</state>
<uri>/finesse/api/Dialog/154689_2448_1</uri>
</Dialog>
</dialogs>
</data>
<event>POST</event>
<requestId></requestId>
<source>/finesse/api/User/1080/Media/5016/Dialogs</source>
</Update>
14:05:57.979 2024-07-11T14:05:57.979 -04:00: : finesse1.dcloud.cisco.com: Jul 11 2024 14:05:57.978 -0400
14:05:57.979 2024-07-11T14:05:57.979 -04:00: : finesse1.dcloud.cisco.com: Jul 11 2024 14:05:57.978 -0400
14:05:57.980 2024-07-11T14:05:57.980 -04:00: : finesse1.dcloud.cisco.com: Jul 11 2024 14:05:57.979 -0400
14:05:57.981 2024-07-11T14:05:57.981 -04:00: : finesse1.dcloud.cisco.com: Jul 11 2024 14:05:57.980 -0400
14:05:57.988 :: usemediasetup processTask- a{_id: '154689_2448_1', _restObj: undefined, autoSubscribe:
14:05:57.989 ::- MediaPopover _showPopOver before popover {taskId: {...}, id: '154689_2448_1', mediaPrope
```

Agent ACCEPT's the chat:

```
14:06:00.353 2024-07-11T14:06:00.353 -04:00: : finesse1.dcloud.cisco.com: Jul 11 2024 14:06:00.352 -0400
14:06:00.354 2024-07-11T14:06:00.354 -04:00: : finesse1.dcloud.cisco.com: Jul 11 2024 14:06:00.353 -0400
14:06:00.355 ::- MediaPopover popOverCallBack:Received popover callback with response {popoverId: '940a
14:06:00.356 ::- MediaPopover _handleMedia {popoverId: '940a0c56-c305-456f-90a6-9aaf8871fcee', source:
14:06:00.358 2024-07-11T14:06:00.357 -04:00: : finesse1.dcloud.cisco.com: Jul 11 2024 14:06:00.356 -0400
14:06:00.364 ::- MediaPopover dismissPopOver before dismiss a{_super: undefined, _id: '154689_2448_1',
14:06:00.365 2024-07-11T14:06:00.365 -04:00: : finesse1.dcloud.cisco.com: Jul 11 2024 14:06:00.364 -0400
14:06:00.367 ::- MediaPopover dismissPopOver after dismiss {} {} {}
14:06:00.371 2024-07-11T14:06:00.371 -04:00: : finesse1.dcloud.cisco.com: Jul 11 2024 14:06:00.370 -0400
14:06:00.427 2024-07-11T14:06:00.427 -04:00: : finesse1.dcloud.cisco.com: Jul 11 2024 14:06:00.426 -0400
14:06:00.428 success: Could move the task to ACCEPT state {status: 202, content: null, isUnsent: false,
```

Chat state is now ACCEPTED:

14:06:00.543 2024-07-11T14:06:00.543 -04:00: : finesse1.dcloud.cisco.com: Jul 11 2024 14:06:00.542 -0400

```
<data>
<dialog>
<taskId>
<routerCallKeyDay>154689</routerCallKeyDay>
<routerCallKeyCallID>2448</routerCallKeyCallID>
<routerCallKeySequenceNum>1</routerCallKeySequenceNum>
</taskId>
<id>154689_2448_1</id>
<mediaProperties>
<mediaId>5016</mediaId>
<dialNumber>WxConnectChat1</dialNumber>
<callVariables>
<CallVariable>
<name>callVariable1</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable2</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable3</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable4</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable5</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable6</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable7</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable8</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable9</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable10</name>
<value></value>
</CallVariable>
<CallVariable>
<name>user_DR_Primary</name>
<value>cloudconnect1.dcloud.cisco.com</value>
</CallVariable>
<CallVariable>
<name>user_DR_Backup</name>
<value></value>
```

```
</CallVariable>
<CallVariable>
<name>user_DR_MediaResourceID</name>
<value>CSR4PMKEIFWI7EMX</value>
</CallVariable>
<CallVariable>
<name>user_DR_CustomerName</name>
<value>Customer</value>
</CallVariable>
<CallVariable>
<name>user_DR_MediaChannelName</name>
<value>chat</value>
</CallVariable>
</callvariables>
<queueNumber>11180119</queueNumber>
<queueName>WxConnectChat1</queueName>
<callKeyCallId>2448</callKeyCallId>
<callKeyPrefix>154689</callKeyPrefix>
<callKeySequenceNum>1</callKeySequenceNum>
</mediaProperties>
<mediaType>WxConnectChat</mediaType>
<mediaChannel>chat</mediaChannel>
<mediaClass>chat</mediaClass>
<participants>
<Participant>
<actions>
<action>UPDATE_CALL_DATA</action>
<action>TRANSFER</action>
<action>START</action>
<action>CLOSE</action>
</actions>
<mediaAddress>1080</mediaAddress>
<mediaAddressType></mediaAddressType>
<startTime>2024-07-11T18:05:57.955Z</startTime>
<state>ACCEPTED</state>
<stateCause></stateCause>
<stateChangeTime>2024-07-11T18:06:00.421Z</stateChangeTime>
</Participant>
</participants>
<state>ACCEPTED</state>
<uri>/finesse/api/Dialog/154689_2448_1</uri>
</dialog>
</data>
<event>PUT</event>
<requestId></requestId>
<source>/finesse/api/Dialog/154689_2448_1</source>
</Update>
14:06:00.546 2024-07-11T14:06:00.546 -04:00: : finesse1.dcloud.cisco.com: Jul 11 2024 14:06:00.545 -0400
<data>
<dialog>
<taskId>
<routerCallKeyDay>154689</routerCallKeyDay>
<routerCallKeyCallID>2448</routerCallKeyCallID>
<routerCallKeySequenceNum>1</routerCallKeySequenceNum>
</taskId>
<id>154689_2448_1</id>
<mediaProperties>
<mediaId>5016</mediaId>
<dialNumber>WxConnectChat1</dialNumber>
<callvariables>
<CallVariable>
<name>callVariable1</name>
```

```
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable2</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable3</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable4</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable5</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable6</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable7</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable8</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable9</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable10</name>
<value></value>
</CallVariable>
<CallVariable>
<name>user_DR_Primary</name>
<value>cloudconnect1.dcloud.cisco.com</value>
</CallVariable>
<CallVariable>
<name>user_DR_Backup</name>
<value></value>
</CallVariable>
<CallVariable>
<name>user_DR_MediaResourceID</name>
<value>CSR4PMKEIFWI7EMX</value>
</CallVariable>
<CallVariable>
<name>user_DR_CustomerName</name>
<value>Customer</value>
</CallVariable>
<CallVariable>
<name>user_DR_MediaChannelName</name>
<value>chat</value>
</CallVariable>
</callvariables>
<queueNumber>11180119</queueNumber>
<queueName>WxConnectChat1</queueName>
<callKeyCallId>2448</callKeyCallId>
```

```
<callKeyPrefix>154689</callKeyPrefix>
<callKeySequenceNum>1</callKeySequenceNum>
</mediaProperties>
<mediaType>WxConnectChat</mediaType>
<mediaChannel>chat</mediaChannel>
<mediaClass>chat</mediaClass>
<participants>
<Participant>
<actions>
<action>UPDATE_CALL_DATA</action>
<action>TRANSFER</action>
<action>START</action>
<action>CLOSE</action>
</actions>
<mediaAddress>1080</mediaAddress>
<mediaAddressType></mediaAddressType>
<startTime>2024-07-11T18:05:57.955Z</startTime>
<state>ACCEPTED</state>
<stateCause></stateCause>
<stateChangeTime>2024-07-11T18:06:00.421Z</stateChangeTime>
</Participant>
</participants>
<state>ACCEPTED</state>
<uri>/finesse/api/Dialog/154689_2448_1</uri>
</dialog>
</data>
<event>PUT</event>
<requestId></requestId>
<source>/finesse/api/Dialog/154689_2448_1</source>
</Update>
14:06:00.548 2024-07-11T14:06:00.548 -04:00: : finesse1.dcloud.cisco.com: Jul 11 2024 14:06:00.547 -0400
14:06:00.548 2024-07-11T14:06:00.548 -04:00: : finesse1.dcloud.cisco.com: Jul 11 2024 14:06:00.547 -0400
14:06:00.549 2024-07-11T14:06:00.549 -04:00: : finesse1.dcloud.cisco.com: Jul 11 2024 14:06:00.548 -0400
14:06:00.549 2024-07-11T14:06:00.549 -04:00: : finesse1.dcloud.cisco.com: Jul 11 2024 14:06:00.548 -0400
14:06:00.552 :: usemediasetup processTask- a{super: undefined, _id: '154689_2448_1', _restObj: undefin
```

Chat session ended and agent is moved to the WORK_READY state:

```
14:07:32.910 moved to wrap-up state successfully
14:07:32.911 2024-07-11T14:07:32.911 -04:00: : finesse1.dcloud.cisco.com: Jul 11 2024 14:07:32.955 -0400
<data>
<media>
<description>WxConnect Chat</description>
<dialogLogoutAction>CLOSE</dialogLogoutAction>
<id>5016</id>
<interruptAction>IGNORE</interruptAction>
<interruptible>false</interruptible>
<maxDialogLimit>3</maxDialogLimit>
<name>WxConnectChat</name>
<routable>true</routable>
<state>WORK_READY</state>
<stateChangeTime>2024-07-11T18:07:32.895Z</stateChangeTime>
<uri>/finesse/api/User/1080/Media/5016</uri>
</media>
</data>
<event>PUT</event>
<requestId></requestId>
<source>/finesse/api/User/1080/Media/5016</source>
</Update>
14:07:32.914 2024-07-11T14:07:32.914 -04:00: : finesse1.dcloud.cisco.com: Jul 11 2024 14:07:32.958 -0400
```

```
<data>
<media>
<description>WxConnect Chat</description>
<dialogLogoutAction>CLOSE</dialogLogoutAction>
<id>5016</id>
<interruptAction>IGNORE</interruptAction>
<interruptible>false</interruptible>
<maxDialogLimit>3</maxDialogLimit>
<name>WxConnectChat</name>
<routable>true</routable>
<state>WORK_READY</state>
<stateChangeTime>2024-07-11T18:07:32.895Z</stateChangeTime>
<uri>/finesse/api/User/1080/Media/5016</uri>
</media>
</data>
<event>PUT</event>
<requestId></requestId>
<source>/finesse/api/User/1080/Media/5016</source>
</Update>
14:07:32.915 2024-07-11T14:07:32.915 -04:00: : finesse1.dcloud.cisco.com: Jul 11 2024 14:07:32.959 -0400
14:07:32.920 :: Media change a[_super: undefined, _id: '5016', _restObj: a, autoSubscribe: true, context: {}]
14:07:32.920 Finesse-IMI Gadget : [useDigitalChannel Hook] [handleMediaChange] : media change event received
14:07:32.921 Finesse-IMI Gadget : [useDigitalChannel Hook] [handleMediaChange] : caching all mrd's
14:07:32.921 Finesse-IMI Gadget : [useDigitalChannel Hook] [cacheMediaStates] : mediaListToBeCached : undefined
14:07:32.922 Finesse-IMI Gadget : [useDigitalChannel Hook] [cacheMediaStates] : final cached item : {"5016": true}
```

Chat activity is now in the WRAPPING_UP state:

```
14:07:32.924 2024-07-11T14:07:32.924 -04:00: : finesse1.dcloud.cisco.com: Jul 11 2024 14:07:32.968 -0400
<data>
<dialog>
<taskId>
<routerCallKeyDay>154689</routerCallKeyDay>
<routerCallKeyCallID>2448</routerCallKeyCallID>
<routerCallKeySequenceNum>1</routerCallKeySequenceNum>
</taskId>
<id>154689_2448_1</id>
<mediaProperties>
<mediaId>5016</mediaId>
<dialNumber>WxConnectChat1</dialNumber>
<callVariables>
<CallVariable>
<name>callVariable1</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable2</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable3</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable4</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable5</name>
<value></value>
```

```
</CallVariable>
<CallVariable>
<name>callVariable6</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable7</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable8</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable9</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable10</name>
<value></value>
</CallVariable>
<CallVariable>
<name>user_DR_Primary</name>
<value>cloudconnect1.dcloud.cisco.com</value>
</CallVariable>
<CallVariable>
<name>user_DR_Backup</name>
<value></value>
</CallVariable>
<CallVariable>
<name>user_DR_MediaResourceID</name>
<value>CSR4PMKEIFWI7EMX</value>
</CallVariable>
<CallVariable>
<name>user_DR_CustomerName</name>
<value>Customer</value>
</CallVariable>
<CallVariable>
<name>user_DR_MediaChannelName</name>
<value>chat</value>
</CallVariable>
</callvariables>
<queueNumber>11180119</queueNumber>
<queueName>WxConnectChat1</queueName>
<callKeyCallId>2448</callKeyCallId>
<callKeyPrefix>154689</callKeyPrefix>
<callKeySequenceNum>1</callKeySequenceNum>
</mediaProperties>
<mediaType>WxConnectChat</mediaType>
<mediaChannel>chat</mediaChannel>
<mediaClass>chat</mediaClass>
<participants>
<Participant>
<actions>
<action>PAUSE</action>
<action>UPDATE_CALL_DATA</action>
<action>TRANSFER</action>
<action>CLOSE</action>
</actions>
<mediaAddress>1080</mediaAddress>
<mediaAddressType></mediaAddressType>
<startTime>2024-07-11T18:05:46.096Z</startTime>
```

```
<state>WRAPPING_UP</state>
<stateCause></stateCause>
<stateChangeTime>2024-07-11T18:07:32.895Z</stateChangeTime>
</Participant>
</participants>
<state>WRAPPING_UP</state>
<uri>/finesse/api/Dialog/154689_2448_1</uri>
</dialog>
</data>
<event>PUT</event>
<requestId></requestId>
<source>/finesse/api/Dialog/154689_2448_1</source>
</Update>
14:07:32.926 2024-07-11T14:07:32.926 -04:00: : finesse1.dcloud.cisco.com: Jul 11 2024 14:07:32.970 -0400
<data>
<dialog>
<taskId>
<routerCallKeyDay>154689</routerCallKeyDay>
<routerCallKeyCallID>2448</routerCallKeyCallID>
<routerCallKeySequenceNum>1</routerCallKeySequenceNum>
</taskId>
<id>154689_2448_1</id>
<mediaProperties>
<mediaId>5016</mediaId>
<dialledNumber>WxConnectChat1</dialledNumber>
<callvariables>
<CallVariable>
<name>callVariable1</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable2</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable3</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable4</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable5</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable6</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable7</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable8</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable9</name>
<value></value>
</CallVariable>
```

```
<CallVariable>
<name>callVariable10</name>
<value></value>
</CallVariable>
<CallVariable>
<name>user_DR_Primary</name>
<value>cloudconnect1.dcloud.cisco.com</value>
</CallVariable>
<CallVariable>
<name>user_DR_Backup</name>
<value></value>
</CallVariable>
<CallVariable>
<name>user_DR_MediaResourceID</name>
<value>CSR4PMKEIFWI7EMX</value>
</CallVariable>
<CallVariable>
<name>user_DR_CustomerName</name>
<value>Customer</value>
</CallVariable>
<CallVariable>
<name>user_DR_MediaChannelName</name>
<value>chat</value>
</CallVariable>
</callvariables>
<queueNumber>11180119</queueNumber>
<queueName>WxConnectChat1</queueName>
<callKeyCallId>2448</callKeyCallId>
<callKeyPrefix>154689</callKeyPrefix>
<callKeySequenceNum>1</callKeySequenceNum>
</mediaProperties>
<mediaType>WxConnectChat</mediaType>
<mediaChannel>chat</mediaChannel>
<mediaClass>chat</mediaClass>
<participants>
<Participant>
<actions>
<action>PAUSE</action>
<action>UPDATE_CALL_DATA</action>
<action>TRANSFER</action>
<action>CLOSE</action>
</actions>
<mediaAddress>1080</mediaAddress>
<mediaAddressType></mediaAddressType>
<startTime>2024-07-11T18:05:46.096Z</startTime>
<state>WRAPPING_UP</state>
<stateCause></stateCause>
<stateChangeTime>2024-07-11T18:07:32.895Z</stateChangeTime>
</Participant>
</participants>
<state>WRAPPING_UP</state>
<uri>/finesse/api/Dialog/154689_2448_1</uri>
</dialog>
</data>
<event>PUT</event>
<requestId></requestId>
<source>/finesse/api/Dialog/154689_2448_1</source>
</Update>
```

Chat session is now CLOSED:

14:07:35.185 finesse.js:3766 2024-07-11T14:07:35.185 -04:00: : finesse1.dcloud.cisco.com: Jul 11 2024 1

```
<data>
<dialogs>
<Dialog>
<taskId>
<routerCallKeyDay>154689</routerCallKeyDay>
<routerCallKeyCallID>2448</routerCallKeyCallID>
<routerCallKeySequenceNum>1</routerCallKeySequenceNum>
</taskId>
<id>154689_2448_1</id>
<mediaProperties>
<mediaId>5016</mediaId>
<wrapUpReason></wrapUpReason>
<dialledNumber>WxConnectChat1</dialledNumber>
<callvariables>
<CallVariable>
<name>callVariable1</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable2</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable3</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable4</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable5</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable6</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable7</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable8</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable9</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable10</name>
<value></value>
</CallVariable>
<CallVariable>
<name>user_DR_Primary</name>
<value>cloudconnect1.dcloud.cisco.com</value>
</CallVariable>
<CallVariable>
<name>user_DR_Backup</name>
```

```
<value></value>
</CallVariable>
<CallVariable>
<name>user_DR_MediaResourceID</name>
<value>CSR4PMKEIFWI7EMX</value>
</CallVariable>
<CallVariable>
<name>user_DR_CustomerName</name>
<value>Customer</value>
</CallVariable>
<CallVariable>
<name>user_DR_MediaChannelName</name>
<value>chat</value>
</CallVariable>
</callvariables>
<queueNumber>11180119</queueNumber>
<queueName>WxConnectChat1</queueName>
<callKeyCallId>2448</callKeyCallId>
<callKeyPrefix>154689</callKeyPrefix>
<callKeySequenceNum>1</callKeySequenceNum>
</mediaProperties>
<mediaType>WxConnectChat</mediaType>
<mediaChannel>chat</mediaChannel>
<mediaClass>chat</mediaClass>
<participants>
<Participant>
<actions>
</actions>
<mediaAddress>1080</mediaAddress>
<mediaAddressType></mediaAddressType>
<startTime>2024-07-11T18:05:46.096Z</startTime>
<state>CLOSED</state>
<stateCause></stateCause>
<stateChangeTime>2024-07-11T18:07:35.124Z</stateChangeTime>
</Participant>
</participants>
<dispositionCode>CD_NORMAL_END_TASK</dispositionCode>
<state>CLOSED</state>
<uri>/finesse/api/Dialog/154689_2448_1</uri>
</Dialog>
</dialogs>
</data>
<event>DELETE</event>
<requestId></requestId>
<source>/finesse/api/User/1080/Media/5016/Dialogs</source>
</Update>
14:07:35.188 finesse.js:3766 2024-07-11T14:07:35.188 -04:00: : finesse1.dcloud.cisco.com: Jul 11 2024 1
<data>
<dialogs>
<Dialog>
<taskId>
<routerCallKeyDay>154689</routerCallKeyDay>
<routerCallKeyCallID>2448</routerCallKeyCallID>
<routerCallKeySequenceNum>1</routerCallKeySequenceNum>
</taskId>
<id>154689_2448_1</id>
<mediaProperties>
<mediaId>5016</mediaId>
<wrapUpReason></wrapUpReason>
<dialledNumber>WxConnectChat1</dialledNumber>
<callvariables>
<CallVariable>
```

```
<name>callVariable1</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable2</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable3</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable4</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable5</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable6</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable7</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable8</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable9</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable10</name>
<value></value>
</CallVariable>
<CallVariable>
<name>user_DR_Primary</name>
<value>cloudconnect1.dcloud.cisco.com</value>
</CallVariable>
<CallVariable>
<name>user_DR_Backup</name>
<value></value>
</CallVariable>
<CallVariable>
<name>user_DR_MediaResourceID</name>
<value>CSR4PMKEIFWI7EMX</value>
</CallVariable>
<CallVariable>
<name>user_DR_CustomerName</name>
<value>Customer</value>
</CallVariable>
<CallVariable>
<name>user_DR_MediaChannelName</name>
<value>chat</value>
</CallVariable>
</callvariables>
<queueNumber>11180119</queueNumber>
<queueName>WxConnectChat1</queueName>
```

```

<callKeyCallId>2448</callKeyCallId>
<callKeyPrefix>154689</callKeyPrefix>
<callKeySequenceNum>1</callKeySequenceNum>
</mediaProperties>
<mediaType>WxConnectChat</mediaType>
<mediaChannel>chat</mediaChannel>
<mediaClass>chat</mediaClass>
<participants>
<Participant>
<actions>
</actions>
<mediaAddress>1080</mediaAddress>
<mediaAddressType></mediaAddressType>
<startTime>2024-07-11T18:05:46.096Z</startTime>
<state>CLOSED</state>
<stateCause></stateCause>
<stateChangeTime>2024-07-11T18:07:35.124Z</stateChangeTime>
</Participant>
</participants>
<dispositionCode>CD_NORMAL_END_TASK</dispositionCode>
<state>CLOSED</state>
<uri>/finesse/api/Dialog/154689_2448_1</uri>
</Dialog>
</dialogs>
</data>
<event>DELETE</event>
<requestId></requestId>
<source>/finesse/api/User/1080/Media/5016/Dialogs</source>
</Update>

```

```

14:07:35.188 2024-07-11T14:07:35.188 -04:00: : finesse1.dcloud.cisco.com: Jul 11 2024 14:07:35.232 -0400
14:07:35.189 2024-07-11T14:07:35.189 -04:00: : finesse1.dcloud.cisco.com: Jul 11 2024 14:07:35.233 -0400
14:07:35.189 2024-07-11T14:07:35.189 -04:00: : finesse1.dcloud.cisco.com: Jul 11 2024 14:07:35.233 -0400

```

Información Relacionada

Guía De Funciones - Integración De Canales Digitales Con Webex Connect:

- UCCE:
https://www.cisco.com/c/en/us/td/docs/voice_ip_comm/cust_contact/contact_center/icm_enterprise/icm_enterprise_guide-1262/rcct_m_digital-channels-integration-webexconnect_12-6-2.html
- PCCE:
https://www.cisco.com/c/en/us/td/docs/voice_ip_comm/cust_contact/contact_center/pcce/pcce_12_6_guide-1262/rcct_m_digital-channels-integration-webexconnect_12-6-2.html

Guía del usuario del gadget Canales digitales de Cisco Contact Center Enterprise Manager:

- https://www.cisco.com/c/en/us/td/docs/voice_ip_comm/cust_contact/contact_center/finesse/finesse_digital-channels/rcct_m_1262_manage-digital-channels.html

Guía de administración y configuración para Webex Engage con Cisco Contact Center Enterprise:

- https://www.cisco.com/c/dam/en/us/td/docs/voice_ip_comm/cust_contact/contact_center/icm_enterprise/icm_enterprise_guide-1262/rcct_m_digital-channels-integration-webexconnect_12-6-2.html

- Integración de Cisco Contact Center Enterprise (CCE) con Webex Connect
https://help.imiconnect.io/docs/cce_overview

Acerca de esta traducción

Cisco ha traducido este documento combinando la traducción automática y los recursos humanos a fin de ofrecer a nuestros usuarios en todo el mundo contenido en su propio idioma.

Tenga en cuenta que incluso la mejor traducción automática podría no ser tan precisa como la proporcionada por un traductor profesional.

Cisco Systems, Inc. no asume ninguna responsabilidad por la precisión de estas traducciones y recomienda remitirse siempre al documento original escrito en inglés (insertar vínculo URL).