

在与Webex Connect集成的CCE环境中跟踪任务路由事件

目录

[简介](#)

[先决条件](#)

[要求:](#)

[使用的组件:](#)

[背景](#)

[部署架构](#)

[日志](#)

[Webex Connect门户](#)

[云连接 — 数字路由](#)

[路由器](#)

[PG](#)

[浏览器控制台](#)

[相关信息](#)

简介

本文档介绍在与Webex Connect集成的Contact Center Enterprise解决方案中路由到座席的新任务的消息流。

先决条件

要求:

Cisco 建议您了解以下主题：

- 思科套装联络中心企业版(PCCE)
- 思科统一联系中心企业版(UCCE)
- WebEx Connect

使用的组件：

本文档中的信息基于以下软件和硬件版本：


- ICM版本：12.6(2)
- Finesse版本：12.6(2)
- Webex Control Hub
- Webex Connect门户
- Webex Engage门户


本文档中的信息都是基于特定实验室环境中的设备编写的。本文档中使用的所有设备最初均采用原始（默认）配置。如果您的网络处于活动状态，请确保您了解所有命令的潜在影响。

背景

Webex Connect允许联系中心业务及其客户使用数字渠道（如电子邮件、聊天和短信）进行交互。Contact Center Enterprise(CCE)解决方案与Webex Connect集成，为客户提供无缝的全方位渠道体验。此集成可帮助客户通过语音和数字通信渠道进行交互。Webex Connect提供丰富的自助服务和僵尸程序集成，使客户能够回答一些常见问题。它为集成的路由、座席桌面和报告服务提供了统一的解决方案。Webex Connect提供简化的框架，帮助合作伙伴和客户通过数字渠道交互。


部署架构

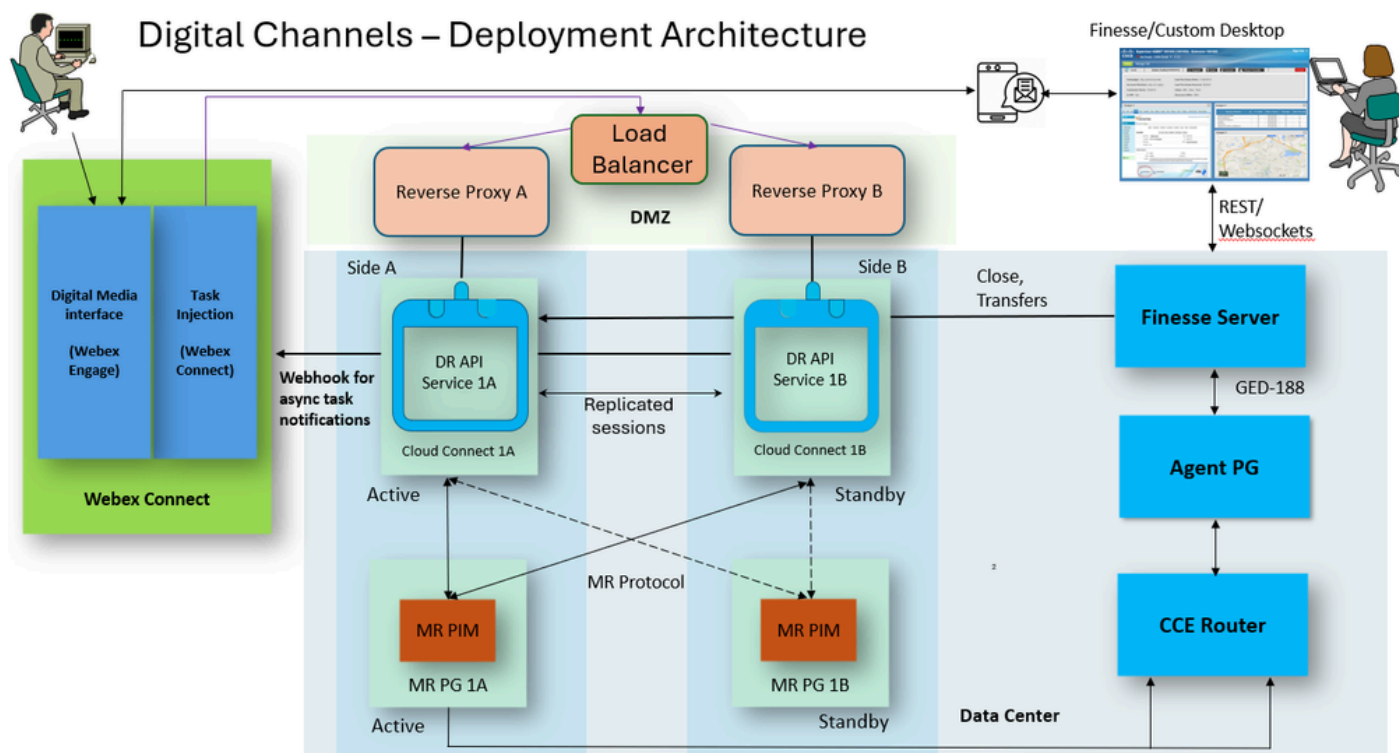

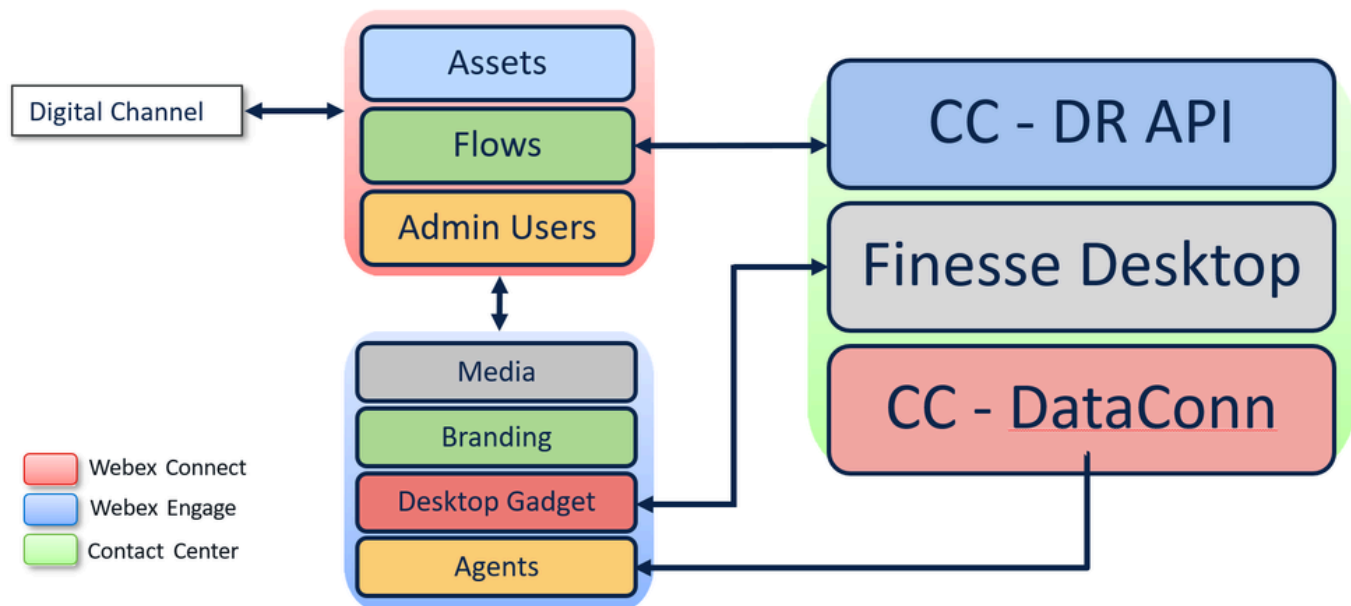

组件摘要

活动路由

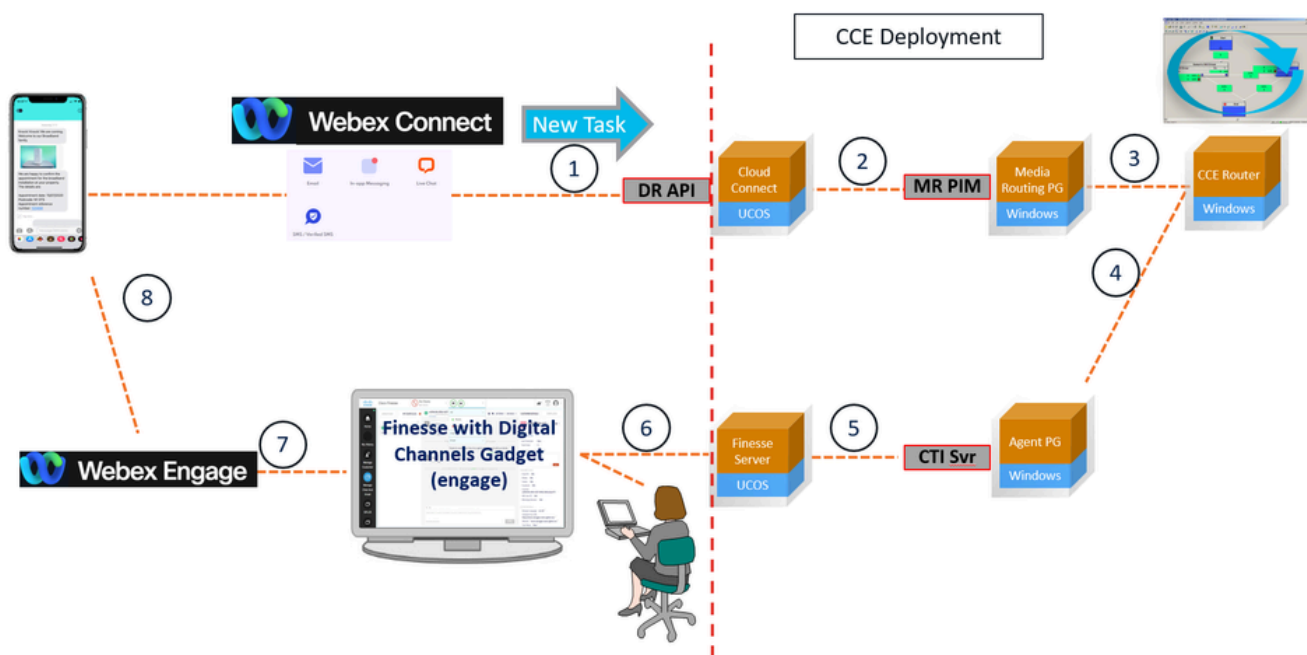

日志

Webex Connect门户

节点 — 配置APP事件

- 此节点是流的起点。此节点的日志显示详细信息，例如在Webex Connect门户上配置的应用入口点、发起聊天表单的URL等。

TRANSACTION LOGS 22be296b-bc6b-4a6f-af6d-a84c0fb67a01_30408_158393					Time Elapsed (HH:mm:ss.SSS): 00:00:25.966	Invoked by: Rule 30408
Trans ID: 22be296b-bc6b-4a6f-af6d-a84c0fb67a01_30408_158393						
NODE ID	NODE	OUTCOME	TIME TAKEN(HH:mm:ss.SSS)	DETAILS		
2	Configure APP Event	onBegin	00:00:00.001	Node Trans : 6ad93c92-39de-4ea5-934b-e86b71657a55 ID Description : success App : AChatEntryPoint Channel : Mobile & Web App Event : MO Data : <pre>{ "inappmessaging.message.customTags": "", "inappmessaging.pciInfo.isPCICompliance": "true", "inappmessaging.pciInfo.nonPCIComplianceReason": "{ \"text\": \"\" }", "inappmessaging.extras": "", "inappmessaging.threadStatus": "", "inappmessaging.message.extras": "{ \"hasprechatform\": \"0\", \"Webpage\": \"https://attachukimi.chat/widget/widgetloader.html?docwidth=1280&id=BE33E549-9326-4F60-9427-7A9FAA22EBD0&org=#\", \"initiatedon\": \"\", \"useragent\": \"Mozilla/5.0 (Windows NT 10.0; rv:109.0) Gecko/20100101 Firefox/118.0\", \"Website\": \"hungry-glittery-terrier.glitch.me\", \"browserfingerprint\": \"976b22d6-1e7b-4702-9a39-9de1d7024884\", \"customprofileparams\": \"xaJO5vPgYt83k/gWcBZBmj9Pg3dZ+f/UvLWE2SEWX+yKOk2Lagxbf6KK+gtHACFK\", \"website_id\": \"809\", \"Initiated from URL\": \"https://hungry-glittery-terrier.glitch.me/\", \"proactive_id\": \"0\", \"Browser language\": \"en-US\" }", "inappmessaging.securityscaninfo.securityFailedReason": "{ \"text\": \"\" }", }</pre>		
9	Evaluate	success	00:00:00.001			
2245	Search Conversation	noConversationFound	00:00:00.053			
2252	Create Conversation	waiting	00:00:00.047			
2252	Create Conversation	onConversationCreated	00:00:00.433			
1333	Pre-chat form	onSuccess	00:00:00.012			
38	Receive	app.onformresponse	00:00:24.229			
2256	Append Conversation	waiting	00:00:00.039			
2256	Append Conversation	onAppendMessageSuccess	00:00:00.335			
2374	CCE Create Task	Successfully Created	00:00:00.771			
2260	Update Conversation	Success	00:00:00.041			
2393	End	Success	00:00:00.004			

节点 — 预聊天表单

- 此节点的日志显示从Webex Connect门户上创建的聊天模板加载的问题。

TRANSACTION LOGS 22be296b-bc6b-4a6f-af6d-a84c0fb67a01_30408_158393					Time Elapsed (HH:mm:ss.SSS): 00:00:25.966	Invoked by: Rule 30408
Trans ID: 22be296b-bc6b-4a6f-af6d-a84c0fb67a01_30408_158393						
NODE ID	NODE	OUTCOME	TIME TAKEN(HH:mm:ss.SSS)	DETAILS		
2	Configure APP Event	onBegin	00:00:00.001	<pre>{ "Fields": [{ "type": "name", "name": "Name", "label": "Name", "description": "", "mandatory": true }, { "type": "email", "name": "Email", "label": "Email", "description": "", "mandatory": false }, { "type": "text", "name": "Question", "label": "How can we help", "description": "How can we help", "mandatory": false }] }</pre>		
9	Evaluate	success	00:00:00.001			
2245	Search Conversation	noConversationFound	00:00:00.053			
2252	Create Conversation	waiting	00:00:00.047			
2252	Create Conversation	onConversationCreated	00:00:00.433			
1333	Pre-chat form	onSuccess	00:00:00.012			
38	Receive	app.onformresponse	00:00:24.229			
2256	Append Conversation	waiting	00:00:00.039			
2256	Append Conversation	onAppendMessageSuccess	00:00:00.335			
2374	CCE Create Task	Successfully Created	00:00:00.771			
2260	Update Conversation	Success	00:00:00.041			
2393	End	Success	00:00:00.004			

节点 — 接收

- 此节点的日志显示对从聊天模板加载的问题提供的响应。

TRANSACTION LOGS22be296b-bc6b-4a6f-af6d-a84c0fb67a01_30408_158393XHELP

Trans ID : 22be296b-bc6b-4a6f-af6d-a84c0fb67a01_30408_158393Time Elapsed (HH:mm:ss.SSS) : 00:00:25.966Invoked by: Rule 30408

NODE ID	NODE	OUTCOME	TIME TAKEN(HH:mm:ss.SSS)	DETAILS
2	Configure APP Event	onBegin	00:00:00.001	
9	Evaluate	success	00:00:00.001	
2245	Search Conversation	noConversationFound	00:00:00.053	
2252	Create Conversation	waiting	00:00:00.047	
2252	Create Conversation	onConversationCreated	00:00:00.433	
1333	Pre-chat form	onSuccess	00:00:00.012	
38	Receive	app.onformresponse	00:00:24.229	<pre>"Channel": "APP", "appid": "AA02142539", "from": "976b22d6-1e7b-4702-9a39-9de1d7024884", - "events": [- { "Event": "OnFormResponse" }] }</pre>
2256	Append Conversation	waiting	00:00:00.039	
2256	Append Conversation	onAppendMessageSuccess	00:00:00.335	
2374	CCE Create Task	Successfully Created	00:00:00.771	
2260	Update Conversation	Success	00:00:00.041	
2393	End	Success	00:00:00.004	

Wait start time : 2024-07-11T18:05:20.755Z

timeoutValue (Sec) : 300

timeout : false

message :

Wait end time : 2024-07-11T18:05:44.984Z

Custom logs : 1003 → {"title":"Welcome","fields":[{"name":"Name","description":"","label":"Name","type":"name","value":"Customer","mandatory":true},{name":"Email","description":"","label":"Email","type":"email","value":"customer@company.com","mandatory":false},{name":"Question","description":"How can we help","label":"How can we help","type":"text","value":"Cisco TAC","mandatory":false}]}

节点 — CCE创建任务

- 此节点调用联系中心企业任务API以创建新任务。在Webex Connect中配置流时，在Contact Center Enterprise上创建任务时需要此节点。

TRANSACTION LOGS22be296b-bc6b-4a6f-af6d-a84c0fb67a01_30408_158393XHELP

Trans ID : 22be296b-bc6b-4a6f-af6d-a84c0fb67a01_30408_158393Time Elapsed (HH:mm:ss.SSS) : 00:00:25.966Invoked by: Rule 30408

NODE ID	NODE	OUTCOME	TIME TAKEN(HH:mm:ss.SSS)	DETAILS
2	Configure APP Event	onBegin	00:00:00.001	
9	Evaluate	success	00:00:00.001	
2245	Search Conversation	noConversationFound	00:00:00.053	
2252	Create Conversation	waiting	00:00:00.047	
2252	Create Conversation	onConversationCreated	00:00:00.433	
1333	Pre-chat form	onSuccess	00:00:00.012	
38	Receive	app.onformresponse	00:00:24.229	
2256	Append Conversation	waiting	00:00:00.039	
2256	Append Conversation	onAppendMessageSuccess	00:00:00.335	
2374	CCE Create Task	Successfully Created	00:00:00.771	<pre>Node Trans ID : a7b93115-196a-4620-9cb5-5f8801166d7c Description : edge: Successfully Created, integration :CCE Create Task, method : Create a New Task, warn : Transaction Details Resume key : - Request Time : 2024-07-11T18:05:46.940Z timestamp Request URL : POST https://rp.vpod458.dc-01.com:8445/draapi/v1/tasks Request Data : { - "headers": { "x-wx-grtid": "e28ccc9b-25b7-a65b-59fa-8056d6ad0a36", "TrackingId": "WebexConnect_22be296b-bc6b-4a6f-af6d-a84c0fb67a01", "Content-Type": "application/json" }</pre>
2260	Update Conversation	Success	00:00:00.041	
2393	End	Success	00:00:00.004	

云连接 — 数字路由

<#root>

Incoming NEW_TASK request coming in from the 'CCE Create Task' node Webex Connect Flow:

[INFO] 2024-07-11 14:05:45.989 [http-nio-127.0.0.1-8091-exec-9:60] [WebexConnect_22be296b-bc6b-4a6f-af6d-a84c0fb67a01_30408_158393] [TaskNotificationProcessor-3:153] [] TaskNotificationProcessor - Notification received

```
[DEBUG] 2024-07-11 14:05:46.025 [TaskNotificationProcessor-3:153] [] NotificationRestClient - Sending n
[DEBUG] 2024-07-11 14:05:46.025 [TaskNotificationProcessor-3:153] [] NotificationRestClient - increment
[INFO ] 2024-07-11 14:05:46.025 [http-nio-127.0.0.1-8091-exec-9:60] [WebexConnect_22be296b-bc6b-4a6f-af
[INFO ] 2024-07-11 14:05:46.031 [http-nio-127.0.0.1-8091-exec-9:60] [WebexConnect_22be296b-bc6b-4a6f-af
```

This NEW_TASK request is then sent to the MR-PIM:

```
[INFO ] 2024-07-11 14:05:46.038 [ApiRequestsProcessorThread:211] [] MrRequestProcessor - NEW_TASK Reque
[INFO ] 2024-07-11 14:05:46.038 [ApiRequestsProcessorThread:211] [] MrRequestProcessor - Sent RequestMe
[DEBUG] 2024-07-11 14:05:46.038 [ApiRequestsProcessorThread:211] [] MrRequestProcessor - Sent NewTaskV5
```

Task state is queued and then routed:

```
[INFO ] 2024-07-11 14:05:46.044 [ApiRequestsProcessorThread:211] [] RedissonQueues - Enqueued Notificat
[INFO ] 2024-07-11 14:05:46.052 [MRProcessorThread:136] [] RedissonQueues - Enqueued Notification on qu
[DEBUG] 2024-07-11 14:05:46.055 [MRProcessorThread:136] [] ServiceCounterTrace - DrapiCountersCurrentIn
[INFO ] 2024-07-11 14:05:46.540 [TaskNotificationProcessor-3:153] [] NotificationRestClient - Sending n
[DEBUG] 2024-07-11 14:05:46.542 [TaskNotificationProcessor-3:153] [] ServiceCounterTrace - DrapiCounter
[DEBUG] 2024-07-11 14:05:46.543 [TaskNotificationProcessor-3:153] [] TaskNotificationProcessor - Notifi
[DEBUG] 2024-07-11 14:05:46.543 [TaskNotificationProcessor-3:153] [] NotificationRestClient - Sending n
[INFO ] 2024-07-11 14:05:46.656 [TaskNotificationProcessor-3:153] [] NotificationRestClient - Sending n
[DEBUG] 2024-07-11 14:05:46.658 [TaskNotificationProcessor-3:153] [] ServiceCounterTrace - DrapiCounter
[DEBUG] 2024-07-11 14:05:46.659 [TaskNotificationProcessor-3:153] [] TaskNotificationProcessor - Notifi
[DEBUG] 2024-07-11 14:05:46.659 [TaskNotificationProcessor-3:153] [] NotificationRestClient - Sending n
[DEBUG] 2024-07-11 14:05:46.659 [TaskNotificationProcessor-3:153] [] NotificationRestClient - increment
[INFO ] 2024-07-11 14:05:46.764 [TaskNotificationProcessor-3:153] [] NotificationRestClient - Sending n
[DEBUG] 2024-07-11 14:05:46.765 [TaskNotificationProcessor-3:153] [] ServiceCounterTrace - DrapiCounter
.
.
.
.
```

TASK is now ended successfully:

```
[DEBUG] 2024-07-11 14:07:37.615 [http-nio-127.0.0.1-8091-exec-7:58] [] FilterChainProxy - Securing POST
[DEBUG] 2024-07-11 14:07:37.615 [http-nio-127.0.0.1-8091-exec-7:58] [] FilterChainProxy - Securing POST
[DEBUG] 2024-07-11 14:07:37.679 [http-nio-127.0.0.1-8091-exec-7:58] [FINESSE_b8526c49-5dfc-43b4-ba55-1a
[INFO ] 2024-07-11 14:07:37.679 [http-nio-127.0.0.1-8091-exec-7:58] [FINESSE_b8526c49-5dfc-43b4-ba55-1a
[INFO ] 2024-07-11 14:07:37.701 [http-nio-127.0.0.1-8091-exec-7:58] [FINESSE_b8526c49-5dfc-43b4-ba55-1a
[DEBUG] 2024-07-11 14:07:37.703 [TaskNotificationProcessor-3:153] [] NotificationRestClient - Sending n
[DEBUG] 2024-07-11 14:07:37.703 [TaskNotificationProcessor-3:153] [] NotificationRestClient - increment
[INFO ] 2024-07-11 14:07:38.171 [TaskNotificationProcessor-3:153] [] NotificationRestClient - Sending n
[DEBUG] 2024-07-11 14:07:38.173 [TaskNotificationProcessor-3:153] [] ServiceCounterTrace - DrapiCounter
```

路由器

<#root>

NewCall request received from MR PG:

```
14:05:46:019 ra-rtr Trace: (14 x 0 : 0 0) NewCall: CID=(154689,2448), DN=WxConnectChat1, ANI=, CED=, RC
14:05:46:019 ra-rtr Trace: RCKSeqNum=-1, NIC_DN= ServiceRequested=0 OrigRCCallID{PhyCtrlID=0, RCID=0, D
14:05:46:019 ra-rtr Trace: ID Name Type Index Value
```

14:05:46:019 ra-rtr Trace: 5041 user_DR_CustomerName Scalar Customer
14:05:46:019 ra-rtr Trace: 5040 user_DR_MediaResourceID Scalar CSR4PMKEIFWI7EMX
14:05:46:019 ra-rtr Trace: 5038 user_DR_Primary Scalar 0cloudconnect1.dcloud.cisco.com
14:05:46:019 ra-rtr Trace: 5039 user_DR_Backup Scalar 0
14:05:46:019 ra-rtr Trace: 5042 user_DR_MediaChannelName Scalar chat

RouteComplete:

14:05:46:019 ra-rtr Trace: (14 x 0 : 0 0) RouteComplete:
14:05:46:019 ra-rtr Trace: Route: DN=WxConnectChat1, ANI=, CED=, Label=
14:05:46:019 ra-rtr Trace: Route: CID=(154689,2448), Labels=1

DeviceTargetPreCall message sent to the Agent PG with the ECC variables:

14:05:46:019 ra-rtr Trace: (14 x 0 : 0 0) DeviceTargetPreCall_V15: CID=(154689,2448), PerID=5000, SGSTI
14:05:46:019 ra-rtr Trace: DN=WxConnectChat1, ANI=, CED=, CustDBProvidedDigits=, RouteID=5039, NetworkT
14:05:46:019 ra-rtr Trace: RCKSeqNum=0, DelayQTime=0, DelayRouterTime=0, SGDelayQTime=0
14:05:46:019 ra-rtr Trace: CallGUID=, CustomerID=1 ServiceRequested=0
14:05:46:019 ra-rtr Trace: LocationParamPKID=, LocationParamName=, SIPHeader=
14:05:46:019 ra-rtr Trace: NIC_CalledPartyNumber=WxConnectChat1 ECCPayloadID=1
14:05:46:019 ra-rtr Trace: OrigRCCallID{PhyCtrlID=0, RCID=0, DlgID=0x0} OrigOperationType=0
14:05:46:019 ra-rtr Trace: PV1= PV2= PV3= PV4= PV5=
14:05:46:019 ra-rtr Trace: PV6= PV7= PV8= PV9= PV10=
14:05:46:019 ra-rtr Trace: ID Name Type Index Value
14:05:46:019 ra-rtr Trace: 5038 user_DR_Primary Scalar 0cloudconnect1.dcloud.cisco.com
14:05:46:019 ra-rtr Trace: 5039 user_DR_Backup Scalar 0
14:05:46:019 ra-rtr Trace: 5040 user_DR_MediaResourceID Scalar CSR4PMKEIFWI7EMX
14:05:46:019 ra-rtr Trace: 5041 user_DR_CustomerName Scalar Customer
14:05:46:019 ra-rtr Trace: 5042 user_DR_MediaChannelName Scalar chat

Connect Label sent to MR PG with the ECC variables:

14:05:46:019 ra-rtr Trace: (14 x 0 : 0 0) Connect: CID=(154689,2448), EventSelect=0x0, ServiceType=0, R
14:05:46:019 ra-rtr Trace: ID Name Type Index Value
14:05:46:019 ra-rtr Trace: 5038 user_DR_Primary Scalar 0cloudconnect1.dcloud.cisco.com
14:05:46:019 ra-rtr Trace: 5039 user_DR_Backup Scalar 0
14:05:46:019 ra-rtr Trace: 5040 user_DR_MediaResourceID Scalar CSR4PMKEIFWI7EMX
14:05:46:019 ra-rtr Trace: 5041 user_DR_CustomerName Scalar Customer
14:05:46:019 ra-rtr Trace: 5042 user_DR_MediaChannelName Scalar chat
14:05:46:019 ra-rtr Trace: (14 x 0 : 0 0) Deleting Dialog.

PG

MR-PG PIM

<#root>

NEW_TASK request on mr pim:

14:05:46:132 PG2A-pim5 Trace: Application->PG:
Message = NEW_TASK; Length = 280 bytes
DialogueID = (14) Hex 0000000e

SendSeqNo = (1) Hex 00000001
MRDomainID = (5016) Hex 00001398
PreviousTask = -1:-1:-1
PreferredAgent = Undefined
Service = Undefined
CiscoReserved = (0) Hex 00000000
ScriptSelector: WxConnectChat1
ApplicationString2: 22be296b-bc6b-4a6f-af6d-a84c0fb67a01
ServiceRequested = (0) Hex 00000000
QueueType = (0) Hex 00000000
QueueID = Undefined

NewCall request is now sent to the Router:

14:05:46:132 PG2A-pim5 Trace: Send INRCMSGNewCall to Router : :
NEW_CALL RCID=5007 PID=5001 DID=14 DIDRelSeq#=1 GrpDelKey=5007 CRS(RtrDate=-1,RtrCID=-1) RCKSeq#=-1 NIC

Router responds back with the Connect label:

14:05:46:132 PG2A-pim5 Trace: MR_Peripheral::On_Router_Connect:
CONNECT RCID=5007 PID=5001 DID=14 DIDRelSeq#=0 CRS(RtrDate=154689,RtrCID=2448) RCKSeq#=0 ErrorCode=0 TR

DO_THIS_WITH_TASK message sent over to WxConnect:

14:05:46:132 PG2A-pim5 Trace: PG->Application:
Message = DO_THIS_WITH_TASK; Length = 250 bytes
DialogueID = (14) Hex 0000000e
SendSeqNo = (1) Hex 00000001
IcmTaskID = 154689:2448: 1
SkillGroup = (5239) Hex 00001477
Service = Undefined
Agent = (5172) Hex 00001434
AgentInfo: 5172
Label:
ApplicationString2:
MRDID = (5016) Hex 00001398
Interruptible = (0) Hex 00000000
PrecisionQueueID = (0) Hex 00000000

MR-PG OPC

<#root>

NEW_CALL request received from the digital routing service on the Cloud Connect server, with the ECC

14:05:46:132 PG2A-opc Trace: SendINRCMessage: NEW_CALL RCID=5007 PID=5001 DID=14 DIDRelSeq#=1 GrpDelKey:
Name Type Index Value
user_DR_CustomerName Scalar Customer
user_DR_MediaResourceID Scalar CSR4PMKEIFWI7EMX
user_DR_Primary Scalar 0cloudconnect1.dcloud.cisco.com
user_DR_Backup Scalar 0
user_DR_MediaChannelName Scalar chat
14:05:46:132 PG2A-opc Trace: ProcessINRCMsgs - BEGIN Msg=8 src=48 dest=1 flag=2 size=444

CONNECT label received from router with the ECC variables:

```
14:05:46:132 PG2A-opc Trace: SendPIMINRCMessage: CONNECT RCID=5007 PID=5001 DID=14 DIDRelSeq#=0 CRS(Rtr
Name Type Index Value
user_DR_Primary          Scalar 0cloudconnect1.dcloud.cisco.com
user_DR_Backup           Scalar 0
user_DR_MediaResourceID   Scalar CSR4PMKEIFWI7EMX
user_DR_CustomerName      Scalar Customer
user_DR_MediaChannelName  Scalar chat
```

BuildClosedCallRecord after chat ends:

```
14:05:46:132 PG2A-opc Trace: BuildClosedCallRecord: CallObj=0x4473dc8 DateTime=07/11 18:05:45 IntervalD
14:05:46:132 PG2A-opc Trace: PV1=(null) PV2=(null) PV3=(null) PV4=(null) PV5=(null) PV6=(null) PV7=(nu
14:05:46:132 PG2A-opc Trace: BuildClosedCallRecord:
Name Type Index Value
user_DR_Primary          Scalar 0cloudconnect1.dcloud.cisco.com
user_DR_Backup           Scalar 0
user_DR_MediaResourceID   Scalar CSR4PMKEIFWI7EMX
user_DR_CustomerName      Scalar Customer
user_DR_MediaChannelName  Scalar chat
```

座席PG - OPC

<#root>

Agent PG receives the Device Precall Indicator message along with the ECC variables as agent '5172' i

```
14:05:46:132 PG3A-opc Trace: ProcessARMPrecallMsg - Precall received for Agent '5172' MRDomainID '5016'
14:05:46:132 PG3A-opc Trace: callVar1 '' callVar2 '' callVar3 '' callVar4 ''
callVar5 '' callVar6 '' callVar7 '' callVar8 ''
callVar9 '' callVar10 ''
ECCDataSize '85'
14:05:46:132 PG3A-opc Trace: Name Type Index Value
14:05:46:132 PG3A-opc Trace: user_DR_Primary          Scalar 0cloudconnect1.dcloud.cisco.com
14:05:46:132 PG3A-opc Trace: user_DR_Backup           Scalar 0
14:05:46:132 PG3A-opc Trace: user_DR_MediaResourceID   Scalar CSR4PMKEIFWI7EMX
14:05:46:132 PG3A-opc Trace: user_DR_CustomerName      Scalar Customer
14:05:46:132 PG3A-opc Trace: user_DR_MediaChannelName  Scalar chat
14:05:46:132 PG3A-opc Trace: MergeECCData Task ID 154689:2448:1, Payload ID 0, New Payload 1
```

OfferTaskInd >> StartTaskInd >> EndTaskInd:

```
14:05:51:321 PG3A-opc Trace: OfferTaskInd - InvokeID = 2375719, ClientInvokeID = 2375719, MRDID = 5016,
SkillGroupID = 5239, ServiceID = -1, SessionID = 2
14:05:52:133 PG3A-opc Trace: StartTaskInd - InvokeID = 2375721, ClientInvokeID = 2375721, MRDID = 5016,
SkillGroupID = 5239, ServiceID = -1, SessionID = 2
14:07:35:168 PG3A-opc Trace: EndTaskInd - InvokeID = 2376024, ClientInvokeID = 2376024, TaskID = 154689,
WrapupData = , ApplicationData =
```

BuildTerminationRecordMsg:

14:07:35:168 PG3A-opc Trace: TaskObj::BuildTerminationRecordMsg - DateTime='07/11 18:07:34' Periph=5000
14:07:35:168 PG3A-opc Trace: Var1='(null)' Var2='(null)' Var3='(null)' Var4='(null)' Var5='(null)' Var6='(null)'
14:07:35:168 PG3A-opc Trace: AgentSessionID=5172-133650295444320000 NetworkTargetID=-1 TrunkGroupID=-1
14:07:35:168 PG3A-opc Trace: Name Type Index Value
14:07:35:168 PG3A-opc Trace: user_DR_Primary Scalar 0cloudconnect1.dcloud.cisco.com
14:07:35:168 PG3A-opc Trace: user_DR_Backup Scalar 0
14:07:35:168 PG3A-opc Trace: user_DR_MediaResourceID Scalar CSR4PMKEIFWI7EMX
14:07:35:168 PG3A-opc Trace: user_DR_CustomerName Scalar Customer
14:07:35:168 PG3A-opc Trace: user_DR_MediaChannelName Scalar chat

浏览器控制台

<#root>

Agent is RESERVED:

14:05:57.964 2024-07-11T14:05:57.964 -04:00: : finesse1.dcloud.cisco.com: Jul 11 2024 14:05:57.963 -0400
<data>
<media>
<description>WxConnect Chat</description>
<dialogLogoutAction>CLOSE</dialogLogoutAction>
<id>5016</id>
<interruptAction>IGNORE</interruptAction>
<interruptible>>false</interruptible>
<maxDialogLimit>3</maxDialogLimit>
<name>WxConnectChat</name>
<routable>>true</routable>
<state>RESERVED</state>
<stateChangeTime>2024-07-11T18:05:57.952Z</stateChangeTime>
<uri>/finesse/api/User/1080/Media/5016</uri>
</media>
</data>
<event>PUT</event>
<requestId></requestId>
<source>/finesse/api/User/1080/Media/5016</source>
</Update>
14:05:57.966 2024-07-11T14:05:57.966 -04:00: : finesse1.dcloud.cisco.com: Jul 11 2024 14:05:57.965 -0400
<data>
<media>
<description>WxConnect Chat</description>
<dialogLogoutAction>CLOSE</dialogLogoutAction>
<id>5016</id>
<interruptAction>IGNORE</interruptAction>
<interruptible>>false</interruptible>
<maxDialogLimit>3</maxDialogLimit>
<name>WxConnectChat</name>
<routable>>true</routable>
<state>RESERVED</state>
<stateChangeTime>2024-07-11T18:05:57.952Z</stateChangeTime>
<uri>/finesse/api/User/1080/Media/5016</uri>
</media>
</data>
<event>PUT</event>
<requestId></requestId>
<source>/finesse/api/User/1080/Media/5016</source>
</Update>

14:05:57.968 2024-07-11T14:05:57.968 -04:00: : finesse1.dcloud.cisco.com: Jul 11 2024 14:05:57.967 -0400
14:05:57.972 :: Media change a{_super: undefined, _id: '5016', _restObj: a, autoSubscribe: true, context: {}}
14:05:57.972 Finesse-IMI Gadget : [useDigitalChannel Hook] [handleMediaChange] : media change event received

Agent is OFFERED the chat with the ACCEPT action available to the agent:

14:05:57.975 Finesse-IMI Gadget : [useDigitalChannel Hook] [cacheMediaStates] : final cached item : {"5016": {}}
14:05:57.975 2024-07-11T14:05:57.975 -04:00: : finesse1.dcloud.cisco.com: Jul 11 2024 14:05:57.974 -0400

```
<data>
<dialogs>
<Dialog>
<taskId>
<routerCallKeyDay>154689</routerCallKeyDay>
<routerCallKeyCallID>2448</routerCallKeyCallID>
<routerCallKeySequenceNum>1</routerCallKeySequenceNum>
</taskId>
<id>154689_2448_1</id>
<mediaProperties>
<mediaId>5016</mediaId>
<dialNumber>WxConnectChat1</dialNumber>
<callVariables>
<CallVariable>
<name>callVariable1</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable2</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable3</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable4</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable5</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable6</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable7</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable8</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable9</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable10</name>
<value></value>
```

```
</CallVariable>
<CallVariable>
<name>user_DR_Primary</name>
<value>cloudconnect1.dcloud.cisco.com</value>
</CallVariable>
<CallVariable>
<name>user_DR_Backup</name>
<value></value>
</CallVariable>
<CallVariable>
<name>user_DR_MediaResourceID</name>
<value>CSR4PMKEIFWI7EMX</value>
</CallVariable>
<CallVariable>
<name>user_DR_CustomerName</name>
<value>Customer</value>
</CallVariable>
<CallVariable>
<name>user_DR_MediaChannelName</name>
<value>chat</value>
</CallVariable>
</callvariables>
<queueNumber>11180119</queueNumber>
<queueName>WxConnectChat1</queueName>
<callKeyCallId>2448</callKeyCallId>
<callKeyPrefix>154689</callKeyPrefix>
<callKeySequenceNum>1</callKeySequenceNum>
</mediaProperties>
<mediaType>WxConnectChat</mediaType>
<mediaChannel>chat</mediaChannel>
<mediaClass>chat</mediaClass>
<participants>
<Participant>
<actions>
<action>ACCEPT</action>
</actions>
<mediaAddress>1080</mediaAddress>
<mediaAddressType></mediaAddressType>
<startTime>2024-07-11T18:05:57.955Z</startTime>
<state>OFFERED</state>
<stateCause></stateCause>
<stateChangeTime>2024-07-11T18:05:57.955Z</stateChangeTime>
</Participant>
</participants>
<state>OFFERED</state>
<uri>/finesse/api/Dialog/154689_2448_1</uri>
</Dialog>
</dialogs>
</data>
<event>POST</event>
<requestId></requestId>
<source>/finesse/api/User/1080/Media/5016/Dialogs</source>
</Update>
14:05:57.978 2024-07-11T14:05:57.978 -04:00: : finesse1.dcloud.cisco.com: Jul 11 2024 14:05:57.977 -0400
<data>
<dialogs>
<Dialog>
<taskId>
<routerCallKeyDay>154689</routerCallKeyDay>
<routerCallKeyCallID>2448</routerCallKeyCallID>
<routerCallKeySequenceNum>1</routerCallKeySequenceNum>
</taskId>
```

```
<id>154689_2448_1</id>
<mediaProperties>
<mediaId>5016</mediaId>
<dialNumber>WxConnectChat1</dialNumber>
<callVariables>
<CallVariable>
<name>callVariable1</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable2</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable3</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable4</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable5</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable6</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable7</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable8</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable9</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable10</name>
<value></value>
</CallVariable>
<CallVariable>
<name>user_DR_Primary</name>
<value>cloudconnect1.dcloud.cisco.com</value>
</CallVariable>
<CallVariable>
<name>user_DR_Backup</name>
<value></value>
</CallVariable>
<CallVariable>
<name>user_DR_MediaResourceID</name>
<value>CSR4PMKEIFWI7EMX</value>
</CallVariable>
<CallVariable>
<name>user_DR_CustomerName</name>
<value>Customer</value>
</CallVariable>
<CallVariable>
```

```
<name>user_DR_MediaChannelName</name>
<value>chat</value>
</CallVariable>
</callvariables>
<queueNumber>11180119</queueNumber>
<queueName>WxConnectChat1</queueName>
<callKeyCallId>2448</callKeyCallId>
<callKeyPrefix>154689</callKeyPrefix>
<callKeySequenceNum>1</callKeySequenceNum>
</mediaProperties>
<mediaType>WxConnectChat</mediaType>
<mediaChannel>chat</mediaChannel>
<mediaClass>chat</mediaClass>
<participants>
<Participant>
<actions>
<action>ACCEPT</action>
</actions>
<mediaAddress>1080</mediaAddress>
<mediaAddressType></mediaAddressType>
<startTime>2024-07-11T18:05:57.955Z</startTime>
<state>OFFERED</state>
<stateCause></stateCause>
<stateChangeTime>2024-07-11T18:05:57.955Z</stateChangeTime>
</Participant>
</participants>
<state>OFFERED</state>
<uri>/finesse/api/Dialog/154689_2448_1</uri>
</Dialog>
</dialogs>
</data>
<event>POST</event>
<requestId></requestId>
<source>/finesse/api/User/1080/Media/5016/Dialogs</source>
</Update>
14:05:57.979 2024-07-11T14:05:57.979 -04:00: : finesse1.dcloud.cisco.com: Jul 11 2024 14:05:57.978 -0400
14:05:57.979 2024-07-11T14:05:57.979 -04:00: : finesse1.dcloud.cisco.com: Jul 11 2024 14:05:57.978 -0400
14:05:57.980 2024-07-11T14:05:57.980 -04:00: : finesse1.dcloud.cisco.com: Jul 11 2024 14:05:57.979 -0400
14:05:57.981 2024-07-11T14:05:57.981 -04:00: : finesse1.dcloud.cisco.com: Jul 11 2024 14:05:57.980 -0400
14:05:57.988 :: usemediasetup processTask- a{_id: '154689_2448_1', _restObj: undefined, autoSubscribe:
14:05:57.989 ::- MediaPopover _showPopOver before popover {taskId: {...}, id: '154689_2448_1', mediaPrope
```

Agent ACCEPT's the chat:

```
14:06:00.353 2024-07-11T14:06:00.353 -04:00: : finesse1.dcloud.cisco.com: Jul 11 2024 14:06:00.352 -0400
14:06:00.354 2024-07-11T14:06:00.354 -04:00: : finesse1.dcloud.cisco.com: Jul 11 2024 14:06:00.353 -0400
14:06:00.355 ::- MediaPopover popOverCallBack:Received popover callback with response {popoverId: '940a
14:06:00.356 ::- MediaPopover _handleMedia {popoverId: '940a0c56-c305-456f-90a6-9aaf8871fcee', source:
14:06:00.358 2024-07-11T14:06:00.357 -04:00: : finesse1.dcloud.cisco.com: Jul 11 2024 14:06:00.356 -0400
14:06:00.364 ::- MediaPopover dismissPopOver before dismiss a{_super: undefined, _id: '154689_2448_1',
14:06:00.365 2024-07-11T14:06:00.365 -04:00: : finesse1.dcloud.cisco.com: Jul 11 2024 14:06:00.364 -0400
14:06:00.367 ::- MediaPopover dismissPopOver after dismiss {} {} {}
14:06:00.371 2024-07-11T14:06:00.371 -04:00: : finesse1.dcloud.cisco.com: Jul 11 2024 14:06:00.370 -0400
14:06:00.427 2024-07-11T14:06:00.427 -04:00: : finesse1.dcloud.cisco.com: Jul 11 2024 14:06:00.426 -0400
14:06:00.428 success: Could move the task to ACCEPT state {status: 202, content: null, isUnsent: false,
```

Chat state is now ACCEPTED:

14:06:00.543 2024-07-11T14:06:00.543 -04:00: : finesse1.dcloud.cisco.com: Jul 11 2024 14:06:00.542 -0400

```
<data>
<dialog>
<taskId>
<routerCallKeyDay>154689</routerCallKeyDay>
<routerCallKeyCallID>2448</routerCallKeyCallID>
<routerCallKeySequenceNum>1</routerCallKeySequenceNum>
</taskId>
<id>154689_2448_1</id>
<mediaProperties>
<mediaId>5016</mediaId>
<dialledNumber>WxConnectChat1</dialledNumber>
<callvariables>
<CallVariable>
<name>callVariable1</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable2</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable3</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable4</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable5</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable6</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable7</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable8</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable9</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable10</name>
<value></value>
</CallVariable>
<CallVariable>
<name>user_DR_Primary</name>
<value>cloudconnect1.dcloud.cisco.com</value>
</CallVariable>
<CallVariable>
<name>user_DR_Backup</name>
<value></value>
</CallVariable>
```

```
<CallVariable>
<name>user_DR_MediaResourceID</name>
<value>CSR4PMKEIFWI7EMX</value>
</CallVariable>
<CallVariable>
<name>user_DR_CustomerName</name>
<value>Customer</value>
</CallVariable>
<CallVariable>
<name>user_DR_MediaChannelName</name>
<value>chat</value>
</CallVariable>
</callvariables>
<queueNumber>11180119</queueNumber>
<queueName>WxConnectChat1</queueName>
<callKeyCallId>2448</callKeyCallId>
<callKeyPrefix>154689</callKeyPrefix>
<callKeySequenceNum>1</callKeySequenceNum>
</mediaProperties>
<mediaType>WxConnectChat</mediaType>
<mediaChannel>chat</mediaChannel>
<mediaClass>chat</mediaClass>
<participants>
<Participant>
<actions>
<action>UPDATE_CALL_DATA</action>
<action>TRANSFER</action>
<action>START</action>
<action>CLOSE</action>
</actions>
<mediaAddress>1080</mediaAddress>
<mediaAddressType></mediaAddressType>
<startTime>2024-07-11T18:05:57.955Z</startTime>
<state>ACCEPTED</state>
<stateCause></stateCause>
<stateChangeTime>2024-07-11T18:06:00.421Z</stateChangeTime>
</Participant>
</participants>
<state>ACCEPTED</state>
<uri>/finesse/api/Dialog/154689_2448_1</uri>
</dialog>
</data>
<event>PUT</event>
<requestId></requestId>
<source>/finesse/api/Dialog/154689_2448_1</source>
</Update>
14:06:00.546 2024-07-11T14:06:00.546 -04:00: : finesse1.dcloud.cisco.com: Jul 11 2024 14:06:00.545 -0400
<data>
<dialog>
<taskId>
<routerCallKeyDay>154689</routerCallKeyDay>
<routerCallKeyCallID>2448</routerCallKeyCallID>
<routerCallKeySequenceNum>1</routerCallKeySequenceNum>
</taskId>
<id>154689_2448_1</id>
<mediaProperties>
<mediaId>5016</mediaId>
<dialNumber>WxConnectChat1</dialNumber>
<callvariables>
<CallVariable>
<name>callVariable1</name>
<value></value>
```



```
</CallVariable>
<CallVariable>
<name>callVariable2</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable3</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable4</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable5</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable6</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable7</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable8</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable9</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable10</name>
<value></value>
</CallVariable>
<CallVariable>
<name>user_DR_Primary</name>
<value>cloudconnect1.dcloud.cisco.com</value>
</CallVariable>
<CallVariable>
<name>user_DR_Backup</name>
<value></value>
</CallVariable>
<CallVariable>
<name>user_DR_MediaResourceID</name>
<value>CSR4PMKEIFWI7EMX</value>
</CallVariable>
<CallVariable>
<name>user_DR_CustomerName</name>
<value>Customer</value>
</CallVariable>
<CallVariable>
<name>user_DR_MediaChannelName</name>
<value>chat</value>
</CallVariable>
</callvariables>
<queueNumber>11180119</queueNumber>
<queueName>WxConnectChat1</queueName>
<callKeyCallId>2448</callKeyCallId>
<callKeyPrefix>154689</callKeyPrefix>
```

```
<callKeySequenceNum>1</callKeySequenceNum>
</mediaProperties>
<mediaType>WxConnectChat</mediaType>
<mediaChannel>chat</mediaChannel>
<mediaClass>chat</mediaClass>
<participants>
<Participant>
<actions>
<action>UPDATE_CALL_DATA</action>
<action>TRANSFER</action>
<action>START</action>
<action>CLOSE</action>
</actions>
<mediaAddress>1080</mediaAddress>
<mediaAddressType></mediaAddressType>
<startTime>2024-07-11T18:05:57.955Z</startTime>
<state>ACCEPTED</state>
<stateCause></stateCause>
<stateChangeTime>2024-07-11T18:06:00.421Z</stateChangeTime>
</Participant>
</participants>
<state>ACCEPTED</state>
<uri>/finesse/api/Dialog/154689_2448_1</uri>
</dialog>
</data>
<event>PUT</event>
<requestId></requestId>
<source>/finesse/api/Dialog/154689_2448_1</source>
</Update>
14:06:00.548 2024-07-11T14:06:00.548 -04:00: : finesse1.dcloud.cisco.com: Jul 11 2024 14:06:00.547 -0400
14:06:00.548 2024-07-11T14:06:00.548 -04:00: : finesse1.dcloud.cisco.com: Jul 11 2024 14:06:00.547 -0400
14:06:00.549 2024-07-11T14:06:00.549 -04:00: : finesse1.dcloud.cisco.com: Jul 11 2024 14:06:00.548 -0400
14:06:00.549 2024-07-11T14:06:00.549 -04:00: : finesse1.dcloud.cisco.com: Jul 11 2024 14:06:00.548 -0400
14:06:00.552 :: usemediasetup processTask- a{super: undefined, _id: '154689_2448_1', _restObj: undefin
```

Chat session ended and agent is moved to the WORK_READY state:

```
14:07:32.910 moved to wrap-up state successfully
14:07:32.911 2024-07-11T14:07:32.911 -04:00: : finesse1.dcloud.cisco.com: Jul 11 2024 14:07:32.955 -0400
<data>
<media>
<description>WxConnect Chat</description>
<dialogLogoutAction>CLOSE</dialogLogoutAction>
<id>5016</id>
<interruptAction>IGNORE</interruptAction>
<interruptible>false</interruptible>
<maxDialogLimit>3</maxDialogLimit>
<name>WxConnectChat</name>
<routable>true</routable>
<state>WORK_READY</state>
<stateChangeTime>2024-07-11T18:07:32.895Z</stateChangeTime>
<uri>/finesse/api/User/1080/Media/5016</uri>
</media>
</data>
<event>PUT</event>
<requestId></requestId>
<source>/finesse/api/User/1080/Media/5016</source>
</Update>
14:07:32.914 2024-07-11T14:07:32.914 -04:00: : finesse1.dcloud.cisco.com: Jul 11 2024 14:07:32.958 -0400
<data>
```

```
<media>
<description>WxConnect Chat</description>
<dialogLogoutAction>CLOSE</dialogLogoutAction>
<id>5016</id>
<interruptAction>IGNORE</interruptAction>
<interruptible>false</interruptible>
<maxDialogLimit>3</maxDialogLimit>
<name>WxConnectChat</name>
<routable>true</routable>
<state>WORK_READY</state>
<stateChangeTime>2024-07-11T18:07:32.895Z</stateChangeTime>
<uri>/finesse/api/User/1080/Media/5016</uri>
</media>
</data>
<event>PUT</event>
<requestId></requestId>
<source>/finesse/api/User/1080/Media/5016</source>
</Update>
14:07:32.915 2024-07-11T14:07:32.915 -04:00: : finesse1.dcloud.cisco.com: Jul 11 2024 14:07:32.959 -0400
14:07:32.920 :: Media change a[_super: undefined, _id: '5016', _restObj: a, autoSubscribe: true, context: a]
14:07:32.920 Finesse-IMI Gadget : [useDigitalChannel Hook] [handleMediaChange] : media change event received
14:07:32.921 Finesse-IMI Gadget : [useDigitalChannel Hook] [handleMediaChange] : caching all mrd's
14:07:32.921 Finesse-IMI Gadget : [useDigitalChannel Hook] [cacheMediaStates] : mediaListToBeCached : undefined
14:07:32.922 Finesse-IMI Gadget : [useDigitalChannel Hook] [cacheMediaStates] : final cached item : {"5016": true}
```

Chat activity is now in the WRAPPING_UP state:

```
14:07:32.924 2024-07-11T14:07:32.924 -04:00: : finesse1.dcloud.cisco.com: Jul 11 2024 14:07:32.968 -0400
<data>
<dialog>
<taskId>
<routerCallKeyDay>154689</routerCallKeyDay>
<routerCallKeyCallID>2448</routerCallKeyCallID>
<routerCallKeySequenceNum>1</routerCallKeySequenceNum>
</taskId>
<id>154689_2448_1</id>
<mediaProperties>
<mediaId>5016</mediaId>
<dialNumber>WxConnectChat1</dialNumber>
<callVariables>
<CallVariable>
<name>callVariable1</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable2</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable3</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable4</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable5</name>
<value></value>
</CallVariable>
```

```
<CallVariable>
<name>callVariable6</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable7</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable8</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable9</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable10</name>
<value></value>
</CallVariable>
<CallVariable>
<name>user_DR_Primary</name>
<value>cloudconnect1.dcloud.cisco.com</value>
</CallVariable>
<CallVariable>
<name>user_DR_Backup</name>
<value></value>
</CallVariable>
<CallVariable>
<name>user_DR_MediaResourceID</name>
<value>CSR4PMKEIFWI7EMX</value>
</CallVariable>
<CallVariable>
<name>user_DR_CustomerName</name>
<value>Customer</value>
</CallVariable>
<CallVariable>
<name>user_DR_MediaChannelName</name>
<value>chat</value>
</CallVariable>
</callvariables>
<queueNumber>11180119</queueNumber>
<queueName>WxConnectChat1</queueName>
<callKeyCallId>2448</callKeyCallId>
<callKeyPrefix>154689</callKeyPrefix>
<callKeySequenceNum>1</callKeySequenceNum>
</mediaProperties>
<mediaType>WxConnectChat</mediaType>
<mediaChannel>chat</mediaChannel>
<mediaClass>chat</mediaClass>
<participants>
<Participant>
<actions>
<action>PAUSE</action>
<action>UPDATE_CALL_DATA</action>
<action>TRANSFER</action>
<action>CLOSE</action>
</actions>
<mediaAddress>1080</mediaAddress>
<mediaAddressType></mediaAddressType>
<startTime>2024-07-11T18:05:46.096Z</startTime>
<state>WRAPPING_UP</state>
```

```
<stateCause></stateCause>
<stateChangeTime>2024-07-11T18:07:32.895Z</stateChangeTime>
</Participant>
</participants>
<state>WRAPPING_UP</state>
<uri>/finesse/api/Dialog/154689_2448_1</uri>
</dialog>
</data>
<event>PUT</event>
<requestId></requestId>
<source>/finesse/api/Dialog/154689_2448_1</source>
</Update>
14:07:32.926 2024-07-11T14:07:32.926 -04:00: : finesse1.dcloud.cisco.com: Jul 11 2024 14:07:32.970 -0400
<data>
<dialog>
<taskId>
<routerCallKeyDay>154689</routerCallKeyDay>
<routerCallKeyCallID>2448</routerCallKeyCallID>
<routerCallKeySequenceNum>1</routerCallKeySequenceNum>
</taskId>
<id>154689_2448_1</id>
<mediaProperties>
<mediaId>5016</mediaId>
<dialledNumber>WxConnectChat1</dialledNumber>
<callvariables>
<CallVariable>
<name>callVariable1</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable2</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable3</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable4</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable5</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable6</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable7</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable8</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable9</name>
<value></value>
</CallVariable>
<CallVariable>
```

```
<name>callVariable10</name>
<value></value>
</CallVariable>
<CallVariable>
<name>user_DR_Primary</name>
<value>cloudconnect1.dcloud.cisco.com</value>
</CallVariable>
<CallVariable>
<name>user_DR_Backup</name>
<value></value>
</CallVariable>
<CallVariable>
<name>user_DR_MediaResourceID</name>
<value>CSR4PMKEIFWI7EMX</value>
</CallVariable>
<CallVariable>
<name>user_DR_CustomerName</name>
<value>Customer</value>
</CallVariable>
<CallVariable>
<name>user_DR_MediaChannelName</name>
<value>chat</value>
</CallVariable>
</callvariables>
<queueNumber>11180119</queueNumber>
<queueName>WxConnectChat1</queueName>
<callKeyCallId>2448</callKeyCallId>
<callKeyPrefix>154689</callKeyPrefix>
<callKeySequenceNum>1</callKeySequenceNum>
</mediaProperties>
<mediaType>WxConnectChat</mediaType>
<mediaChannel>chat</mediaChannel>
<mediaClass>chat</mediaClass>
<participants>
<Participant>
<actions>
<action>PAUSE</action>
<action>UPDATE_CALL_DATA</action>
<action>TRANSFER</action>
<action>CLOSE</action>
</actions>
<mediaAddress>1080</mediaAddress>
<mediaAddressType></mediaAddressType>
<startTime>2024-07-11T18:05:46.096Z</startTime>
<state>WRAPPING_UP</state>
<stateCause></stateCause>
<stateChangeTime>2024-07-11T18:07:32.895Z</stateChangeTime>
</Participant>
</participants>
<state>WRAPPING_UP</state>
<uri>/finesse/api/Dialog/154689_2448_1</uri>
</dialog>
</data>
<event>PUT</event>
<requestId></requestId>
<source>/finesse/api/Dialog/154689_2448_1</source>
</Update>
```

Chat session is now CLOSED:

14:07:35.185 finesse.js:3766 2024-07-11T14:07:35.185 -04:00: : finesse1.dcloud.cisco.com: Jul 11 2024 1

```
<data>
<dialogs>
<Dialog>
<taskId>
<routerCallKeyDay>154689</routerCallKeyDay>
<routerCallKeyCallID>2448</routerCallKeyCallID>
<routerCallKeySequenceNum>1</routerCallKeySequenceNum>
</taskId>
<id>154689_2448_1</id>
<mediaProperties>
<mediaId>5016</mediaId>
<wrapUpReason></wrapUpReason>
<dialledNumber>WxConnectChat1</dialledNumber>
<callvariables>
<CallVariable>
<name>callVariable1</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable2</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable3</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable4</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable5</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable6</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable7</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable8</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable9</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable10</name>
<value></value>
</CallVariable>
<CallVariable>
<name>user_DR_Primary</name>
<value>cloudconnect1.dcloud.cisco.com</value>
</CallVariable>
<CallVariable>
<name>user_DR_Backup</name>
<value></value>
```

```
</CallVariable>
<CallVariable>
<name>user_DR_MediaResourceID</name>
<value>CSR4PMKEIFWI7EMX</value>
</CallVariable>
<CallVariable>
<name>user_DR_CustomerName</name>
<value>Customer</value>
</CallVariable>
<CallVariable>
<name>user_DR_MediaChannelName</name>
<value>chat</value>
</CallVariable>
</callvariables>
<queueNumber>11180119</queueNumber>
<queueName>WxConnectChat1</queueName>
<callKeyCallId>2448</callKeyCallId>
<callKeyPrefix>154689</callKeyPrefix>
<callKeySequenceNum>1</callKeySequenceNum>
</mediaProperties>
<mediaType>WxConnectChat</mediaType>
<mediaChannel>chat</mediaChannel>
<mediaClass>chat</mediaClass>
<participants>
<Participant>
<actions>
</actions>
<mediaAddress>1080</mediaAddress>
<mediaAddressType></mediaAddressType>
<startTime>2024-07-11T18:05:46.096Z</startTime>
<state>CLOSED</state>
<stateCause></stateCause>
<stateChangeTime>2024-07-11T18:07:35.124Z</stateChangeTime>
</Participant>
</participants>
<dispositionCode>CD_NORMAL_END_TASK</dispositionCode>
<state>CLOSED</state>
<uri>/finesse/api/Dialog/154689_2448_1</uri>
</Dialog>
</dialogs>
</data>
<event>DELETE</event>
<requestId></requestId>
<source>/finesse/api/User/1080/Media/5016/Dialogs</source>
</Update>
14:07:35.188 finesse.js:3766 2024-07-11T14:07:35.188 -04:00: : finesse1.dcloud.cisco.com: Jul 11 2024 1
<data>
<dialogs>
<Dialog>
<taskId>
<routerCallKeyDay>154689</routerCallKeyDay>
<routerCallKeyCallId>2448</routerCallKeyCallId>
<routerCallKeySequenceNum>1</routerCallKeySequenceNum>
</taskId>
<id>154689_2448_1</id>
<mediaProperties>
<mediaId>5016</mediaId>
<wrapUpReason></wrapUpReason>
<dialNumber>WxConnectChat1</dialNumber>
<callvariables>
<CallVariable>
<name>callVariable1</name>
```



```
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable2</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable3</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable4</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable5</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable6</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable7</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable8</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable9</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable10</name>
<value></value>
</CallVariable>
<CallVariable>
<name>user_DR_Primary</name>
<value>cloudconnect1.dcloud.cisco.com</value>
</CallVariable>
<CallVariable>
<name>user_DR_Backup</name>
<value></value>
</CallVariable>
<CallVariable>
<name>user_DR_MediaResourceID</name>
<value>CSR4PMKEIFWI7EMX</value>
</CallVariable>
<CallVariable>
<name>user_DR_CustomerName</name>
<value>Customer</value>
</CallVariable>
<CallVariable>
<name>user_DR_MediaChannelName</name>
<value>chat</value>
</CallVariable>
</callvariables>
<queueNumber>11180119</queueNumber>
<queueName>WxConnectChat1</queueName>
<callKeyCallId>2448</callKeyCallId>
```

```

<callKeyPrefix>154689</callKeyPrefix>
<callKeySequenceNum>1</callKeySequenceNum>
</mediaProperties>
<mediaType>WxConnectChat</mediaType>
<mediaChannel>chat</mediaChannel>
<mediaClass>chat</mediaClass>
<participants>
<Participant>
<actions>
</actions>
<mediaAddress>1080</mediaAddress>
<mediaAddressType></mediaAddressType>
<startTime>2024-07-11T18:05:46.096Z</startTime>
<state>CLOSED</state>
<stateCause></stateCause>
<stateChangeTime>2024-07-11T18:07:35.124Z</stateChangeTime>
</Participant>
</participants>
<dispositionCode>CD_NORMAL_END_TASK</dispositionCode>
<state>CLOSED</state>
<uri>/finesse/api/Dialog/154689_2448_1</uri>
</Dialog>
</dialogs>
</data>
<event>DELETE</event>
<requestId></requestId>
<source>/finesse/api/User/1080/Media/5016/Dialogs</source>
</Update>

```

```

14:07:35.188 2024-07-11T14:07:35.188 -04:00: : finesse1.dcloud.cisco.com: Jul 11 2024 14:07:35.232 -0400
14:07:35.189 2024-07-11T14:07:35.189 -04:00: : finesse1.dcloud.cisco.com: Jul 11 2024 14:07:35.233 -0400
14:07:35.189 2024-07-11T14:07:35.189 -04:00: : finesse1.dcloud.cisco.com: Jul 11 2024 14:07:35.233 -0400

```

相关信息

功能指南 — 使用Webex Connect实现数字渠道集成：

- UCCE：https://www.cisco.com/c/en/us/td/docs/voice_ip_comm/cust_contact/contact_center/icm_enterprise/guide-1262/rcct_m_digital-channels-integration-webexconnect_12-6-2.html
- PCCE：https://www.cisco.com/c/en/us/td/docs/voice_ip_comm/cust_contact/contact_center/pcce/pcce/guide-1262/rcct_m_digital-channels-integration-webexconnect_12-6-2.html

Cisco Contact Center Enterprise Manage Digital Channels小工具用户指南：

- https://www.cisco.com/c/en/us/td/docs/voice_ip_comm/cust_contact/contact_center/finesse/finesse_digital-channels/rcct_m_1262_manage-digital-channels.html

Webex Engage with Cisco Contact Center Enterprise的管理和设置指南：

- https://www.cisco.com/c/dam/en/us/td/docs/voice_ip_comm/cust_contact/contact_center/icm_enterprise/guide-1262/rcct_m_digital-channels-integration-webexconnect_12-6-2.html
- 思科联系中心企业版(CCE)与Webex Connect集成
https://help.imiconnect.io/docs/cce_overview

关于此翻译

思科采用人工翻译与机器翻译相结合的方式将此文档翻译成不同语言，希望全球的用户都能通过各自的语言得到支持性的内容。

请注意：即使是最好的机器翻译，其准确度也不及专业翻译人员的水平。

Cisco Systems, Inc. 对于翻译的准确性不承担任何责任，并建议您总是参考英文原始文档（已提供链接）。