



RADIUS Attributes Overview and RADIUS IETF Attributes

First Published: March 19, 2001

Last Updated: September 23, 2009

Remote Authentication Dial-In User Service (RADIUS) attributes are used to define specific authentication, authorization, and accounting (AAA) elements in a user profile, which is stored on the RADIUS daemon. This module lists the RADIUS attributes currently supported.

Finding Feature Information

Your software release may not support all the features documented in this module. For the latest feature information and caveats, see the release notes for your platform and software release. To find information about the features documented in this module, and to see a list of the releases in which each feature is supported, see the [“Feature Information for RADIUS Attributes Overview and RADIUS IETF Attributes” section on page 20](#).

Use Cisco Feature Navigator to find information about platform support and Cisco IOS and Catalyst OS software image support. To access Cisco Feature Navigator, go to <http://tools.cisco.com/ITDIT/CFN/jsp/index.jsp>. An account on Cisco.com is not required.

Contents

- [Information About RADIUS Attributes, page 2](#)
- [Additional References, page 17](#)
- [Feature Information for RADIUS Attributes Overview and RADIUS IETF Attributes, page 19](#)



Americas Headquarters:

Cisco Systems, Inc., 170 West Tasman Drive, San Jose, CA 95134-1706 USA

Information About RADIUS Attributes

This section contains information important to understanding how RADIUS attributes exchange AAA information between a client and server and includes the following sections:

- [IETF Attributes Versus VSAs, page 2](#)
- [RADIUS Packet Format, page 2](#)
- [RADIUS Files, page 3](#)
- [RADIUS IETF Attributes, page 5](#)

IETF Attributes Versus VSAs

RADIUS Internet Engineering Task Force (IETF) attributes are the original set of 255 standard attributes that are used to communicate AAA information between a client and a server. Because IETF attributes are standard, the attribute data is predefined and well known; thus all clients and servers who exchange AAA information via IETF attributes must agree on attribute data such as the exact meaning of the attributes and the general bounds of the values for each attribute.


RADIUS vendor-specific attributes (VSAs) derived from one IETF attribute—vendor-specific (attribute 26). Attribute 26 allows a vendor to create an additional 255 attributes however they wish. That is, a vendor can create an attribute that does not match the data of any IETF attribute and encapsulate it behind attribute 26; thus, the newly created attribute is accepted if the user accepts attribute 26.

See “[Related Documents](#)” section on [page 17](#) for more information on VSAs.

RADIUS Packet Format

The data between a RADIUS server and a RADIUS client is exchanged in RADIUS packets. The data fields are transmitted from left to right.

[Figure 1](#) shows the fields within a RADIUS packet.

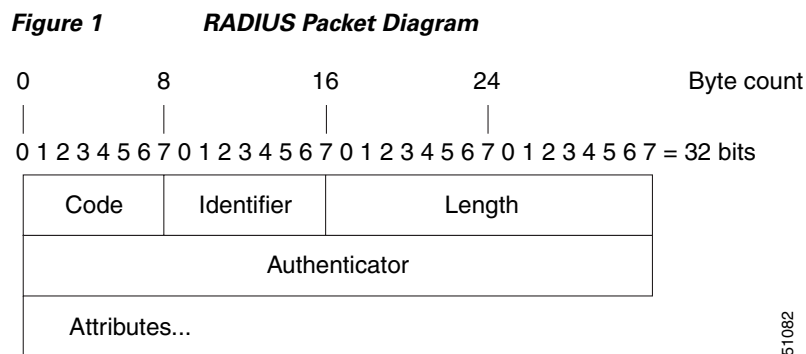

Each RADIUS packet contains the following information:

- Code—The code field is one octet; it identifies one of the following types of RADIUS packets:
 - Access-Request (1)
 - Access-Accept (2)
 - Access-Reject (3)

- Accounting-Request (4)
- Accounting-Response (5)
- Identifier—The identifier field is one octet; it helps the RADIUS server match requests and responses and detect duplicate requests.
- Length—The length field is two octets; it specifies the length of the entire packet.
- Authenticator—The authenticator field is 16 octets. The most significant octet is transmitted first; it is used to authenticate the reply from the RADIUS server. Two types of authenticators are as follows:
 - Request-Authentication: Available in Access-Request and Accounting-Request packets
 - Response-Authenticator: Available in Access-Accept, Access-Reject, Access-Challenge, and Accounting-Response packets

RADIUS Packet Types

The following list defines the various types of RADIUS packet types that can contain attribute information:

Access-Request—Sent from a client to a RADIUS server. The packet contains information that allows the RADIUS server to determine whether to allow access to a specific network access server (NAS), which allows access to the user. Any user performing authentication must submit an Access-Request packet. Once an Access-Request packet is received, the RADIUS server must forward a reply.

Access-Accept—Once a RADIUS server receives an Access-Request packet, it must send an Access-Accept packet if all attribute values in the Access-Request packet are acceptable. Access-Accept packets provide the configuration information necessary for the client to provide service to the user.

Access-Reject—Once a RADIUS server receives an Access-Request packet, it must send an Access-Reject packet if any of the attribute values are not acceptable.

Access-Challenge—Once the RADIUS server receives an Access-Accept packet, it can send the client an Access-Challenge packet, which requires a response. If the client does not know how to respond or if the packets are invalid, the RADIUS server discards the packets. If the client responds to the packet, a new Access-Request packet should be sent with the original Access-Request packet.

Accounting-Request—Sent from a client to a RADIUS accounting server, which provides accounting information. If the RADIUS server successfully records the Accounting-Request packet, it must submit an Accounting Response packet.

Accounting-Response—Sent by the RADIUS accounting server to the client to acknowledge that the Accounting-Request has been received and recorded successfully.

RADIUS Files

Understanding the types of files used by RADIUS is important for communicating AAA information from a client to a server. Each file defines a level of authentication or authorization for the user: The dictionary file defines which attributes the user's NAS can implement; the clients file defines which users are allowed to make requests to the RADIUS server; the users file defines which user requests the RADIUS server authenticates based on security and configuration data.

- [Dictionary File](#)
- [Clients File](#)
- [Users File](#)

Dictionary File

A dictionary file provides a list of attributes that are dependent upon which attributes your NAS supports. However, you can add your own set of attributes to your dictionary for custom solutions. It defines attribute values, thereby allowing you to interpret attribute output such as parsing requests. A dictionary file contains the following information:

- Name—The ASCII string “name” of the attribute, such as User-Name.
- ID—The numerical “name” of the attribute; for example, User-Name attribute is attribute 1.
- Value type—Each attribute can be specified as one of the following five value types:
 - abinary—0 to 254 octets.
 - date—32-bit value in big endian order. For example, seconds since 00:00:00 GMT, JAN. 1, 1970.
 - ipaddr—4 octets in network byte order.
 - integer—32-bit value in big endian order (high byte first).
 - string—0 to 253 octets.

When the data type for a particular attribute is an integer, you can optionally expand the integer to equate to some string. The follow sample dictionary includes an integer-based attribute and its corresponding values:

```
# dictionary sample of integer entry
#
ATTRIBUTE      Service-Type      6              integer
VALUE          Service-Type      Login          1
VALUE          Service-Type      Framed         2
VALUE          Service-Type      Callback-Login 3
VALUE          Service-Type      Callback-Framed 4
VALUE          Service-Type      Outbound       5
VALUE          Service-Type      Administrative 6
VALUE          Service-Type      NAS-Prompt     7
VALUE          Service-Type      Authenticate-Only 8
VALUE          Service-Type      Callback-NAS-Prompt 9
VALUE          Service-Type      Call-Check     10
VALUE          Service-Type      Callback-Administrative 11
```

Clients File

A clients file is important because it contains a list of RADIUS clients that are allowed to send authentication and accounting requests to the RADIUS server. To receive authentication, the name and authentication key the client sends the server must be an exact match with the data contained in clients file.

The following is an example of a clients file. The key, as shown in this example, must be the same as the **radius-server key** *SomeSecret* command.

```
#Client Name      Key
#-----
10.1.2.3:256      test
nas01             bananas
nas02             MoNkEys
nas07.foo.com     SomeSecret
```

Users File

A RADIUS users file contains an entry for each user that the RADIUS server authenticates; each entry, which is also referred to as a user profile, establishes an attribute the user can access.

The first line in any user profile is always a “user access” line; that is, the server must check the attributes on the first line before it can grant access to the user. The first line contains the name of the user, which can be up to 252 characters, followed by authentication information such as the password of the user.

Additional lines, which are associated with the user access line, indicate the attribute reply that is sent to the requesting client or server. The attributes sent in the reply must be defined in the dictionary file.

When looking at a user file, please note the the data to the left of the equal (=) character is an attribute defined in the dictionary file, and the data to the right of the equal character is the configuration data.

**Note**

A blank line cannot appear anywhere within a user profile.

The following is an example of a RADIUS user profile (Merit Daemon format). In this example, the user name is cisco.com, the password is cisco, and the user can access five tunnel attributes.

```
# This user profile includes RADIUS tunneling attributes
cisco.com Password="cisco" Service-Type=Outbound
  Tunnel-Type = :1:L2TP
  Tunnel-Medium-Type = :1:IP
  Tunnel-Server-Endpoint = :1:10.0.0.1
  Tunnel-Password = :1:"welcome"
  Tunnel-Assignment-ID = :1:"nas"
```

RADIUS IETF Attributes

**Note**

In the Cisco IOS Release 12.2 for RADIUS tunnel attributes, 32 tagged tunnel sets are supported for L2TP.

This section contains the following sections:

- [Supported RADIUS IETF Attributes](#)
- [Comprehensive List of RADIUS Attribute Descriptions](#)

Supported RADIUS IETF Attributes

[Table 1](#) lists Cisco-supported IETF RADIUS attributes and the Cisco IOS release in which they are implemented. In cases where the attribute has a security server-specific format, the format is specified.

Refer to [Table 2](#) for a description of each listed attribute.

**Note**

Attributes implemented in special (AA) or early development (T) releases are added to the next mainline image.

Table 1 Supported RADIUS IETF Attributes

Number	IETF Attribute	11.1	11.2	11.3	11.3 AA	11.3T	12.0	12.1	12.2
1	User-Name	yes	yes	yes	yes	yes	yes	yes	yes
2	User-Password	yes	yes	yes	yes	yes	yes	yes	yes
3	CHAP-Password	yes	yes	yes	yes	yes	yes	yes	yes
4	NAS-IP Address	yes	yes	yes	yes	yes	yes	yes	yes
5	NAS-Port	yes	yes	yes	yes	yes	yes	yes	yes
6	Service-Type	yes	yes	yes	yes	yes	yes	yes	yes
7	Framed-Protocol	yes	yes	yes	yes	yes	yes	yes	yes
8	Framed-IP-Address	yes	yes	yes	yes	yes	yes	yes	yes
9	Framed-IP-Netmask	yes	yes	yes	yes	yes	yes	yes	yes
10	Framed-Routing	yes	yes	yes	yes	yes	yes	yes	yes
11	Filter-Id	yes	yes	yes	yes	yes	yes	yes	yes
12	Framed-MTU	yes	yes	yes	yes	yes	yes	yes	yes
13	Framed-Compression	yes	yes	yes	yes	yes	yes	yes	yes
14	Login-IP-Host	yes	yes	yes	yes	yes	yes	yes	yes
15	Login-Service	yes	yes	yes	yes	yes	yes	yes	yes
16	Login-TCP-Port	yes	yes	yes	yes	yes	yes	yes	yes
18	Reply-Message	yes	yes	yes	yes	yes	yes	yes	yes
19	Callback-Number	no	no	no	no	no	no	yes	yes
20	Callback-ID	no	no	no	no	no	no	no	no
22	Framed-Route	yes	yes	yes	yes	yes	yes	yes	yes
23	Framed-IPX-Network	no	no	no	no	no	no	no	no
24	State	yes	yes	yes	yes	yes	yes	yes	yes
25	Class	yes	yes	yes	yes	yes	yes	yes	yes
26	Vendor-Specific	yes	yes	yes	yes	yes	yes	yes	yes
27	Session-Timeout	yes	yes	yes	yes	yes	yes	yes	yes
28	Idle-Timeout	yes	yes	yes	yes	yes	yes	yes	yes
29	Termination-Action	no	no	no	no	no	no	no	no
30	Called-Station-Id	yes	yes	yes	yes	yes	yes	yes	yes
31	Calling-Station-Id	yes	yes	yes	yes	yes	yes	yes	yes
32	NAS-Identifier	no	no	no	no	no	no	no	yes
33	Proxy-State	no	no	no	no	no	no	no	no
34	Login-LAT-Service	yes	yes	yes	yes	yes	yes	yes	yes
35	Login-LAT-Node	no	no	no	no	no	no	no	yes
36	Login-LAT-Group	no	no	no	no	no	no	no	no
37	Framed-AppleTalk-Link	no	no	no	no	no	no	no	no
38	Framed-AppleTalk- Network	no	no	no	no	no	no	no	no

Table 1 Supported RADIUS IETF Attributes (continued)

Number	IETF Attribute	11.1	11.2	11.3	11.3 AA	11.3T	12.0	12.1	12.2
39	Framed-AppleTalk-Zone	no	no	no	no	no	no	no	no
40	Acct-Status-Type	yes	yes	yes	yes	yes	yes	yes	yes
41	Acct-Delay-Time	yes	yes	yes	yes	yes	yes	yes	yes
42	Acct-Input-Octets	yes	yes	yes	yes	yes	yes	yes	yes
43	Acct-Output-Octets	yes	yes	yes	yes	yes	yes	yes	yes
44	Acct-Session-Id	yes	yes	yes	yes	yes	yes	yes	yes
45	Acct-Authentic	yes	yes	yes	yes	yes	yes	yes	yes
46	Acct-Session-Time	yes	yes	yes	yes	yes	yes	yes	yes
47	Acct-Input-Packets	yes	yes	yes	yes	yes	yes	yes	yes
48	Acct-Output-Packets	yes	yes	yes	yes	yes	yes	yes	yes
49	Acct-Terminate-Cause	no	no	no	yes	yes	yes	yes	yes
50	Acct-Multi-Session-Id	no	yes	yes	yes	yes	yes	yes	yes
51	Acct-Link-Count	no	yes	yes	yes	yes	yes	yes	yes
52	Acct-Input-Gigawords	no	no	no	no	no	no	no	no
53	Acct-Output-Gigawords	no	no	no	no	no	no	no	no
55	Event-Timestamp	no	no	no	no	no	no	no	yes
60	CHAP-Challenge	yes	yes	yes	yes	yes	yes	yes	yes
61	NAS-Port-Type	yes	yes	yes	yes	yes	yes	yes	yes
62	Port-Limit	yes	yes	yes	yes	yes	yes	yes	yes
63	Login-LAT-Port	no	no	no	no	no	no	no	no
64	Tunnel-Type ¹	no	no	no	no	no	no	yes	yes
65	Tunnel-Medium-Type ¹	no	no	no	no	no	no	yes	yes
66	Tunnel-Client-Endpoint	no	no	no	no	no	no	yes	yes
67	Tunnel-Server-Endpoint ¹	no	no	no	no	no	no	yes	yes
68	Acct-Tunnel-Connection-ID	no	no	no	no	no	no	yes	yes
69	Tunnel-Password ¹	no	no	no	no	no	no	yes	yes
70	ARAP-Password	no	no	no	no	no	no	no	no
71	ARAP-Features	no	no	no	no	no	no	no	no
72	ARAP-Zone-Access	no	no	no	no	no	no	no	no
73	ARAP-Security	no	no	no	no	no	no	no	no
74	ARAP-Security-Data	no	no	no	no	no	no	no	no
75	Password-Retry	no	no	no	no	no	no	no	no
76	Prompt	no	no	no	no	no	no	yes	yes
77	Connect-Info	no	no	no	no	no	no	no	yes
78	Configuration-Token	no	no	no	no	no	no	no	no
79	EAP-Message	no	no	no	no	no	no	no	no

Table 1 Supported RADIUS IETF Attributes (continued)

Number	IETF Attribute	11.1	11.2	11.3	11.3 AA	11.3T	12.0	12.1	12.2
80	Message-Authenticator	no	no	no	no	no	no	no	no
81	Tunnel-Private-Group-ID	no	no	no	no	no	no	no	no
82	Tunnel-Assignment-ID ¹	no	no	no	no	no	no	yes	yes
83	Tunnel-Preference	no	no	no	no	no	no	no	yes
84	ARAP-Challenge-Response	no	no	no	no	no	no	no	no
85	Acct-Interim-Interval	no	no	no	no	no	no	yes	yes
86	Acct-Tunnel-Packets-Lost	no	no	no	no	no	no	no	no
87	NAS-Port-ID	no	no	no	no	no	no	no	no
88	Framed-Pool	no	no	no	no	no	no	no	no
90	Tunnel-Client-Auth-ID ²	no	no	no	no	no	no	no	yes
91	Tunnel-Server-Auth-ID	no	no	no	no	no	no	no	yes
200	IETF-Token-Immediate	no	no	no	no	no	no	no	no

1. This RADIUS attribute complies with the following two draft IETF documents: [RFC 2868 RADIUS Attributes for Tunnel Protocol Support](#) and [RFC 2867 RADIUS Accounting Modifications for Tunnel Protocol Support](#).

2. This RADIUS attribute complies with RFC 2865 and RFC 2868.

Comprehensive List of RADIUS Attribute Descriptions

[Table 2](#) lists and describes IETF RADIUS attributes. In cases where the attribute has a security server-specific format, the format is specified.

Table 2 RADIUS IETF Attributes

Number	IETF Attribute	Description
1	User-Name	Indicates the name of the user being authenticated by the RADIUS server.
2	User-Password	Indicates the user's password or the user's input following an Access-Challenge. Passwords longer than 16 characters are encrypted using RFC 2865 specifications.
3	CHAP-Password	Indicates the response value provided by a PPP Challenge-Handshake Authentication Protocol (CHAP) user in response to an Access-Challenge.
4	NAS-IP Address	Specifies the IP address of the network access server that is requesting authentication. The default value is 0.0.0.0.

Table 2 RADIUS IETF Attributes (continued)

Number	IETF Attribute	Description
5	NAS-Port	<p>Indicates the physical port number of the network access server that is authenticating the user. The NAS-Port value (32 bits) consists of one or two 16-bit values (depending on the setting of the radius-server extended-portnames command). Each 16-bit number should be viewed as a 5-digit decimal integer for interpretation as follows:</p> <p>For asynchronous terminal lines, async network interfaces, and virtual async interfaces, the value is 00ttt, where ttt is the line number or async interface unit number.</p> <p>For ordinary synchronous network interface, the value is 10xxx.</p> <p>For channels on a primary rate ISDN interface, the value is 2ppcc.</p> <p>For channels on a basic rate ISDN interface, the value is 3bb0c.</p> <p>For other types of interfaces, the value is 6nnss.</p>
6	Service-Type	<p>Indicates the type of service requested or the type of service to be provided.</p> <ul style="list-style-type: none"> In a request: <ul style="list-style-type: none"> Framed for known PPP or SLIP connection. Administrative-user for enable command. In response: <ul style="list-style-type: none"> Login—Make a connection. Framed—Start SLIP or PPP. Administrative User—Start an EXEC or enable ok. <p>Exec User—Start an EXEC session.</p> <p>Service type is indicated by a particular numeric value as follows:</p> <ul style="list-style-type: none"> 1: Login 2: Framed 3: Callback-Login 4: Callback-Framed 5: Outbound 6: Administrative 7: NAS-Prompt 8: Authenticate Only 9: Callback-NAS-Prompt
7	Framed-Protocol	<p>Indicates the framing to be used for framed access. No other framing is allowed.</p> <p>Framing is indicated by a numeric value as follows:</p> <ul style="list-style-type: none"> 1: PPP 2: SLIP 3: ARA 4: Gandalf-proprietary single-link/multilink protocol 5: Xylogics-proprietary IPX/SLIP

Table 2 RADIUS IETF Attributes (continued)

Number	IETF Attribute	Description
8	Framed-IP-Address	Indicates the IP address to be configured for the user, by sending the IP address of a user to the RADIUS server in the access-request. To enable this command, use the radius-server attribute 8 include-in-access-req command in global configuration mode.
9	Framed-IP-Netmask	Indicates the IP netmask to be configured for the user when the user is a router to a network. This attribute value results in a static route being added for Framed-IP-Address with the mask specified.
10	Framed-Routing	Indicates the routing method for the user when the user is a router to a network. Only “None” and “Send and Listen” values are supported for this attribute. Routing method is indicated by a numeric value as follows: <ul style="list-style-type: none"> • 0: None • 1: Send routing packets • 2: Listen for routing packets • 3: Send routing packets and listen for routing packets
11	Filter-Id	Indicates the name of the filter list for the user and is formatted as follows: %d, %d.in, or %d.out. This attribute is associated with the most recent service-type command. For login and EXEC, use %d or %d.out as the line access list value from 0 to 199. For Framed service, use %d or %d.out as interface output access list, and %d.in for input access list. The numbers are self-encoding to the protocol to which they refer.
12	Framed-MTU	Indicates the maximum transmission unit (MTU) that can be configured for the user when the MTU is not negotiated by PPP or some other means.
13	Framed-Compression	Indicates a compression protocol used for the link. This attribute results in a “/compress” being added to the PPP or SLIP autocommand generated during EXEC authorization. Not currently implemented for non-EXEC authorization. Compression protocol is indicated by a numeric value as follows: <ul style="list-style-type: none"> • 0: None • 1: VJ-TCP/IP header compression • 2: IPX header compression
14	Login-IP-Host	Indicates the host to which the user will connect when the Login-Service attribute is included. (This begins immediately after login.)
15	Login-Service	Indicates the service that should be used to connect the user to the login host. Service is indicated by a numeric value as follows: <ul style="list-style-type: none"> • 0: Telnet • 1: Rlogin • 2: TCP-Clear • 3: PortMaster • 4: LAT
16	Login-TCP-Port	Defines the TCP port with which the user is to be connected when the Login-Service attribute is also present.

Table 2 RADIUS IETF Attributes (continued)

Number	IETF Attribute	Description
18	Reply-Message	Indicates text that might be displayed to the user via the RADIUS server. You can include this attribute in user files; however, you cannot exceed a maximum of 16 Reply-Message entries per profile.
19	Callback-Number	Defines a dialing string to be used for callback.
20	Callback-ID	Defines the name (consisting of one or more octets) of a place to be called, to be interpreted by the network access server.
22	Framed-Route	Provides routing information to be configured for the user on this network access server. The RADIUS RFC format (net/bits [router [metric]]) and the old style dotted mask (net mask [router [metric]]) are supported. If the router field is omitted or 0, the peer IP address is used. Metrics are currently ignored. This attribute is access-request packets.
23	Framed-IPX-Network	Defines the IPX network number configured for the user.
24	State	Allows state information to be maintained between the network access server and the RADIUS server. This attribute is applicable only to CHAP challenges.
25	Class	(Accounting) Arbitrary value that the network access server includes in all accounting packets for this user if supplied by the RADIUS server.
26	Vendor-Specific	<p>Allows vendors to support their own extended attributes not suitable for general use. The Cisco RADIUS implementation supports one vendor-specific option using the format recommended in the specification. Cisco's vendor-ID is 9, and the supported option has vendor-type 1, which is named "cisco-avpair." The value is a string of the format:</p> <pre>protocol : attribute sep value</pre> <p>"Protocol" is a value of the Cisco "protocol" attribute for a particular type of authorization. "Attribute" and "value" are an appropriate AV pair defined in the Cisco TACACS+ specification, and "sep" is "=" for mandatory attributes and "*" for optional attributes. This allows the full set of features available for TACACS+ authorization to also be used for RADIUS. For example:</p> <pre>cisco-avpair= "ip:addr-pool=first" cisco-avpair= "shell:priv-lvl=15"</pre> <p>The first example causes Cisco's "multiple named ip address pools" feature to be activated during IP authorization (during PPP's IPCP address assignment). The second example causes a user logging in from a network access server to have immediate access to EXEC commands.</p> <p>Table 1 lists supported vendor-specific RADIUS attributes (IETF attribute 26). The "TACACS+ Attribute-Value Pairs" module provides a complete list of supported TACACS+ attribute-value (AV) pairs that can be used with IETF attribute 26. (RFC 2865)</p>
27	Session-Timeout	Sets the maximum number of seconds of service to be provided to the user before the session terminates. This attribute value becomes the per-user "absolute timeout."
28	Idle-Timeout	Sets the maximum number of consecutive seconds of idle connection allowed to the user before the session terminates. This attribute value becomes the per-user "session-timeout."

Table 2 RADIUS IETF Attributes (continued)

Number	IETF Attribute	Description
29	Termination-Action	Termination is indicated by a numeric value as follows: <ul style="list-style-type: none"> • 0: Default • 1: RADIUS request
30	Called-Station-Id	(Accounting) Allows the network access server to send the telephone number the user called as part of the Access-Request packet (using Dialed Number Identification Service [DNIS] or similar technology). This attribute is only supported on ISDN, and modem calls on the Cisco AS5200 if used with PRI.
31	Calling-Station-Id	(Accounting) Allows the network access server to send the telephone number the call came from as part of the Access-Request packet (using Automatic Number Identification or similar technology). This attribute has the same value as “remote-addr” from TACACS+. This attribute is only supported on ISDN, and modem calls on the Cisco AS5200 if used with PRI.
32	NAS-Identifier	String identifying the network access server originating the Access-Request. Use the radius-server attribute 32 include-in-access-req global configuration command to send RADIUS attribute 32 in an Access-Request or Accounting-Request. By default, the FQDN is sent in the attribute when the format is not specified.
33	Proxy-State	Attribute that can be sent by a proxy server to another server when forwarding Access-Requests; this must be returned unmodified in the Access-Accept, Access-Reject or Access-Challenge and removed by the proxy server before sending the response to the network access server.
34	Login-LAT-Service	Indicates the system with which the user is to be connected by LAT. This attribute is only available in the EXEC mode.
35	Login-LAT-Node	Indicates the node with which the user is to be automatically connected by LAT.
36	Login-LAT-Group	Identifies the LAT group codes that this user is authorized to use.
37	Framed-AppleTalk-Link	Indicates the AppleTalk network number that should be used for serial links to the user, which is another AppleTalk router.
38	Framed-AppleTalk-Network	Indicates the AppleTalk network number that the network access server uses to allocate an AppleTalk node for the user.
39	Framed-AppleTalk-Zone	Indicates the AppleTalk Default Zone to be used for this user.
40	Acct-Status-Type	(Accounting) Indicates whether this Accounting-Request marks the beginning of the user service (start) or the end (stop).
41	Acct-Delay-Time	(Accounting) Indicates how many seconds the client has been trying to send a particular record.
42	Acct-Input-Octets	(Accounting) Indicates how many octets have been received from the port over the course of this service being provided.
43	Acct-Output-Octets	(Accounting) Indicates how many octets have been sent to the port in the course of delivering this service.
44	Acct-Session-Id	(Accounting) A unique accounting identifier that makes it easy to match start and stop records in a log file. Acct-Session ID numbers restart at 1 each time the router is power cycled or the software is reloaded. To send this attribute in access-request packets, use the radius-server attribute 44 include-in-access-req command in global configuration mode.

Table 2 RADIUS IETF Attributes (continued)

Number	IETF Attribute	Description
45	Acct-Authentic	(Accounting) Indicates how the user was authenticated, whether by RADIUS, the network access server itself, or another remote authentication protocol. This attribute is set to “radius” for users authenticated by RADIUS; “remote” for TACACS+ and Kerberos; or “local” for local, enable, line, and if-needed methods. For all other methods, the attribute is omitted.
46	Acct-Session-Time	(Accounting) Indicates how long (in seconds) the user has received service.
47	Acct-Input-Packets	(Accounting) Indicates how many packets have been received from the port over the course of this service being provided to a framed user.
48	Acct-Output-Packets	(Accounting) Indicates how many packets have been sent to the port in the course of delivering this service to a framed user.
49	Acct-Terminate-Cause	<p>(Accounting) Reports details on why the connection was terminated. Termination causes are indicated by a numeric value as follows:</p> <ol style="list-style-type: none"> 1. User request 2. Lost carrier 3. Lost service 4. Idle timeout 5. Session timeout 6. Admin reset 7. Admin reboot 8. Port error 9. NAS error 10. NAS request 11. NAS reboot 12. Port unneeded 13. Port pre-empted 14. Port suspended 15. Service unavailable 16. Callback 17. User error 18. Host request <p>Note For attribute 49, Cisco IOS supports values 1 to 6, 9, 12, and 15 to 18.</p>
50	Acct-Multi-Session-Id	<p>(Accounting) A unique accounting identifier used to link multiple related sessions in a log file.</p> <p>Each linked session in a multilink session has a unique Acct-Session-Id value, but shares the same Acct-Multi-Session-Id.</p>
51	Acct-Link-Count	(Accounting) Indicates the number of links known in a given multilink session at the time an accounting record is generated. The network access server can include this attribute in any accounting request that might have multiple links.

Table 2 RADIUS IETF Attributes (continued)

Number	IETF Attribute	Description
52	Acct-Input-Gigawords	Indicates how many times the Acct-Input-Octets counter has wrapped around 2^{32} over the course of the provided service.
53	Acct-Output-Gigawords	Indicates how many times the Acct-Output-Octets counter has wrapped around 2^{32} while delivering service.
55	Event-Timestamp	<p>Records the time that the event occurred on the NAS; the timestamp sent in attribute 55 is in seconds since January 1, 1970 00:00 UTC. To send RADIUS attribute 55 in accounting packets, use the radius-server attribute 55 include-in-acct-req command.</p> <p>Note Before the Event-Timestamp attribute can be sent in accounting packets, you must configure the clock on the router. (For information on setting the clock on your router, refer to the Cisco IOS Configuration Fundamentals Configuration Guide, Release 12.4T.)</p> <p>To avoid configuring the clock on the router every time the router is reloaded, you can enable the clock calendar-valid command. See the Cisco IOS Configuration Fundamentals Command Reference for more information on this command.</p>
60	CHAP-Challenge	Contains the Challenge Handshake Authentication Protocol challenge sent by the network access server to a PPP CHAP user.
61	NAS-Port-Type	<p>Indicates the type of physical port the network access server is using to authenticate the user. Physical ports are indicated by a numeric value as follows:</p> <ul style="list-style-type: none"> • 0: Asynchronous • 1: Synchronous • 2: ISDN-Synchronous • 3: ISDN-Asynchronous (V.120) • 4: ISDN-Asynchronous (V.110) • 5: Virtual
62	Port-Limit	Sets the maximum number of ports provided to the user by the NAS.
63	Login-LAT-Port	Defines the port with which the user is to be connected by LAT.
64	Tunnel-Type ¹	Indicates the tunneling protocol(s) used. Cisco IOS software supports two possible values for this attribute: L2TP and L2F. If this attribute is not set, L2F is used as a default.
65	Tunnel-Medium-Type ¹	Indicates the transport medium type to use to create a tunnel. This attribute has only one available value for this release: IP. If no value is set for this attribute, IP is used as the default.

Table 2 RADIUS IETF Attributes (continued)

Number	IETF Attribute	Description
66	Tunnel-Client-Endpoint	<p>Contains the address of the initiator end of the tunnel. It may be included in both Access-Request and Access-Accept packets to indicate the address from which a new tunnel is to be initiated. If the Tunnel-Client-Endpoint attribute is included in an Access-Request packet, the RADIUS server should take the value as a hint; the server is not obligated to honor the hint, however. This attribute should be included in Accounting-Request packets that contain Acct-Status-Type attributes with values of either Start or Stop, in which case it indicates the address from which the tunnel was initiated. This attribute, along with the Tunnel-Server-Endpoint and Acct-Tunnel-Connection-ID attributes, may be used to provide a globally unique means to identify a tunnel for accounting and auditing purposes.</p> <p>An enhancement has been added for the network access server to accept a value of 127.0.0.X for this attribute such that:</p> <p style="padding-left: 40px;">127.0.0.0 would indicate that loopback0 IP address is to be used 127.0.0.1 would indicate that loopback1 IP address is to be used ... 127.0.0.X would indicate that loopbackX IP address is to be used</p> <p>for the actual tunnel client endpoint IP address. This enhancement adds scalability across multiple network access servers.</p>
67	Tunnel-Server-Endpoint ¹	Indicates the address of the server end of the tunnel. The format of this attribute varies depending on the value of Tunnel-Medium-Type. Because this release only supports IP as a tunnel medium type, the IP address or the host name of LNS is valid for this attribute.
68	Acct-Tunnel-Connection-ID	Indicates the identifier assigned to the tunnel session. This attribute should be included in Accounting-Request packets that contain an Acct-Status-Type attribute having the value Start, Stop, or any of the values described above. This attribute, along with the Tunnel-Client-Endpoint and Tunnel-Server-Endpoint attributes, may be used to provide a means to uniquely identify a tunnel session for auditing purposes.
69	Tunnel-Password ¹	<p>Defines the password to be used to authenticate to a remote server. This attribute is converted into different AAA attributes based on the value of Tunnel-Type: AAA_ATTR_l2tp_tunnel_pw (L2TP), AAA_ATTR_nas_password (L2F), and AAA_ATTR_gw_password (L2F).</p> <p>By default, all passwords received are encrypted, which can cause authorization failures when a NAS attempts to decrypt a non-encrypted password. To enable attribute 69 to receive non-encrypted passwords, use the radius-server attribute 69 clear global configuration command.</p>
70	ARAP-Password	Identifies an Access-Request packet containing a Framed-Protocol of ARAP.
71	ARAP-Features	Includes password information that the NAS should send to the user in an ARAP "feature flags" packet.
72	ARAP-Zone-Access	Indicates how the ARAP zone list for the user should be used.
73	ARAP-Security	Identifies the ARAP Security Module to be used in an Access-Challenge packet.
74	ARAP-Security-Data	Contains the actual security module challenge or response. It can be found in Access-Challenge and Access-Request packets.
75	Password-Retry	Indicates how many times a user may attempt authentication before being disconnected.

Table 2 RADIUS IETF Attributes (continued)

Number	IETF Attribute	Description
76	Prompt	Indicates to the NAS whether it should echo the user's response as it is entered or not echo it. (0=no echo, 1=echo)
77	Connect-Info	Provides additional call information for modem calls. This attribute is generated in start and stop accounting records.
78	Configuration-Token	Indicates a type of user profile to be used. This attribute should be used in large distributed authentication networks based on proxy. It is sent from a RADIUS Proxy Server to a RADIUS Proxy Client in an Access-Accept; it should not be sent to a NAS.
79	EAP-Message	Encapsulates Extended Access Protocol (EAP) packets that allow the NAS to authenticate dial-in users via EAP without having to understand the EAP protocol.
80	Message-Authenticator	Prevents spoofing Access-Requests using CHAP, ARAP, or EAP authentication methods.
81	Tunnel-Private-Group-ID	Indicates the group ID for a particular tunneled session.
82	Tunnel-Assignment-ID ¹	Indicates to the tunnel initiator the particular tunnel to which a session is assigned.
83	Tunnel-Preference	Indicates the relative preference assigned to each tunnel. This attribute should be included if more than one set of tunneling attributes is returned by the RADIUS server to the tunnel initiator.
84	ARAP-Challenge-Response	Contains the response to the challenge of the dial-in client.
85	Acct-Interim-Interval	Indicates the number of seconds between each interim update in seconds for this specific session. This value can only appear in the Access-Accept message.
86	Acct-Tunnel-Packets-Lost	Indicates the number of packets lost on a given link. This attribute should be included in Accounting-Request packets that contain an Acct-Status-Type attribute having the value Tunnel-Link-Stop.
87	NAS-Port-ID	Contains a text string which identifies the port of the NAS that is authenticating the user.
88	Framed-Pool	Contains the name of an assigned address pool that should be used to assign an address for the user. If a NAS does not support multiple address pools, the NAS should ignore this attribute.
90	Tunnel-Client-Auth-ID	Specifies the name used by the tunnel initiator (also known as the NAS) when authenticating tunnel setup with the tunnel terminator. Supports L2F and L2TP protocols.
91	Tunnel-Server-Auth-ID	Specifies the name used by the tunnel terminator (also known as the Home Gateway) when authenticating tunnel setup with the tunnel initiator. Supports L2F and L2TP protocols.
200	IETF-Token-Immediate	Determines how RADIUS treats passwords received from login-users when their file entry specifies a hand-held security card server. The value for this attribute is indicated by a numeric value as follows: <ul style="list-style-type: none"> • 0: No, meaning that the password is ignored. • 1: Yes, meaning that the password is used for authentication.

1. This RADIUS attribute complies with the following two IETF documents: [RFC 2868](#), *RADIUS Attributes for Tunnel Protocol Support* and [RFC 2867](#), *RADIUS Accounting Modifications for Tunnel Protocol Support*.

Additional References

The following sections provide references related to RADIUS IETF attributes.

Related Documents

Related Topic	Document Title
RADIUS	“ Configuring RADIUS ” module.
Authentication	“ Configuring Authentication ” module.
Authorization	“ Configuring Authorization ” module.
Accounting	“ Configuring Accounting ” module.
RADIUS Vendor-Specific Attributes	“ RADIUS Vendor-Proprietary Attributes ” module.

Standards

Standard	Title
None.	—

MIBs

MIB	MIBs Link
None.	To locate and download MIBs for selected platforms, Cisco IOS releases, and feature sets, use Cisco MIB Locator found at the following URL: http://www.cisco.com/go/mibs

RFCs

RFC	Title
RFC 2865	<i>Remote Authentication Dial In User Service (RADIUS)</i>
RFC 2866	<i>RADIUS Accounting</i>
RFC 2867	<i>RADIUS Accounting Modifications for Tunnel Protocol Support</i>
RFC 2868	<i>RADIUS Attributes for Tunnel Protocol Support</i>
RFC 2869	<i>RADIUS Extensions</i>

Technical Assistance

Description	Link
<p>The Cisco Support website provides extensive online resources, including documentation and tools for troubleshooting and resolving technical issues with Cisco products and technologies.</p> <p>To receive security and technical information about your products, you can subscribe to various services, such as the Product Alert Tool (accessed from Field Notices), the Cisco Technical Services Newsletter, and Really Simple Syndication (RSS) Feeds.</p> <p>Access to most tools on the Cisco Support website requires a Cisco.com user ID and password.</p>	<p>http://www.cisco.com/techsupport</p>

Feature Information for RADIUS Attributes Overview and RADIUS IETF Attributes

Table 3 lists the release history for this feature.

Not all commands may be available in your Cisco IOS software release. For release information about a specific command, see the command reference documentation.

Use Cisco Feature Navigator to find information about platform support and software image support. Cisco Feature Navigator enables you to determine which Cisco IOS and Catalyst OS software images support a specific software release, feature set, or platform. To access Cisco Feature Navigator, go to <http://tools.cisco.com/ITDIT/CFN/jsp/index.jsp>. An account on Cisco.com is not required.



Note

Table 3 lists only the Cisco IOS software release that introduced support for a given feature in a given Cisco IOS software release train. Unless noted otherwise, subsequent releases of that Cisco IOS software release train also support that feature.

Table 3 Feature Information for RADIUS Attributes Overview and RADIUS IETF Attributes

Feature Name	Releases	Feature Information
RADIUS IETF Attributes	Cisco IOS Release 11.1	This feature was introduced in Cisco IOS Release 11.1.

Cisco and the Cisco Logo are trademarks of Cisco Systems, Inc. and/or its affiliates in the U.S. and other countries. A listing of Cisco's trademarks can be found at www.cisco.com/go/trademarks. Third party trademarks mentioned are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (1005R)

Any Internet Protocol (IP) addresses and phone numbers used in this document are not intended to be actual addresses and phone numbers. Any examples, command display output, network topology diagrams, and other figures included in the document are shown for illustrative purposes only. Any use of actual IP addresses or phone numbers in illustrative content is unintentional and coincidental.

© 2001–2009 Cisco Systems, Inc. All rights reserved.

