

Konfigurieren eines standortübergreifenden Nexus EVPN-VXLAN mit Routenserver

Inhalt

[Einleitung](#)

[Voraussetzungen](#)

[Anforderungen](#)

[Verwendete Komponenten](#)

[Hintergrundinformationen](#)

[Wie ist Multi-Site hilfreich?](#)

[Weitere Vorteile](#)

[Konfigurieren](#)

[Netzwerkdiagramm](#)

[Leaf-1-Konfiguration für Standort 1](#)

[Leaf-2-Konfiguration für Standort 1](#)

[Leaf-3-Konfiguration für Standort 1](#)

[Leaf-4-Konfiguration für Standort 1](#)

[Standort 1 - Spine-1-Konfiguration](#)

[Grenzgateway-1-Konfiguration für Standort 1](#)

[Grenzgateway-2-Konfiguration für Standort 1](#)

[Router-Server](#)

[Konfiguration des Grenz-Gateways 1 von Standort 2](#)

[Konfiguration des Grenz-Gateways 2 von Standort 2](#)

[Standort 2 - Spine-1-Konfiguration](#)

[Leaf-1-Konfiguration für Standort 2](#)

[Leaf-2-Konfiguration für Standort 2](#)

[Leaf-3-Konfiguration für Standort 2](#)

[Leaf-4-Konfiguration für Standort 2](#)

[Überprüfung](#)

[Fehlerbehebung](#)

Einleitung

In diesem Dokument wird beschrieben, wie die standortübergreifende Ethernet VPN-/Virtual Extensible LAN (EVPN/VxLAN)-Umgebung auf den Cisco Nexus 9000-Switches konfiguriert und verifiziert wird. Dies umfasst Virtual Fabric-Peering in vPC-Leaf-Knoten.

Für Site-to-Site-Verbindungen wird das Konzept des Routenservers erläutert.

Voraussetzungen

Anforderungen

Cisco empfiehlt, dass Sie über Kenntnisse in folgenden Bereichen verfügen:

- Multiprotocol Label Switching (MPLS) Layer 3-VPN
- Multiprotocol-Border Gateway Protocol (MP-BGP)
- EVPN

Verwendete Komponenten

Die Informationen in diesem Dokument basierend auf folgenden Software- und Hardware-Versionen:

Alle Site-Leafs	N9K-C9336C-FX2	NX-OS: 10,2 (3)
S1_Spine1	N9K-C9364C	NX-OS: 10,2(4)
S1_Spine2	N9K-C9364C	NX-OS 9.3(5)
S1_Border Gateway1, S2_Border Gateway2, S2_Border Gateway1	N9K-C9332C	NX-OS: 9.3(9)
S1_Border-Gateway2	N9K-C9332C	NX-OS: 10,2(4)
Routingserver	N9K-C9396PX	NX-OS: 9.2(2)
Host 1	N3K-C3264C-E	NX-OS: 9.3(5)
Host 2 und Host 3	N3K-C3264C-E	NX-OS: 9.2(2)

Die Informationen in diesem Dokument beziehen sich auf Geräte in einer speziell eingerichteten Testumgebung. Alle Geräte, die in diesem Dokument benutzt wurden, begannen mit einer gelöschten (Nichterfüllungs) Konfiguration. Wenn Ihr Netzwerk in Betrieb ist, stellen Sie sicher, dass Sie die möglichen Auswirkungen aller Befehle kennen.

Hintergrundinformationen

Das Rechenzentrum ist ein Ressourcen-Pool, der Rechenleistung, Storage und die erforderlichen Anwendungen zur Unterstützung der Geschäftsumgebung umfasst. Eine angemessene Planung des Infrastrukturdesigns für das Rechenzentrum ist von entscheidender Bedeutung. In diesem Dokument werden wichtige Anforderungen behandelt, z. B. für Krankenhausnetzwerke, und es wird erläutert, wie diese Anforderungen erfüllt oder übertroffen werden können. Moderne IT-Infrastrukturen und Rechenzentrumsbereitstellungen erfordern hohe Verfügbarkeit, eine schnelle Skalierung und eine stets hohe Leistung.

Einige der wichtigsten Anforderungen an das Design und die Architektur des Rechenzentrums sind:

- Die Port-Dichte wird durch Fabric Extender (FEX) verbessert.
- Die Rechenkapazität wird durch Hardware-Virtualisierung (UCS) verbessert.
- Die Uplink-Bandbreite des Access-Layers wird durch den Port-Channel verbessert.
- Die Redundanz auf Chassis-Ebene wird durch vPC verbessert.
- Die Application Centric Infrastructure (ACI) verbessert die SDN-Fabric (Software-Defined Networking) und automatisiert Underlay und Overlay in einer Fabric.
- Data Center Network Manager (DCNM) verbessert die schnelle Bereitstellung und Unterstützung neuer Services.
- Die Bandbreitenanforderungen für Langstreckenanwendungen werden durch Dark Fiber- oder Wavelength-Services verbessert.
- Vor allem geografische Redundanz und Skalierung sind Schlüsselattribute für die Erweiterung bzw. Erweiterung der Rechenzentrumsumgebung. Multi-Site VxLAN/EVPN unterstützt uns bei der Implementierung besserer Data Center Interconnect (DCI)-Lösungen.

Wie ist Multi-Site hilfreich?

Zu den externen Verbindungen gehört die Verbindung des Rechenzentrums mit dem übrigen Netzwerk: mit dem Internet, dem WAN oder dem Campus. Alle für externe Verbindungen bereitgestellten Optionen sind Multi-Tenant-fähig und konzentrieren sich auf den Layer-3 (L3)-Transport zu den externen

Netzwerkdomänen.


- EVPN ist eine All-in-One-VPN-Lösung der nächsten Generation.
- Es leistet nicht nur die Arbeit vieler anderer VPN-Technologien, sondern ist auch besser.
- Integration in bestehende Netzwerke
- Selektive Werbung/Durchwahl:
 - Erweiterung des einzigen Layer 2 (L2) - spezifische VLANs/Subnetze, die um Typ-2-Routen erweitert werden können
 - Erweiterung des einzigen L3: Bestimmte L3-Domänen können durch Typ-5-Routen erweitert werden.
- Automatische Erkennung von Redundanzgruppen mit Typ-4-Routen
- Aliasing, Massenentzug von Adressen, Split Horizon (SH) Multi Homing (MH) Anzeige mit Typ-1 Routen.
- Automatische Erkennung von Endpunkten und MCAST-Tunneltypen mit Typ-3-Routen.

Weitere Vorteile

- Workload-Ausgleich zwischen Rechenzentren und Clouds
- Proaktive Reaktion auf Störungen - Minderung des Risikos sich nähernder Katastrophen wie Hurrikane und Überschwemmungen.
- Wartung und Migration von Rechenzentren: geplante Veranstaltungen über einen gewissen Zeitraum und Integration in bestehende Netzwerke.
- Backup und Disaster Recovery-as-a-Service (aaS).

Konfigurieren

Netzwerkdiagramm

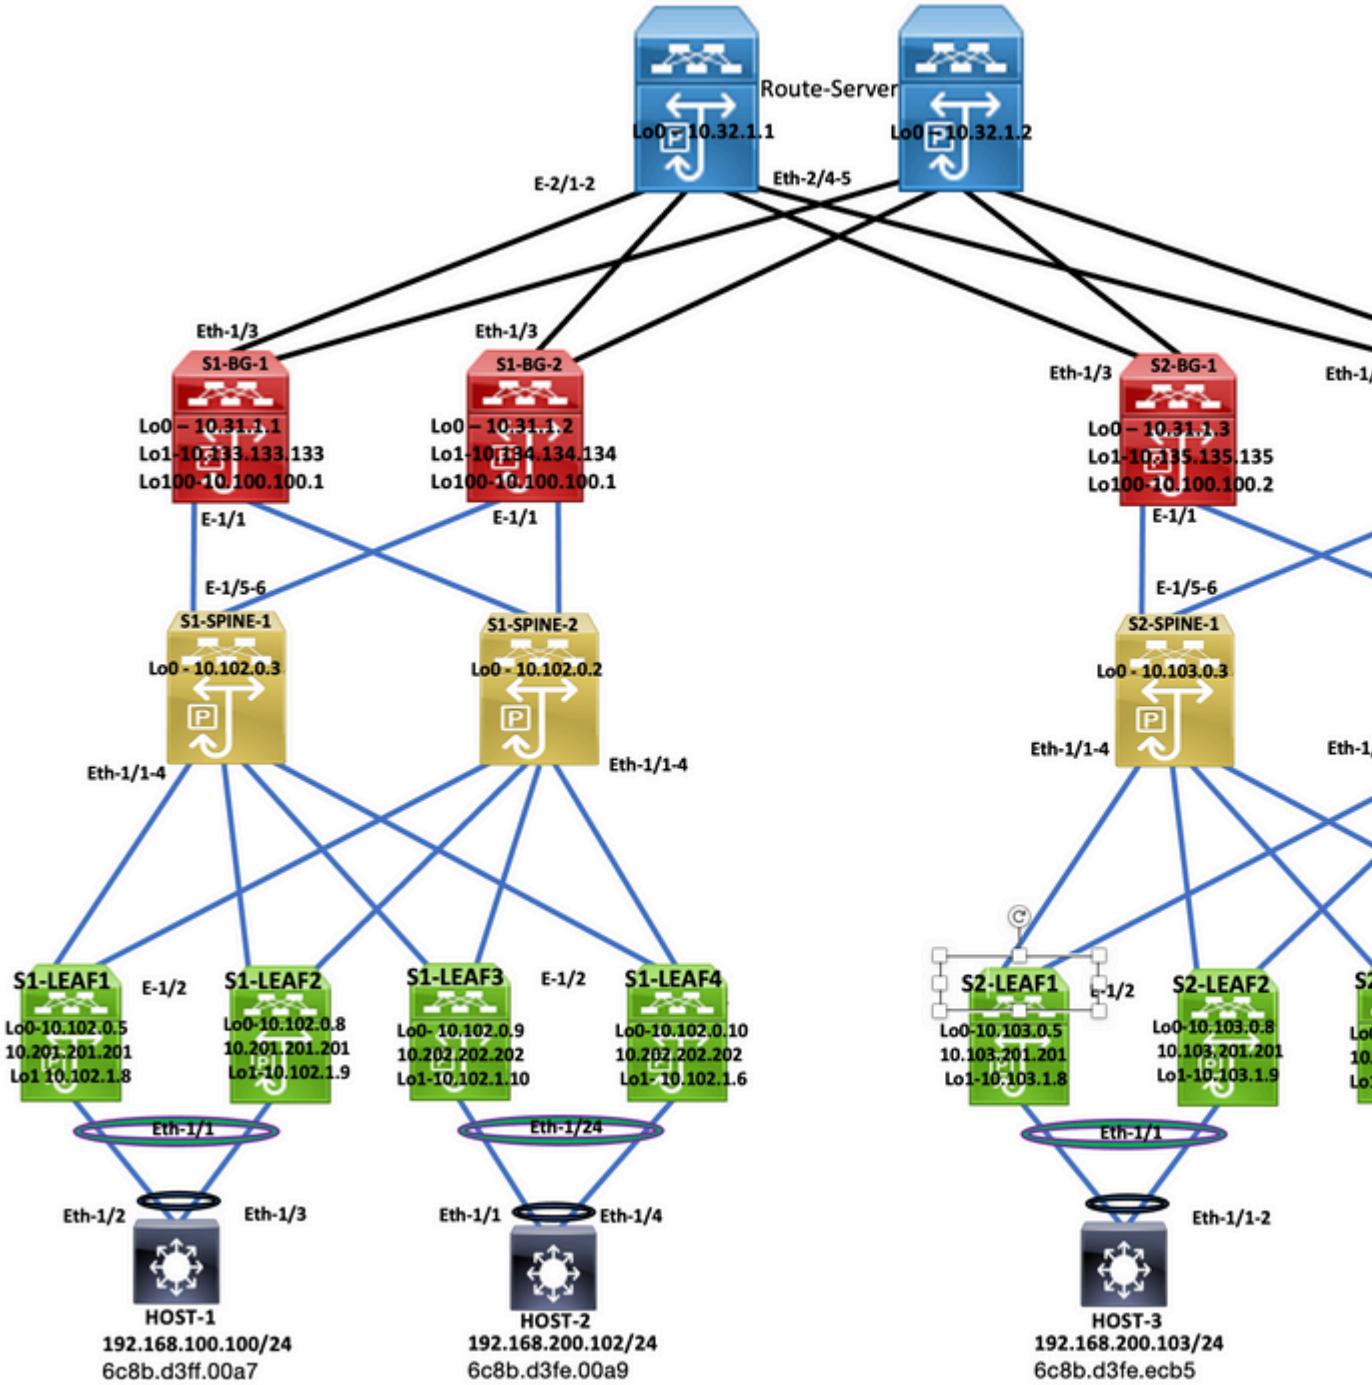

Topology

Leaf-1-Konfiguration für Standort 1

```

feature nxapi
cfs ipv4 distribute
nv overlay evpn
feature ospf
feature bgp
feature pim
feature fabric forwarding
feature interface-vlan
feature vn-segment-vlan-based
feature lacp
feature vpc
feature nv overlay

```

```
fabric forwarding anycast-gateway-mac 0000.1111.2222

ip pim rp-address 10.102.0.2 group-list 224.0.0.0/4
ip pim ssm range 232.0.0.0/8
ip igmp snooping vxlan

vlan 1,100,200,300-350,2001
vlan 100
  vn-segment 4000100
vlan 200
  vn-segment 4000200
vlan 301
  vn-segment 4000301
vlan 302
  vn-segment 4000302
vlan 303
  vn-segment 4000303
vlan 350
  name L3-VNI
  vn-segment 4000999
vlan 2001
  vn-segment 4000502

vrf context L3VNI4000999
  vni 4000999
  rd auto
  address-family ipv4 unicast
    route-target both auto
    route-target both auto evpn
vrf context vrf_1
  vni 4000501
  rd auto
  address-family ipv4 unicast
    route-target both auto
    route-target both auto evpn

vrf context vrf_2
  vni 4000502
  rd auto
  address-family ipv4 unicast
    route-target both auto
    route-target both auto evpn
vpc domain 100
  peer-switch
    peer-keepalive destination 10.197.214.54 source 10.197.214.53
    virtual peer-link destination 10.102.1.9 source 10.102.1.8 dscp 56
    delay restore 150
  peer-gateway
    ip arp synchronize

interface Vlan100
  no shutdown
  mtu 9216
  vrf member vrf_2
  no ip redirects
  ip address 192.168.100.254/24
  no ipv6 redirects
  fabric forwarding mode anycast-gateway

interface Vlan200
```

```
no shutdown
mtu 9216
vrf member vrf_2
no ip redirects
ip address 192.168.200.254/24
no ipv6 redirects
fabric forwarding mode anycast-gateway

interface Vlan301
no shutdown
mtu 9216
vrf member vrf_1
no ip redirects
ip address 172.16.11.254/24
no ipv6 redirects
fabric forwarding mode anycast-gateway

interface Vlan302
no shutdown
mtu 9216
vrf member vrf_1
no ip redirects
ip address 172.16.12.254/24
no ipv6 redirects
fabric forwarding mode anycast-gateway

interface Vlan303
no shutdown
mtu 9216
vrf member vrf_1
no ip redirects
ip address 172.16.13.254/24
no ipv6 redirects
fabric forwarding mode anycast-gateway

interface Vlan2001
no shutdown
mtu 9000
vrf member vrf_2
no ip redirects
ip forward
ipv6 address use-link-local-only
no ipv6 redirects

interface port-channel10
switchport
switchport mode trunk
switchport trunk allowed vlan 100,200,300-350,2001
spanning-tree port type network
vpc peer-link

interface port-channel100
switchport
switchport mode trunk
switchport trunk allowed vlan 100,200
mtu 9216
vpc 100

interface nve1
no shutdown
host-reachability protocol bgp
advertise virtual-rmac
```

```
source-interface loopback1
member vni 4000100
  suppress-arp
  mcast-group 231.0.0.1
member vni 4000200
  suppress-arp
  mcast-group 231.0.0.2
member vni 4000502 associate-vrf

interface Ethernet1/1
  switchport
  switchport mode trunk
  switchport trunk allowed vlan 100,200
  mtu 9216
  channel-group 100
  no shutdown

interface Ethernet1/2
  mtu 9216
  port-type fabric
  medium p2p
  ip address 192.168.17.12/24
  ip ospf network point-to-point
  ip router ospf 100 area 0.0.0.0
  ip pim sparse-mode
  no shutdown

interface loopback0
  ip address 10.102.0.5/32
  ip router ospf 100 area 0.0.0.0
  ip pim sparse-mode

interface loopback1
  ip address 10.102.1.8/32
  ip address 10.201.201.201/32 secondary
  ip router ospf 100 area 0.0.0.0
  ip pim sparse-mode

router ospf 100
  router-id 10.102.0.5
router bgp 100
  router-id 10.102.0.5
  log-neighbor-changes
  address-family l2vpn evpn
    advertise-pip
  neighbor 10.102.0.2
    remote-as 100
    update-source loopback0
    address-family ipv4 unicast
    address-family ipv6 unicast
      send-community
      send-community extended
    address-family l2vpn evpn
      send-community
      send-community extended
  neighbor 10.102.0.3
    remote-as 100
    update-source loopback0
    address-family ipv4 unicast
    address-family ipv6 unicast
      send-community
      send-community extended
```

```

address-family l2vpn evpn
  send-community
  send-community extended

evpn
  vni 4000100 12
    rd auto
    route-target import auto
    route-target export auto
  vni 4000200 12
    rd auto
    route-target import auto
    route-target export auto
  vni 4000301 12
    rd auto
    route-target import auto
    route-target export auto
  vni 4000302 12
    rd auto
    route-target import auto
    route-target export auto
  vni 4000303 12
    rd auto
    route-target import auto
    route-target export auto

```

Leaf-2-Konfiguration für Standort 1

```

feature nxapi
feature sftp-server
cfs ipv4 distribute
nv overlay evpn
feature ospf
feature bgp
feature pim
feature fabric forwarding
feature interface-vlan
feature vn-segment-vlan-based
feature lacp
feature vpc
feature nv overlay
fabric forwarding anycast-gateway-mac 0000.1111.2222

ip pim rp-address 10.102.0.2 group-list 224.0.0.0/4
ip pim ssm range 232.0.0.0/8

vlan 1,100,200,300-350,2001

vlan 100
  vn-segment 4000100
vlan 200
  vn-segment 4000200
vlan 301
  vn-segment 4000301
vlan 302
  vn-segment 4000302
vlan 303
  vn-segment 4000303

```

```
vlan 350
  name L3-VNI
  vn-segment 4000999
vlan 2001
  vn-segment 4000502

vrf context L3VNI4000999
  vni 4000999
  rd auto
  address-family ipv4 unicast
    route-target both auto
    route-target both auto evpn

vrf context vrf_1
  vni 4000501
  rd auto
  address-family ipv4 unicast
    route-target both auto
    route-target both auto evpn

vrf context vrf_2
  vni 4000502
  rd auto
  address-family ipv4 unicast
    route-target both auto
    route-target both auto evpn

vpc domain 100
  peer-switch
  peer-keepalive destination 10.197.214.53 source 10.197.214.54
  virtual peer-link destination 10.102.1.8 source 10.102.1.9 dscp 56
  delay restore 150
  peer-gateway
  ip arp synchronize

interface Vlan100
  no shutdown
  mtu 9216
  vrf member vrf_2
  no ip redirects
  ip address 192.168.100.254/24
  no ipv6 redirects
  fabric forwarding mode anycast-gateway

interface Vlan200
  no shutdown
  mtu 9216
  vrf member vrf_2
  no ip redirects
  ip address 192.168.200.254/24
  no ipv6 redirects
  fabric forwarding mode anycast-gateway

interface Vlan301
  no shutdown
  mtu 9216
  vrf member vrf_1
  no ip redirects
  ip address 172.16.11.254/24
  no ipv6 redirects

  fabric forwarding mode anycast-gateway
```

```
interface Vlan302
  no shutdown
  mtu 9216
  vrf member vrf_1
  no ip redirects
  ip address 172.16.12.254/24
  no ipv6 redirects
  fabric forwarding mode anycast-gateway

interface Vlan303
  no shutdown
  mtu 9216
  vrf member vrf_1
  no ip redirects
  ip address 172.16.13.254/24
  no ipv6 redirects
  fabric forwarding mode anycast-gateway

interface Vlan2001
  no shutdown
  mtu 9000
  vrf member vrf_2
  no ip redirects
  ip forward
  ipv6 address use-link-local-only
  no ipv6 redirects

interface port-channel10
  switchport
  switchport mode trunk
  switchport trunk allowed vlan 100,200,300-350,2001
  spanning-tree port type network
  vpc peer-link

interface port-channel100
  switchport
  switchport mode trunk
  switchport trunk allowed vlan 100,200
  mtu 9216
  vpc 100

interface nve1
  no shutdown
  host-reachability protocol bgp
  advertise virtual-rmac
  source-interface loopback1
  member vni 4000100
    suppress-arp
    mcast-group 231.0.0.1
  member vni 4000200
    suppress-arp
    mcast-group 231.0.0.2
  member vni 4000502 associate-vrf

interface Ethernet1/1
  switchport
  switchport mode trunk
  switchport trunk allowed vlan 100,200
  mtu 9216
  channel-group 100
  no shutdown
```

```
interface Ethernet1/2
  mtu 9216
  port-type fabric
  medium p2p
  ip address 192.168.18.12/24
  ip ospf network point-to-point
  ip router ospf 100 area 0.0.0.0
  ip pim sparse-mode
  no shutdown

interface loopback0
  ip address 10.102.0.8/32
  ip router ospf 100 area 0.0.0.0
  ip pim sparse-mode

interface loopback1
  ip address 10.102.1.9/32
  ip address 10.201.201.201/32 secondary
  ip router ospf 100 area 0.0.0.0
  ip pim sparse-mode
  icam monitor scale

router ospf 100
  router-id 10.102.0.8
router bgp 100
  router-id 10.102.0.8
  log-neighbor-changes
  address-family l2vpn evpn
    advertise-pip
  neighbor 10.102.0.2
    remote-as 100
    update-source loopback0
    address-family ipv4 unicast
    address-family ipv6 unicast
      send-community
      send-community extended
    address-family l2vpn evpn
      send-community
      send-community extended
  neighbor 10.102.0.3
    remote-as 100
    update-source loopback0
    address-family ipv4 unicast
    address-family ipv6 unicast
      send-community
      send-community extended
    address-family l2vpn evpn
      send-community
      send-community extended
evpn
  vni 4000100 12
    rd auto
    route-target import auto
    route-target export auto
  vni 4000200 12
    rd auto
    route-target import auto
    route-target export auto
  vni 4000301 12
    rd auto
    route-target import auto
    route-target export auto
```

```

vni 4000302 12
  rd auto
  route-target import auto
  route-target export auto
vni 4000303 12
  rd auto
  route-target import auto
  route-target export auto

```

Leaf-3-Konfiguration für Standort 1

```

feature nxapi
feature bash-shell
cfs ipv4 distribute
nv overlay evpn
feature ospf
feature bgp
feature pim
feature fabric forwarding
feature interface-vlan
feature vn-segment-vlan-based
feature lacp
feature vpc
feature nv overlay
feature ngoam

fabric forwarding anycast-gateway-mac 0000.1111.2222

ip pim rp-address 10.102.0.2 group-list 224.0.0.0/4
ip pim ssm range 232.0.0.0/8

vlan 1,100,200,300-350,2001

vlan 100
  vn-segment 4000100
vlan 200
  vn-segment 4000200
vlan 301
  vn-segment 4000301
vlan 302
  vn-segment 4000302
vlan 303
  vn-segment 4000303
vlan 350
  name L3-VNI
  vn-segment 4000999
vlan 2001
  vn-segment 4000502

vrf context L3VNI4000999
  vni 4000999
  rd auto
  address-family ipv4 unicast
    route-target both auto
    route-target both auto evpn

vrf context vrf_1
  vni 4000501

```

```

rd auto
address-family ipv4 unicast
  route-target both auto
  route-target both auto evpn

vrf context vrf_2
  vni 4000502
  rd auto
  address-family ipv4 unicast
    route-target both auto
    route-target both auto evpn

vpc domain 100
  peer-switch
  peer-keepalive destination 10.197.214.56 source 10.197.214.55
  virtual peer-link destination 10.102.0.10 source 10.102.0.9 dscp 56
  delay restore 150
  peer-gateway
  layer3 peer-router
  ip arp synchronize

interface Vlan100
  no shutdown
  mtu 9216
  vrf member vrf_2
  no ip redirects
  ip address 192.168.100.254/24
  no ipv6 redirects
  fabric forwarding mode anycast-gateway

interface Vlan200
  no shutdown
  mtu 9216
  vrf member vrf_2
  no ip redirects
  ip address 192.168.200.254/24
  no ipv6 redirects
  fabric forwarding mode anycast-gateway

interface Vlan2001
  no shutdown
  mtu 9000
  vrf member vrf_2
  no ip redirects
  ip forward
  ipv6 address use-link-local-only
  no ipv6 redirects

interface port-channel2
  switchport
  switchport mode trunk
  switchport trunk allowed vlan 100,200
  vpc 2

interface port-channel10
  switchport
  switchport mode trunk
  switchport trunk allowed vlan 100,200,300-500,2001
  spanning-tree port type network
  vpc peer-link

interface nve1

```

```
no shutdown
host-reachability protocol bgp
advertise virtual-rmac
source-interface loopback1
member vni 4000100
    suppress-arp
    mcast-group 231.0.0.1
member vni 4000200
    suppress-arp
    mcast-group 231.0.0.2
member vni 4000502 associate-vrf

interface Ethernet1/1
    switchport
    switchport mode trunk
    switchport trunk allowed vlan 200,300-305
    mtu 9216
    no shutdown

interface Ethernet1/2
    mtu 9216
    port-type fabric
    medium p2p
    ip address 192.168.19.12/24
    ip ospf network point-to-point
    ip router ospf 100 area 0.0.0.0
    ip pim sparse-mode
    no shutdown

interface Ethernet1/24
    switchport
    switchport mode trunk
    switchport trunk allowed vlan 100,200
    channel-group 2 mode active
    no shutdown

interface loopback0
    ip address 10.102.0.9/32
    ip router ospf 100 area 0.0.0.0
    ip pim sparse-mode

interface loopback1
    ip address 10.102.1.10/32
    ip address 10.202.202.202/32 secondary
    ip router ospf 100 area 0.0.0.0
    ip pim sparse-mode

interface loopback100
    vrf member vrf_2
    ip address 10.15.100.2/24

router ospf 100
    router-id 10.102.0.9
router bgp 100
    router-id 10.102.0.9
    log-neighbor-changes
    address-family l2vpn evpn
        advertise-pip
    neighbor 10.102.0.2
        remote-as 100
        update-source loopback0
    address-family ipv4 unicast
```

```

address-family ipv6 unicast
  send-community
  send-community extended
address-family l2vpn evpn
  send-community
  send-community extended
neighbor 10.102.0.3
  remote-as 100
  update-source loopback0
  address-family ipv4 unicast
  address-family ipv6 unicast
    send-community
    send-community extended
  address-family l2vpn evpn
    send-community
    send-community extended
      vrf vrf_2
  address-family ipv4 unicast
    network 10.15.100.2/32
    network 192.168.100.0/24
neighbor 192.168.100.253
  remote-as 65111
  update-source loopback100
  ebgp-multipath 10
  address-family ipv4 unicast
evpn
  vni 4000100 12
    rd auto
    route-target import auto
    route-target export auto
  vni 4000200 12
    rd auto
    route-target import auto
    route-target export auto
  vni 4000301 12
    rd auto
    route-target import auto
    route-target export auto
  vni 4000302 12
    rd auto
    route-target import auto
    route-target export auto
  vni 4000303 12
    rd auto
    route-target import auto
    route-target export auto

```

Leaf-4-Konfiguration für Standort 1

```

feature nxapi
cfs ipv4 distribute
nv overlay evpn
feature ospf
feature bgp
feature pim
feature fabric forwarding
feature interface-vlan
feature vn-segment-vlan-based

```

```
feature lacp
feature vpc
feature nv overlay
feature ngoam

fabric forwarding anycast-gateway-mac 0000.1111.2222

ip pim rp-address 10.102.0.2 group-list 224.0.0.0/4
ip pim ssm range 232.0.0.0/8

vlan 1,100,200,300-350,2001

vlan 100
  vn-segment 4000100
vlan 200
  vn-segment 4000200
vlan 301
  vn-segment 4000301
vlan 302
  vn-segment 4000302
vlan 303
  vn-segment 4000303
vlan 350
  name L3-VNI
  vn-segment 4000999
vlan 2001
  vn-segment 4000502

vrf context L3VNI4000999
  vni 4000999
  rd auto
  address-family ipv4 unicast
    route-target both auto
    route-target both auto evpn

vrf context vrf_1
  vni 4000501
  rd auto
  address-family ipv4 unicast
    route-target both auto
    route-target both auto evpn

vrf context vrf_2
  vni 4000502
  rd auto
  address-family ipv4 unicast
    route-target both auto
    route-target both auto evpn

vpc domain 100
  peer-switch
  peer-keepalive destination 10.197.214.55 source 10.197.214.56
  virtual peer-link destination 10.102.0.9 source 10.102.0.10 dscp 56
  delay restore 150
  peer-gateway
  layer3 peer-router
  ip arp synchronize

interface Vlan100
  no shutdown
  mtu 9216
```

```
vrf member vrf_2
no ip redirects
ip address 192.168.100.254/24
no ipv6 redirects
fabric forwarding mode anycast-gateway

interface Vlan200
no shutdown
mtu 9216
vrf member vrf_2
no ip redirects
ip address 192.168.200.254/24
no ipv6 redirects
fabric forwarding mode anycast-gateway

interface Vlan2001
no shutdown
mtu 9000
vrf member vrf_2
no ip redirects
ip forward
ipv6 address use-link-local-only
no ipv6 redirects

interface port-channel2
switchport
switchport mode trunk
switchport trunk allowed vlan 100,200
vpc 2

interface port-channel10
switchport
switchport mode trunk
switchport trunk allowed vlan 100,200,300-500,2001
spanning-tree port type network
vpc peer-link

interface nve1
no shutdown
host-reachability protocol bgp
advertise virtual-rmac
source-interface loopback1
member vni 4000100
  suppress-arp
  mcast-group 231.0.0.1
member vni 4000200
  suppress-arp
  mcast-group 231.0.0.2
member vni 4000502 associate-vrf

interface Ethernet1/1
switchport
switchport mode trunk
switchport trunk allowed vlan 200,300-305
mtu 9216
no shutdown

interface Ethernet1/2
mtu 9216
port-type fabric
medium p2p
ip address 192.168.20.12/24
```

```
ip ospf network point-to-point
ip router ospf 100 area 0.0.0.0
ip pim sparse-mode
no shutdown

interface Ethernet1/24
switchport
switchport mode trunk
switchport trunk allowed vlan 100,200
channel-group 2 mode active
no shutdown

interface loopback0
ip address 10.102.0.10/32
ip router ospf 100 area 0.0.0.0
ip pim sparse-mode

interface loopback1
ip address 10.102.1.6/32
ip address 10.202.202.202/32 secondary
ip router ospf 100 area 0.0.0.0
ip pim sparse-mode

interface loopback100
vrf member vrf_2
ip address 10.15.100.1/24

router ospf 100
router-id 10.102.0.10
router bgp 100
router-id 10.102.0.10
log-neighbor-changes
address-family ipv4 unicast
address-family ipv4 mvpn
address-family l2vpn evpn
advertise-pip
neighbor 10.102.0.2
remote-as 100
update-source loopback0
address-family ipv4 unicast
address-family ipv6 unicast
address-family ipv4 mvpn
send-community
send-community extended
address-family l2vpn evpn
send-community
send-community extended
neighbor 10.102.0.3
remote-as 100
update-source loopback0
address-family ipv4 unicast
address-family ipv6 unicast
address-family ipv4 mvpn
send-community
send-community extended
address-family l2vpn evpn
send-community
send-community extended
vrf vrf_2
address-family ipv4 unicast
network 10.15.100.1/32
network 192.168.100.0/24
```

```

neighbor 192.168.100.253
  remote-as 65111
  update-source loopback100
  ebgp-multipath 3
  address-family ipv4 unicast
evpn
  vni 4000100 12
    rd auto
    route-target import auto
    route-target export auto
  vni 4000200 12
    rd auto
    route-target import auto
    route-target export auto
  vni 4000301 12
    rd auto
    route-target import auto
    route-target export auto
  vni 4000302 12
    rd auto
    route-target import auto
    route-target export auto
  vni 4000303 12
    rd auto
    route-target import auto
    route-target export auto

```

Standort 1 - Spine-1-Konfiguration

```

feature nxapi
nv overlay evpn
feature ospf
feature bgp
feature pim
feature interface-vlan
feature vn-segment-vlan-based
feature lacp

ip pim rp-address 10.102.0.2 group-list 224.0.0.0/4
ip pim ssm range 232.0.0.0/8

vlan 1

interface Ethernet1/1
  mtu 9216
  medium p2p
  ip address 192.168.17.11/24
  ip ospf network point-to-point
  ip router ospf 100 area 0.0.0.0
  ip pim sparse-mode
  no shutdown

interface Ethernet1/2
  mtu 9216
  medium p2p
  ip address 192.168.18.11/24
  ip ospf network point-to-point

```

```
ip router ospf 100 area 0.0.0.0
ip pim sparse-mode
no shutdown

interface Ethernet1/3
  mtu 9216
  port-type fabric
  medium p2p
  ip address 192.168.19.11/24
  ip ospf network point-to-point
  ip router ospf 100 area 0.0.0.0
  ip pim sparse-mode
  no shutdown

interface Ethernet1/4
  mtu 9216
  medium p2p
  ip address 192.168.20.11/24
  ip ospf network point-to-point
  ip router ospf 100 area 0.0.0.0
  ip pim sparse-mode
  no shutdown

interface Ethernet1/5
  mtu 9216
  medium p2p
  ip address 192.168.15.11/24
  ip ospf network point-to-point
  ip router ospf 100 area 0.0.0.0
  ip pim sparse-mode
  no shutdown

interface Ethernet1/6
  mtu 9216
  medium p2p
  ip address 192.168.16.11/24
  ip ospf network point-to-point
  ip router ospf 100 area 0.0.0.0
  ip pim sparse-mode
  no shutdown

interface loopback0
  description "anycast RP address"
  ip address 10.102.0.2/32
  ip router ospf 100 area 0.0.0.0
  ip pim sparse-mode
  icam monitor scale

router ospf 100
  router-id 10.102.0.2
  router bgp 100
    router-id 10.102.0.2
    log-neighbor-changes
    address-family ipv4 unicast
    address-family ipv6 unicast
    address-family l2vpn evpn
    neighbor 10.31.1.1
      remote-as 100
      update-source loopback0
      address-family ipv4 unicast
      address-family ipv6 unicast
      address-family ipv4 mvpn
```

```
send-community
send-community extended
route-reflector-client
address-family l2vpn evpn
  send-community
  send-community extended
  route-reflector-client
neighbor 10.31.1.2
  remote-as 100
  update-source loopback0
  address-family ipv4 unicast
  address-family ipv6 unicast
    send-community
    send-community extended
    route-reflector-client
  address-family l2vpn evpn
    send-community
    send-community extended
    route-reflector-client
neighbor 10.102.0.5
  remote-as 100
  update-source loopback0
  address-family ipv4 unicast
  address-family ipv6 unicast
    send-community
    send-community extended
    route-reflector-client
  address-family l2vpn evpn
    send-community
    send-community extended
    route-reflector-client
neighbor 10.102.0.8
  remote-as 100
  update-source loopback0
  address-family ipv4 unicast
  address-family ipv6 unicast
  address-family ipv4 mvpn
    send-community
    send-community extended
    route-reflector-client
  address-family l2vpn evpn
    send-community
    send-community extended
    route-reflector-client
neighbor 10.102.0.9
  remote-as 100
  update-source loopback0
  address-family ipv4 unicast
  address-family ipv6 unicast
    send-community
    send-community extended
    route-reflector-client
  address-family l2vpn evpn
    send-community
    send-community extended
    route-reflector-client
neighbor 10.102.0.10
  remote-as 100
  update-source loopback0
  address-family ipv4 unicast
  address-family ipv6 unicast
    send-community
```

```

    send-community extended
    route-reflector-client
  address-family l2vpn evpn
    send-community
    send-community extended
    route-reflector-client
neighbor 10.133.133.133
  remote-as 100
  update-source loopback0
  address-family ipv4 unicast
  address-family ipv6 unicast
    send-community
send-community extended
  route-reflector-client
  address-family l2vpn evpn
    send-community
    send-community extended
    route-reflector-client

```

Grenzgateway-1-Konfiguration für Standort 1

```

S1-Bg1# show run
cfs ipv4 distribute
nv overlay evpn
feature ospf
feature bgp
feature pim
feature fabric forwarding
feature interface-vlan
feature vn-segment-vlan-based
feature lacp
feature nv overlay
evpn multisite border-gateway 100
  delay-restore time 300

fabric forwarding anycast-gateway-mac 0000.1111.2222

ip pim rp-address 10.102.0.2 group-list 224.0.0.0/4
ip pim ssm range 232.0.0.0/8

vlan 1,100,200,300-350,2001

vlan 100
  vn-segment 4000100
vlan 200
  vn-segment 4000200
vlan 301
  vn-segment 4000301
vlan 302
  vn-segment 4000302
vlan 303
  vn-segment 4000303
vlan 350
  name L3-VNI
  vn-segment 4000999
vlan 2001
  vn-segment 4000502

```

```
route-map REDIST-TO-SITE-EXT-DCI permit 10
  match tag 54321
route-map RETAIN-NEXT-HOP permit 10
  set ip next-hop unchanged

vrf context L3VNI4000999
  vni 4000999
  rd auto
  address-family ipv4 unicast
    route-target both auto
    route-target both auto evpn

vrf context vrf_1
  vni 4000501
  rd auto
  address-family ipv4 unicast
    route-target both auto
    route-target both auto evpn

vrf context vrf_2
  vni 4000502
  rd auto
  address-family ipv4 unicast
    route-target both auto
    route-target both auto evpn

interface Vlan100
  no shutdown
  mtu 9216
  vrf member vrf_2
  no ip redirects
  ip address 192.168.100.254/24
  no ipv6 redirects
  fabric forwarding mode anycast-gateway

interface Vlan200
  no shutdown
  mtu 9216
  vrf member vrf_2
  no ip redirects
  ip address 192.168.200.254/24
  no ipv6 redirects
  fabric forwarding mode anycast-gateway

interface Vlan301
  no shutdown
  mtu 9216
  vrf member vrf_1
  no ip redirects
  ip address 172.16.11.254/24
  no ipv6 redirects
  fabric forwarding mode anycast-gateway

interface Vlan302
  no shutdown
  mtu 9216
  vrf member vrf_1
  no ip redirects
  ip address 172.16.12.254/24
  no ipv6 redirects
  fabric forwarding mode anycast-gateway
```

```
interface Vlan303
    no shutdown
    mtu 9216
    vrf member vrf_1
    no ip redirects
    ip address 172.16.13.254/24
    no ipv6 redirects
    fabric forwarding mode anycast-gateway

interface Vlan2001
    no shutdown
    mtu 9000
    vrf member vrf_2
    no ip redirects
    ip forward
    ipv6 address use-link-local-only
    no ipv6 redirects

interface nve1
    no shutdown
    host-reachability protocol bgp
    source-interface loopback1
    multisite border-gateway interface loopback100
    member vni 4000100
        suppress-arp
        multisite ingress-replication
        mcast-group 231.0.0.1
    member vni 4000200
        suppress-arp
        multisite ingress-replication
        mcast-group 231.0.0.2
    member vni 4000502 associate-vrf

interface Ethernet1/1
    mtu 9216
    port-type fabric
    medium p2p
    ip address 192.168.15.12/24
    ip ospf network point-to-point
    ip router ospf 100 area 0.0.0.0
    ip pim sparse-mode
    no shutdown
    evpn multisite fabric-tracking

interface Ethernet1/3
    mtu 9216
    ip address 10.150.150.1/24 tag 54321
    ip router ospf 100 area 0.0.0.0
    no shutdown
    evpn multisite dci-tracking

interface loopback0
    ip address 10.31.1.1/32 tag 54321
    ip router ospf 100 area 0.0.0.0
    ip pim sparse-mode

interface loopback1
    ip address 10.133.133.133/32 tag 54321
    ip router ospf 100 area 0.0.0.0
    ip pim sparse-mode

interface loopback100
```

```
description "Multi-site VIP"
ip address 10.100.100.1/32 tag 54321
ip router ospf 100 area 0.0.0.0
ip pim sparse-mode
icam monitor scale

router ospf 100
  router-id 10.31.1.1
router bgp 100
  router-id 10.31.1.1
  log-neighbor-changes
  address-family ipv4 unicast
    redistribute direct route-map REDIST-TO-SITE-EXT-DCI
  address-family ipv4 mvpn
  address-family l2vpn evpn
  neighbor 10.32.1.1
    remote-as 300
    update-source loopback0
    ebgp-multipath 5
    peer-type fabric-external
    address-family ipv4 mvpn
      send-community
      send-community extended
      rewrite-rt-asn
    address-family l2vpn evpn
      send-community
      send-community extended
      rewrite-evpn-rt-asn
  neighbor 10.102.0.2
    remote-as 100
    update-source loopback0
    address-family ipv4 unicast
    address-family ipv6 unicast
    address-family ipv4 mvpn
      send-community
      send-community extended
    address-family l2vpn evpn
      send-community
      send-community extended
  neighbor 10.150.150.2
    remote-as 300
    address-family ipv4 unicast
evpn
  vni 4000100 12
    rd auto
    route-target import auto
    route-target export auto
  vni 4000200 12
    rd auto
    route-target import auto
    route-target export auto
  vni 4000301 12
    rd auto
    route-target import auto
    route-target export auto
  vni 4000302 12
    rd auto
    route-target import auto
    route-target export auto
  vni 4000303 12
    rd auto
    route-target import auto
```

```
route-target export auto
```

Grenzgateway-2-Konfiguration für Standort 1

```
S1_B2#
cfs ipv4 distribute
nv overlay evpn
feature ospf
feature bgp
feature pim
feature fabric forwarding
feature interface-vlan
feature vn-segment-vlan-based
feature lacp
feature nv overlay
evpn multisite border-gateway 100
  delay-restore time 300

fabric forwarding anycast-gateway-mac 0000.2222.4444

ip pim rp-address 10.102.0.2 group-list 224.0.0.0/4
ip pim ssm range 232.0.0.0/8

vlan 1,100,200,300-350,2001
vlan 100
  vn-segment 4000100
vlan 200
  vn-segment 4000200
vlan 301
  vn-segment 4000301
vlan 302
  vn-segment 4000302
vlan 303
  vn-segment 4000303
vlan 350
  name L3-VNI
  vn-segment 4000999
vlan 2001
  vn-segment 4000502

route-map REDIST-TO-SITE-EXT-DCI permit 10
  match tag 54321
route-map RETAIN-NEXT-HOP permit 10
  set ip next-hop unchanged

vrf context L3VNI4000999
  vni 4000999
  rd auto
  address-family ipv4 unicast
    route-target both auto
    route-target both auto evpn

vrf context vrf_1
  vni 4000501
  rd auto
  address-family ipv4 unicast
    route-target both auto
    route-target both auto evpn
```

```
vrf context vrf_2
  vni 4000502
  rd auto
  address-family ipv4 unicast
    route-target both auto
    route-target both auto evpn

interface Vlan100
  no shutdown
  mtu 9216
  vrf member vrf_2
  no ip redirects
  ip address 192.168.100.254/24
  no ipv6 redirects
  fabric forwarding mode anycast-gateway

interface Vlan200
  no shutdown
  mtu 9216
  vrf member vrf_2
  no ip redirects
  ip address 192.168.200.254/24
  no ipv6 redirects
  fabric forwarding mode anycast-gateway

interface Vlan301
  no shutdown
  mtu 9216
  vrf member vrf_1
  no ip redirects
  ip address 172.16.11.254/24
  no ipv6 redirects
  fabric forwarding mode anycast-gateway

interface Vlan302
  no shutdown
  mtu 9216
  vrf member vrf_1
  no ip redirects
  ip address 172.16.12.254/24
  no ipv6 redirects
  fabric forwarding mode anycast-gateway

interface Vlan303
  no shutdown
  mtu 9216
  vrf member vrf_1
  no ip redirects
  ip address 172.16.13.254/24
  no ipv6 redirects
  fabric forwarding mode anycast-gateway

interface Vlan2001
  no shutdown
  mtu 9000
  vrf member vrf_2
  no ip redirects
  ip forward
  ipv6 address use-link-local-only
  no ipv6 redirects
```

```

interface nve1
  no shutdown
  host-reachability protocol bgp
  source-interface loopback1
  multisite border-gateway interface loopback100
  member vni 4000100
    suppress-arp
    multisite ingress-replication
    mcast-group 231.0.0.1
  member vni 4000200
    suppress-arp
    multisite ingress-replication
    mcast-group 231.0.0.2
  member vni 4000502 associate-vrf

interface Ethernet1/1
  mtu 9216
  port-type fabric
  medium p2p
  ip address 192.168.16.12/24
  ip ospf network point-to-point
  ip router ospf 100 area 0.0.0.0
  ip pim sparse-mode
  no shutdown
  evpn multisite fabric-tracking

interface Ethernet1/3
  mtu 9216
  ip address 10.150.151.1/24 tag 54321
  ip router ospf 100 area 0.0.0.0
  no shutdown
  evpn multisite dci-tracking

interface loopback0
  ip address 10.31.1.2/32 tag 54321
  ip router ospf 100 area 0.0.0.0
  ip pim sparse-mode

interface loopback1
  ip address 10.134.134.134/32 tag 54321
  ip router ospf 100 area 0.0.0.0
  ip pim sparse-mode

interface loopback100
  description "Multi-site VIP"
  ip address 10.100.100.1/32 tag 54321
  ip router ospf 100 area 0.0.0.0
  ip pim sparse-mode
  icam monitor scale

router ospf 100
  router-id 10.31.1.2
router bgp 100
  router-id 10.31.1.2
  log-neighbor-changes
  address-family ipv4 unicast
    redistribute direct route-map REDIST-TO-SITE-EXT-DCI
  address-family ipv4 mvpn
  address-family l2vpn evpn
  neighbor 10.32.1.1
    remote-as 300
    update-source loopback0

```

```

ebgp-multipath 5
peer-type fabric-external
address-family ipv4 mvpn
  send-community
  send-community extended
  rewrite-rt-asn
address-family l2vpn evpn
  send-community
  send-community extended
  rewrite-evpn-rt-asn
neighbor 10.102.0.2
  remote-as 100
  update-source loopback0
  address-family ipv4 unicast
  address-family ipv6 unicast
    send-community
    send-community extended
  address-family l2vpn evpn
    send-community
    send-community extended
neighbor 10.150.151.2
  remote-as 300
  address-family ipv4 unicast
evpn
vni 4000100 12
  rd auto
  route-target import auto
  route-target export auto
vni 4000200 12
  rd auto
  route-target import auto
  route-target export auto
vni 4000301 12
  rd auto
  route-target import auto
  route-target export auto
vni 4000302 12
  rd auto
  route-target import auto
  route-target export auto
vni 4000303 12
  rd auto
  route-target import auto
  route-target export auto
S1_B2#

```

Router-Server

```

Router_Server#
nv overlay evpn
feature ospf
feature bgp
feature pim
feature interface-vlan

vlan 1

route-map REDIST-TO-SITE-EXT-DCI permit 10

```

```
match tag 54321
route-map RETAIN-NEXT-HOP permit 10
  set ip next-hop unchanged

interface Ethernet2/1
  no switchport
  ip address 10.150.150.2/24
  no shutdown

interface Ethernet2/2
  no switchport
  ip address 10.150.151.2/24
  no shutdown

interface Ethernet2/4
  no switchport
  ip address 10.150.152.2/24
  no shutdown

interface Ethernet2/5
  no switchport
  mtu 9216
  ip address 10.150.153.2/24
  no shutdown

interface loopback0
  ip address 10.32.1.1/32 tag 54321

router bgp 300
  router-id 10.32.1.1
  address-family ipv4 unicast
    redistribute direct route-map REDIST-T0-SITE-EXT-DCI
    maximum-paths 2
    retain route-target all
  address-family l2vpn evpn
    retain route-target all
  neighbor 10.31.1.1
    remote-as 100
    update-source loopback0
    ebgp-multipath 5
    address-family ipv4 unicast
      send-community
      send-community extended
      route-map RETAIN-NEXT-HOP out
      rewrite-rt-asn
    address-family l2vpn evpn
      send-community
      send-community extended
      route-map RETAIN-NEXT-HOP out
      rewrite-evpn-rt-asn
  neighbor 10.31.1.2
    remote-as 100
    update-source loopback0
    ebgp-multipath 5
    address-family ipv4 unicast
      send-community
      send-community extended
      route-map RETAIN-NEXT-HOP out
      rewrite-rt-asn
    address-family l2vpn evpn
      send-community
```

```

    send-community extended
    route-map RETAIN-NEXT-HOP out
    rewrite-evpn-rt-asn
neighbor 10.31.1.3
    remote-as 200
    update-source loopback0
    ebgp-multipath 5
    address-family ipv4 unicast
        send-community
        send-community extended
        route-map RETAIN-NEXT-HOP out
        rewrite-rt-asn
    address-family l2vpn evpn
        send-community
        send-community extended
        route-map RETAIN-NEXT-HOP out
        rewrite-evpn-rt-asn
neighbor 10.31.1.4
    remote-as 200
    update-source loopback0
    ebgp-multipath 5
    address-family ipv4 unicast
    address-family ipv4 mvpn
        send-community
        send-community extended
        route-map RETAIN-NEXT-HOP out
        rewrite-rt-asn
    address-family l2vpn evpn
        send-community
        send-community extended
        route-map RETAIN-NEXT-HOP out
        rewrite-evpn-rt-asn
neighbor 10.150.150.1
    remote-as 100
    address-family ipv4 unicast
neighbor 10.150.151.1
    remote-as 100
    address-family ipv4 unicast
neighbor 10.150.152.1
    remote-as 200
    address-family ipv4 unicast
neighbor 10.150.153.1
    remote-as 200
    address-family ipv4 unicast
Router_Server#

```

Konfiguration des Grenz-Gateways 1 von Standort 2

```

cfs ipv4 distribute
nv overlay evpn
feature ospf
feature bgp
feature pim
feature fabric forwarding
feature interface-vlan
feature vn-segment-vlan-based
feature lacp
feature nv overlay

```

```
evpn multisite border-gateway 200
fabric forwarding anycast-gateway-mac 0000.2222.4444
ip pim rp-address 10.103.0.3 group-list 224.0.0.0/4
ip pim ssm range 232.0.0.0/8

vlan 1,100,200,300-350,2000-2001
vlan 100
  vn-segment 4000100
vlan 200
  vn-segment 4000200
vlan 301
  vn-segment 4000301
vlan 302
  vn-segment 4000302
vlan 303
  vn-segment 4000303
vlan 350
  name L3-VNI
  vn-segment 4000999
vlan 2000
  vn-segment 2000
vlan 2001
  vn-segment 4000502

route-map REDIST-TO-SITE-EXT-DCI permit 10
  match tag 54321
route-map RETAIN-NEXT-HOP permit 10
  set ip next-hop unchanged

vrf context L3VNI4000999
  vni 4000999
  rd auto
  address-family ipv4 unicast
    route-target both auto
    route-target both auto evpn

vrf context vrf_1
  vni 4000501
  rd auto
  address-family ipv4 unicast
    route-target both auto
    route-target both auto evpn

vrf context vrf_2
  vni 4000502
  rd auto
  address-family ipv4 unicast
    route-target both auto
    route-target both auto evpn

interface Vlan100
  no shutdown
  mtu 9216
  vrf member vrf_2
  no ip redirects
  ip address 192.168.100.254/24
  no ipv6 redirects
  fabric forwarding mode anycast-gateway

interface Vlan200
```

```
no shutdown
mtu 9216
vrf member vrf_2
no ip redirects
ip address 192.168.200.254/24
no ipv6 redirects
fabric forwarding mode anycast-gateway

interface Vlan301
no shutdown
mtu 9216
vrf member vrf_1
no ip redirects
ip address 172.16.11.254/24
no ipv6 redirects
fabric forwarding mode anycast-gateway

interface Vlan302
no shutdown
mtu 9216
vrf member vrf_1
no ip redirects
ip address 172.16.12.254/24
no ipv6 redirects
fabric forwarding mode anycast-gateway

interface Vlan303
no shutdown
mtu 9216
vrf member vrf_1
no ip redirects
ip address 172.16.13.254/24
no ipv6 redirects
fabric forwarding mode anycast-gateway

interface Vlan2001
no shutdown
mtu 9000
vrf member vrf_2
no ip redirects
ip forward
ipv6 address use-link-local-only
no ipv6 redirects

interface nve1
no shutdown
host-reachability protocol bgp
source-interface loopback1
multisite border-gateway interface loopback100
member vni 4000100
    suppress-arp
    mcast-group 231.0.0.1
member vni 4000200
    suppress-arp
    mcast-group 231.0.0.2
member vni 4000502 associate-vrf

interface Ethernet1/1
mtu 9216
port-type fabric
medium p2p
ip address 192.168.17.12/24
```

```
ip ospf network point-to-point
ip router ospf 200 area 0.0.0.0
ip pim sparse-mode
no shutdown
evpn multisite fabric-tracking

interface Ethernet1/3
mtu 9216
ip address 10.150.152.1/24 tag 54321
ip router ospf 200 area 0.0.0.0
no shutdown
evpn multisite dci-tracking

interface loopback0
ip address 10.31.1.3/32 tag 54321
ip router ospf 200 area 0.0.0.0
ip pim sparse-mode

interface loopback1
ip address 10.135.135.135/32 tag 54321
ip router ospf 200 area 0.0.0.0
ip pim sparse-mode

interface loopback100
description "Multi-site VIP"
ip address 10.100.100.2/32 tag 54321
ip router ospf 200 area 0.0.0.0
ip pim sparse-mode
icam monitor scale

router ospf 200
router bgp 200
  router-id 10.31.1.3
  log-neighbor-changes
  address-family ipv4 unicast
    redistribute direct route-map REDIST-T0-SITE-EXT-DCI
  address-family l2vpn evpn
  neighbor 10.32.1.1
    remote-as 300
    update-source loopback0
    ebgp-multipath 5
    peer-type fabric-external
      send-community
      send-community extended
      rewrite-rt-asn
    address-family l2vpn evpn
      send-community
      send-community extended
      rewrite-evpn-rt-asn
  neighbor 10.103.0.3
    remote-as 200
    update-source loopback0
    address-family ipv4 unicast
    address-family ipv6 unicast
      send-community
      send-community extended
    address-family l2vpn evpn
      send-community
      send-community extended
  neighbor 10.150.152.2
    remote-as 300
    address-family ipv4 unicast
```

```

evpn
  vni 4000100 12
    rd auto
    route-target import auto
    route-target export auto
  vni 4000200 12
    rd auto
    route-target import auto
    route-target export auto
  vni 4000301 12
    rd auto
    route-target import auto
    route-target export auto
  vni 4000302 12
    rd auto
    route-target import auto
    route-target export auto
  vni 4000303 12
    rd auto
    route-target import auto
    route-target export auto

```

Konfiguration des Grenz-Gateways 2 von Standort 2

```

S2-BG2#
cfs ipv4 distribute
feature ngmvpn
nv overlay evpn
feature ospf
feature bgp
feature pim
feature fabric forwarding
feature interface-vlan
feature vn-segment-vlan-based
feature lacp
feature lldp
feature bfd
feature nv overlay
evpn multisite border-gateway 200
  delay-restore time 300

fabric forwarding anycast-gateway-mac 0000.2222.4444
ip pim rp-address 10.103.0.3 group-list 224.0.0.0/4
ip pim ssm range 232.0.0.0/8

vlan 1,100,200,301-303,350,2000-2001
vlan 100
  vn-segment 4000100
vlan 200
  vn-segment 4000200
vlan 301
  vn-segment 4000301
vlan 302
  vn-segment 4000302
vlan 303
  vn-segment 4000303
vlan 350
  name L3-VNI

```

```

vn-segment 4000999
vlan 2000
  vn-segment 2000
vlan 2001
  vn-segment 4000502

route-map REDIST-TO-SITE-EXT-DCI permit 10
  match tag 54321
route-map RETAIN-NEXT-HOP permit 10
  set ip next-hop unchanged

vrf context L3VNI4000999
  vni 4000999
  rd auto
  address-family ipv4 unicast
    route-target both auto
    route-target both auto evpn

vrf context vrf_1
  vni 4000501
  rd auto
  address-family ipv4 unicast
    route-target both auto
    route-target both auto evpn

vrf context vrf_2
  vni 4000502
  rd auto
  address-family ipv4 unicast
    route-target both auto
    route-target both auto evpn

```

```

interface Vlan100
  no shutdown
  mtu 9216
  vrf member vrf_2
  no ip redirects
  ip address 192.168.100.254/24
  no ipv6 redirects
  fabric forwarding mode anycast-gateway

interface Vlan200
  no shutdown
  mtu 9216
  vrf member vrf_2
  no ip redirects
  ip address 192.168.200.254/24
  no ipv6 redirects
  fabric forwarding mode anycast-gateway

interface Vlan301
  no shutdown
  mtu 9216
  vrf member vrf_1
  no ip redirects
  ip address 172.16.11.254/24
  no ipv6 redirects
  fabric forwarding mode anycast-gateway

```

```
interface Vlan302
  no shutdown
  mtu 9216
  vrf member vrf_1
  no ip redirects
  ip address 172.16.12.254/24
  no ipv6 redirects
  fabric forwarding mode anycast-gateway

interface Vlan303
  no shutdown
  mtu 9216
  vrf member vrf_1
  no ip redirects
  ip address 172.16.13.254/24
  no ipv6 redirects
  fabric forwarding mode anycast-gateway

interface Vlan2001
  no shutdown
  mtu 9000
  vrf member vrf_2
  no ip redirects
  ip forward
  ipv6 address use-link-local-only
  no ipv6 redirects

interface nve1
  no shutdown
  host-reachability protocol bgp
  source-interface loopback1
  multisite border-gateway interface loopback100
  member vni 4000100
    suppress-arp
    multisite ingress-replication
    mcast-group 231.0.0.1
  member vni 4000200
    suppress-arp
    multisite ingress-replication
    mcast-group 231.0.0.2
  member vni 4000502 associate-vrf

interface Ethernet1/1
  mtu 9216
  port-type fabric
  medium p2p
  ip address 192.168.18.12/24
  ip ospf network point-to-point
  ip router ospf 200 area 0.0.0.0
  ip pim sparse-mode
  no shutdown
  evpn multisite fabric-tracking

interface Ethernet1/3
  mtu 9216
  ip address 10.150.153.1/24 tag 54321
  ip router ospf 200 area 0.0.0.0
  no shutdown
  evpn multisite dci-tracking

interface loopback0
```

```
ip address 10.31.1.4/32 tag 54321
ip router ospf 200 area 0.0.0.0
ip pim sparse-mode

interface loopback1
    ip address 10.136.136.136/32 tag 54321
    ip router ospf 200 area 0.0.0.0
    ip pim sparse-mode

interface loopback100
    description "Multi-site VIP"
    ip address 10.100.100.2/32 tag 54321
    ip router ospf 200 area 0.0.0.0
    ip pim sparse-mode
    icam monitor scale

router ospf 200
router bgp 200
    router-id 10.31.1.4
    log-neighbor-changes
    address-family ipv4 unicast
        redistribute direct route-map REDIST-T0-SITE-EXT-DCI
    address-family l2vpn evpn
    neighbor 10.32.1.1
        remote-as 300
        update-source loopback0
        ebgp-multipath 5
        peer-type fabric-external
            send-community
            send-community extended
            rewrite-rt-asn
        address-family l2vpn evpn
            send-community
            send-community extended
            rewrite-evpn-rt-asn
    neighbor 10.103.0.3
        remote-as 200
        update-source loopback0
        address-family ipv4 unicast
        address-family ipv6 unicast
            send-community
            send-community extended
        address-family l2vpn evpn
            send-community
            send-community extended
    neighbor 10.150.153.2
        remote-as 300
        address-family ipv4 unicast
evpn
    vni 4000100 12
        rd auto
        route-target import auto
        route-target export auto
    vni 4000200 12
        rd auto
        route-target import auto
        route-target export auto
    vni 4000301 12
        rd auto
        route-target import auto
        route-target export auto
    vni 4000302 12
```

```

rd auto
route-target import auto
route-target export auto
vni 4000303 l2
rd auto
route-target import auto
route-target export auto
S2-BG2#

```

Standort 2 - Spine-1-Konfiguration

```

S2-Spine1#
feature nxapi
cfs ipv4 distribute
cfs eth distribute
nv overlay evpn
feature ospf
feature bgp
feature pim
feature fabric forwarding
feature interface-vlan
feature vn-segment-vlan-based
feature lacp
feature vpc
feature ngoam

ip pim rp-address 10.103.0.3 group-list 224.0.0.0/4
ip pim ssm range 232.0.0.0/8

interface Ethernet1/1
  mtu 9216
  medium p2p
  ip address 192.168.0.11/24
  ip ospf network point-to-point
  ip router ospf 200 area 0.0.0.0
  ip pim sparse-mode
  no shutdown

interface Ethernet1/2
  mtu 9216
  medium p2p
  ip address 192.168.1.11/24
  ip ospf network point-to-point
  ip router ospf 200 area 0.0.0.0
  ip pim sparse-mode
  no shutdown

interface Ethernet1/3
  mtu 9216
  medium p2p
  ip address 192.168.2.11/24
  ip ospf network point-to-point
  ip router ospf 200 area 0.0.0.0
  ip pim sparse-mode
  no shutdown

interface Ethernet1/4
  mtu 9216

```

```
medium p2p
ip address 192.168.3.11/24
ip ospf network point-to-point
ip router ospf 200 area 0.0.0.0
ip pim sparse-mode
no shutdown

interface Ethernet1/5
  mtu 9216
  medium p2p
  ip address 192.168.17.11/24
  ip ospf network point-to-point
  ip router ospf 200 area 0.0.0.0
  ip pim sparse-mode
  no shutdown

interface Ethernet1/6
  mtu 9216
  medium p2p
  ip address 192.168.18.11/24
  ip ospf network point-to-point
  ip router ospf 200 area 0.0.0.0
  ip pim sparse-mode
  no shutdown

interface loopback0
  description "anycast RP address"
  ip address 10.103.0.3/32
  ip router ospf 200 area 0.0.0.0
  ip pim sparse-mode
  icam monitor scale

router ospf 200
  router-id 10.202.0.3
router bgp 200
  router-id 10.103.0.3
  log-neighbor-changes
  address-family ipv4 unicast
  address-family ipv6 unicast
  address-family ipv4 mvpn
  address-family l2vpn evpn
  neighbor 10.31.1.3
    remote-as 200
    update-source loopback0
    address-family ipv4 unicast
    address-family ipv6 unicast
      send-community
      send-community extended
    address-family l2vpn evpn
      send-community
      send-community extended
  neighbor 10.31.1.4
    remote-as 200
    update-source loopback0
    address-family ipv4 unicast
    address-family ipv6 unicast
      send-community
      send-community extended
    address-family l2vpn evpn
      send-community
      send-community extended
  neighbor 10.103.0.5
```

```

remote-as 200
update-source loopback0
address-family ipv4 unicast
address-family ipv6 unicast
  send-community
  send-community extended
  route-reflector-client
address-family l2vpn evpn
  send-community
  send-community extended
  route-reflector-client
neighbor 10.103.0.8
  remote-as 200
  update-source loopback0
  address-family ipv4 unicast
  address-family ipv6 unicast
    send-community
    send-community extended
    route-reflector-client
  address-family l2vpn evpn
    send-community
    send-community extended
    route-reflector-client
neighbor 10.103.0.9
  remote-as 200
  update-source loopback0
  address-family ipv4 unicast
  address-family ipv6 unicast
  address-family ipv4 mvpn
    send-community
    send-community extended
    route-reflector-client
  address-family l2vpn evpn
    send-community
    send-community extended
    route-reflector-client
neighbor 10.103.0.10
  remote-as 200
  update-source loopback0
  address-family ipv4 unicast
  address-family ipv6 unicast
  address-family ipv4 mvpn
    send-community
    send-community extended
    route-reflector-client
  address-family l2vpn evpn
    send-community
    send-community extended
    route-reflector-client

```

S2-Spine1#

Leaf-1-Konfiguration für Standort 2

```

feature nxapi
cfs ipv4 distribute
nv overlay evpn
feature ospf
feature bgp

```

```
feature pim
feature fabric forwarding
feature interface-vlan
feature vn-segment-vlan-based
feature lacp
feature vpc
feature nv overlay

fabric forwarding anycast-gateway-mac 0000.1111.2222
ip pim rp-address 10.103.0.3 group-list 224.0.0.0/4
ip pim ssm range 232.0.0.0/8

vlan 1,100,200,300-350,2001
vlan 100
    vn-segment 4000100
vlan 200
    vn-segment 4000200
vlan 301
    vn-segment 4000301
vlan 302
    vn-segment 4000302
vlan 303
    vn-segment 4000303
vlan 350
    name L3-VNI
    vn-segment 4000999
vlan 2001
    vn-segment 4000502

route-map DIRECT permit 10
    match tag 12345
route-map DIRECT deny 90
vrf context L3VNI4000999
    vni 4000999
    rd auto
    address-family ipv4 unicast
        route-target both auto
        route-target both auto evpn

vrf context vrf_1
    vni 4000501
    rd auto
    address-family ipv4 unicast
        route-target both auto
        route-target both auto evpn

vrf context vrf_2
    vni 4000502
    rd auto
    address-family ipv4 unicast
        route-target both auto
        route-target both auto evpn

vpc domain 100
    peer-switch
    peer-keepalive destination 10.197.214.63
    virtual peer-link destination 10.103.1.9 source 10.103.1.8 dscp 56
    delay restore 150
    peer-gateway
        ip arp synchronize
```

```
interface Vlan100
    no shutdown
    mtu 9216
    vrf member vrf_2
    no ip redirects
    ip address 192.168.100.254/24
    no ipv6 redirects
    fabric forwarding mode anycast-gateway

interface Vlan200
    no shutdown
    mtu 9216
    vrf member vrf_2
    no ip redirects
    ip address 192.168.200.254/24
    no ipv6 redirects
    fabric forwarding mode anycast-gateway

interface Vlan301
    no shutdown
    mtu 9216
    vrf member vrf_1
    no ip redirects
    ip address 172.16.11.254/24
    no ipv6 redirects
    fabric forwarding mode anycast-gateway

interface Vlan302
    no shutdown
    mtu 9216
    vrf member vrf_1
    no ip redirects
    ip address 172.16.12.254/24
    no ipv6 redirects
    fabric forwarding mode anycast-gateway

interface Vlan303
    no shutdown
    mtu 9216
    vrf member vrf_1
    no ip redirects
    ip address 172.16.13.254/24
    no ipv6 redirects
    fabric forwarding mode anycast-gateway

interface Vlan2001
    no shutdown
    mtu 9000
    vrf member vrf_2
    no ip redirects
    ip forward
    ipv6 address use-link-local-only
    no ipv6 redirects

interface port-channel10
    switchport
    switchport mode trunk
    switchport trunk allowed vlan 100,200,300-500
    spanning-tree port type network
```

```
vpc peer-link

interface port-channel100
switchport
switchport mode trunk
switchport trunk allowed vlan 100,200,300-305
mtu 9216
vpc 100

interface nve1
no shutdown
host-reachability protocol bgp
advertise virtual-rmac
source-interface loopback1
member vni 4000100
    suppress-arp
    mcast-group 231.0.0.1
member vni 4000200
    suppress-arp
    mcast-group 231.0.0.2
member vni 4000502 associate-vrf

interface Ethernet1/1
switchport
switchport mode trunk
switchport trunk allowed vlan 100,200,300-305
mtu 9216
channel-group 100
no shutdown

interface Ethernet1/2
mtu 9216
port-type fabric
medium p2p
ip address 192.168.0.12/24
ip ospf network point-to-point
ip router ospf 100 area 0.0.0.0
ip pim sparse-mode
no shutdown

interface loopback0
ip address 10.103.0.5/32
ip router ospf 100 area 0.0.0.0
ip pim sparse-mode

interface loopback1
ip address 10.103.1.8/32
ip address 10.103.201.201/32 secondary
ip router ospf 100 area 0.0.0.0
ip pim sparse-mode
icam monitor scale

router ospf 100
router-id 10.102.0.5
router bgp 200
router-id 10.103.0.5
log-neighbor-changes
address-family ipv4 mvpn
address-family l2vpn evpn
    advertise-pip
neighbor 10.103.0.2
    remote-as 200
```

```

update-source loopback0
address-family ipv4 unicast
address-family ipv6 unicast
  send-community
  send-community extended
address-family l2vpn evpn
  send-community
  send-community extended
neighbor 10.103.0.3
  remote-as 200
  update-source loopback0
  address-family ipv4 unicast
  address-family ipv6 unicast
    send-community
    send-community extended
  address-family l2vpn evpn
    send-community
    send-community extended
evpn
  vni 4000100 12
    rd auto
    route-target import auto
    route-target export auto
  vni 4000200 12
    rd auto
    route-target import auto
    route-target export auto
  vni 4000301 12
    rd auto
    route-target import auto
    route-target export auto
  vni 4000302 12
    rd auto
    route-target import auto
    route-target export auto
  vni 4000303 12
    rd auto
    route-target import auto
    route-target export auto

```

Leaf-2-Konfiguration für Standort 2

```

S2-Leaf2#
feature nxapi
cfs ipv4 distribute
nv overlay evpn
feature ospf
feature bgp
feature pim
feature fabric forwarding
feature interface-vlan
feature vn-segment-vlan-based
feature lacp
feature vpc
feature nv overlay

fabric forwarding anycast-gateway-mac 0000.1111.2222
ip pim rp-address 10.103.0.3 group-list 224.0.0.0/4

```

```

ip pim ssm range 232.0.0.0/8

vlan 1,100,200,300-350,2001
vlan 100
  vn-segment 4000100
vlan 200
  vn-segment 4000200
vlan 301
  vn-segment 4000301
vlan 302
  vn-segment 4000302
vlan 303
  vn-segment 4000303
vlan 350
  name L3-VNI
  vn-segment 4000999
vlan 2001
  vn-segment 4000502

vrf context L3VNI4000999
  vni 4000999
  rd auto
  address-family ipv4 unicast
    route-target both auto
    route-target both auto evpn

vrf context vrf_1
  vni 4000501
  rd auto
  address-family ipv4 unicast
    route-target both auto
    route-target both auto evpn

vrf context vrf_2
  vni 4000502
  rd auto
  address-family ipv4 unicast
    route-target both auto
    route-target both auto evpn

vpc domain 100
  peer-switch
  peer-keepalive destination 10.197.214.62
  virtual peer-link destination 10.103.1.8 source 10.103.1.9 dscp 56
  delay restore 150
  peer-gateway
  ip arp synchronize

interface Vlan100
  no shutdown
  mtu 9216
  vrf member vrf_2
  no ip redirects
  ip address 192.168.100.254/24
  no ipv6 redirects
  fabric forwarding mode anycast-gateway

interface Vlan200

```

```
no shutdown
mtu 9216
vrf member vrf_2
no ip redirects
ip address 192.168.200.254/24
no ipv6 redirects
fabric forwarding mode anycast-gateway

interface Vlan301
no shutdown
mtu 9216
vrf member vrf_1
no ip redirects
ip address 172.16.11.254/24
no ipv6 redirects
fabric forwarding mode anycast-gateway

interface Vlan302
no shutdown
mtu 9216
vrf member vrf_1
no ip redirects
ip address 172.16.12.254/24
no ipv6 redirects
fabric forwarding mode anycast-gateway

interface Vlan303
no shutdown
mtu 9216
vrf member vrf_1
no ip redirects
ip address 172.16.13.254/24
no ipv6 redirects
fabric forwarding mode anycast-gateway

interface Vlan2001
no shutdown
mtu 9000
vrf member vrf_2
no ip redirects
ip forward
ipv6 address use-link-local-only
no ipv6 redirects

interface port-channel10
switchport
switchport mode trunk
switchport trunk allowed vlan 100,200,300-500
spanning-tree port type network
vpc peer-link

interface port-channel100
switchport
switchport mode trunk
switchport trunk allowed vlan 100,200,300-305
mtu 9216
vpc 100

interface nve1
no shutdown
host-reachability protocol bgp
advertise virtual-rmac
```

```
source-interface loopback1
member vni 4000100
  suppress-arp
  mcast-group 231.0.0.1
member vni 4000200
  suppress-arp
  mcast-group 231.0.0.2
member vni 4000502 associate-vrf

interface Ethernet1/1
switchport
switchport mode trunk
switchport trunk allowed vlan 100,200,300-305
mtu 9216
channel-group 100
no shutdown

interface Ethernet1/2
mtu 9216
port-type fabric
medium p2p
ip address 192.168.1.12/24
ip ospf network point-to-point
ip router ospf 100 area 0.0.0.0
ip pim sparse-mode
no shutdown

interface loopback0
ip address 10.103.0.8/32
ip router ospf 100 area 0.0.0.0
ip pim sparse-mode

interface loopback1
ip address 10.103.1.9/32
ip address 10.103.201.201/32 secondary
ip router ospf 100 area 0.0.0.0
ip pim sparse-mode
icam monitor scale

router ospf 100
  router-id 10.102.0.8
router bgp 200
  router-id 10.103.0.8
  log-neighbor-changes
  address-family l2vpn evpn
    advertise-pip
  neighbor 10.103.0.2
    remote-as 200
    update-source loopback0
    address-family ipv4 unicast
    address-family ipv6 unicast
      send-community
      send-community extended
    address-family l2vpn evpn
      send-community
      send-community extended
  neighbor 10.103.0.3
    remote-as 200
    update-source loopback0
    address-family ipv4 unicast
    address-family ipv6 unicast
    address-family ipv4 mvpn
```

```

    send-community
    send-community extended
  address-family l2vpn evpn
    send-community
    send-community extended
evpn
  vni 4000100 12
    rd auto
    route-target import auto
    route-target export auto
  vni 4000200 12
    rd auto
    route-target import auto
    route-target export auto
  vni 4000301 12
    rd auto
    route-target import auto
    route-target export auto
  vni 4000302 12
    rd auto
    route-target import auto
    route-target export auto
  vni 4000303 12
    rd auto
    route-target import auto
    route-target export auto
S2-Leaf2#

```

Leaf-3-Konfiguration für Standort 2

```

S2-leaf3#
feature nxapi
cfs ipv4 distribute
nv overlay evpn
feature ospf
feature bgp
feature pim
feature fabric forwarding
feature interface-vlan
feature vn-segment-vlan-based
feature lacp
feature vpc
feature nv overlay

fabric forwarding anycast-gateway-mac 0000.1111.2222
ip pim rp-address 10.103.0.3 group-list 224.0.0.0/4
ip pim ssm range 232.0.0.0/8

vlan 1,100,200,300-350,2001
vlan 100
  vn-segment 4000100
vlan 200
  vn-segment 4000200
vlan 301
  vn-segment 4000301
vlan 302
  vn-segment 4000302
vlan 303

```

```

vn-segment 4000303
vlan 350
  name L3-VNI
  vn-segment 4000999
vlan 2001
  vn-segment 4000502

vrf context L3VNI4000999
  vni 4000999
  rd auto
  address-family ipv4 unicast
    route-target both auto
    route-target both auto evpn

vrf context vrf_1
  vni 4000501
  rd auto
  address-family ipv4 unicast
    route-target both auto
    route-target both auto evpn

vrf context vrf_2
  vni 4000502
  rd auto
  address-family ipv4 unicast
    route-target both auto
    route-target both auto evpn

vpc domain 100
  peer-switch
  peer-keepalive destination 10.197.214.65
  virtual peer-link destination 10.103.1.6 source 10.103.1.10 dscp 56
  delay restore 150
  peer-gateway
  ip arp synchronize

```

```

interface Vlan100
  no shutdown
  mtu 9216
  vrf member vrf_2
  no ip redirects
  ip address 192.168.100.254/24
  no ipv6 redirects
  fabric forwarding mode anycast-gateway

```

```

interface Vlan200
  no shutdown
  mtu 9216
  vrf member vrf_2
  no ip redirects
  ip address 192.168.200.254/24
  no ipv6 redirects
  fabric forwarding mode anycast-gateway

```

```

interface Vlan301
  no shutdown
  mtu 9216
  vrf member vrf_1

```

```
no ip redirects
ip address 172.16.11.254/24
no ipv6 redirects
fabric forwarding mode anycast-gateway

interface Vlan302
no shutdown
mtu 9216
vrf member vrf_1
no ip redirects
ip address 172.16.12.254/24
no ipv6 redirects
fabric forwarding mode anycast-gateway

interface Vlan303
no shutdown
mtu 9216
vrf member vrf_1
no ip redirects
ip address 172.16.13.254/24
no ipv6 redirects
fabric forwarding mode anycast-gateway

interface Vlan2001
no shutdown
mtu 9000
vrf member vrf_2
no ip redirects
ip forward
ipv6 address use-link-local-only
no ipv6 redirects

interface port-channel10
switchport
switchport mode trunk
switchport trunk allowed vlan 100,200,300-500
spanning-tree port type network
vpc peer-link

interface port-channel100
switchport
switchport mode trunk
switchport trunk allowed vlan 100,200,300-305
mtu 9216
vpc 100

interface nve1
no shutdown
host-reachability protocol bgp
advertise virtual-rmac
source-interface loopback1
member vni 4000100
suppress-arp
mcast-group 231.0.0.1
member vni 4000200
suppress-arp
mcast-group 231.0.0.2
member vni 4000502 associate-vrf

interface Ethernet1/2
mtu 9216
port-type fabric
```

```
medium p2p
ip address 192.168.2.12/24
ip ospf network point-to-point
ip router ospf 100 area 0.0.0.0
ip pim sparse-mode
no shutdown

interface Ethernet1/23
switchport
switchport mode trunk
switchport trunk allowed vlan 100,200,300-305
mtu 9216
channel-group 100
no shutdown

interface Ethernet1/24
switchport
switchport mode trunk
switchport trunk allowed vlan 100,200,300-305
mtu 9216
channel-group 100
no shutdown

interface loopback0
ip address 10.103.0.9/32
ip router ospf 100 area 0.0.0.0
ip pim sparse-mode

interface loopback1
ip address 10.103.1.10/32
ip address 10.103.202.202/32 secondary
ip router ospf 100 area 0.0.0.0
ip pim sparse-mode
icam monitor scale

router ospf 100
router-id 10.102.0.9
router bgp 200
router-id 10.103.0.9
log-neighbor-changes
address-family ipv4 mvpn
address-family l2vpn evpn
advertise-pip
neighbor 10.103.0.2
remote-as 200
update-source loopback0
address-family ipv4 unicast
address-family ipv6 unicast
address-family ipv4 mvpn
send-community
send-community extended
address-family l2vpn evpn
send-community
send-community extended
neighbor 10.103.0.3
remote-as 200
update-source loopback0
address-family ipv4 unicast
address-family ipv6 unicast
send-community
send-community extended
address-family l2vpn evpn
```

```

    send-community
    send-community extended
evpn
vni 4000100 12
    rd auto
    route-target import auto
    route-target export auto
vni 4000200 12
    rd auto
    route-target import auto
    route-target export auto
vni 4000301 12
    rd auto
    route-target import auto
    route-target export auto
vni 4000302 12
    rd auto
    route-target import auto
    route-target export auto
vni 4000303 12
    rd auto
    route-target import auto
    route-target export auto

```

Leaf-4-Konfiguration für Standort 2

```

S2-Leaf4#
feature nxapi
cfs ipv4 distribute
nv overlay evpn
feature ospf
feature bgp
feature pim
feature fabric forwarding
feature interface-vlan
feature vn-segment-vlan-based
feature lacp
feature vpc
feature nv overlay

fabric forwarding anycast-gateway-mac 0000.1111.2222
ip pim rp-address 10.103.0.3 group-list 224.0.0.0/4
ip pim ssm range 232.0.0.0/8

vlan 1,100,200,300-350,2001
vlan 100
    vn-segment 4000100
vlan 200
    vn-segment 4000200
vlan 301
    vn-segment 4000301
vlan 302
    vn-segment 4000302
vlan 303
    vn-segment 4000303
vlan 350
    name L3-VNI
    vn-segment 4000999

```

```

vlan 2001
  vn-segment 4000502

vrf context L3VNI4000999
  vni 4000999
  rd auto
  address-family ipv4 unicast
    route-target both auto
    route-target both auto evpn

vrf context vrf_1
  vni 4000501
  rd auto
  address-family ipv4 unicast
    route-target both auto
    route-target both auto evpn

vrf context vrf_2
  vni 4000502
  rd auto
  address-family ipv4 unicast
    route-target both auto
    route-target both auto evpn

vpc domain 100
  peer-switch
  peer-keepalive destination 10.197.214.64
  virtual peer-link destination 10.103.1.10 source 10.103.1.6 dscp 56
  delay restore 150
  peer-gateway
  ip arp synchronize

```

```

interface Vlan100
  no shutdown
  mtu 9216
  vrf member vrf_2
  no ip redirects
  ip address 192.168.100.254/24
  no ipv6 redirects
  fabric forwarding mode anycast-gateway

```

```

interface Vlan200
  no shutdown
  mtu 9216
  vrf member vrf_2
  no ip redirects
  ip address 192.168.200.254/24
  no ipv6 redirects
  fabric forwarding mode anycast-gateway

```

```

interface Vlan301
  no shutdown
  mtu 9216
  vrf member vrf_1
  no ip redirects
  ip address 172.16.11.254/24
  no ipv6 redirects
  fabric forwarding mode anycast-gateway

```

```
interface Vlan302
    no shutdown
    mtu 9216
    vrf member vrf_1
    no ip redirects
    ip address 172.16.12.254/24
    no ipv6 redirects
    fabric forwarding mode anycast-gateway

interface Vlan303
    no shutdown
    mtu 9216
    vrf member vrf_1
    no ip redirects
    ip address 172.16.13.254/24
    no ipv6 redirects
    fabric forwarding mode anycast-gateway

interface Vlan2001
    no shutdown
    mtu 9000
    vrf member vrf_2
    no ip redirects
    ip forward
    ipv6 address use-link-local-only
    no ipv6 redirects

interface port-channel10
    switchport
    switchport mode trunk
    switchport trunk allowed vlan 100,200,300-500
    spanning-tree port type network
    vpc peer-link

interface port-channel100
    switchport
    switchport mode trunk
    switchport trunk allowed vlan 100,200,300-305
    mtu 9216
    vpc 100

interface nve1
    no shutdown
    host-reachability protocol bgp
    advertise virtual-rmac
    source-interface loopback1
    member vni 4000100
        suppress-arp
        mcast-group 231.0.0.1
    member vni 4000200
        suppress-arp
        mcast-group 231.0.0.2
    member vni 4000502 associate-vrf

interface Ethernet1/2
    mtu 9216
    port-type fabric
    medium p2p
    ip address 192.168.3.12/24
    ip ospf network point-to-point
    ip router ospf 100 area 0.0.0.0
```

```
ip pim sparse-mode
no shutdown

interface Ethernet1/23
switchport
switchport mode trunk
switchport trunk allowed vlan 100,200,300-305
mtu 9216
channel-group 100
no shutdown

interface Ethernet1/24
switchport
switchport mode trunk
switchport trunk allowed vlan 100,200,300-305
mtu 9216
channel-group 100
no shutdown

interface loopback0
ip address 10.103.0.10/32
ip router ospf 100 area 0.0.0.0
ip pim sparse-mode

interface loopback1
ip address 10.103.1.6/32
ip address 10.103.202.202/32 secondary
ip router ospf 100 area 0.0.0.0
ip pim sparse-mode
icam monitor scale

router ospf 100
router-id 10.102.0.10
router bgp 200
router-id 10.102.0.10
log-neighbor-changes
address-family l2vpn evpn
advertise-pip
neighbor 10.103.0.2
remote-as 200
update-source loopback0
address-family ipv4 unicast
address-family ipv6 unicast
address-family ipv4 mvpn
send-community
send-community extended
address-family l2vpn evpn
send-community
send-community extended
neighbor 10.103.0.3
remote-as 200
update-source loopback0
address-family ipv4 unicast
address-family ipv6 unicast
send-community
send-community extended
address-family l2vpn evpn
send-community
send-community extended
evpn
vni 4000100 12
rd auto
```

```

route-target import auto
route-target export auto
vni 4000200 12
rd auto
route-target import auto
route-target export auto
vni 4000301 12
rd auto
route-target import auto
route-target export auto
vni 4000302 12
rd auto
route-target import auto
route-target export auto
vni 4000303 12
rd auto
route-target import auto
route-target export auto
S2-Leaf4#

```

Überprüfung

Nutzen Sie diesen Abschnitt, um zu überprüfen, ob Ihre Konfiguration ordnungsgemäß funktioniert.

Der [Cisco CLI Analyzer](#) (nur registrierte Kunden) unterstützt bestimmte `show`-Befehlen. Verwenden Sie den Cisco CLI Analyzer, um eine Analyse von `show` Befehlsausgabe.

```

<#root>

Host2#
show ip int brief

IP Interface Status for VRF "default"(1)
Interface          IP Address      Interface Status
Vlan100            192.168.100.102 protocol-up/link-up/admin-up
Vlan200            192.168.200.102 protocol-up/link-up/admin-up
Lo100              10.2.3.4        protocol-up/link-up/admin-up
Host2#
Host2#

```

```

<#root>

Host2#
ping 192.168.200.103

PING 192.168.200.103 (192.168.200.103): 56 data bytes
64 bytes from 192.168.200.103: icmp_seq=0 ttl=254 time=1.21 ms
64 bytes from 192.168.200.103: icmp_seq=1 ttl=254 time=0.627 ms
64 bytes from 192.168.200.103: icmp_seq=2 ttl=254 time=0.74 ms
64 bytes from 192.168.200.103: icmp_seq=3 ttl=254 time=0.737 ms
64 bytes from 192.168.200.103: icmp_seq=4 ttl=254 time=0.542 ms
--- 192.168.200.103 ping statistics ---
5 packets transmitted, 5 packets received, 0.00% packet loss

```

```
round-trip min/avg/max = 0.542/0.771/1.21 ms
Host2#
Host2#
Host2#
ping 192.168.100.103

PING 192.168.100.103 (192.168.100.103): 56 data bytes
64 bytes from 192.168.100.103: icmp_seq=0 ttl=254 time=1.195 ms
64 bytes from 192.168.100.103: icmp_seq=1 ttl=254 time=0.613 ms
64 bytes from 192.168.100.103: icmp_seq=2 ttl=254 time=0.575 ms
64 bytes from 192.168.100.103: icmp_seq=3 ttl=254 time=0.522 ms
64 bytes from 192.168.100.103: icmp_seq=4 ttl=254 time=0.534 ms
--- 192.168.100.103 ping statistics ---
5 packets transmitted, 5 packets received, 0.00% packet loss
round-trip min/avg/max = 0.522/0.687/1.195 ms
Host2#
Host2#
Host2#
ping 192.168.100.100

PING 192.168.100.100 (192.168.100.100): 56 data bytes
64 bytes from 192.168.100.100: icmp_seq=0 ttl=254 time=1.029 ms
64 bytes from 192.168.100.100: icmp_seq=1 ttl=254 time=0.561 ms
64 bytes from 192.168.100.100: icmp_seq=2 ttl=254 time=0.579 ms
64 bytes from 192.168.100.100: icmp_seq=3 ttl=254 time=0.511 ms
64 bytes from 192.168.100.100: icmp_seq=4 ttl=254 time=0.496 ms
--- 192.168.100.100 ping statistics ---
5 packets transmitted, 5 packets received, 0.00% packet loss
round-trip min/avg/max = 0.496/0.635/1.029 ms
Host2#
Host2#
Host2#
ping 192.168.200.100

PING 192.168.200.100 (192.168.200.100): 56 data bytes
64 bytes from 192.168.200.100: icmp_seq=0 ttl=254 time=1.263 ms
64 bytes from 192.168.200.100: icmp_seq=1 ttl=254 time=0.816 ms
64 bytes from 192.168.200.100: icmp_seq=2 ttl=254 time=0.735 ms
64 bytes from 192.168.200.100: icmp_seq=3 ttl=254 time=0.659 ms
64 bytes from 192.168.200.100: icmp_seq=4 ttl=254 time=0.634 ms
--- 192.168.200.100 ping statistics ---
5 packets transmitted, 5 packets received, 0.00% packet loss
round-trip min/avg/max = 0.634/0.821/1.263 ms
Host2#
```

<#root>

```
HOST_3(config)#
HOST_3(config)#
ping 192.168.100.100

PING 192.168.100.100 (192.168.100.100): 56 data bytes
64 bytes from 192.168.100.100: icmp_seq=0 ttl=254 time=1.319 ms
64 bytes from 192.168.100.100: icmp_seq=1 ttl=254 time=0.77 ms
```

```

64 bytes from 192.168.100.100: icmp_seq=2 ttl=254 time=0.505 ms
64 bytes from 192.168.100.100: icmp_seq=3 ttl=254 time=0.542 ms
64 bytes from 192.168.100.100: icmp_seq=4 ttl=254 time=0.486 ms
--- 192.168.100.100 ping statistics ---
5 packets transmitted, 5 packets received, 0.00% packet loss
round-trip min/avg/max = 0.486/0.724/1.319 ms
HOST_3(config)#

HOST_3(config)#
ping 192.168.100.102

PING 192.168.100.102 (192.168.100.102): 56 data bytes
64 bytes from 192.168.100.102: icmp_seq=0 ttl=254 time=1.304 ms
64 bytes from 192.168.100.102: icmp_seq=1 ttl=254 time=0.853 ms
64 bytes from 192.168.100.102: icmp_seq=2 ttl=254 time=0.845 ms
64 bytes from 192.168.100.102: icmp_seq=3 ttl=254 time=0.564 ms
64 bytes from 192.168.100.102: icmp_seq=4 ttl=254 time=0.55 ms
--- 192.168.100.102 ping statistics ---
5 packets transmitted, 5 packets received, 0.00% packet loss
round-trip min/avg/max = 0.55/0.823/1.304 ms
HOST_3(config)#
HOST_3(config)#
HOST_3(config)#

ping 192.168.200.102

PING 192.168.200.102 (192.168.200.102): 56 data bytes
64 bytes from 192.168.200.102: icmp_seq=0 ttl=254 time=0.997 ms
64 bytes from 192.168.200.102: icmp_seq=1 ttl=254 time=0.766 ms
64 bytes from 192.168.200.102: icmp_seq=2 ttl=254 time=0.84 ms
64 bytes from 192.168.200.102: icmp_seq=3 ttl=254 time=0.734 ms
64 bytes from 192.168.200.102: icmp_seq=4 ttl=254 time=0.592 ms
--- 192.168.200.102 ping statistics ---
5 packets transmitted, 5 packets received, 0.00% packet loss
round-trip min/avg/max = 0.592/0.785/0.997 ms
HOST_3(config)#

HOST_3(config)#
ping 192.168.200.100

PING 192.168.200.100 (192.168.200.100): 56 data bytes
36 bytes from 192.168.200.103: Destination Host Unreachable
Request 0 timed out
64 bytes from 192.168.200.100: icmp_seq=1 ttl=254 time=1.376 ms
64 bytes from 192.168.200.100: icmp_seq=2 ttl=254 time=0.806 ms
64 bytes from 192.168.200.100: icmp_seq=3 ttl=254 time=0.77 ms
64 bytes from 192.168.200.100: icmp_seq=4 ttl=254 time=0.793 ms
--- 192.168.200.100 ping statistics ---
5 packets transmitted, 4 packets received, 20.00% packet loss
round-trip min/avg/max = 0.77/0.936/1.376 ms
HOST_3(config)#

```

Fehlerbehebung

In diesem Abschnitt finden Sie Informationen zur Behebung von Fehlern in Ihrer Konfiguration.

Der [Cisco CLI Analyzer](#) (nur registrierte Kunden) unterstützt bestimmte `show`-Befehlen. Verwenden Sie den Cisco CLI Analyzer, um eine Analyse von `show`-Befehlausgabe.

```
<#root>

Host2#
show ip arp

Flags: * - Adjacencies learnt on non-active FHRP router
      + - Adjacencies synced via CFSoE
      # - Adjacencies Throttled for Glean
      CP - Added via L2RIB, Control plane Adjacencies
      PS - Added via L2RIB, Peer Sync
      RO - Re-Originated Peer Sync Entry
      D - Static Adjacencies attached to down interface
IP ARP Table for context default
Total number of entries: 8
Address          Age      MAC Address      Interface      Flags
192.168.100.100 00:06:52 6c8b.d3ff.00a7  Vlan100
192.168.100.103 00:07:54 6c8b.d3fe.ecb5  Vlan100
192.168.100.104 00:07:01  6c8b.d3fe.df3b  Vlan100
192.168.100.254 00:08:01  0000.1111.2222  Vlan100
192.168.200.100 00:14:46  6c8b.d3ff.00a7  Vlan200
192.168.200.103 00:07:07  6c8b.d3fe.ecb5  Vlan200
192.168.200.104 00:07:31  6c8b.d3fe.df3b  Vlan200
192.168.200.254 00:07:07  0000.1111.2222  Vlan200
```

```
Host2#
Host2#
```

```
show mac address-table
```

Legend:

* - primary entry, G - Gateway MAC, (R) - Routed MAC, O - Overlay MAC
age - seconds since last seen,+ - primary entry using vPC Peer-Link,
(T) - True, (F) - False, C - ControlPlane MAC, ~ - vsan

VLAN	MAC Address	Type	age	Secure	NTFY	Ports	
*	0000.1111.2222	dynamic	0	F	F	Po2	
*	6c8b.d3fe.df3b	dynamic	0	F	F	Po2	
*	6c8b.d3fe.ecb5	dynamic	0	F	F	Po2	
*	6c8b.d3ff.00a7	dynamic	0	F	F	Po2	
*	200	0000.1111.2222	dynamic	0	F	F	Po2
*	6c8b.d3fe.df3b	dynamic	0	F	F	Po2	
*	6c8b.d3fe.ecb5	dynamic	0	F	F	Po2	
*	6c8b.d3ff.00a7	dynamic	0	F	F	Po2	
G	-	6c8b.d3fe.ff09	static	-	F	F	sup-eth1(R)
G	100	6c8b.d3fe.ff09	static	-	F	F	sup-eth1(R)
G	200	6c8b.d3fe.ff09	static	-	F	F	sup-eth1(R)

```
Host2#
Host2#
```

```
<#root>
```

```
HOST_3(config)#
show ip arp
```

```

Flags: * - Adjacencies learnt on non-active FHRP router
      + - Adjacencies synced via CFSoE
      # - Adjacencies Throttled for Glean
      CP - Added via L2RIB, Control plane Adjacencies
      PS - Added via L2RIB, Peer Sync
      RO - Re-Originated Peer Sync Entry
      D - Static Adjacencies attached to down interface

```

IP ARP Table for context default

Total number of entries: 8

Address	Age	MAC Address	Interface	Flags
192.168.200.100	00:00:07	6c8b.d3ff.00a7	Vlan200	
192.168.200.102	00:11:41	6c8b.d3fe.ff09	Vlan200	
192.168.200.104	00:18:38	6c8b.d3fe.df3b	Vlan200	
192.168.200.254	00:12:19	0000.1111.2222	Vlan200	
192.168.100.100	00:07:16	6c8b.d3ff.00a7	Vlan100	
192.168.100.102	00:11:51	6c8b.d3fe.ff09	Vlan100	
192.168.100.104	00:15:06	6c8b.d3fe.df3b	Vlan100	
192.168.100.254	00:11:37	0000.1111.2222	Vlan100	

HOST_3(config)#

<#root>

S1-Leaf1#

show bgp 12vpn evpn

```

BGP routing table information for VRF default, address family L2VPN EVPN
BGP table version is 3291, Local Router ID is 10.102.0.5
Status: s-suppressed, x-deleted, S-stale, d-dampened, h-history, *-valid, >-best
Path type: i-internal, e-external, c-confed, l-local, a-aggregate, r-redist, I-injected
Origin codes: i - IGP, e - EGP, ? - incomplete, | - multipath, & - backup, 2 - best2
      Network          Next Hop          Metric     LocPrf    Weight Path
Route Distinguisher: 100:4000100
*>i[2]:[0]:[0]:[48]:[10b3.d5c7.9fb]#[0]:[0.0.0.0]/216
              10.100.100.1          100        0 300 200 i
*>i[2]:[0]:[0]:[48]:[4ce1.75f7.3785]#[0]:[0.0.0.0]/216
              10.100.100.1          100        0 300 200 i
*>i[2]:[0]:[0]:[48]:[6c8b.d3fe.df3b]#[0]:[0.0.0.0]/216
              10.100.100.1          100        0 300 200 i
*>i[2]:[0]:[0]:[48]:[6c8b.d3fe.ecb5]#[0]:[0.0.0.0]/216
              10.100.100.1          100        0 300 200 i
*>i[2]:[0]:[0]:[48]:[cc7f.76d4.2ebf]#[0]:[0.0.0.0]/216
              10.100.100.1          100        0 300 200 i
*>i[2]:[0]:[0]:[48]:[cc7f.76d4.3aef]#[0]:[0.0.0.0]/216
              10.100.100.1          100        0 300 200 i
*>i[2]:[0]:[0]:[48]:[cc7f.76fa.04c3]#[0]:[0.0.0.0]/216
              10.100.100.1          100        0 300 200 i
*>i[2]:[0]:[0]:[48]:[cc7f.76fa.0a3f]#[0]:[0.0.0.0]/216
              10.100.100.1          100        0 300 200 i
*>i[2]:[0]:[0]:[48]:[6c8b.d3fe.df3b]#[32]:[192.168.100.104]/272
              10.100.100.1          100        0 300 200 i
*>i[2]:[0]:[0]:[48]:[6c8b.d3fe.ecb5]#[32]:[192.168.100.103]/272
              10.100.100.1          100        0 300 200 i

Route Distinguisher: 100:4000200
*>i[2]:[0]:[0]:[48]:[10b3.d5c7.9fb]#[0]:[0.0.0.0]/216
              10.100.100.1          100        0 300 200 i
*>i[2]:[0]:[0]:[48]:[4ce1.75f7.3785]#[0]:[0.0.0.0]/216
              10.100.100.1          100        0 300 200 i

```

*>i[2]:[0]:[0]:[48]:[6c8b.d3fe.df3b]:[0]:[0.0.0.0]/216			
10.100.100.1	100	0 300 200	i
*>i[2]:[0]:[0]:[48]:[6c8b.d3fe.ecb5]:[0]:[0.0.0.0]/216			
10.100.100.1	100	0 300 200	i
*>i[2]:[0]:[0]:[48]:[cc7f.76d4.2ebf]:[0]:[0.0.0.0]/216			
10.100.100.1	100	0 300 200	i
*>i[2]:[0]:[0]:[48]:[cc7f.76d4.3aef]:[0]:[0.0.0.0]/216			
10.100.100.1	100	0 300 200	i
*>i[2]:[0]:[0]:[48]:[cc7f.76fa.04c3]:[0]:[0.0.0.0]/216			
10.100.100.1	100	0 300 200	i
*>i[2]:[0]:[0]:[48]:[cc7f.76fa.0a3f]:[0]:[0.0.0.0]/216			
10.100.100.1	100	0 300 200	i
*>i[2]:[0]:[0]:[48]:[6c8b.d3fe.df3b]:[32]:[192.168.200.104]/272			
10.100.100.1	100	0 300 200	i
*>i[2]:[0]:[0]:[48]:[6c8b.d3fe.ecb5]:[32]:[192.168.200.103]/272			
10.100.100.1	100	0 300 200	

Route Distinguisher: 10.31.1.1:32867

*>i[2]:[0]:[0]:[48]:[4ce1.75f7.383d]:[0]:[0.0.0.0]/216			
10.133.133.133	100	0	

Route Distinguisher: 10.31.1.1:32967

*>i[2]:[0]:[0]:[48]:[4ce1.75f7.383d]:[0]:[0.0.0.0]/216			
10.133.133.133	100	0 i	

Route Distinguisher: 10.31.1.2:32867

*>i[2]:[0]:[0]:[48]:[4ce1.75f7.38c7]:[0]:[0.0.0.0]/216			
10.134.134.134	100	0 i	

Route Distinguisher: 10.31.1.2:32967

*>i[2]:[0]:[0]:[48]:[4ce1.75f7.38c7]:[0]:[0.0.0.0]/216			
10.134.134.134	100	0 i	

Route Distinguisher: 10.102.0.5:32867 (L2VNI 4000100)

*>i[2]:[0]:[0]:[48]:[10b3.d5c7.9fdb]:[0]:[0.0.0.0]/216			
10.100.100.1	100	0 300 200	i

*>i[2]:[0]:[0]:[48]:[4ce1.75f7.3785]:[0]:[0.0.0.0]/216			
10.100.100.1	100	0 300 200	i

*>i[2]:[0]:[0]:[48]:[4ce1.75f7.383d]:[0]:[0.0.0.0]/216			
10.133.133.133	100	0 i	

*>i[2]:[0]:[0]:[48]:[4ce1.75f7.38c7]:[0]:[0.0.0.0]/216			
10.134.134.134	100	0 i	

*>i[2]:[0]:[0]:[48]:[6c8b.d3fe.df3b]:[0]:[0.0.0.0]/216			
10.100.100.1	100	0 300 200	i

*>i[2]:[0]:[0]:[48]:[6c8b.d3fe.ecb5]:[0]:[0.0.0.0]/216			
10.100.100.1	100	0 300 200	i

* i[2]:[0]:[0]:[48]:[6c8b.d3fe.ff09]:[0]:[0.0.0.0]/216			
10.202.202.202	100	0 i	

*>i 10.202.202.202	100	0 i	
----------------------------------	-----	-----	--

*>l[2]:[0]:[0]:[48]:[6c8b.d3ff.00a7]:[0]:[0.0.0.0]/216			
10.201.201.201	100	32768	i

*>i[2]:[0]:[0]:[48]:[cc7f.76c6.a673]:[0]:[0.0.0.0]/216			
10.202.202.202	100	0 i	

*>i[2]:[0]:[0]:[48]:[cc7f.76d4.2ebf]:[0]:[0.0.0.0]/216			
10.100.100.1	100	0 300 200	i

*>i[2]:[0]:[0]:[48]:[cc7f.76d4.3aef]:[0]:[0.0.0.0]/216			
10.100.100.1	100	0 300 200	i

*>i[2]:[0]:[0]:[48]:[cc7f.76fa.04c3]:[0]:[0.0.0.0]/216			
10.100.100.1	100	0 300 200	i

*>i[2]:[0]:[0]:[48]:[cc7f.76fa.0a3f]:[0]:[0.0.0.0]/216			
10.100.100.1	100	0 300 200	i

```

*>l[2]:[0]:[0]:[48]:[cc7f.76fa.0adb]:[0]:[0.0.0.0]/216
    10.201.201.201                                100      32768 i
*>i[2]:[0]:[0]:[48]:[cc7f.76fa.118f]:[0]:[0.0.0.0]/216
    10.202.202.202                                100      0 i
*>i[2]:[0]:[0]:[48]:[6c8b.d3fe.df3b]:[32]:[192.168.100.104]/272
    10.100.100.1                                100      0 300 200 i
*>i[2]:[0]:[0]:[48]:[6c8b.d3fe.ecb5]:[32]:[192.168.100.103]/272
    10.100.100.1                                100      0 300 200 i
* i[2]:[0]:[0]:[48]:[6c8b.d3fe.ff09]:[32]:[192.168.100.102]/272
    10.202.202.202                                100      0 i
*>i
    10.202.202.202                                100      0 i
*>l[2]:[0]:[0]:[48]:[6c8b.d3ff.00a7]:[32]:[192.168.100.100]/272
    10.201.201.201                                100      32768 i

Route Distinguisher: 10.102.0.5:32967 (L2VNI 4000200)
*>i[2]:[0]:[0]:[48]:[10b3.d5c7.9fb9]:[0]:[0.0.0.0]/216
    10.100.100.1                                100      0 300 200 i
*>i[2]:[0]:[0]:[48]:[4ce1.75f7.3785]:[0]:[0.0.0.0]/216
    10.100.100.1                                100      0 300 200 i
*>i[2]:[0]:[0]:[48]:[4ce1.75f7.383d]:[0]:[0.0.0.0]/216
    10.133.133.133                                100      0 i
*>i[2]:[0]:[0]:[48]:[4ce1.75f7.38c7]:[0]:[0.0.0.0]/216
    10.134.134.134                                100      0 i
*>i[2]:[0]:[0]:[48]:[6c8b.d3fe.df3b]:[0]:[0.0.0.0]/216
    10.100.100.1                                100      0 300 200 i
*>i[2]:[0]:[0]:[48]:[6c8b.d3fe.ecb5]:[0]:[0.0.0.0]/216
    10.100.100.1                                100      0 300 200 i

* i[2]:[0]:[0]:[48]:[6c8b.d3fe.ff09]:[0]:[0.0.0.0]/216
    10.202.202.202                                100      0 i
*>i
    10.202.202.202                                100      0 i
*>l[2]:[0]:[0]:[48]:[6c8b.d3ff.00a7]:[0]:[0.0.0.0]/216
    10.201.201.201                                100      32768 i
*>i[2]:[0]:[0]:[48]:[cc7f.76c6.a673]:[0]:[0.0.0.0]/216
    10.202.202.202                                100      0 i
*>i[2]:[0]:[0]:[48]:[cc7f.76d4.2ebf]:[0]:[0.0.0.0]/216
    10.100.100.1                                100      0 300 200 i
*>i[2]:[0]:[0]:[48]:[cc7f.76d4.3aef]:[0]:[0.0.0.0]/216
    10.100.100.1                                100      0 300 200 i
*>i[2]:[0]:[0]:[48]:[cc7f.76fa.04c3]:[0]:[0.0.0.0]/216
    10.100.100.1                                100      0 300 200 i
*>i[2]:[0]:[0]:[48]:[cc7f.76fa.0a3f]:[0]:[0.0.0.0]/216
    10.100.100.1                                100      0 300 200 i
*>l[2]:[0]:[0]:[48]:[cc7f.76fa.0adb]:[0]:[0.0.0.0]/216
    10.201.201.201                                100      32768 i
*>i[2]:[0]:[0]:[48]:[cc7f.76fa.118f]:[0]:[0.0.0.0]/216
    10.202.202.202                                100      0 i
*>i[2]:[0]:[0]:[48]:[6c8b.d3fe.df3b]:[32]:[192.168.200.104]/272
    10.100.100.1                                100      0 300 200 i
*>i[2]:[0]:[0]:[48]:[6c8b.d3fe.ecb5]:[32]:[192.168.200.103]/272
    10.100.100.1                                100      0 300 200 i
* i[2]:[0]:[0]:[48]:[6c8b.d3fe.ff09]:[32]:[192.168.200.102]/272
    10.202.202.202                                100      0 i
*>i
    10.202.202.202                                100      0 i
*>l[2]:[0]:[0]:[48]:[6c8b.d3ff.00a7]:[32]:[192.168.200.100]/272
    10.201.201.201                                100      32768 i

Route Distinguisher: 10.102.0.9:5
*>i[2]:[0]:[0]:[48]:[cc7f.76fa.118f]:[0]:[0.0.0.0]/216
    10.202.202.202                                100      0 i
*>i[5]:[0]:[0]:[24]:[192.168.100.0]/224
    10.102.1.10                                 100      0 i

```

*>i[5]:[0]:[0]:[32]:[10.15.100.2]/224
 10.102.1.10 100 0 i

 Route Distinguisher: 10.102.0.9:32867
 *>i[2]:[0]:[0]:[48]:[6c8b.d3fe.ff09]:[0]:[0.0.0.0]/216
 10.202.202.202 100 0 i
 *>i[2]:[0]:[0]:[48]:[cc7f.76fa.118f]:[0]:[0.0.0.0]/216
 10.202.202.202 100 0 i
 *>i[2]:[0]:[0]:[48]:[6c8b.d3fe.ff09]:[32]:[192.168.100.102]/272
 10.202.202.202 100 0 i

 Route Distinguisher: 10.102.0.9:32967
 *>i[2]:[0]:[0]:[48]:[6c8b.d3fe.ff09]:[0]:[0.0.0.0]/216
 10.202.202.202 100 0 i
 *>i[2]:[0]:[0]:[48]:[cc7f.76fa.118f]:[0]:[0.0.0.0]/216
 10.202.202.202 100 0 i
 *>i[2]:[0]:[0]:[48]:[6c8b.d3fe.ff09]:[32]:[192.168.200.102]/272
 10.202.202.202 100 0 i

 Route Distinguisher: 10.102.0.10:5
 *>i[2]:[0]:[0]:[48]:[cc7f.76c6.a673]:[0]:[0.0.0.0]/216
 10.202.202.202 100 0 i
 *>i[5]:[0]:[0]:[24]:[192.168.100.0]/224
 10.102.1.6 100 0 i
 *>i[5]:[0]:[0]:[32]:[10.15.100.1]/224
 10.102.1.6 100 0 i

 Route Distinguisher: 10.102.0.10:32867
 *>i[2]:[0]:[0]:[48]:[6c8b.d3fe.ff09]:[0]:[0.0.0.0]/216
 10.202.202.202 100 0 i
 *>i[2]:[0]:[0]:[48]:[cc7f.76c6.a673]:[0]:[0.0.0.0]/216
 10.202.202.202 100 0 i
 *>i[2]:[0]:[0]:[48]:[6c8b.d3fe.ff09]:[32]:[192.168.100.102]/272
 10.202.202.202 100 0 i

 Route Distinguisher: 10.102.0.10:32967
 *>i[2]:[0]:[0]:[48]:[6c8b.d3fe.ff09]:[0]:[0.0.0.0]/216
 10.202.202.202 100 0 i
 *>i[2]:[0]:[0]:[48]:[cc7f.76c6.a673]:[0]:[0.0.0.0]/216
 10.202.202.202 100 0 i
 *>i[2]:[0]:[0]:[48]:[6c8b.d3fe.ff09]:[32]:[192.168.200.102]/272
 10.202.202.202 100 0 i

 Route Distinguisher: 10.102.0.5:5 (L3VNI 4000502)
 *>i[2]:[0]:[0]:[48]:[cc7f.76c6.a673]:[0]:[0.0.0.0]/216
 10.202.202.202 100 0 i
 *>l[2]:[0]:[0]:[48]:[cc7f.76fa.0adb]:[0]:[0.0.0.0]/216
 10.201.201.201 100 32768 i
 *>i[2]:[0]:[0]:[48]:[cc7f.76fa.118f]:[0]:[0.0.0.0]/216
 10.202.202.202 100 0 i
 *>i[2]:[0]:[0]:[48]:[6c8b.d3fe.df3b]:[32]:[192.168.100.104]/272
 10.100.100.1 100 0 300 200 i
 *>i[2]:[0]:[0]:[48]:[6c8b.d3fe.df3b]:[32]:[192.168.200.104]/272
 10.100.100.1 100 0 300 200 i
 *>i[2]:[0]:[0]:[48]:[6c8b.d3fe.ecb5]:[32]:[192.168.100.103]/272
 10.100.100.1 100 0 300 200 i
 *>i[2]:[0]:[0]:[48]:[6c8b.d3fe.ecb5]:[32]:[192.168.200.103]/272
 10.100.100.1 100 0 300 200 i
 * i[2]:[0]:[0]:[48]:[6c8b.d3fe.ff09]:[32]:[192.168.100.102]/272
 10.202.202.202 100 0 i
 *>i 10.202.202.202 100 0 i
 * i[2]:[0]:[0]:[48]:[6c8b.d3fe.ff09]:[32]:[192.168.200.102]/272

```

          10.202.202.202      100      0 i
*>i          10.202.202.202      100      0 i
* i[5]:[0]:[0]:[24]:[192.168.100.0]/224
          10.102.1.6      100      0 i
*>i          10.102.1.10      100      0 i
* i[5]:[0]:[0]:[32]:[10.15.100.1]/224
          10.102.1.6      100      0 i
*>i[5]:[0]:[0]:[32]:[10.15.100.2]/224
          10.102.1.10      100      0 i
S1-Leaf1#

```

<#root>

S1-Leaf1#

show vpc brief

Legend:

(*) - local vPC is down, forwarding via vPC peer-link

vPC domain id	:	100
Peer status	:	peer adjacency formed ok
vPC keep-alive status	:	peer is alive
Configuration consistency status	:	success
Per-vlan consistency status	:	success
Type-2 consistency status	:	success
vPC role	:	secondary
Number of vPCs configured	:	1
Peer Gateway	:	Enabled
Dual-active excluded VLANs	:	-
Graceful Consistency Check	:	Enabled
Auto-recovery status	:	Disabled
Delay-restore status	:	Timer is off.(timeout = 150s)
Delay-restore SVI status	:	Timer is off.(timeout = 10s)
Delay-restore Orphan-port status	:	Timer is off.(timeout = 0s)
Operational Layer3 Peer-router	:	Disabled
Virtual-peerlink mode	:	Enabled

vPC Peer-link status

id	Port	Status	Active vlans
1	Po10	up	100,200,300-350,2001

vPC status

Id	Port	Status	Consistency	Reason	Active vlans
100	Po100	up	success	success	100,200

Please check "show vpc consistency-parameters vpc <vpc-num>" for the consistency reason of down vpc and for type-2 consistency reasons for any vpc.

S1-Leaf1#

<#root>

S1-Leaf1#

S1-Leaf1#

```
show ip int brief
```

IP Interface Status for VRF "default"(1)			
Interface	IP Address	Interface Status	
Lo0	10.102.0.5	protocol-up/link-up/admin-up	
Lo1	10.102.1.8	protocol-up/link-up/admin-up	
Eth1/2	192.168.17.12	protocol-up/link-up/admin-up	

S1-Leaf1#

<#root>

S2-Leaf1#

```
show bgp l2vpn evpn
```

BGP routing table information for VRF default, address family L2VPN EVPN
BGP table version is 4016, Local Router ID is 10.103.0.5
Status: s-suppressed, x-deleted, S-stale, d-dampened, h-history, *-valid, >-best
Path type: i-internal, e-external, c-confed, l-local, a-aggregate, r-redist, I-injected
Origin codes: i - IGP, e - EGP, ? - incomplete, | - multipath, & - backup, 2 - best2

Network	Next Hop	Metric	LocPrf	Weight	Path
Route Distinguisher: 200:4000100					
*>i[2]:[0]:[48]:[4ce1.75f7.383d]:[0]:[0.0.0.0]/216	10.100.100.2	100	0 300 100	i	
*>i[2]:[0]:[48]:[4ce1.75f7.38c7]:[0]:[0.0.0.0]/216	10.100.100.2	100	0 300 100	i	
*>i[2]:[0]:[48]:[6c8b.d3fe.ff09]:[0]:[0.0.0.0]/216	10.100.100.2	100	0 300 100	i	
*>i[2]:[0]:[48]:[6c8b.d3ff.00a7]:[0]:[0.0.0.0]/216	10.100.100.2	100	0 300 100	i	
*>i[2]:[0]:[48]:[cc7f.76c6.a673]:[0]:[0.0.0.0]/216	10.100.100.2	100	0 300 100	i	
*>i[2]:[0]:[48]:[cc7f.76fa.0907]:[0]:[0.0.0.0]/216	10.100.100.2	100	0 300 100	i	
*>i[2]:[0]:[48]:[cc7f.76fa.0adb]:[0]:[0.0.0.0]/216	10.100.100.2	100	0 300 100	i	
*>i[2]:[0]:[48]:[cc7f.76fa.118f]:[0]:[0.0.0.0]/216	10.100.100.2	100	0 300 100	i	
*>i[2]:[0]:[48]:[6c8b.d3fe.ff09]:[32]:[192.168.100.102]/272	10.100.100.2	100	0 300 100	i	
*>i[2]:[0]:[48]:[6c8b.d3ff.00a7]:[32]:[192.168.100.100]/272	10.100.100.2	100	0 300 100	i	
Route Distinguisher: 200:4000200					
*>i[2]:[0]:[48]:[4ce1.75f7.383d]:[0]:[0.0.0.0]/216	10.100.100.2	100	0 300 100	i	
*>i[2]:[0]:[48]:[4ce1.75f7.38c7]:[0]:[0.0.0.0]/216	10.100.100.2	100	0 300 100	i	
*>i[2]:[0]:[48]:[6c8b.d3fe.ff09]:[0]:[0.0.0.0]/216	10.100.100.2	100	0 300 100	i	
*>i[2]:[0]:[48]:[6c8b.d3ff.00a7]:[0]:[0.0.0.0]/216	10.100.100.2	100	0 300 100	i	
*>i[2]:[0]:[48]:[cc7f.76c6.a673]:[0]:[0.0.0.0]/216	10.100.100.2	100	0 300 100	i	
*>i[2]:[0]:[48]:[cc7f.76fa.0907]:[0]:[0.0.0.0]/216	10.100.100.2	100	0 300 100	i	
*>i[2]:[0]:[48]:[cc7f.76fa.0adb]:[0]:[0.0.0.0]/216	10.100.100.2	100	0 300 100	i	
*>i[2]:[0]:[48]:[cc7f.76fa.118f]:[0]:[0.0.0.0]/216	10.100.100.2	100	0 300 100	i	

	10.100.100.2	100	0 300 100 i
*>i[2]:[0]:[0]:[48]:[6c8b.d3fe.ff09]:[32]:[192.168.200.102]/272	10.100.100.2	100	0 300 100 i
*>i[2]:[0]:[0]:[48]:[6c8b.d3ff.00a7]:[32]:[192.168.200.100]/272	10.100.100.2	100	0 300 100 i
 Route Distinguisher: 200:4000502			
*>i[5]:[0]:[0]:[24]:[192.168.100.0]/224	10.100.100.2	100	0 300 100 i
*>i[5]:[0]:[0]:[32]:[10.15.100.1]/224	10.100.100.2	100	0 300 100 i
*>i[5]:[0]:[0]:[32]:[10.15.100.2]/224	10.100.100.2	100	0 300 100 i
 Route Distinguisher: 10.31.1.3:32867			
*>i[2]:[0]:[0]:[48]:[4ce1.75f7.3785]:[0]:[0.0.0.0]/216	10.135.135.135	100	0 i
 Route Distinguisher: 10.31.1.3:32967			
*>i[2]:[0]:[0]:[48]:[4ce1.75f7.3785]:[0]:[0.0.0.0]/216	10.135.135.135	100	0 i
 Route Distinguisher: 10.31.1.4:32867			
*>i[2]:[0]:[0]:[48]:[10b3.d5c7.9fdbd]:[0]:[0.0.0.0]/216	10.136.136.136	100	0 i
 Route Distinguisher: 10.31.1.4:32967			
*>i[2]:[0]:[0]:[48]:[10b3.d5c7.9fdbd]:[0]:[0.0.0.0]/216	10.136.136.136	100	0 i
 Route Distinguisher: 10.102.0.10:5			
*>i[2]:[0]:[0]:[48]:[cc7f.76fa.04c3]:[0]:[0.0.0.0]/216	10.103.202.202	100	0 i
 Route Distinguisher: 10.102.0.10:32867			
*>i[2]:[0]:[0]:[48]:[6c8b.d3fe.df3b]:[0]:[0.0.0.0]/216	10.103.202.202	100	0 i
*>i[2]:[0]:[0]:[48]:[cc7f.76fa.04c3]:[0]:[0.0.0.0]/216	10.103.202.202	100	0 i
*>i[2]:[0]:[0]:[48]:[6c8b.d3fe.df3b]:[32]:[192.168.100.104]/272	10.103.202.202	100	0 i
 Route Distinguisher: 10.102.0.10:32967			
*>i[2]:[0]:[0]:[48]:[6c8b.d3fe.df3b]:[0]:[0.0.0.0]/216	10.103.202.202	100	0 i
*>i[2]:[0]:[0]:[48]:[cc7f.76fa.04c3]:[0]:[0.0.0.0]/216	10.103.202.202	100	0 i
*>i[2]:[0]:[0]:[48]:[6c8b.d3fe.df3b]:[32]:[192.168.200.104]/272	10.103.202.202	100	0 i
 Route Distinguisher: 10.103.0.5:32867 (L2VNI 4000100)			
*>i[2]:[0]:[0]:[48]:[10b3.d5c7.9fdbd]:[0]:[0.0.0.0]/216	10.136.136.136	100	0 i
*>i[2]:[0]:[0]:[48]:[4ce1.75f7.3785]:[0]:[0.0.0.0]/216	10.135.135.135	100	0 i
*>i[2]:[0]:[0]:[48]:[4ce1.75f7.383d]:[0]:[0.0.0.0]/216	10.100.100.2	100	0 300 100 i
*>i[2]:[0]:[0]:[48]:[4ce1.75f7.38c7]:[0]:[0.0.0.0]/216	10.100.100.2	100	0 300 100 i
* i[2]:[0]:[0]:[48]:[6c8b.d3fe.df3b]:[0]:[0.0.0.0]/216	10.103.202.202	100	0 i
*>i	10.103.202.202	100	0 i

```

*>l[2]:[0]:[0]:[48]:[6c8b.d3fe.ecb5]:[0]:[0.0.0.0]/216
    10.103.201.201                                100      32768 i
*>i[2]:[0]:[0]:[48]:[6c8b.d3fe.ff09]:[0]:[0.0.0.0]/216
    10.100.100.2                                100      0 300 100 i
*>i[2]:[0]:[0]:[48]:[6c8b.d3ff.00a7]:[0]:[0.0.0.0]/216
    10.100.100.2                                100      0 300 100 i
*>i[2]:[0]:[0]:[48]:[cc7f.76c6.a673]:[0]:[0.0.0.0]/216
    10.100.100.2                                100      0 300 100 i
*>i[2]:[0]:[0]:[48]:[cc7f.76d4.2ebf]:[0]:[0.0.0.0]/216
    10.103.202.202                                100      0 i
*>i[2]:[0]:[0]:[48]:[cc7f.76fa.04c3]:[0]:[0.0.0.0]/216
    10.103.202.202                                100      0 i
*>i[2]:[0]:[0]:[48]:[cc7f.76fa.0907]:[0]:[0.0.0.0]/216
    10.100.100.2                                100      0 300 100 i
*>l[2]:[0]:[0]:[48]:[cc7f.76fa.0a3f]:[0]:[0.0.0.0]/216
    10.103.201.201                                100      32768 i
*>i[2]:[0]:[0]:[48]:[cc7f.76fa.0adb]:[0]:[0.0.0.0]/216
    10.100.100.2                                100      0 300 100 i
*>i[2]:[0]:[0]:[48]:[cc7f.76fa.118f]:[0]:[0.0.0.0]/216
    10.100.100.2                                100      0 300 100 i
* i[2]:[0]:[0]:[48]:[6c8b.d3fe.df3b]:[32]:[192.168.100.104]/272
    10.103.202.202                                100      0 i
*>i
    10.103.202.202                                100      0 i
*>l[2]:[0]:[0]:[48]:[6c8b.d3fe.ecb5]:[32]:[192.168.100.103]/272
    10.103.201.201                                100      32768 i
*>i[2]:[0]:[0]:[48]:[6c8b.d3fe.ff09]:[32]:[192.168.100.102]/272
    10.100.100.2                                100      0 300 100 i
*>i[2]:[0]:[0]:[48]:[6c8b.d3ff.00a7]:[32]:[192.168.100.100]/272
    10.100.100.2                                100      0 300 100 i

```

Route Distinguisher: 10.103.0.5:32967 (L2VNI 4000200)

```

*>i[2]:[0]:[0]:[48]:[10b3.d5c7.9fdb]:[0]:[0.0.0.0]/216
    10.136.136.136                                100      0 i
*>i[2]:[0]:[0]:[48]:[4ce1.75f7.3785]:[0]:[0.0.0.0]/216
    10.135.135.135                                100      0 i
*>i[2]:[0]:[0]:[48]:[4ce1.75f7.383d]:[0]:[0.0.0.0]/216
    10.100.100.2                                100      0 300 100 i
*>i[2]:[0]:[0]:[48]:[4ce1.75f7.38c7]:[0]:[0.0.0.0]/216
    10.100.100.2                                100      0 300 100 i
* i[2]:[0]:[0]:[48]:[6c8b.d3fe.df3b]:[0]:[0.0.0.0]/216
    10.103.202.202                                100      0 i
*>i
    10.103.202.202                                100      0 i
*>l[2]:[0]:[0]:[48]:[6c8b.d3fe.ecb5]:[0]:[0.0.0.0]/216
    10.103.201.201                                100      32768 i
*>i[2]:[0]:[0]:[48]:[6c8b.d3fe.ff09]:[0]:[0.0.0.0]/216
    10.100.100.2                                100      0 300 100 i
*>i[2]:[0]:[0]:[48]:[6c8b.d3ff.00a7]:[0]:[0.0.0.0]/216
    10.100.100.2                                100      0 300 100 i
*>i[2]:[0]:[0]:[48]:[cc7f.76c6.a673]:[0]:[0.0.0.0]/216
    10.100.100.2                                100      0 300 100 i
*>i[2]:[0]:[0]:[48]:[cc7f.76d4.2ebf]:[0]:[0.0.0.0]/216
    10.103.202.202                                100      0 i
*>i[2]:[0]:[0]:[48]:[cc7f.76fa.04c3]:[0]:[0.0.0.0]/216
    10.103.202.202                                100      0 i
*>i[2]:[0]:[0]:[48]:[cc7f.76fa.0907]:[0]:[0.0.0.0]/216
    10.100.100.2                                100      0 300 100 i
*>l[2]:[0]:[0]:[48]:[cc7f.76fa.0a3f]:[0]:[0.0.0.0]/216
    10.103.201.201                                100      32768 i
*>i[2]:[0]:[0]:[48]:[cc7f.76fa.0adb]:[0]:[0.0.0.0]/216
    10.100.100.2                                100      0 300 100 i
*>i[2]:[0]:[0]:[48]:[cc7f.76fa.118f]:[0]:[0.0.0.0]/216
    10.100.100.2                                100      0 300 100 i

```

```

* i[2]:[0]:[0]:[48]:[6c8b.d3fe.df3b]:[32]:[192.168.200.104]/272
          10.103.202.202           100      0 i
*>i          10.103.202.202           100      0 i
*>l[2]:[0]:[0]:[48]:[6c8b.d3fe.ecb5]:[32]:[192.168.200.103]/272
          10.103.201.201           100      32768 i
*>i[2]:[0]:[0]:[48]:[6c8b.d3fe.ff09]:[32]:[192.168.200.102]/272
          10.100.100.2            100      0 300 100 i
*>i[2]:[0]:[0]:[48]:[6c8b.d3ff.00a7]:[32]:[192.168.200.100]/272
          10.100.100.2            100      0 300 100 i

Route Distinguisher: 10.103.0.9:5
*>i[2]:[0]:[0]:[48]:[cc7f.76d4.2ebf]:[0]:[0.0.0.0]/216
          10.103.202.202           100      0 i

Route Distinguisher: 10.103.0.9:32867
*>i[2]:[0]:[0]:[48]:[6c8b.d3fe.df3b]:[0]:[0.0.0.0]/216
          10.103.202.202           100      0 i
*>i[2]:[0]:[0]:[48]:[cc7f.76d4.2ebf]:[0]:[0.0.0.0]/216
          10.103.202.202           100      0 i
*>i[2]:[0]:[0]:[48]:[6c8b.d3fe.df3b]:[32]:[192.168.100.104]/272
          10.103.202.202           100      0 i

Route Distinguisher: 10.103.0.9:32967
*>i[2]:[0]:[0]:[48]:[6c8b.d3fe.df3b]:[0]:[0.0.0.0]/216
          10.103.202.202           100      0 i
*>i[2]:[0]:[0]:[48]:[cc7f.76d4.2ebf]:[0]:[0.0.0.0]/216
          10.103.202.202           100      0 i
*>i[2]:[0]:[0]:[48]:[6c8b.d3fe.df3b]:[32]:[192.168.200.104]/272
          10.103.202.202           100      0 i

Route Distinguisher: 10.103.0.5:5 (L3VNI 4000502)
*>i[2]:[0]:[0]:[48]:[cc7f.76d4.2ebf]:[0]:[0.0.0.0]/216
          10.103.202.202           100      0 i
*>i[2]:[0]:[0]:[48]:[cc7f.76fa.04c3]:[0]:[0.0.0.0]/216
          10.103.202.202           100      0 i
*>l[2]:[0]:[0]:[48]:[cc7f.76fa.0a3f]:[0]:[0.0.0.0]/216
          10.103.201.201           100      32768 i
* i[2]:[0]:[0]:[48]:[6c8b.d3fe.df3b]:[32]:[192.168.100.104]/272
          10.103.202.202           100      0 i
*>i          10.103.202.202           100      0 i
* i[2]:[0]:[0]:[48]:[6c8b.d3fe.df3b]:[32]:[192.168.200.104]/272
          10.103.202.202           100      0 i
*>i          10.103.202.202           100      0 i
*>i[2]:[0]:[0]:[48]:[6c8b.d3fe.ff09]:[32]:[192.168.100.102]/272
          10.100.100.2            100      0 300 100 i
*>i[2]:[0]:[0]:[48]:[6c8b.d3fe.ff09]:[32]:[192.168.200.102]/272
          10.100.100.2            100      0 300 100 i
*>i[2]:[0]:[0]:[48]:[6c8b.d3ff.00a7]:[32]:[192.168.100.100]/272
          10.100.100.2            100      0 300 100 i
*>i[2]:[0]:[0]:[48]:[6c8b.d3ff.00a7]:[32]:[192.168.200.100]/272
          10.100.100.2            100      0 300 100 i
*>i[5]:[0]:[0]:[24]:[192.168.100.0]/224
          10.100.100.2            100      0 300 100 i
*>i[5]:[0]:[0]:[32]:[10.15.100.1]/224
          10.100.100.2            100      0 300 100 i
*>i[5]:[0]:[0]:[32]:[10.15.100.2]/224
          10.100.100.2            100      0 300 100 i

```

S2-Leaf1#

Informationen zu dieser Übersetzung

Cisco hat dieses Dokument maschinell übersetzen und von einem menschlichen Übersetzer editieren und korrigieren lassen, um unseren Benutzern auf der ganzen Welt Support-Inhalte in ihrer eigenen Sprache zu bieten. Bitte beachten Sie, dass selbst die beste maschinelle Übersetzung nicht so genau ist wie eine von einem professionellen Übersetzer angefertigte. Cisco Systems, Inc. übernimmt keine Haftung für die Richtigkeit dieser Übersetzungen und empfiehlt, immer das englische Originaldokument (siehe bereitgestellter Link) heranzuziehen.