



The bridge to possible

[Data sheet](#)
Cisco public

Cisco MDS 9700 Series Supervisor-4 Module

Contents

Product overview	3
Main features and benefits	3
Product specifications	6
Ordering information	12
Product sustainability	13
Cisco Capital	13
For more information	13

Product overview

The Cisco® MDS 9700 Series Supervisor-4 Module delivers the latest advanced switching technology with proven Cisco NX-OS software to power a new generation of scalable and intelligent multilayer switching solutions for SANs.

Designed to integrate multiprotocol switching and routing, intelligent SAN services, and storage applications onto highly scalable SAN switching platforms, the Cisco MDS 9700 Series Supervisor-4 Module enables intelligent, resilient, scalable, and secure high-performance multilayer SAN switching solutions. The Cisco MDS 9000 family of storage networking solutions lowers the Total Cost of Ownership (TCO) for storage networking by combining robust and flexible hardware architecture, multiple layers of network and storage intelligence, and compatibility with all Cisco MDS 9000 family switching modules.

This powerful combination helps organizations build highly available, scalable storage networks with comprehensive security and unified management. The Cisco MDS 9700 Series Supervisor-4 Module is supported on the Cisco MDS 9700 Series Multilayer Directors. Figure 1 shows the Cisco MDS 9700 Series Supervisor-4 Module.

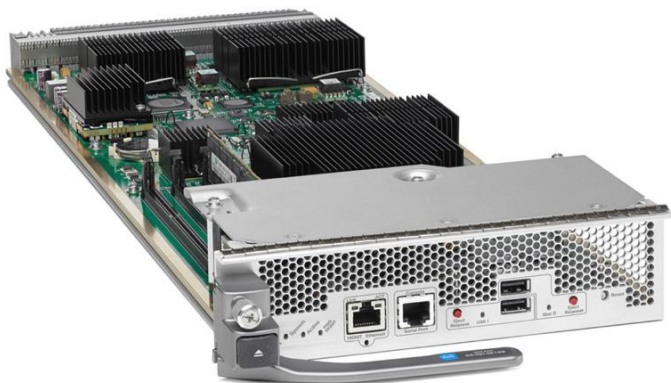


Figure 1.
Cisco MDS 9700 Series Supervisor-4 Module

Main features and benefits

The Cisco MDS 9700 Series Supervisor-4 Module offers numerous benefits.

Industry-leading scalability

The Cisco MDS 9700 Series Supervisor-4 Module is designed to meet the requirements of the largest data center storage environments and combines industry-leading scalability and performance, intelligent SAN services, nondisruptive software upgrades, stateful process restart and failover, and fully redundant operation for a new standard in director-class SAN switching.

Integrated performance

The combination of the Cisco MDS 9700 Series Supervisor-4 module, Cisco MDS 9700 48-Port 32-Gbps Fibre Channel Switching Module, and Cisco Fabric Manager Release 3 crossbar switching modules enables up to 3 Tbps of Fibre Channel throughput between modules in each direction for each payload slot in the Cisco MDS 9700 Series director switches. This per-slot bandwidth is four times the bandwidth needed to support a 48-port 32-Gbps Fibre Channel module at full line rate. The Cisco MDS 9700 Series architecture, based on central arbitration and crossbar fabric, provides 64 Gbps line-rate, nonblocking, predictable performance across all traffic conditions for every port in the chassis.

High availability

The Cisco MDS 9700 Series Supervisor-4 Module and Cisco MDS 9700 Series Multilayer Directors were designed from the beginning for high availability. In addition to meeting the basic requirement of nondisruptive software upgrades, the Cisco MDS 9700 Series software architecture offers availability. The Cisco MDS 9700 Series Supervisor-4 Module has the unique ability to automatically restart failed processes, making it exceptionally robust. In the rare event that a supervisor module is reset, complete synchronization between the active and standby supervisor modules helps ensure stateful failover with no disruption of traffic.

The Cisco MDS 9700 Series provides the industry's first redundancy on all major hardware components, as detailed in Table 1.

Table 1. Redundancy details for the Cisco MDS 9700 Series Supervisor-4 Module and Cisco MDS 9700 Series Multilayer Directors

Component	Redundancy
Supervisors	1+1
Power supplies	Grid redundancy
Fabrics	N+1 redundancy

The Cisco MDS 9700 Series Supervisor-4 Module also provides Fabric Shortest Path First (FSPF)-based multipathing to help ensure high availability at the fabric level. With the intelligence to load balance across up to 16 equal-cost paths, the module can dynamically reroute traffic in the event of a switch failure. The Cisco MDS 9700 Series Supervisor-4 Module in combination with Cisco MDS 9700 Series Multilayer Directors provides exceptional high availability, helping ensure that solutions exceed the 99.999 percent uptime requirements of today's most demanding environments.

Lower Total Cost of Ownership (TCO)

The Cisco MDS 9000 family provides advanced management tools for overall low Total Cost of Ownership (TCO). It supports Cisco virtual SAN (VSAN) technology for hardware-enforced, isolated environments within a single physical fabric for secure sharing of physical infrastructure, further decreasing TCO.

Comprehensive security framework

The Cisco MDS 9000 family supports RADIUS and TACACS+, Fibre Channel Security Protocol (FC-SP)¹, Secure File Transfer Protocol (SFTP), Secure Shell (SSH) Protocol, and Simple Network Management Protocol Version 3 (SNMPv3) implementing Advanced Encryption Standard (AES), VSANs, hardware-enforced zoning, Access Control Lists (ACLs), and per-VSAN Role-Based Access Control (RBAC).

Unified SAN management

The Cisco MDS 9000 family includes built-in storage network management, with all features available through a Command-Line Interface (CLI) or Cisco Prime® Data Center Network Manager (DCNM), a centralized management tool that simplifies management of multiple switches and fabrics. Integration with third-party storage management platforms allows transparent interaction with existing management tools.

Intelligent network services

VSAN technology, ACLs for hardware-based intelligent frame processing, and fabricwide Quality of Service (QoS) enable migration from SAN islands to enterprise-wide storage networks.

- Integrated hardware-based VSANs and Inter-VSAN Routing (IVR): Integration of VSANs into port-level hardware allows any port in a system or fabric to be partitioned to any VSAN. Integrated hardware-based IVR provides line-rate routing between any ports in a system or fabric without the need for external routing appliances.
- Intelligent storage services: The Cisco MDS 9700 Series operates with intelligent service capabilities on other Cisco MDS 9000 family platforms to provide services such as acceleration of storage applications for data replication and backup and data migration to hosts and targets attached to the Cisco MDS 9700 Series.
- Smart Zoning: When the Smart Zoning feature is enabled, Cisco MDS 9700 Series fabrics provision the hardware access control entries specified by the zone set more efficiently, avoiding the superfluous entries that would allow servers (initiators) to talk to other servers or allow storage devices (targets) to talk to other storage devices. This feature makes larger zones with multiple initiators and multiple targets feasible without excessive consumption of hardware resources. Thus, smart zones can correspond to applications, application clusters, hypervisor clusters, or other data center entities, saving the time that administrators previously spent creating many small zones and enabling the automation of zoning tasks.

Advanced diagnostics and troubleshooting tools

Management of large-scale storage networks requires proactive diagnostics, tools to verify connectivity and route latency, and mechanisms for capturing and analyzing traffic. The Cisco MDS 9000 family integrates advanced, industry-leading analysis and debugging tools. The power-on self-test (POST) and online diagnostics provide proactive health monitoring. The Cisco MDS 9700 Series Supervisor-4 Module provides the integrated functions required to implement diagnostic capabilities such as Fibre Channel traceroute for identifying the exact path and timing of flows, and Cisco Switched Port Analyzer (SPAN) and Remote SPAN (RSPAN) to intelligently capture network traffic. After traffic has been captured, it can then be analyzed with the Cisco Fabric Manager – Cisco SAN Analyzer.

The Cisco MDS 9700 Series Supervisor-4 Module also allows collection and management of comprehensive port-based and flow-based statistics, enabling sophisticated performance analysis and Service-Level Agreement (SLA) accounting. The integrated Cisco Smart Call Home capability provides additional reliability and enables faster problem resolution and reduced service costs.

The Cisco MDS 9700 Series Supervisor-4 enables the powerful Cisco Generic Online Diagnostics (GOLD framework) diagnostic framework on the Cisco MDS 9700 Series Multilayer Director chassis. Cisco GOLD is a suite of diagnostic facilities to verify that hardware and internal data paths are operating as designed. Boot-time diagnostics, continuous monitoring, standby fabric loopback tests, and on-demand and scheduled tests are part of the Cisco GOLD feature set. This industry-leading diagnostics subsystem enables the rapid fault isolation and continuous system monitoring critical in today's continuously operating environments. With the Cisco MDS 9700 Series, Cisco delivers a comprehensive tool set for troubleshooting and analyzing an organization's storage network.

Multiprotocol intelligence

The multilayer architecture of the Cisco MDS 9700 Series enables a consistent feature set over a protocol-independent switch fabric. The Cisco MDS 9700 Series transparently integrates Fibre Channel, Fibre Channel over Ethernet (FCoE), and IBM Fibre Connection (FICON).

- 2/4/8-Gbps, 4/8/16-Gbps, 8/16/32-Gbps and 10-Gbps Fibre Channel and 10 Gigabit Ethernet: The Cisco MDS 9700 Series supports both 2/4/8/16/32-Gbps and 10-Gbps ports on the Cisco MDS 9700 48-Port 32-Gbps Fibre Channel Switching Module. The Cisco MDS 9700 Series also supports 10 Gigabit Ethernet clocked optics carrying 10-Gbps Fibre Channel traffic.
- FICON: The Cisco MDS 9700 Series supports deployment in IBM System z FICON and Linux environments.
- Multihop FCoE: The Cisco MDS 9700 Series supports multihop FCoE, extending connectivity from FCoE and Fibre Channel fabrics to FCoE and Fibre Channel storage devices.
- USB ports: Two **USB 3.0 ports** are provided on the front panel for simplified configuration-file uploading and downloading using common USB memory stick products.

Product specifications

Table 2 lists the product specifications for the Cisco MDS 9700 Series Supervisor-4 Module.

Table 2. Product specifications

Feature	Description
Product compatibility	Cisco MDS 9700 Series
Software compatibility	Cisco MDS SAN-OS Software Release 8.4.1 and later
Interfaces	<ul style="list-style-type: none"> • One RS-232 RJ-45 console port • One 10/100/1000 Ethernet management port • Two USB 3.0 ports

Feature	Description
Indicators	<ul style="list-style-type: none"> • Supervisor ID LED • Supervisor status LED • System status LED • Active supervisor LED • Power management LED • 10/100/1000 management port link and activity LED • Log flash-memory activity LED → USB 1 activity LED • Slot 0 activity LED
Switching bandwidth	<ul style="list-style-type: none"> • Front-panel Fibre Channel system bandwidth: <ul style="list-style-type: none"> ◦ Up to 24 terabits per second (Tbps) in a single Cisco MDS 9710 Multilayer Director chassis ◦ Up to 12 terabits per second (Tbps) in a single MDS 9706 Multilayer Director chassis • Up to 384 2/4/8-Gbps, 4/8/16-Gbps, 8/16/32-Gbps or 10-Gbps full line-rate autosensing Fibre Channel ports or 10-Gbps FCoE in a single Cisco MDS 9710 chassis • Up to 192 2/4/8-Gbps, 4/8/16-Gbps, 8/16/32-Gbps or 10-Gbps full line-rate autosensing Fibre Channel ports or 10-Gbps FCoE in a single Cisco MDS 9706 chassis
Protocols	<ul style="list-style-type: none"> • Fibre Channel standards • FC-PH, Revision 4.3 (ANSI INCITS 230-1994) • FC-PH, Amendment 1 (ANSI INCITS 230-1994/AM1-1996) • FC-PH, Amendment 2 (ANSI INCITS 230-1994/AM2-1999) • FC-PH-2, Revision 7.4 (ANSI INCITS 297-1997) • FC-PH-3, Revision 9.4 (ANSI INCITS 303-1998) • FC-PI, Revision 13 (ANSI INCITS 352-2002) • FC-PI-2, Revision 10 (ANSI INCITS 404-2006) • FC-PI-3, Revision 4 (ANSI INCITS 460-2011) • FC-PI-4, Revision 8 (ANSI INCITS 450-2008) • FC-PI-5, Revision 6 (ANSI INCITS 479-2011) • FC-FS, Revision 1.9 (ANSI INCITS 373-2003) • FC-FS-2, Revision 1.01 (ANSI INCITS 424-2007) • FC-FS-2, Amendment 1 (ANSI INCITS 424-2007/AM1-2007) • FC-FS-3, Revision 1.11 (ANSI INCITS 470-2011) • FC-LS, Revision 1.62 (ANSI INCITS 433-2007) • FC-LS-2, Revision 2.21 (ANSI INCITS 477-2011) • FC-SW-2, Revision 5.3 (ANSI INCITS 355-2001) • FC-SW-3, Revision 6.6 (ANSI INCITS 384-2004) • FC-SW-4, Revision 7.5 (ANSI INCITS 418-2006) • FC-SW-5, Revision 8.5 (ANSI INCITS 461-2010) • FC-GS-3, Revision 7.01 (ANSI INCITS 348-2001) • FC-GS-4, Revision 7.91 (ANSI INCITS 387-2004) • FC-GS-5, Revision 8.51 (ANSI INCITS 427-2007) • FC-GS-6, Revision 9.4 (ANSI INCITS 463-2010) • FCP, Revision 12 (ANSI INCITS 269-1996) • FCP-2, Revision 8 (ANSI INCITS 350-2003) • FCP-3, Revision 4 (ANSI INCITS 416-2006) • FCP-4, Revision 2b (ANSI INCITS 481-2011) • FC-SB-2, Revision 2.1 (ANSI INCITS 349-2001)

Feature	Description
	<ul style="list-style-type: none"> • FC-SB-3, Revision 1.6 (ANSI INCITS 374-2003) • FC-SB-3, Amendment 1 (ANSI INCITS 374-2003/AM1-2007) • FC-SB-4, Revision 3.0 (ANSI INCITS 466-2011) • FC-SB-5, Revision 2.00 (ANSI INCITS 485-2014) • FC-BB-6, Revision 2.00 (ANSI INCITS 509-2014) • FC-BB-2, Revision 6.0 (ANSI INCITS 372-2003) • FC-BB-3, Revision 6.8 (ANSI INCITS 414-2006) • FC-BB-4, Revision 2.7 (ANSI INCITS 419-2008) • FC-BB-5, Revision 2.0 (ANSI INCITS 462-2010) • FC-VI, Revision 1.84 (ANSI INCITS 357-2002) • FC-SP, Revision 1.8 (ANSI INCITS 426-2007) • FC-SP-2, Revision 2.71 (ANSI INCITS 496-2012) • FAIS, Revision 1.03 (ANSI INCITS 432-2007) • FAIS-2, Revision 2.23 (ANSI INCITS 449-2008) • FC-IFR, Revision 1.06 (ANSI INCITS 475-2011) • FC-FLA, Revision 2.7 (INCITS TR-20-1998) • FC-PLDA, Revision 2.1 (INCITS TR-19-1998) • FC-Tape, Revision 1.17 (INCITS TR-24-1999) • FC-MI, Revision 1.92 (INCITS TR-30-2002) • FC-MI-2, Revision 2.6 (INCITS TR-39-2005) • FC-MI-3, Revision 1.03 (INCITS TR-48-2012) • FC-DA, Revision 3.1 (INCITS TR-36-2004) • FC-DA-2, Revision 1.06 (INCITS TR-49-2012) • FC-MSQS, Revision 3.2 (INCITS TR-46-2011) • IP over Fibre Channel (RFC 2625) • IPv6, IPv4, and ARP over Fibre Channel (RFC 4338) • Extensive IETF-standards-based TCP/IP, SNMPv3, and remote monitoring (RMON) MIBs • Class of Service: Class 2, Class 3, and Class F • Fibre Channel standard port types: E, F, FL, and B • Fibre Channel enhanced port types: SD, ST, and TE
Chassis slot configuration	<ul style="list-style-type: none"> • Two Cisco MDS 9700 Series Supervisor-4 Modules required per system to provide redundancy
Features and functions	
Fabric services	<ul style="list-style-type: none"> • Name server • Registered State Change Notification (RSCN) • Login services • Fabric configuration server (FCS) • Broadcast • In-order delivery

Feature	Description
Advanced functions	<ul style="list-style-type: none"> • VSAN • IVR • PortChannel with multipath load balancing • QoS: flow-based and zone-based • N-Port ID virtualization
Diagnostics and troubleshooting tools	<ul style="list-style-type: none"> • POST diagnostics • Online diagnostics • Internal port loopbacks • SPAN and RSPAN • Fibre Channel traceroute • Fibre Channel ping • Fibre Channel debug • Syslog • Online system health • Port-level statistics • Real-Time Protocol debug
Network security	<ul style="list-style-type: none"> • VSANs • ACLs • Per-VSAN RBAC • Fibre Channel zoning <ul style="list-style-type: none"> ◦ N-Port WWN ◦ N-Port FC-ID ◦ Fx-Port WWN ◦ Fx-Port WWN and interface index ◦ Fx-Port domain ID and interface index ◦ Fx-Port domain ID and port number ◦ LUN ◦ Read-only ◦ Broadcast • FC-SP¹ <ul style="list-style-type: none"> ◦ DH-CHAP switch-switch authentication ◦ DH-CHAP host-switch authentication • Port security and fabric binding • Management access <ul style="list-style-type: none"> ◦ SSHv2 implementing AES ◦ SNMPv3 implementing AES ◦ SFTP • Cisco TrustSec[®] Fibre Channel link encryption
FICON	<ul style="list-style-type: none"> • FC-SB-5 compliant • Cascaded FICON fabrics • Intermix of FICON and Fibre Channel FCP traffic • IBM CUP management interface • Exchange Based Routing Ready

Feature	Description
Serviceability	<ul style="list-style-type: none"> • Configuration file management • Nondisruptive software upgrades for Fibre Channel interfaces • Cisco Smart Call Home • Power-management LEDs • Port beaconing • System LED • SNMP traps for alerts • Network boot
Reliability and availability	<ul style="list-style-type: none"> • Hot-swappable module • Active/active redundancy • Stateful process restart • Stateful, nondisruptive supervisor failover • Online, nondisruptive software upgrades • Virtual Routing Redundancy Protocol (VRRP) for management • Per-VSAN fabric services • Power management • Thermal management • Fabric-based multipathing
Network management	<ul style="list-style-type: none"> • Access methods through Cisco MDS 9700 Series Supervisor-4 Module <ul style="list-style-type: none"> ◦ Out-of-band 10/100/1000 Ethernet port ◦ RS-232 serial console port ◦ In-band IP over Fibre Channel • Access methods through Cisco MDS 9700 Fibre Channel switching module <ul style="list-style-type: none"> ◦ In-band FICON CUP over any Systems z FICON Channel • Access protocols <ul style="list-style-type: none"> ◦ CLI using console and Ethernet ports ◦ SNMPv3-using Ethernet port and in-band IP over Fibre Channel access ◦ FICON CUP • Distributed Device Alias service • Network security <ul style="list-style-type: none"> ◦ Per-VSAN RBAC using RADIUS- and TACACS+-based Authentication, Authorization, and Accounting (AAA) functions ◦ SFTP ◦ SSHv2 implementing AES ◦ SNMPv3 implementing AES • Management applications <ul style="list-style-type: none"> ◦ Cisco MDS 9000 family CLI ◦ Cisco Prime DCNM GUI
Programming interface	<ul style="list-style-type: none"> • Scriptable CLI • Cisco Prime DCNM web services API • Cisco Prime DCNM GUI

Feature	Description
Environmental	<ul style="list-style-type: none"> ● Temperature, ambient operating: 32 to 104°F (0 to 40°C) ● Temperature, ambient nonoperating and storage: -40 to 158°F (-40 to 70°C) ● Relative humidity, ambient (noncondensing) operating: 10 to 90% ● Relative humidity, ambient (noncondensing) nonoperating and storage: 10 to 95% ● Altitude, operating: -197 to 6500 ft (-60 to 2000m)
Physical dimensions	<ul style="list-style-type: none"> ● Dimensions (H x W x D): 2.04 x 7.5 x 21.8 in. (5.18 x 19.05 x 55.37 cm)
Weight	<ul style="list-style-type: none"> ● 7 lb (3.2 kg)
Approvals and compliance	<ul style="list-style-type: none"> ● Safety compliance <ul style="list-style-type: none"> ◦ CE Marking ◦ UL 60950 ◦ CAN/CSA-C22.2 No. 60950 ◦ EN 60950 ◦ IEC 60950 ◦ TS 001 ◦ AS/NZS 3260 ◦ IEC60825 ◦ EN60825 ◦ 21 CFR 1040 ● EMC compliance <ul style="list-style-type: none"> ◦ FCC Part 15 (CFR 47) Class A ◦ ICES-003 Class A ◦ EN 55022 Class A ◦ CISPR 22 Class A ◦ AS/NZS 3548 Class A ◦ VCCI Class A ◦ EN 55024 ◦ EN 50082-1 ◦ EN 61000-6-1 ◦ EN 61000-3-2 ◦ EN 61000-3-3 ● FIPS certified ● FIPS 140-2 Level 2

Ordering information

Table 3 provides ordering information for the Cisco MDS 9700 Series Supervisor-4 Module.

Table 3. Ordering information

Part number	Product description
Cisco MDS 9700 Series component	
DS-C9710	MDS 9710 chassis, no power supplies, fans included
DS-C9706	MDS 9706 chassis, no power supplies, fans included
DS-X97-SF4-K9	MDS 9700 Series Supervisor-4
Licensed software	
M97ENTK9	Enterprise package license for 1 MDS9700 switch
DCNM-SAN-M97-K9	DCNM for SAN license for MDS 9700
M97FIC1K9	Mainframe package license for 1 MDS9700 switch
Spare component	
DS-C9710=	MDS 9710 chassis, spare, no power supplies, fans included
DS-C9706=	MDS 9706 chassis, spare, no power supplies, fans included
DS-X7-SF4-K9=	MDS 9700 Series Supervisor-4
Licensed software	
M97ENTK9=	Enterprise package license for 1 MDS9700 switch
L-M97ENTK9=	E-delivery Enterprise package license for 1 MDS9700 switch
DCNM-SAN-M97-K9=	DCNM for SAN license for MDS 9700
L-DCNM-S-M97-K9=	E-delivery DCNM for SAN Package Advanced Edition for MDS 9700
M97FIC1K9=	Mainframe package license for 1 MDS9700 switch
L-M97FIC1K9=	E-delivery Mainframe package license for 1 MDS9700 switch

Product sustainability

Information about Cisco's Environmental, Social and Governance (ESG) initiatives and performance is provided in Cisco's CSR and sustainability [reporting](#).

Table 4. Product sustainability

Sustainability Topic		Reference
General	Information on product-material-content laws and regulations	Materials
	Information on electronic waste laws and regulations, including our products, batteries and packaging	WEEE Compliance
	Information on product takeback and resuse program	Cisco Takeback and Reuse Program
	Sustainability Inquiries	Contact: csr_inquiries@cisco.com
Material	Product packaging weight and materials	Contact: environment@cisco.com

Cisco Capital

Flexible payment solutions to help you achieve your objectives

Cisco Capital makes it easier to get the right technology to achieve your objectives, enable business transformation and help you stay competitive. We can help you reduce the total cost of ownership, conserve capital, and accelerate growth. In more than 100 countries, our flexible payment solutions can help you acquire hardware, software, services and complementary third-party equipment in easy, predictable payments.

[Learn more.](#)

For more information

For more information about the Cisco MDS 9700 Series, visit <https://www.cisco.com/go/storage> or contact your local account representative.

Americas Headquarters
Cisco Systems, Inc.
San Jose, CA

Asia Pacific Headquarters
Cisco Systems (USA) Pte. Ltd.
Singapore

Europe Headquarters
Cisco Systems International BV Amsterdam,
The Netherlands

Cisco has more than 200 offices worldwide. Addresses, phone numbers, and fax numbers are listed on the Cisco Website at <https://www.cisco.com/go/offices>.

Cisco and the Cisco logo are trademarks or registered trademarks of Cisco and/or its affiliates in the U.S. and other countries. To view a list of Cisco trademarks, go to this URL: <https://www.cisco.com/go/trademarks>. Third-party trademarks mentioned are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (1110R)