

# Contents

[Introduction](#)

[Prerequisites](#)

[Requirements](#)

[Components Used](#)

[Background Information](#)

[Working of VASI](#)

[Configure](#)

[Network Diagram](#)

[Initial Configurations](#)

[VASI Interface configuration](#)

[NAT Configuration:](#)

[Scenario 1 - NAT on Vasiright](#)

[Scenario 2 - NAT on Vasileft](#)

[Verify](#)

[Troubleshoot](#)

[Related Information](#)

## Introduction

This document describes the configuration of VASI NAT on routers that run Cisco IOS-XE

Contributed by Rohit Nair, Cisco TAC Engineer.

## Prerequisites

### Requirements

There are no specific requirements for this document.

### Components Used

This document is not restricted to specific software and hardware versions. This document applies to all Cisco routers and switches that run Cisco IOS-XE.

The information in this document was created from the devices in a specific lab environment. All of the devices used in this document started with a cleared (default) configuration. If your network is live, make sure that you understand the potential impact of any command.

## Background Information


Devices that run on IOS-XE do not support classical inter-vrf nat configurations as those found on

IOS devices. Support for Inter-vrf NAT on IOS-XE is achieved via VASI implementation.

VASI provides the ability to configure services such as IPsec, firewall and NAT to traffic that flows between VRF instances.

VASI is implemented by configuring VASI pairs, where each of the interfaces in the pair is associated with a different VRF instance. The VASI virtual interface is the next-hop interface for any packet that needs to be switched between these two VRF instances. The pairing is done automatically based on the two interface indexes such that the vasileft interface is automatically paired to the vasiright interface. Any packet that enters the vasileft interface is automatically forwarded to its paired vasiright interface.

## Working of VASI

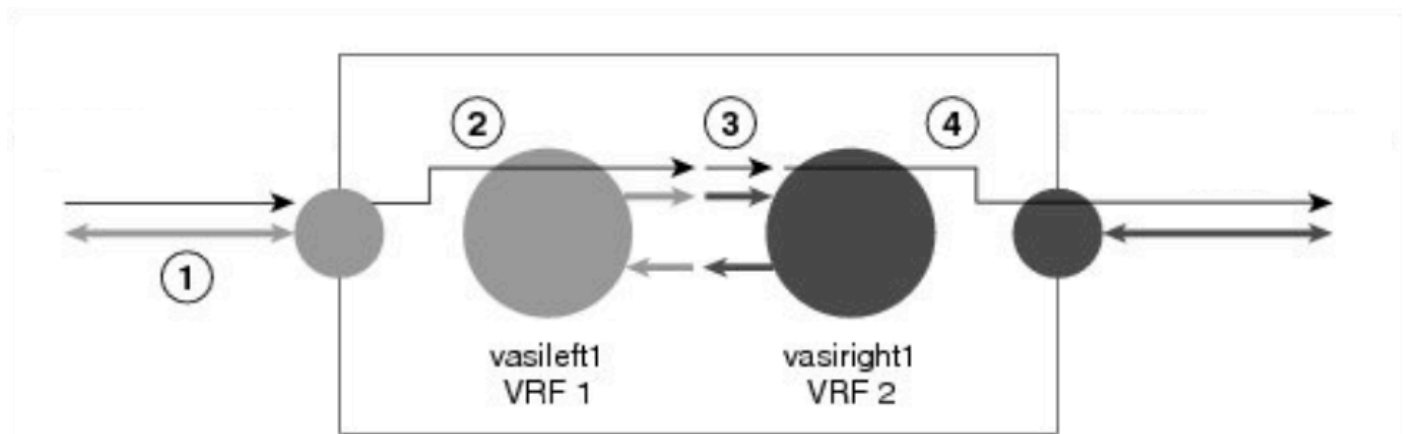


When an inter-VRF VASI is configured on the same device, the packet flow happens in the following order:

1. A packet enters the physical interface that belongs to VRF 1.
2. Before forwarding the packet, a forwarding lookup is done in the VRF 1 routing table. Vasileft1 is chosen as the next hop, and the Time to Live (TTL) value is decremented from the packet. Usually, the forwarding address is selected on the basis of the default route in the VRF. However, the forwarding address can also be a static route or a learned route. The packet is sent to the egress path of vasileft1 and then automatically sent to the vasiright1 ingress path.
3. When the packet enters vasiright1, a forwarding lookup is done in the VRF 2 routing table, and the TTL is decremented again (second time for this packet).
4. VRF 2 forwards the packet to the physical interface.

## Configure

The following scenarios describe basic inter-vrf NAT configuration.

## Network Diagram

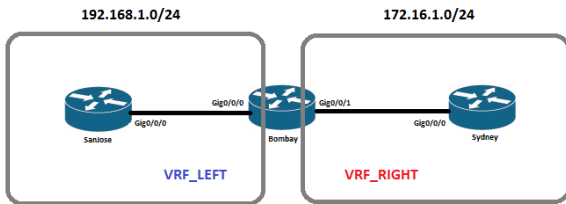

## Initial Configurations

### SanJose:

```
interface GigabitEthernet0/0/0
 ip address 192.168.1.1 255.255.255.0

ip route 0.0.0.0 0.0.0.0 192.168.1.2
```

### Bombay:

```
vrf definition VRF_LEFT
 rd 1:1
 !
 address-family ipv4
 exit-address-family
```

```
vrf definition VRF_RIGHT
 rd 2:2
 !
 address-family ipv4
 exit-address-family
```

```
interface GigabitEthernet0/0/0
 vrf forwarding VRF_LEFT
 ip address 192.168.1.2 255.255.255.0
```

```
interface GigabitEthernet0/0/1
 vrf forwarding VRF_RIGHT
 ip address 172.16.1.2 255.255.255.0
```

### Sydney:

```
interface GigabitEthernet0/0/0
 ip address 172.16.1.1 255.255.255.0
```

## VASI Interface configuration

Each VASI interface will be paired to a different VRF instance.

```
interface vasileft1
 vrf forwarding VRF_LEFT
 ip address 10.1.1.1 255.255.255.252
```

```
interface vasiright1
 vrf forwarding VRF_RIGHT
 ip address 10.1.1.2 255.255.255.252
```

## NAT Configuration:

In this example, NAT is to be configured with the following requirements:

1. Static NAT - Source IP of 192.168.1.1 should be translated to 172.16.1.5

2. Dynamic NAT - Source subnet of 192.168.1.0/24 should be translated to 172.16.1.5

## Scenario 1 - NAT on Vasiright

In most cases, the WAN interface would be on the outgoing VRF, VRF\_RIGHT in this topology. In such cases, NAT can be configured between the vasiright and the WAN interface; traffic coming in on the vasiright interface from vasileft will be configured as NAT inside, while the WAN interface would be the NAT outside interface.

In this scenario, we use static routes to traffic between the VRFs. A static route for the destination 172.16.0.0 subnet is configured on VRF\_LEFT pointing to the vasileft interface and another route for the source subnet 192.168.0.0 is configured on VRF\_RIGHT pointing to the vasiright interface.



### Note

Do not configure NAT to translate the source IP to the WAN interface IP; the router will treat return traffic to be destined to itself and will not forward traffic to the vasi interface.

## Static NAT :

*!--- Interface configuration*

```
interface vasiright1
vrf forwarding VRF_RIGHT
ip address 10.1.1.2 255.255.255.252
ip nat inside
```

```
interface GigabitEthernet0/0/1
vrf forwarding VRF_RIGHT
ip address 172.16.1.2 255.255.255.0
ip nat outside
```

*!--- Static route configuration*

```
ip route vrf VRF_LEFT 172.16.0.0 255.255.0.0 vasileft1 10.1.1.2
ip route vrf VRF_RIGHT 192.168.0.0 255.255.0.0 vasiright1 10.1.1.1
```

*!--- NAT configuration*

```
ip nat inside source static 192.168.1.1 172.16.1.5 vrf VRF_RIGHT
```

## Verification:

```
Bombay#sh ip nat translations vrf VRF_RIGHT
Pro      Inside global      Inside local      Outside local      Outside global
---      172.16.1.5         192.168.1.1      ---                ---
icmp     172.16.1.5:8       192.168.1.1:8    172.16.1.1:8      172.16.1.1:8
tcp      172.16.1.5:47491   192.168.1.1:47491 172.16.1.1:23     172.16.1.1:23
Total number of translations: 3
```

## Dynamic NAT :

```
!--- Interface configuration
```

```
interface vasiright1
vrf forwarding VRF_RIGHT
ip address 10.1.1.2 255.255.255.252
ip nat inside
```

```
interface GigabitEthernet0/0/1
vrf forwarding VRF_RIGHT
ip address 172.16.1.2 255.255.255.0
ip nat outside
```

```
!--- Static route configuration
```

```
ip route vrf VRF_LEFT 172.16.0.0 255.255.0.0 vasileft1 10.1.1.2
ip route vrf VRF_RIGHT 192.168.0.0 255.255.0.0 vasiright1 10.1.1.1
```

```
!--- Access-list configuration
```

```
Extended IP access list 100
10 permit tcp 192.168.1.0 0.0.0.255 host 172.16.1.1
20 permit udp 192.168.1.0 0.0.0.255 host 172.16.1.1
30 permit icmp 192.168.1.0 0.0.0.255 host 172.16.1.1
```

```
!--- NAT configuration
```

```
ip nat pool POOL 172.16.1.5 172.16.1.5 prefix-length 24
ip nat inside source list 100 pool POOL vrf VRF_RIGHT overload
```

## Verification:

```
Bombay#sh ip nat translations
Pro      Inside global      Inside local          Outside local          Outside global
icmp     172.16.1.5:1       192.168.1.1:15       172.16.1.1:15         172.16.1.1:1
tcp      172.16.1.5:1024    192.168.1.1:58166    172.16.1.1:23         172.16.1.1:23
Total number of translations: 2
```

## Scenario 2 - NAT on Vasileft

NAT can also be configured solely on the vasileft side, i.e VRF\_LEFT and have traffic NATTED before it is sent to VRF\_RIGHT. The incoming interface on VRF\_LEFT will be considered as the NAT inside interface, and vasileft 1 will be configured as the NAT outside interface.

In this scenario, we use static routes to traffic between the VRFs. A static route for the destination 172.16.0.0 subnet is configured on VRF\_LEFT pointing to the vasileft interface and another route for the source natted IP 172.16.1.5 is configured on VRF\_RIGHT pointing to the vasiright interface.

## Static NAT:

```
!--- Interface configuration
```

```
interface GigabitEthernet0/0/0
vrf forwarding VRF_LEFT
ip address 192.168.1.2 255.255.255.0
ip nat inside
```

```
interface vasileft1
 vrf forwarding VRF_LEFT
 ip address 10.1.1.1 255.255.255.252
 ip nat outside
```

*!--- Static route configuration*

```
ip route vrf VRF_LEFT 172.16.0.0 255.255.0.0 vasileft1 10.1.1.2
ip route vrf VRF_RIGHT 172.16.1.5 255.255.255.255 vasiright1 10.1.1.1
```

*!--- NAT configuration*

```
ip nat inside source static 192.168.1.1 172.16.1.5 vrf VRF_LEFT
```

## Verification:

```
Bombay#sh ip nat translations vrf VRF_LEFT
Pro      Inside global      Inside local      Outside local      Outside global
---      172.16.1.5         192.168.1.1      ---                ---
icmp     172.16.1.5:5       192.168.1.1:5    172.16.1.1:5      172.16.1.1:5
tcp      172.16.1.5:35414   192.168.1.1:35414 172.16.1.1:23     172.16.1.1:23
Total number of translations: 3
```

## Dynamic NAT:

*!--- Interface configuration*

```
interface GigabitEthernet0/0/0
 vrf forwarding VRF_LEFT
 ip address 192.168.1.2 255.255.255.0
 ip nat inside
```

```
interface vasileft1
 vrf forwarding VRF_LEFT
 ip address 10.1.1.1 255.255.255.252
 ip nat outside
```

*!--- Static route configuration*

```
ip route vrf VRF_LEFT 172.16.0.0 255.255.0.0 vasileft1 10.1.1.2
ip route vrf VRF_RIGHT 172.16.1.5 255.255.255.255 vasiright1 10.1.1.1
```

*!--- Access-list configuration*

```
Extended IP access list 100
10 permit tcp 192.168.1.0 0.0.0.255 host 172.16.1.1
20 permit udp 192.168.1.0 0.0.0.255 host 172.16.1.1
30 permit icmp 192.168.1.0 0.0.0.255 host 172.16.1.1
```

*!--- NAT configuration*

```
ip nat pool POOL 172.16.1.5 172.16.1.5 prefix-length 24
ip nat inside source list 100 pool POOL vrf VRF_LEFT overload
```

## Verification:

```
Bombay#sh ip nat translations vrf VRF_LEFT
```

Pro	Inside global	Inside local	Outside local	Outside global
icmp	172.16.1.5:1	192.168.1.1:4	172.16.1.1:4	172.16.1.1:1
tcp	172.16.1.5:1024	192.168.1.1:27593	172.16.1.1:23	172.16.1.1:23

Total number of translations: 2

## Verify

1. Check if dynamic/static routes are configured to route traffic between the two VRF instances.
2. Check if NAT has been configured for the correct VRF.

## Troubleshoot

There is currently no specific troubleshooting information available for this configuration.

## Related Information

- [Configuring the VRF-Aware Software Infrastructure](#)