



# Configuring Enhanced Object Tracking

**Last Updated: July 13, 2011**

Before the introduction of the Enhanced Object Tracking feature, the Hot Standby Router Protocol (HSRP) had a simple tracking mechanism that allowed you to track the interface line-protocol state only. If the line-protocol state of the interface went down, the HSRP priority of the router was reduced, allowing another HSRP router with a higher priority to become active.

The Enhanced Object Tracking feature separates the tracking mechanism from HSRP and creates a separate standalone tracking process that can be used by other Cisco IOS processes and HSRP. This feature allows tracking of other objects in addition to the interface line-protocol state.

A client process such as HSRP, Virtual Router Redundancy Protocol (VRRP), or Gateway Load Balancing Protocol (GLBP), can register its interest in tracking objects and then be notified when the tracked object changes state.

- [Finding Feature Information, page 1](#)
- [Restrictions for Enhanced Object Tracking, page 2](#)
- [Information About Enhanced Object Tracking, page 2](#)
- [How to Configure Enhanced Object Tracking, page 6](#)
- [Configuration Examples for Enhanced Object Tracking, page 25](#)
- [Additional References, page 30](#)
- [Feature Information for Enhanced Object Tracking, page 31](#)
- [Glossary, page 33](#)

## Finding Feature Information

Your software release may not support all the features documented in this module. For the latest feature information and caveats, see the release notes for your platform and software release. To find information about the features documented in this module, and to see a list of the releases in which each feature is supported, see the Feature Information Table at the end of this document.

Use Cisco Feature Navigator to find information about platform support and Cisco software image support. To access Cisco Feature Navigator, go to [www.cisco.com/go/cfn](http://www.cisco.com/go/cfn). An account on Cisco.com is not required.

## Restrictions for Enhanced Object Tracking

Enhanced Object Tracking is not stateful switchover (SSO)-aware and cannot be used with Hot Standby Routing Protocol (HSRP), Virtual Router Redundancy Protocol (VRRP), or Gateway Load Balancing Protocol (GLBP) in SSO mode.

## Information About Enhanced Object Tracking

- [Feature Design of Enhanced Object Tracking, page 2](#)
- [Interface State Tracking, page 3](#)
- [Scaled Route Metrics, page 3](#)
- [IP SLA Operation Tracking, page 4](#)
- [Enhanced Object Tracking and Embedded Event Manager, page 5](#)
- [EOT Support for Carrier Delay, page 5](#)
- [Enhanced Object Tracking for Mobile IP Applications, page 5](#)
- [Benefits of Enhanced Object Tracking, page 6](#)

## Feature Design of Enhanced Object Tracking

The Enhanced Object Tracking feature provides complete separation between the objects to be tracked and the action to be taken by a client when a tracked object changes. Thus, several clients such as HSRP, VRRP, or GLPB can register their interest with the tracking process, track the same object, and each take different action when the object changes.

Each tracked object is identified by a unique number that is specified on the tracking CLI. Client processes use this number to track a specific object.

The tracking process periodically polls the tracked objects and notes any change of value. The changes in the tracked object are communicated to interested client processes, either immediately or after a specified delay. The object values are reported as either up or down.

You can configure a combination of tracked objects in a list and a flexible method for combining objects using Boolean logic. This functionality includes the following capabilities:

- **Threshold**—The tracked list can be configured to use a weight or percentage threshold to measure the state of the list. Each object in a tracked list can be assigned a threshold weight. The state of the tracked list is determined by whether the threshold has been met.
- **Boolean "and" function**—When a tracked list has been assigned a Boolean "and" function, each object defined within a subset must be in an up state so that the tracked object can become up.
- **Boolean "or" function**—When the tracked list has been assigned a Boolean "or" function, at least one object defined within a subset must be in an up state so that the tracked object can become up.

As of Cisco IOS Release 15.1(3)T, 15.1(1)S and 12.2(50)SY a maximum of 1000 objects can be tracked. Although 1000 tracked objects can be configured, each tracked object uses CPU resources. The amount of available CPU resources on a router depends on variables such as traffic load and how other protocols are configured and run. The ability to use 1000 tracked objects depends on the available CPU. Testing should be conducted on site to ensure that the service works under the specific site traffic conditions.

## Interface State Tracking

An IP-routing object is considered up when the following criteria exist:

- IP routing is enabled and active on the interface.
- The interface line-protocol state is up.
- The interface IP address is known. The IP address is configured or received through Dynamic Host Configuration Protocol (DHCP) or IP Control Protocol (IPCP) negotiation.

Interface IP routing will go down when one of the following criteria exists:

- IP routing is disabled globally.
- The interface line-protocol state is down.
- The interface IP address is unknown. The IP address is not configured or received through DHCP or IPCP negotiation.

Tracking the IP-routing state of an interface using the **track interface ip routing** command can be more useful in some situations than just tracking the line-protocol state using the **track interface line-protocol** command, especially on interfaces for which IP addresses are negotiated. For example, on a serial interface that uses the PPP, the line protocol could be up (link control protocol [LCP] negotiated successfully), but IP could be down (IPCP negotiation failed).

The **track interface ip routing** command supports the tracking of an interface with an IP address acquired through any of the following methods:

- Conventional IP address configuration
- PPP/IPCP
- DHCP
- Unnumbered interface

You can configure Enhanced Object Tracking to consider the carrier-delay timer when tracking the IP-routing state of an interface by using the **carrier-delay** command in tracking configuration mode.

## Scaled Route Metrics

The **track ip route** command enables tracking of a route in the routing table. If a route exists in the table, the metric value is converted into a number. To provide a common interface to tracking clients, normalize route metric values to the range from 0 to 255, where 0 is connected and 255 is inaccessible. Scaled metrics can be tracked by setting thresholds. Up and down state notification occurs when the thresholds are crossed. The resulting value is compared against threshold values to determine the tracking state as follows:

- State is up if the scaled metric for that route is less than or equal to the up threshold.
- State is down if the scaled metric for that route is greater than or equal to the down threshold.

Tracking uses a per-protocol configurable resolution value to convert the real metric to the scaled metric. The table below shows the default values used for the conversion. You can use the **track resolution** command to change the metric resolution default values.

**Table 1**      **Metric Conversion**

Route Type <sup>1</sup>	Metric Resolution
Static	10
Enhanced Interior Gateway Routing Protocol (EIGRP)	2560
Open Shortest Path First (OSPF)	1
Intermediate System-to-Intermediate System (IS-IS)	10

For example, a change in 10 in an IS-IS metric results in a change of 1 in the scaled metric. The default resolutions are designed so that approximately one 2-Mbps link in the path will give a scaled metric of 255.

Scaling the very large metric ranges of EIGRP and IS-IS to a 0 to 255 range is a compromise. The default resolutions will cause the scaled metric to exceed the maximum limit with a 2-Mb/s link. However, this scaling allows a distinction between a route consisting of three Fast-Ethernet links and a route consisting of four Fast-Ethernet links.

## IP SLA Operation Tracking

Object tracking of IP Service Level Agreements (SLAs) operations allows tracking clients to track the output from IP SLAs objects and use the provided information to trigger an action.

Cisco IOS IP SLAs is a network performance measurement and diagnostics tool that uses active monitoring. Active monitoring is the generation of traffic in a reliable and predictable manner to measure network performance. Cisco IOS software uses IP SLAs to collect real-time metrics such as response time, network resource availability, application performance, jitter (interpacket delay variance), connect time, throughput, and packet loss.

These metrics can be used for troubleshooting, for proactive analysis before problems occur, and for designing network topologies.

Every IP SLAs operation maintains an operation return-code value. This return code is interpreted by the tracking process. The return code can return OK, OverThreshold, and several other return codes. Different operations can have different return-code values, so only values common to all operation types are used.

Two aspects of an IP SLAs operation can be tracked: state and reachability. The difference between these aspects is the acceptance of the OverThreshold return code. The table below shows the state and reachability aspects of IP SLAs operations that can be tracked.

**Table 2**      **Comparison of State and Reachability Operations**

Tracking	Return Code	Track State
State	OK	Up
	(all other return codes)	Down

<sup>1</sup> RIP is scaled directly to the range from 0 to 255 because its maximum metric is less than 255.

Tracking	Return Code	Track State
Reachability	OK or OverThreshold	Up
	(all other return codes)	Down

## Enhanced Object Tracking and Embedded Event Manager

Enhanced Object Tracking (EOT) is now integrated with Embedded Event Manager (EEM) to allow EEM to report on status change of a tracked object and to allow EOT to track EEM objects. A new type of tracking object--a stub object--is created. The stub object can be modified by an external process through a defined Application Programming Interface (API). See the Embedded Event Manager Overview document in the *Cisco IOS Network Management Configuration Guide* for more information on how EOT works with EEM.

## EOT Support for Carrier Delay

The EOT Support for Carrier Delay feature enables Enhanced Object Tracking (EOT) to consider the carrier-delay timer when tracking the status of an interface.

If a link fails, by default there is a two-second timer that must expire before an interface and the associated routes are declared as being down. If a link goes down and comes back up before the carrier delay timer expires, the down state is effectively filtered, and the rest of the software on the switch is not aware that a link-down event occurred. You can configure the carrier-delay seconds command in interface configuration mode to extend the timer up to 60 seconds.

When EOT is configured on an interface, the tracking may detect the interface is down before a configured carrier-delay timer has expired. This is because EOT looks at the interface state and does not consider the carrier delay timer. Use the **carrier-delay** command in tracking configuration mode to enable tracking to consider the carrier-delay timer configured on an interface.

## Enhanced Object Tracking for Mobile IP Applications

The Enhanced Object Tracking Support for Mobile IP feature enables EOT to monitor the presence of Home Agent, Packet Data Serving Node (PDSN), or Gateway GPRS Support Node (GGSN) traffic on a router for mobile wireless applications.

When a redundant pair of Home Agents running HSRP between them loses connectivity, both HSRP nodes become active. Once the connectivity is restored between the two nodes, a graceful way is needed to restore proper HSRP states without losing Home Agent bindings. During the time of no connectivity, one of the nodes will continue to process Home Agent, GGSN, or PDSN traffic while the other will not. The node that continues to process traffic needs to remain active once connectivity is restored. To ensure that the active node remains in the active state, the priority of the HSRP group member that does not process Home Agent traffic is reduced. Reducing the priority of the node that is not processing Home Agent traffic ensures that this node will become the standby after connectivity is restored. When connectivity is restored, the normal Home Agent state synchronization will get all bindings back into the inactive node and, depending on the preempt configuration, it may switch over again. This state synchronization ensures that no Mobile IP, GGSN, or PDSN bindings are lost.

For more information on configuring Mobile IP services, see the following Cisco IOS configuration guides:

- *Cisco IOS Mobile Wireless Home Agent Configuration Guide*
- *Cisco IOS Mobile Wireless Gateway GPRS Support Node Configuration Guide*

- *Cisco IOS Mobile Wireless Packet Data Serving Node Configuration Guide*
- *Cisco IOS IP Mobility Configuration Guide*

## Benefits of Enhanced Object Tracking

- Increases the availability and speed of recovery of a network.
- Decreases the number of network outages and their duration.
- Enables client processes such as VRRP and GLBP to track objects individually or as a list of objects. Prior to the introduction of this functionality, the tracking process was embedded within HSRP.

## How to Configure Enhanced Object Tracking

- [Tracking the Line-Protocol State of an Interface, page 6](#)
- [Tracking the IP-Routing State of an Interface, page 8](#)
- [Tracking IP-Route Reachability, page 10](#)
- [Tracking the Threshold of IP-Route Metrics, page 12](#)
- [Tracking the State of an IP SLAs Operation, page 14](#)
- [Tracking the Reachability of an IP SLAs IP Host, page 16](#)
- [Configuring a Tracked List and Boolean Expression, page 17](#)
- [Configuring a Tracked List and Threshold Weight, page 19](#)
- [Configuring a Tracked List and Threshold Percentage, page 20](#)
- [Configuring Track List Defaults, page 22](#)
- [Configuring Tracking for Mobile IP Applications, page 23](#)

## Tracking the Line-Protocol State of an Interface

### SUMMARY STEPS

1. **enable**
2. **configure terminal**
3. **track timer interface** {*seconds* | **msec** *milliseconds*}
4. **track object-number interface type number line-protocol**
5. **carrier-delay**
6. **delay** {**up** *seconds* [**down** [*seconds*] | [**up** *seconds*] **down** *seconds*]}
7. **end**
8. **show track object-number**

## DETAILED STEPS

Command or Action	Purpose
<p><b>Step 1</b> <code>enable</code></p> <p><b>Example:</b></p> <pre>Router&gt; enable</pre>	<p>Enables privileged EXEC mode.</p> <ul style="list-style-type: none"> <li>Enter your password if prompted.</li> </ul>
<p><b>Step 2</b> <code>configure terminal</code></p> <p><b>Example:</b></p> <pre>Router# configure terminal</pre>	<p>Enters global configuration mode.</p>
<p><b>Step 3</b> <code>track timer interface {seconds   msec milliseconds}</code></p> <p><b>Example:</b></p> <pre>Router(config)# track timer interface 5</pre>	<p>(Optional) Specifies the interval in which the tracking process polls the tracked object.</p> <ul style="list-style-type: none"> <li>The default interval that the tracking process polls interface objects is 1 second.</li> </ul> <p><b>Note</b> All polling frequencies can be configured down to 500 milliseconds, overriding the minimum 1-second interval configured using the <b>msec</b> keyword and <i>milliseconds</i> argument.</p>
<p><b>Step 4</b> <code>track object-number interface type number line-protocol</code></p> <p><b>Example:</b></p> <pre>Router(config)# track 3 interface ethernet 0/1 line-protocol</pre>	<p>Tracks the line-protocol state of an interface and enters tracking configuration mode.</p>
<p><b>Step 5</b> <code>carrier-delay</code></p> <p><b>Example:</b></p> <pre>Router(config-track)# carrier-delay</pre>	<p>(Optional) Enables EOT to consider the carrier-delay timer when tracking the status of an interface.</p>
<p><b>Step 6</b> <code>delay {up seconds [down [seconds]   [up seconds] down seconds]}</code></p> <p><b>Example:</b></p> <pre>Router(config-track)# delay up 30</pre>	<p>(Optional) Specifies a period of time (in seconds) to delay communicating state changes of a tracked object.</p>

Command or Action	Purpose
<b>Step 7</b> <code>end</code>  <b>Example:</b> <pre>Router(config-track)# end</pre>	Exits to privileged EXEC mode.
<b>Step 8</b> <code>show track object-number</code>  <b>Example:</b> <pre>Router# show track 3</pre>	(Optional) Displays tracking information. <ul style="list-style-type: none"> <li>Use this command to verify the configuration.</li> </ul>

### Example

The following example shows the state of the line protocol on an interface when it is tracked:

```
Router# show track 3

Track 3
  Interface Ethernet0/1 line-protocol
  Line protocol is Up
  1 change, last change 00:00:05
  Tracked by:
    HSRP Ethernet0/3 1
```

## Tracking the IP-Routing State of an Interface

### SUMMARY STEPS

- `enable`
- `configure terminal`
- `track timer interface {seconds | msec milliseconds}`
- `track object-number interface type number ip routing`
- `carrier-delay`
- `delay {up seconds [down seconds] | [up seconds] down seconds}`
- `end`
- `show track object-number`

### DETAILED STEPS

Command or Action	Purpose
<b>Step 1</b> <code>enable</code>  <b>Example:</b> <pre>Router&gt; enable</pre>	Enables privileged EXEC mode. <ul style="list-style-type: none"> <li>Enter your password if prompted.</li> </ul>

Command or Action	Purpose
<p><b>Step 2</b> <code>configure terminal</code></p> <p><b>Example:</b></p> <pre>Router# configure terminal</pre>	<p>Enters global configuration mode.</p>
<p><b>Step 3</b> <code>track timer interface {seconds   msec milliseconds}</code></p> <p><b>Example:</b></p> <pre>Router(config)# track timer interface 5</pre>	<p>(Optional) Specifies the interval in which the tracking process polls the tracked object.</p> <ul style="list-style-type: none"> <li>The default interval that the tracking process polls interface objects is 1 second.</li> </ul> <p><b>Note</b> All polling frequencies can be configured down to 500 milliseconds, overriding the minimum 1-second interval configured using the <b>msec</b> keyword and <i>milliseconds</i> argument.</p>
<p><b>Step 4</b> <code>track object-number interface type number ip routing</code></p> <p><b>Example:</b></p> <pre>Router(config)# track 1 interface ethernet 0/1 ip routing</pre>	<p>Tracks the IP-routing state of an interface and enters tracking configuration mode.</p> <ul style="list-style-type: none"> <li>IP-route tracking tracks an IP route in the routing table and the ability of an interface to route IP packets.</li> </ul>
<p><b>Step 5</b> <code>carrier-delay</code></p> <p><b>Example:</b></p> <pre>Router(config-track)# carrier-delay</pre>	<p>(Optional) Enables EOT to consider the carrier-delay timer when tracking the status of an interface.</p>
<p><b>Step 6</b> <code>delay {up seconds [down seconds]   [up seconds] down seconds}</code></p> <p><b>Example:</b></p> <pre>Router(config-track)# delay up 30</pre>	<p>(Optional) Specifies a period of time (in seconds) to delay communicating state changes of a tracked object.</p>
<p><b>Step 7</b> <code>end</code></p> <p><b>Example:</b></p> <pre>Router(config-track)# end</pre>	<p>Returns to privileged EXEC mode.</p>

Command or Action	Purpose
<b>Step 8</b> <code>show track object-number</code>  <b>Example:</b>  Router# <code>show track 1</code>	Displays tracking information. <ul style="list-style-type: none"> <li>Use this command to verify the configuration.</li> </ul>

### Example

The following example shows the state of IP routing on an interface when it is tracked:

```
Router# show track 1
Track 1
  Interface Ethernet0/1 ip routing
  IP routing is Up
    1 change, last change 00:01:08
  Tracked by:
    HSRP Ethernet0/3 1
```

## Tracking IP-Route Reachability

Perform this task to track the reachability of an IP route. A tracked object is considered up when a routing table entry exists for the route and the route is accessible.

### SUMMARY STEPS

- enable
- configure terminal
- track timer ip route {seconds | msec milliseconds}
- track object-number ip route ip-address/prefix-length reachability
- delay {up seconds [down seconds] | [up seconds] down seconds}
- ip vrf vrf-name
- end
- show track object-number

### DETAILED STEPS

Command or Action	Purpose
<b>Step 1</b> <code>enable</code>  <b>Example:</b>  Router> <code>enable</code>	Enables privileged EXEC mode. <ul style="list-style-type: none"> <li>Enter your password if prompted.</li> </ul>

Command or Action	Purpose
<p><b>Step 2</b> <code>configure terminal</code></p> <p><b>Example:</b></p> <pre>Router# configure terminal</pre>	<p>Enters global configuration mode.</p>
<p><b>Step 3</b> <code>track timer ip route {seconds   msec milliseconds}</code></p> <p><b>Example:</b></p> <pre>Router(config)# track timer ip route 20</pre>	<p>(Optional) Specifies the interval in which the tracking process polls the tracked object.</p> <ul style="list-style-type: none"> <li>The default interval that the tracking process polls IP-route objects is 15 seconds.</li> </ul> <p><b>Note</b> All polling frequencies can be configured down to 500 milliseconds, overriding the minimum 1-second interval configured using the <b>msec</b> keyword and <i>milliseconds</i> argument.</p>
<p><b>Step 4</b> <code>track object-number ip route ip-address/prefix-length reachability</code></p> <p><b>Example:</b></p> <pre>Router(config)# track 4 ip route 10.16.0.0/16 reachability</pre>	<p>Tracks the reachability of an IP route and enters tracking configuration mode.</p>
<p><b>Step 5</b> <code>delay {up seconds [down seconds]   [up seconds] down seconds}</code></p> <p><b>Example:</b></p> <pre>Router(config-track)# delay up 30</pre>	<p>(Optional) Specifies a period of time (in seconds) to delay communicating state changes of a tracked object.</p>
<p><b>Step 6</b> <code>ip vrf vrf-name</code></p> <p><b>Example:</b></p> <pre>Router(config-track)# ip vrf VRF2</pre>	<p>(Optional) Configures a VPN routing and forwarding (VRF) table.</p>
<p><b>Step 7</b> <code>end</code></p> <p><b>Example:</b></p> <pre>Router(config-track)# end</pre>	<p>Returns to privileged EXEC mode.</p>

Command or Action	Purpose
<b>Step 8</b> <code>show track object-number</code>  <b>Example:</b>  Router# <code>show track 4</code>	(Optional) Displays tracking information. <ul style="list-style-type: none"> <li>Use this command to verify the configuration.</li> </ul>

### Example

The following example shows the state of the reachability of an IP route when it is tracked:

```
Router# show track 4
Track 4
  IP route 10.16.0.0 255.255.0.0 reachability
  Reachability is Up (RIP)
    1 change, last change 00:02:04
  First-hop interface is Ethernet0/1
  Tracked by:
    HSRP Ethernet0/3 1
```

## Tracking the Threshold of IP-Route Metrics

### SUMMARY STEPS

- enable
- configure terminal
- track timer ip route {seconds | msec milliseconds}
- track resolution ip route {eigrp | isis | ospf | static} resolution-value
- track object-number ip route ip-address/prefix-length metric threshold
- delay {up seconds [down seconds] | [up seconds] down seconds}
- ip vrf vrf-name
- threshold metric {up number [down number] | down number [up number]}
- end
- show track object-number

### DETAILED STEPS

Command or Action	Purpose
<b>Step 1</b> <code>enable</code>  <b>Example:</b>  Router> <code>enable</code>	Enables privileged EXEC mode. <ul style="list-style-type: none"> <li>Enter your password if prompted.</li> </ul>

	Command or Action	Purpose
<b>Step 2</b>	<b>configure terminal</b>  <b>Example:</b>  Router# configure terminal	Enters global configuration mode.
<b>Step 3</b>	<b>track timer ip route</b> {seconds   msec milliseconds}  <b>Example:</b>  Router(config)# track timer ip route 20	(Optional) Specifies the interval in which the tracking process polls the tracked object. <ul style="list-style-type: none"> <li>The default interval that the tracking process polls IP-route objects is 15 seconds.</li> </ul> <b>Note</b> All polling frequencies can be configured down to 500 milliseconds, overriding the minimum 1-second interval configured using the <b>msec</b> keyword and <i>milliseconds</i> argument.
<b>Step 4</b>	<b>track resolution ip route</b> {eigrp   isis   ospf   static} resolution-value  <b>Example:</b>  Router(config)# track resolution ip route eigrp 300	(Optional) Specifies resolution parameters for a tracked object. <ul style="list-style-type: none"> <li>Use this command to change the default metric resolution values.</li> </ul>
<b>Step 5</b>	<b>track object-number ip route ip-address/prefix-length metric threshold</b>  <b>Example:</b>  Router(config)# track 6 ip route 10.16.0.0/16 metric threshold	Tracks the scaled metric value of an IP route to determine if it is above or below a threshold and enters tracking configuration mode. <ul style="list-style-type: none"> <li>The default down value is 255, which equates to an inaccessible route.</li> <li>The default up value is 254.</li> </ul>
<b>Step 6</b>	<b>delay</b> {up seconds [down seconds]   [up seconds] down seconds}  <b>Example:</b>  Router(config-track)# delay up 30	(Optional) Specifies a period of time (in seconds) to delay communicating state changes of a tracked object.
<b>Step 7</b>	<b>ip vrf vrf-name</b>  <b>Example:</b>  Router(config-track)# ip vrf VRF1	(Optional) Configures a VRF table.

	Command or Action	Purpose
Step 8	<p><b>threshold metric</b> {<b>up number</b> [<b>down number</b>]   <b>down number</b> [<b>up number</b>] }</p> <p><b>Example:</b></p> <pre>Router(config-track)# threshold metric up 254 down 255</pre>	(Optional) Sets a metric threshold other than the default value.
Step 9	<p><b>end</b></p> <p><b>Example:</b></p> <pre>Router(config-track)# end</pre>	Exits to privileged EXEC mode.
Step 10	<p><b>show track</b> <i>object-number</i></p> <p><b>Example:</b></p> <pre>Router# show track 6</pre>	<p>(Optional) Displays tracking information.</p> <ul style="list-style-type: none"> <li>Use this command to verify the configuration.</li> </ul>

### Example

The following example shows the metric threshold of an IP route when it is tracked:

```
Router# show track 6

Track 6
  IP route 10.16.0.0 255.255.0.0 metric threshold
  Metric threshold is Up (RIP/6/102)
    1 change, last change 00:00:08
  Metric threshold down 255 up 254
  First-hop interface is Ethernet0/1
  Tracked by:
    HSRP Ethernet0/3 1
```

## Tracking the State of an IP SLAs Operation

### SUMMARY STEPS

1. **enable**
2. **configure terminal**
3. **track** *object-number* **ip sla** *operation-number* **state**
4. **delay** {**up seconds** [**down seconds**] | [**up seconds**] **down seconds**}
5. **end**
6. **show track** *object-number*

## DETAILED STEPS

Command or Action	Purpose
<p><b>Step 1</b> <b>enable</b></p> <p><b>Example:</b></p> <pre>Router&gt; enable</pre>	<p>Enables privileged EXEC mode.</p> <ul style="list-style-type: none"> <li>Enter your password if prompted.</li> </ul>
<p><b>Step 2</b> <b>configure terminal</b></p> <p><b>Example:</b></p> <pre>Router# configure terminal</pre>	<p>Enters global configuration mode.</p>
<p><b>Step 3</b> <b>track <i>object-number</i> ip sla <i>operation-number</i> state</b></p> <p><b>Example:</b></p> <pre>Router(config)# track 2 ip sla 4 state</pre>	<p>Tracks the state of an IP SLAs object and enters tracking configuration mode.</p> <p>Effective with Cisco IOS Release 12.4(20)T, 12.2(33)SXII, and 12.2(33)SRE the <b>track rtr</b> command was replaced by the <b>track ip sla</b> command.</p>
<p><b>Step 4</b> <b>delay { <i>up seconds</i> [<i>down seconds</i>   [<i>up seconds</i>] <i>down seconds</i> }</b></p> <p><b>Example:</b></p> <pre>Router(config-track)# delay up 60 down 30</pre>	<p>(Optional) Specifies a period of time (in seconds) to delay communicating state changes of a tracked object.</p>
<p><b>Step 5</b> <b>end</b></p> <p><b>Example:</b></p> <pre>Router(config-track)# end</pre>	<p>Exits to privileged EXEC mode.</p>
<p><b>Step 6</b> <b>show track <i>object-number</i></b></p> <p><b>Example:</b></p> <pre>Router# show track 2</pre>	<p>(Optional) Displays tracking information.</p> <ul style="list-style-type: none"> <li>Use this command to verify the configuration.</li> </ul>

**Example**

The following example shows the state of the IP SLAs tracking:

```
Router# show track 2

Track 2
  IP SLA 1 state
  State is Down
```

```

1 change, last change 00:00:47
Latest operation return code: over threshold
Latest RTT (milliseconds) 4
Tracked by:
  HSRP Ethernet0/1 3

```

## Tracking the Reachability of an IP SLAs IP Host

### SUMMARY STEPS

1. **enable**
2. **configure terminal**
3. **track *object-number* ip sla *operation-number* reachability**
4. **delay {*up seconds* [*down seconds*] | [*up seconds*] *downseconds*}**
5. **end**
6. **show track *object-number***

### DETAILED STEPS

	Command or Action	Purpose
Step 1	<b>enable</b>  <b>Example:</b> Router> enable	Enables privileged EXEC mode. <ul style="list-style-type: none"> <li>• Enter your password if prompted.</li> </ul>
Step 2	<b>configure terminal</b>  <b>Example:</b> Router# configure terminal	Enters global configuration mode.
Step 3	<b>track <i>object-number</i> ip sla <i>operation-number</i> reachability</b>  <b>Example:</b> Router(config)# track 2 ip sla 4 reachability	Tracks the reachability of an IP SLAs IP host and enters tracking configuration mode.  <b>Note</b> Effective with Cisco IOS Release 12.4(20)T, 12.2(33)SXII, and 12.2(33)SRE, the <b>track rtr</b> command was replaced by the <b>track ip sla</b> command.
Step 4	<b>delay {<i>up seconds</i> [<i>down seconds</i>]   [<i>up seconds</i>] <i>downseconds</i>}</b>  <b>Example:</b> Router(config-track)# delay up 30 down 10	(Optional) Specifies a period of time (in seconds) to delay communicating state changes of a tracked object.

Command or Action	Purpose
<b>Step 5</b> <code>end</code>  <b>Example:</b> <code>Router(config-track)# end</code>	Exits to privileged EXEC mode.
<b>Step 6</b> <code>show track object-number</code>  <b>Example:</b> <code>Router# show track 3</code>	(Optional) Displays tracking information. <ul style="list-style-type: none"> <li>• Use this command to verify the configuration.</li> </ul>

### Example

The following example shows whether the route is reachable:

```
Router# show track 3

Track 3
  IP SLA 1 reachability
  Reachability is Up
    1 change, last change 00:00:47
  Latest operation return code: over threshold
  Latest RTT (milliseconds) 4
  Tracked by:
    HSRP Ethernet0/1 3
```

## Configuring a Tracked List and Boolean Expression

Perform this task to configure a tracked list of objects and a Boolean expression to determine the state of the list. A tracked list contains one or more objects. The Boolean expression enables two types of calculations by using either “and” or “or” operators. For example, when you configure tracking for two interfaces using the “and” operator up means that *both* interfaces are up, and down means that either interface is down.

You may configure a tracked list state to be measured using a weight or percentage threshold. See the [Configuring a Tracked List and Threshold Weight, page 19](#) section and the [Configuring a Tracked List and Threshold Percentage, page 20](#) section.

An object must exist before it can be added to a tracked list.



### Note

The “not” operator is specified for one or more objects and negates the state of the object.

**SUMMARY STEPS**

1. **enable**
2. **configure terminal**
3. **track** *track-number* **list boolean {and | or}**
4. **object** *object-number* [**not**]
5. **delay** {**up** *seconds* [**down** *seconds*] | [**up** *seconds*] **down** *seconds*}
6. **end**

**DETAILED STEPS**

Command or Action	Purpose
<p><b>Step 1</b> <b>enable</b></p> <p><b>Example:</b></p> <pre>Router&gt; enable</pre>	<p>Enables privileged EXEC mode.</p> <ul style="list-style-type: none"> <li>• Enter your password if prompted.</li> </ul>
<p><b>Step 2</b> <b>configure terminal</b></p> <p><b>Example:</b></p> <pre>Router# configure terminal</pre>	<p>Enters global configuration mode.</p>
<p><b>Step 3</b> <b>track</b> <i>track-number</i> <b>list boolean {and   or}</b></p> <p><b>Example:</b></p> <pre>Router(config)# track 100 list boolean and</pre>	<p>Configures a tracked list object and enters tracking configuration mode.</p>
<p><b>Step 4</b> <b>object</b> <i>object-number</i> [<b>not</b>]</p> <p><b>Example:</b></p> <pre>Router(config-track)# object 3 not</pre>	<p>Specifies the object to be tracked.</p> <ul style="list-style-type: none"> <li>• The <i>object-number</i> argument has a valid range from 1 to 500. There is no default. The optional <b>not</b> keyword negates the state of the object.</li> </ul> <p><b>Note</b> The example means that when object 3 is up, the tracked list detects object 3 as down.</p>
<p><b>Step 5</b> <b>delay</b> {<b>up</b> <i>seconds</i> [<b>down</b> <i>seconds</i>]   [<b>up</b> <i>seconds</i>] <b>down</b> <i>seconds</i>}</p> <p><b>Example:</b></p> <pre>Router(config-track)# delay up 3</pre>	<p>(Optional) Specifies a tracking delay in seconds between up and down states.</p>

Command or Action	Purpose
<b>Step 6</b> end  <b>Example:</b>  Router(config-track)# end	Returns to privileged EXEC mode.

## Configuring a Tracked List and Threshold Weight

Perform this task to configure a list of tracked objects, to specify that weight be used as the threshold, and to configure a weight for each of the objects in the list of tracked objects. A tracked list contains one or more objects. Enhanced object tracking uses a threshold weight to determine the state of each object by comparing the total weight of all objects that are up against a threshold weight for each object.

You can also configure a tracked list state to be measured using a Boolean calculation or threshold percentage. See the [Configuring a Tracked List and Boolean Expression, page 17](#) section and the [Configuring a Tracked List and Threshold Percentage, page 20](#) section.

An object must exist before it can be added to a tracked list.



### Note

You cannot use the Boolean “not” operator in a weight or percentage threshold list.

### SUMMARY STEPS

1. enable
2. configure terminal
3. track *track-number* list threshold weight
4. object *object-number* [weight *weight-number*]
5. threshold weight {up *number* down *number* | up *number* | down *number*}
6. delay {up *seconds* [down *seconds*] | [up *seconds*] down *seconds*}
7. end

### DETAILED STEPS

Command or Action	Purpose
<b>Step 1</b> enable  <b>Example:</b>  Router> enable	Enables privileged EXEC mode. <ul style="list-style-type: none"> <li>• Enter your password if prompted.</li> </ul>

Command or Action	Purpose
<p><b>Step 2</b> <code>configure terminal</code></p> <p><b>Example:</b></p> <pre>Router# configure terminal</pre>	Enters global configuration mode.
<p><b>Step 3</b> <code>track track-number list threshold weight</code></p> <p><b>Example:</b></p> <pre>Router(config)# track 100 list threshold weight</pre>	<p>Configures a tracked list object and enters tracking configuration mode. The keywords are as follows:</p> <ul style="list-style-type: none"> <li>• <b>threshold</b> —Specifies that the state of the tracked list is based on a threshold.</li> <li>• <b>weight</b> —Specifies that the threshold is based on a specified weight.</li> </ul>
<p><b>Step 4</b> <code>object object-number [weight weight-number]</code></p> <p><b>Example:</b></p> <pre>Router(config-track)# object 3 weight 30</pre>	Specifies the object to be tracked. The <i>object-number</i> argument has a valid range from 1 to 500. There is no default. The optional <b>weight</b> keyword specifies a threshold weight for each object.
<p><b>Step 5</b> <code>threshold weight {up number down number   up number   down number}</code></p> <p><b>Example:</b></p> <pre>Router(config-track)# threshold weight up 30</pre>	<p>Specifies the threshold weight.</p> <ul style="list-style-type: none"> <li>• <b>up number</b> —Valid range is from 1 to 255.</li> <li>• <b>down number</b>—Range depends upon what you select for the <b>up</b> keyword. For example, if you configure 25 for up, you will see a range from 0 to 24 for down.</li> </ul>
<p><b>Step 6</b> <code>delay {up seconds [down seconds]   [up seconds] down seconds}</code></p> <p><b>Example:</b></p> <pre>Router(config-track)# delay up 3</pre>	(Optional) Specifies a tracking delay in seconds between up and down states.
<p><b>Step 7</b> <code>end</code></p> <p><b>Example:</b></p> <pre>Router(config-track)# end</pre>	Returns to privileged EXEC mode.

## Configuring a Tracked List and Threshold Percentage

Perform this task to configure a tracked list of objects, to specify that a percentage will be used as the threshold, and to specify a percentage for each object in the list. A tracked list contains one or more objects. Enhanced object tracking uses the threshold percentage to determine the state of the list by comparing the assigned percentage of each object to the list.

You may also configure a tracked list state to be measured using a Boolean calculation or threshold weight. See the [Configuring a Tracked List and Boolean Expression, page 17](#) section and the [Configuring a Tracked List and Threshold Weight, page 19](#) section.



**Note** You cannot use the Boolean “not” operator in a weight or percentage threshold list.

An object must exist before it can be added to a tracked list.

**SUMMARY STEPS**

1. **enable**
2. **configure terminal**
3. **track track-number list threshold percentage**
4. **object object-number**
5. **threshold percentage {up number [down number ] | down number [up number]}**
6. **delay {up seconds [down seconds] | [up seconds] down seconds}**
7. **end**

**DETAILED STEPS**

Command or Action	Purpose
<p><b>Step 1 enable</b></p> <p><b>Example:</b></p> <pre>Router&gt; enable</pre>	<p>Enables privileged EXEC mode.</p> <ul style="list-style-type: none"> <li>• Enter your password if prompted.</li> </ul>
<p><b>Step 2 configure terminal</b></p> <p><b>Example:</b></p> <pre>Router# configure terminal</pre>	<p>Enters global configuration mode.</p>
<p><b>Step 3 track track-number list threshold percentage</b></p> <p><b>Example:</b></p> <pre>Router(config)# track 100 list threshold percentage</pre>	<p>Configures a tracked list object and enters tracking configuration mode. The keywords are as follows:</p> <ul style="list-style-type: none"> <li>• <b>threshold</b> —Specifies that the state of the tracked list is based on a threshold.</li> <li>• <b>percentage</b> —Specifies that the threshold is based on a percentage.</li> </ul>
<p><b>Step 4 object object-number</b></p> <p><b>Example:</b></p> <pre>Router(config-track)# object 3</pre>	<p>Specifies the object to be tracked.</p> <ul style="list-style-type: none"> <li>• The <i>object-number</i> argument has a valid range from 1 to 500. There is no default.</li> </ul>

Command or Action	Purpose
<p><b>Step 5</b> <b>threshold percentage</b> { <b>up number</b> [<b>down number</b> ]   <b>down number</b> [<b>up number</b>]}   <b>Example:</b>   Router(config-track)# threshold percentage up 30</p>	<p>Specifies the threshold percentage.</p> <ul style="list-style-type: none"> <li>• <b>up number</b>—Valid range is from 1 to 100.</li> <li>• <b>down number</b> —Range depends upon what you have selected for the <b>up</b> keyword. For example, if you specify 25 as up, a range from 26 to 100 is displayed for the <b>down</b> keyword.</li> </ul>
<p><b>Step 6</b> <b>delay</b> { <b>up seconds</b> [<b>down seconds</b>]   [<b>up seconds</b>] <b>down seconds</b> }   <b>Example:</b>   Router(config-track)# delay up 3</p>	<p>(Optional) Specifies a tracking delay in seconds between up and down states.</p>
<p><b>Step 7</b> <b>end</b>   <b>Example:</b>   Router(config-track)# end</p>	<p>Returns to privileged EXEC mode.</p>

## Configuring Track List Defaults

Perform this task to configure a default delay value for a tracked list, a default object, and default threshold parameters for a tracked list.

### SUMMARY STEPS

1. **enable**
2. **configure terminal**
3. **track track-number**
4. **default { delay | object object-number | threshold percentage }**
5. **end**

### DETAILED STEPS

Command or Action	Purpose
<p><b>Step 1</b> <b>enable</b>   <b>Example:</b>   Router&gt; enable</p>	<p>Enables privileged EXEC mode.</p> <ul style="list-style-type: none"> <li>• Enter your password if prompted.</li> </ul>

Command or Action	Purpose
<p><b>Step 2</b> <code>configure terminal</code></p> <p><b>Example:</b></p> <pre>Router# configure terminal</pre>	<p>Enters global configuration mode.</p>
<p><b>Step 3</b> <code>track track-number</code></p> <p><b>Example:</b></p> <pre>Router(config)# track 3</pre>	<p>Enters tracking configuration mode.</p>
<p><b>Step 4</b> <code>default {delay   object object-number   threshold percentage}</code></p> <p><b>Example:</b></p> <pre>Router(config-track)# default delay</pre>	<p>Specifies a default delay value for a tracked list, a default object, and default threshold parameters for a tracked list.</p> <ul style="list-style-type: none"> <li>• <b>delay</b> —Reverts to the default delay.</li> <li>• <b>object object-number</b>—Specifies a default object for the track list. The valid range is from 1 to 1000.</li> <li>• <b>threshold percentage</b>—Specifies a default threshold percentage.</li> </ul>
<p><b>Step 5</b> <code>end</code></p> <p><b>Example:</b></p> <pre>Router(config-track)# end</pre>	<p>Returns to privileged EXEC mode.</p>

## Configuring Tracking for Mobile IP Applications

Perform this task to configure a tracked list of Mobile IP application objects.

### SUMMARY STEPS

1. `enable`
2. `configure terminal`
3. `track track-number application home-agent`
4. `exit`
5. `track track-number application pdsn`
6. `exit`
7. `track track-number application ggsn`
8. `end`

## DETAILED STEPS

Command or Action	Purpose
<p><b>Step 1</b> <code>enable</code></p> <p><b>Example:</b></p> <pre>Router&gt; enable</pre>	<p>Enables privileged EXEC mode.</p> <ul style="list-style-type: none"> <li>Enter your password if prompted.</li> </ul>
<p><b>Step 2</b> <code>configure terminal</code></p> <p><b>Example:</b></p> <pre>Router# configure terminal</pre>	<p>Enters global configuration mode.</p>
<p><b>Step 3</b> <code>track track-number application home-agent</code></p> <p><b>Example:</b></p> <pre>Router(config)# track 100 application home-agent</pre>	<p>(Optional) Tracks the presence of Home Agent traffic on a router and enters tracking configuration mode.</p>
<p><b>Step 4</b> <code>exit</code></p> <p><b>Example:</b></p> <pre>Router(config-track)# exit</pre>	<p>Returns to global configuration mode.</p>
<p><b>Step 5</b> <code>track track-number application pdsn</code></p> <p><b>Example:</b></p> <pre>Router(config)# track 100 application pdsn</pre>	<p>(Optional) Tracks the presence of Packet Data Serving Node (PDSN) traffic on a router tracking configuration mode.</p>
<p><b>Step 6</b> <code>exit</code></p> <p><b>Example:</b></p> <pre>Router(config-track)# exit</pre>	<p>Returns to global configuration mode.</p>
<p><b>Step 7</b> <code>track track-number application ggsn</code></p> <p><b>Example:</b></p> <pre>Router(config)# track 100 application ggsn</pre>	<p>(Optional) Tracks the presence of Gateway GPRS Support Node (GGSN) traffic on a router tracking configuration mode.</p>

Command or Action	Purpose
<b>Step 8</b> end  <b>Example:</b>  Router(config)# end	Returns to privileged EXEC mode.

## Configuration Examples for Enhanced Object Tracking

- [Example: Interface Line Protocol, page 25](#)
- [Example: Interface IP Routing, page 26](#)
- [Example: IP-Route Reachability, page 26](#)
- [Example: IP-Route Threshold Metric, page 27](#)
- [Example: IP SLAs IP Host Tracking, page 27](#)
- [Example: Boolean Expression for a Tracked List, page 28](#)
- [Example: Threshold Weight for a Tracked List, page 29](#)
- [Example: Threshold Percentage for a Tracked List, page 29](#)
- [Example Mobile IP Application Tracking, page 29](#)

### Example: Interface Line Protocol

In the following example, the tracking process is configured to track the line-protocol state of GigabitEthernet interface 1/0/0. HSRP on GigabitEthernet interface 0/0/0 then registers with the tracking process to be informed of any changes to the line-protocol state of GigabitEthernet interface 1/0/0. If the line protocol on GigabitEthernet interface 1/0/0 goes down, the priority of the HSRP group is reduced by 10.

#### Router A Configuration

```
Router(config)# track 100 interface GigabitEthernet1/0/0 line-protocol
!
Router(config)# interface GigabitEthernet0/0/0
Router(config-if)# ip address 10.1.0.21 255.255.0.0
Router(config-if)# standby 1 preempt
Router(config-if)# standby 1 ip 10.1.0.1
Router(config-if)# standby 1 priority 110
Router(config-if)# standby 1 track 100 decrement 10
```

#### Router B Configuration

```
Router(config)# track 100 interface GigabitEthernet1/0/0 line-protocol
!
Router(config)# interface GigabitEthernet0/0/0
Router(config-if)# ip address 10.1.0.22 255.255.0.0
Router(config-if)# standby 1 preempt
Router(config-if)# standby 1 ip 10.1.0.1
Router(config-if)# standby 1 priority 105
Router(config-if)# standby 1 track 100 decrement 10
```


## Example: Interface IP Routing

In the following example, the tracking process is configured to track the IP-routing capability of GigabitEthernet interface 1/0/0. HSRP on GigabitEthernet interface 0/0/0 then registers with the tracking process to be informed of any changes to the IP-routing state of GigabitEthernet interface 1/0/0. If the IP-routing state on GigabitEthernet interface 1/0/0 goes down, the priority of the HSRP group is reduced by 10.

If both serial interfaces are operational, Router A will be the HSRP active router because it has the higher priority. However, if IP on GigabitEthernet interface 1/0/0 in Router A fails, the HSRP group priority will be reduced and Router B will take over as the active router, thus maintaining a default virtual gateway service to hosts on the 10.1.0.0 subnet.

See the figure below for a sample topology.

Figure 1

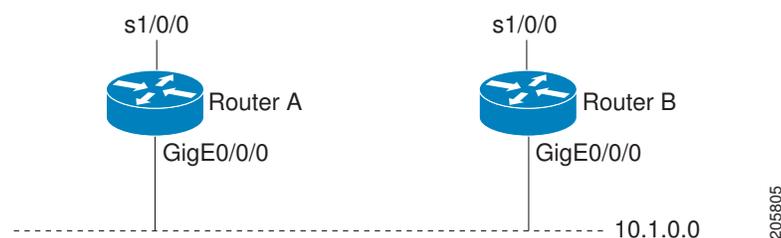

### Router A Configuration

```
Router(config)# track 100 interface GigabitEthernet1/0/0 ip routing
!
Router(config)# interface GigabitEthernet0/0/0
Router(config-if)# ip address 10.1.0.21 255.255.0.0
Router(config-if)# standby 1 preempt
Router(config-if)# standby 1 ip 10.1.0.1
Router(config-if)# standby 1 priority 110
Router(config-if)# standby 1 track 100 decrement 10
```

### Router B Configuration

```
Router(config)# track 100 interface GigabitEthernet1/0/0 ip routing
!
Router(config)# interface GigabitEthernet0/0/0
Router(config-if)# ip address 10.1.0.22 255.255.0.0
Router(config-if)# standby 1 preempt
Router(config-if)# standby 1 ip 10.1.0.1
Router(config-if)# standby 1 priority 105
Router(config-if)# standby 1 track 100 decrement 10
```

## Example: IP-Route Reachability

In the following example, the tracking process is configured to track the reachability of IP route 10.2.2.0/24:

### Router A Configuration

```
Router(config)# track 100 ip route 10.2.2.0/24 reachability
```

```

!
Router(config)# interface GigabitEthernet0/0/0
Router(config-if)# ip address 10.1.1.21 255.255.255.0
Router(config-if)# standby 1 preempt
Router(config-if)# standby 1 ip 10.1.1.1
Router(config-if)# standby 1 priority 110
Router(config-if)# standby 1 track 100 decrement 10

```

### Router B Configuration

```

Router(config)# track 100 ip route 10.2.2.0/24 reachability
!
Router(config)# interface GigabitEthernet0/0/0
Router(config-if)# ip address 10.1.1.22 255.255.255.0
Router(config-if)# standby 1 preempt
Router(config-if)# standby 1 ip 10.1.1.1
Router(config-if)# standby 1 priority 105
Router(config-if)# standby 1 track 100 decrement 10

```

## Example: IP-Route Threshold Metric

In the following example, the tracking process is configured to track the threshold metric of IP route 10.2.2.0/24:

### Router A Configuration

```

Router(config)# track 100 ip route 10.2.2.0/24 metric threshold
!
Router(config)# interface GigabitEthernet0/0/0
Router(config-if)# ip address 10.1.1.21 255.255.255.0
Router(config-if)# standby 1 preempt
Router(config-if)# standby 1 ip 10.1.1.1
Router(config-if)# standby 1 priority 110
Router(config-if)# standby 1 track 100 decrement 10

```

### Router B Configuration

```

Router(config)# track 100 ip route 10.2.2.0/24 metric threshold
!
Router(config)# interface GigabitEthernet0/0/0
Router(config-if)# ip address 10.1.1.22 255.255.255.0
Router(config-if)# standby 1 preempt
Router(config-if)# standby 1 ip 10.1.1.1
Router(config-if)# standby 1 priority 105
Router(config-if)# standby 1 track 100 decrement 10

```

## Example: IP SLAs IP Host Tracking

The following example shows how to configure IP host tracking for IP SLAs operation 1 in Cisco IOS releases prior to Cisco IOS Release 12.4(20)T, 12.2(33)SXII, and 12.2(33)SRE:

```

Router(config)# ip sla 1
Router(config-ip-sla)# icmp-echo 10.51.12.4
Router(config-ip-sla-echo)# timeout 1000
Router(config-ip-sla-echo)# threshold 2
Router(config-ip-sla-echo)# frequency 3
Router(config-ip-sla-echo)# request-data-size 1400
Router(config-ip-sla-echo)# exit
Router(config)# ip sla schedule 1 start-time now life forever
Router(config-ip-sla)# track 2 rtr 1 state
Router(config-ip-sla)# exit
Router(config)# track 3 rtr 1 reachability
Router(config-track)# exit

```

```

Router(config)# interface ethernet0/1
Router(config-if)# ip address 10.21.0.4 255.255.0.0
Router(config-if)# no shutdown
Router(config-if)# standby 3 ip 10.21.0.10
Router(config-if)# standby 3 priority 120
Router(config-if)# standby 3 preempt
Router(config-if)# standby 3 track 2 decrement 10
Router(config-if)# standby 3 track 3 decrement 10

```

The following example shows how to configure IP host tracking for IP SLAs operation 1 in Cisco IOS Release 12.4(20)T, 12.2(33)SXII, 12.2(33)SRE, and later releases:

```

Router(config)# ip sla 1
Router(config-ip-sla)# icmp-echo 10.51.12.4
Router(config-ip-sla-echo)# threshold 2
Router(config-ip-sla-echo)# timeout 1000
Router(config-ip-sla-echo)# frequency 3
Router(config-ip-sla-echo)# request-data-size 1400
Router(config-ip-sla-echo)# exit
Router(config)# ip sla schedule 1 start-time now life forever
Router(config)# track 2 ip sla 1 state
Router(config-track)# exit
Router(config)# track 3 ip sla 1 reachability
Router(config-track)# exit
Router(config)# interface ethernet0/1
Router(config-if)# ip address 10.21.0.4 255.255.0.0
Router(config-if)# no shutdown
Router(config-if)# standby 3 ip 10.21.0.10
Router(config-if)# standby 3 priority 120
Router(config-if)# standby 3 preempt
Router(config-if)# standby 3 track 2 decrement 10
Router(config-if)# standby 3 track 3 decrement 10

```

## Example: Boolean Expression for a Tracked List

In the following example, a track list object is configured to track two GigabitEthernet interfaces when both interfaces are up and when either interface is down:

```

Router(config)# track 1 interface GigabitEthernet2/0/0 line-protocol
Router(config)# track 2 interface GigabitEthernet2/1/0 line-protocol
Router(config-track)# exit
Router(config)# track 100 list boolean and
Router(config-track)# object 1
Router(config-track)# object 2

```

In the following example, a track list object is configured to track two GigabitEthernet interfaces when either interface is up and when both interfaces are down:

```

Router(config)# track 1 interface GigabitEthernet2/0/0 line-protocol
Router(config)# track 2 interface GigabitEthernet2/1/0 line-protocol
Router(config-track)# exit
Router(config)# track 101 list boolean or
Router(config-track)# object 1
Router(config-track)# object 2

```

The following configuration example shows that tracked list 4 has two objects and one object state is negated (if the list is up, the list detects that object 2 is down):

```

Router(config)# track 4 list boolean and
Router(config-track)# object 1
Router(config-track)# object 2 not

```

## Example: Threshold Weight for a Tracked List

In the following example, three GigabitEthernet interfaces in tracked list 100 are configured with a threshold weight of 20 each. The down threshold is configured to 0 and the up threshold is configured to 40:

```
Router(config)# track 1 interface GigabitEthernet2/0/0 line-protocol
Router(config)# track 2 interface GigabitEthernet2/1/0 line-protocol
Router(config)# track 3 interface GigabitEthernet2/2/0 line-protocol
Router(config-track)# exit
Router(config)# track 100 list threshold weight
Router(config-track)# object 1 weight 20
Router(config-track)# object 2 weight 20
Router(config-track)# object 3 weight 20
Router(config-track)# threshold weight up 40 down 0
```

In the example above the track-list object goes down only when all three serial interfaces go down, and comes up again only when at least two interfaces are up (because  $20 + 20 \geq 40$ ). The advantage of this configuration is that it prevents the track-list object from coming up if two interfaces are down and the third interface is flapping.

The following configuration example shows that if object 1 and object 2 are down, then track list 4 is up, because object 3 satisfies the up threshold value of up 30. But, if object 3 is down, both objects 1 and 2 need to be up in order to satisfy the threshold weight.

```
Router(config)# track 4 list threshold weight
Router(config-track)# object 1 weight 15
Router(config-track)# object 2 weight 20
Router(config-track)# object 3 weight 30
Router(config-track)# threshold weight up 30 down 10
```

This configuration may be useful to you if you have two small bandwidth connections (represented by object 1 and 2) and one large bandwidth connection (represented by object 3). Also the down 10 value means that once the tracked object is up, it will not go down until the threshold value is lower or equal to 10, which in this example means that all connections are down.

## Example: Threshold Percentage for a Tracked List

In the following example, four GigabitEthernet interfaces in track list 100 are configured for an up threshold percentage of 75. The track list is up when 75 percent of the interfaces are up and down when fewer than 75 percent of the interfaces are up.

```
Router(config)# track 1 interface GigabitEthernet2/0/0 line-protocol
Router(config)# track 2 interface GigabitEthernet2/1/0 line-protocol
Router(config)# track 3 interface GigabitEthernet2/2/0 line-protocol
Router(config)# track 4 interface GigabitEthernet2/3/0 line-protocol
Router(config-track)# exit
Router(config)# track 100 list threshold percentage
Router(config-track)# object 1
Router(config-track)# object 2
Router(config-track)# object 3
Router(config-track)# object 4
Router(config-track)# threshold percentage up 75
```

## Example Mobile IP Application Tracking

The following example shows how to configure EOT to track Mobile IP, GGSN, and PDSN traffic on a router:

```
Router(config)# track 1 application home-agent
```

```

Router(config-track)# exit
Router(config)# track 2 application ggsn
Router(config-track)# exit
Router(config)# track 3 application pdsn

```

## Additional References

### Related Documents

Related Topic	Document Title
Cisco IOS commands	<a href="#">Cisco IOS Master Commands List, All Releases</a>
Embedded Event Manager	<i>Embedded Event Manager Overview</i>
HSRP concepts and configuration tasks	<i>Configuring HSRP</i>
GLBP concepts and configuration tasks	<i>Configuring GLBP</i>
IP SLAs commands	<i>Cisco IOS IP SLAs Command Reference</i>
VRRP concepts and configuration tasks	<i>Configuring VRRP</i>
GLBP, HSRP, and VRRP commands	<i>Cisco IOS IP Application Services Command Reference</i>

### Standards

Standards	Title
No new or modified standards are supported by this feature, and support for existing standards has not been modified by this feature.	—

### MIBs

MIBs	MIBs Link
No new or modified MIBs are supported by this feature, and support for existing MIBs has not been modified by this feature.	To locate and download MIBs for selected platforms, Cisco software releases, and feature sets, use Cisco MIB Locator found at the following URL: <a href="http://www.cisco.com/go/mibs">http://www.cisco.com/go/mibs</a>

### RFCs

RFCs	Title
No new or modified RFCs are supported by this feature, and support for existing RFCs has not been modified by this feature.	—

### Technical Assistance

Description	Link
The Cisco Support and Documentation website provides online resources to download documentation, software, and tools. Use these resources to install and configure the software and to troubleshoot and resolve technical issues with Cisco products and technologies. Access to most tools on the Cisco Support and Documentation website requires a Cisco.com user ID and password.	<a href="http://www.cisco.com/cisco/web/support/index.html">http://www.cisco.com/cisco/web/support/index.html</a>

## Feature Information for Enhanced Object Tracking

The following table provides release information about the feature or features described in this module. This table lists only the software release that introduced support for a given feature in a given software release train. Unless noted otherwise, subsequent releases of that software release train also support that feature.

Use Cisco Feature Navigator to find information about platform support and Cisco software image support. To access Cisco Feature Navigator, go to [www.cisco.com/go/cfn](http://www.cisco.com/go/cfn). An account on Cisco.com is not required.

**Table 3** Feature Information for Enhanced Object Tracking

Feature Name	Releases	Feature Configuration Information
Enhanced Tracking Support	Cisco IOS XE 3.1.0SG 12.2(15)T 12.2(25)S 12.2(28)SB 12.2(33)SRA 12.2(33)SXH	The Enhanced Tracking Support feature separates the tracking mechanism from HSRP and creates a separate standalone tracking process that can be used by other Cisco IOS processes as well as HSRP. This feature allows tracking of other objects in addition to the interface line-protocol state.  The following commands were introduced or modified by this feature: <b>debug track</b> , <b>delay tracking ip vrf</b> , <b>show track</b> , <b>standby track</b> , <b>threshold metric</b> , <b>track interface</b> , <b>track ip route</b> , <b>track timer</b> .

Feature Name	Releases	Feature Configuration Information
FHRP--Enhanced Object Tracking Integration with Embedded Event Manager	12.2(33)SRB 12.2(33)SXI 12.4(2)T	EOT is now integrated with EEM to allow EEM to report on a status change of a tracked object and to allow EOT to track EEM objects.  The following commands were introduced or modified by this feature: <b>action track read, action track set, default-state,event resource, event rf,event track, show track, track stub.</b>
FHRP--Enhanced Object Tracking of IP SLAs Operations	Cisco IOS XE 3.1.0SG 12.2(25)S 12.2(27)SBC 12.2(33)SRA 12.2(33)SXH 12.3(4)T 15.0(1)S	This feature enables First Hop Redundancy Protocols (FHRPs) and other Enhanced Object Tracking (EOT) clients to track the output from IP SLAs objects and use the provided information to trigger an action.  The following command was introduced by this feature: <b>track rtr.</b>
FHRP--Enhanced Object Tracking Support for Mobile IP	12.4(11)T	The FHRP--Enhanced Object Tracking Support for Mobile IP feature provides new tracking objects needed by mobile wireless applications to track the presence of Home Agent, GGSN, or PDSN traffic on a router.  The following command was introduced by this feature: <b>track application.</b>
FHRP--EOT Deprecation of <b>rtr</b> Keyword	12.2(33)SRE 12.2(33)SXI1 12.4(20)T	This feature replaces the <b>track rtr</b> command with the <b>track ip sla</b> command.  The following command was introduced by this feature: <b>track ip sla.</b>

Feature Name	Releases	Feature Configuration Information
FHRP--Object Tracking List	Cisco IOS XE 3.1.0SG 12.2(30)S 12.2(31)SB2 12.2(33)SRA 12.2(33)SXH 12.3(8)T 15.0(1)S	This feature enhances the tracking capabilities to enable the configuration of a combination of tracked objects in a list, and a flexible method of combining objects using Boolean logic.  The following commands were introduced or modified by this feature: <b>show track</b> , <b>threshold percentage</b> , <b>threshold weight</b> , <b>track list</b> , <b>track resolution</b> .
EOT Support for Carrier Delay	12.4(9)T	The EOT Support for Carrier Delay feature enables Enhanced Object Tracking (EOT) to consider the carrier-delay timer when tracking the status of an interface.  The following commands were introduced or modified by this feature: <b>carrier-delay (tracking)</b> , <b>show track</b> .

## Glossary

**DHCP**—Dynamic Host Configuration Protocol. DHCP is a protocol that delivers IP addresses and configuration information to network clients.

**GGSN**—Gateway GPRS Support Node. A wireless gateway that allows mobile cell phone users to access the public data network (PDN) or specified private IP networks. The GGSN function is implemented on the Cisco routers.

**GLBP**—Gateway Load Balancing Protocol. Provides automatic router backup for IP hosts that are configured with a single default gateway on an IEEE 802.3 LAN. Multiple first-hop routers on the LAN combine to offer a single virtual first-hop IP router while sharing the IP packet forwarding load. Other routers on the LAN may act as redundant (GLBP) routers that will become active if any of the existing forwarding routers fail.

**GPRS**—General Packet Radio Service. A 2.5G mobile communications technology that enables mobile wireless service providers to offer their mobile subscribers with packet-based data services over GSM networks.

**GSM network**—Global System for Mobile Communications network. A digital cellular technology that is used worldwide, predominantly in Europe and Asia. GSM is the world's leading standard in digital wireless communications.

**Home Agent**—A Home Agent is a router on the home network of the Mobile Node (MN) that maintains an association between the home IP address of the MN and its care-of address, which is the current location of the MN on a foreign or visited network. The HA redirects packets by tunneling them to the MN while it is away from the home network.

**HSRP**—Hot Standby Router Protocol. Provides high network availability and transparent network topology changes. HSRP creates a Hot Standby router group with a lead router that services all packets sent to the Hot Standby address. The lead router is monitored by other routers in the group, and if it fails, one of these standby routers inherits the lead position and the Hot Standby group address.

**IPCP**—IP Control Protocol. The protocol used to establish and configure IP over PPP.

**LCP**—Link Control Protocol. The protocol used to establish, configure, and test data-link connections for use by PPP.

**PDSN**—Packet Data Serving Node. The Cisco PDSN is a standards-compliant, wireless gateway that enables packet data services in a Code Division Multiplex Access (CDMA) environment. Acting as an access gateway, the Cisco PDSN provides simple IP and Mobile IP access, foreign-agent support, and packet transport for Virtual Private Networks (VPN).

**PPP**—Point-to-Point Protocol. Provides router-to-router and host-to-network connections over synchronous and asynchronous circuits. PPP is most commonly used for dial-up Internet access. Its features include address notification, authentication via CHAP or PAP, support for multiple protocols, and link monitoring.

**VRF**—VPN routing and forwarding instance. A VRF consists of an IP routing table, a derived forwarding table, a set of interfaces that use the forwarding table, and a set of rules and routing protocols that determine what goes into the forwarding table. In general, a VRF includes the routing information that defines a customer VPN site that is attached to a provider edge router.

**VRRP**—Virtual Router Redundancy Protocol. Eliminates the single point of failure inherent in the static default routed environment. VRRP specifies an election protocol that dynamically assigns responsibility for a virtual router to one of the VRRP routers on a LAN. The VRRP router that controls the IP addresses associated with a virtual router is called the master, and forwards packets sent to these IP addresses. The election process provides dynamic failover in the forwarding responsibility should the master become unavailable. Any of the virtual router IP addresses on a LAN can then be used as the default first-hop router by end hosts.

Cisco and the Cisco Logo are trademarks of Cisco Systems, Inc. and/or its affiliates in the U.S. and other countries. A listing of Cisco's trademarks can be found at [www.cisco.com/go/trademarks](http://www.cisco.com/go/trademarks). Third party trademarks mentioned are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (1005R)

Any Internet Protocol (IP) addresses and phone numbers used in this document are not intended to be actual addresses and phone numbers. Any examples, command display output, network topology diagrams, and other figures included in the document are shown for illustrative purposes only. Any use of actual IP addresses or phone numbers in illustrative content is unintentional and coincidental.