



## Command Reference for Cisco NCS 1010


**First Published:** 2022-07-29

**Last Modified:** 2024-10-29

### Americas Headquarters

Cisco Systems, Inc.  
170 West Tasman Drive  
San Jose, CA 95134-1706  
USA  
<http://www.cisco.com>  
Tel: 408 526-4000  
800 553-NETS (6387)  
Fax: 408 527-0883



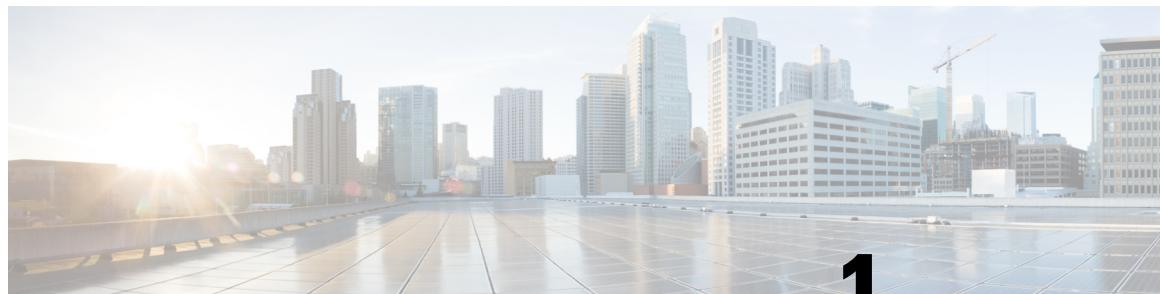

# CHAPTER 1

## List of Commands

---

This guide describes the commands supported in NCS 1010.

- [apc, on page 3](#)
- [apc-local, on page 4](#)
- [apc-pause, on page 5](#)
- [automatic-link-bringup, on page 5](#)
- [bfr-pause, on page 6](#)
- [bridge-port routed-interface, on page 7](#)
- [cdp, on page 8](#)
- [cdp advertise, on page 8](#)
- [cdp holdtime, on page 9](#)
- [cdp timer, on page 10](#)
- [commit, on page 10](#)
- [connector-loss, on page 11](#)
- [controller ots, on page 12](#)
- [controller dfb, on page 16](#)
- [controller osc, on page 18](#)
- [controller ots-och, on page 20](#)
- [drop-psd, on page 21](#)
- [dual-band-psd, on page 22](#)
- [fiber-type, on page 22](#)
- [fpd auto-upgrade, on page 23](#)
- [gain-estimator, on page 24](#)
- [http client connection, on page 25](#)
- [http client response, on page 25](#)
- [http client ssl, on page 26](#)
- [http client secure-verify-host, on page 27](#)
- [http client secure-verify-peer, on page 28](#)
- [http client source interface, on page 28](#)
- [http client tcp-window-scale, on page 29](#)
- [http client version, on page 30](#)
- [http client vrf, on page 31](#)
- [hw-module, on page 31](#)
- [interface, on page 32](#)

- [ipv4-access-group](#), on page 33
- [ipv6-access-group](#), on page 34
- [ipv4-access-list](#), on page 35
- [ipv6-access-list](#), on page 36
- [ipv4 address](#), on page 37
- [ipv6 address](#), on page 38
- [link-tuner](#), on page 39
- [license smart deregister](#), on page 40
- [license smart register](#), on page 40
- [license smart renew](#), on page 41
- [license smart reservation install file](#), on page 41
- [license smart transport](#), on page 42
- [ntp](#), on page 43
- [olc bfr-initialize](#), on page 43
- [olc bfr-pause](#), on page 44
- [olc force-raman-turn-up](#), on page 45
- [olc otdr raman-turn-up](#), on page 45
- [olc start-raman-turn-up](#), on page 46
- [olc start-gain-estimation](#), on page 47
- [olc start-raman-tuning](#), on page 47
- [optical-line-control](#), on page 47
- [otdr auto-scan](#), on page 48
- [otdr start](#), on page 48
- [otdr stop](#), on page 49
- [partner-band-port](#), on page 49
- [pm](#), on page 50
- [process restart](#), on page 58
- [psd](#), on page 58
- [psd-min](#), on page 59
- [raman-tuning](#), on page 59
- [raman-tx-power](#), on page 60
- [reload](#), on page 61
- [server](#), on page 65
- [show access-lists-ipv4](#), on page 66
- [show access-lists ipv6](#), on page 68
- [show alarms](#), on page 70
- [show cdp](#), on page 71
- [show configuration commit changes](#), on page 74
- [show controllers](#), on page 79
- [show controllers raman-info](#), on page 83
- [show environment](#), on page 84
- [show fpd package](#), on page 91
- [show hw-module fpd](#), on page 92
- [show inventory](#), on page 94
- [show license all](#), on page 96
- [show logging onboard](#), on page 99

- show license platform detail, on page 100
- show license platform summary, on page 101
- show license summary, on page 102
- show license udi, on page 103
- show license usage, on page 103
- show ntp associations, on page 104
- show ntp status, on page 107
- show olc apc, on page 109
- show olc apc-local, on page 110
- show olc band-status, on page 114
- show olc gain-estimator, on page 117
- show olc link-tuner, on page 118
- show olc otdr-status, on page 120
- show olc raman-tuning, on page 121
- show olc span-loss, on page 122
- show platform, on page 123
- show tcp dump-file, on page 124
- show version, on page 125
- span-length, on page 126
- span-loss, on page 126
- tcp dump-file convert, on page 127
- tone-pattern controller, on page 128
- tone-pattern-detect controller, on page 129
- upgrade hw-module, on page 130
- ztp clean, on page 131
- ztp initiate, on page 132
- ztp terminate, on page 132

## apc

To enable or disable APC at the link level, use the **apc** command on an OLT node.

**apc { disable | enable }**

<b>Syntax Description</b>	<table border="0"> <tr> <td><b>disable</b></td><td>Disable APC</td></tr> <tr> <td><b>enable</b></td><td>Enable APC</td></tr> </table>	<b>disable</b>	Disable APC	<b>enable</b>	Enable APC
<b>disable</b>	Disable APC				
<b>enable</b>	Enable APC				

**Command Default** (config-olc-ots)

apc-local

**Command Modes****Command History**

<b>Release</b>	<b>Modification</b>
Cisco IOS XR Release 7.7.1	This command was introduced.

**Usage Guidelines**

Use this command on an OLT node. APC can be disabled and enabled at a link level only from the APC Manager for the link.

**Example**

The following is a sample configuration that disables APC.

```
RP/0/RP0/CPU0:ios#configure
RP/0/RP0/CPU0:ios(config)#optical-line-control
RP/0/RP0/CPU0:ios(config-olc)#controller ots 0/0/0/0
RP/0/RP0/CPU0:ios(config-olc-ots)#apc disable
RP/0/RP0/CPU0:ios(config-olc-ots)#commit
RP/0/RP0/CPU0:ios(config-olc-ots)#end
```

The following is a sample configuration that enables APC.

```
RP/0/RP0/CPU0:ios#configure
RP/0/RP0/CPU0:ios(config)#optical-line-control
RP/0/RP0/CPU0:ios(config-olc)#controller ots 0/0/0/0
RP/0/RP0/CPU0:ios(config-olc-ots)#apc enable
RP/0/RP0/CPU0:ios(config-olc-ots)#commit
RP/0/RP0/CPU0:ios(config-olc-ots)#end
```

# apc-local

Use the **apc-local disable** command to disable APC on an agent node.

**apc-local { RX | TX } disable**

**Syntax Description**

<b>RX</b>	Disable APC agent in RX direction
<b>TX</b>	Disable APC agent in TX direction
<b>disable</b>	Disable APC on APC agent.

**Command Modes**

(config-olc-ots)

**Command History**

<b>Release</b>	<b>Modification</b>
Cisco IOS XR Release 7.7.1	This command was introduced.

**Example**

The following is a sample configuration that disables APC locally.

```
RP/0/RP0/CPU0:ios#configure
RP/0/RP0/CPU0:ios(config)#optical-line-control
RP/0/RP0/CPU0:ios(config-olc)#controller ots 0/0/0/0
RP/0/RP0/CPU0:ios(config-olc-ots)#apc-local RX disable
RP/0/RP0/CPU0:ios(config-olc-ots)#commit
RP/0/RP0/CPU0:ios(config-olc-ots)#end
```

## apc-pause

Use the **apc-pause** command to pause APC.

### apc-pause

<b>Command Modes</b>	(config-olc-ots)				
<b>Command History</b>	<table border="1"> <thead> <tr> <th>Release</th> <th>Modification</th> </tr> </thead> <tbody> <tr> <td>Cisco IOS XR Release 7.7.1</td> <td>This command was introduced.</td> </tr> </tbody> </table>	Release	Modification	Cisco IOS XR Release 7.7.1	This command was introduced.
Release	Modification				
Cisco IOS XR Release 7.7.1	This command was introduced.				

**Usage Guidelines** If you run the apc-pause command when APC is in idle state, APC remains in the idle state until APC detects changes in the network that requires power correction. APC changes the status to paused after it detects changes, but does not perform power correction.

Running the apc-pause command, does not pause channel startup.

### Example

The following is a sample configuration that pauses APC.

```
RP/0/RP0/CPU0:ios#configure
RP/0/RP0/CPU0:ios(config)#optical-line-control
RP/0/RP0/CPU0:ios(config-olc)#controller ots 0/0/0/0
RP/0/RP0/CPU0:ios(config-olc-ots)#apc-pause
RP/0/RP0/CPU0:ios(config-olc-ots)#commit
RP/0/RP0/CPU0:ios(config-olc-ots)#end
```

## automatic-link-bringup

To enable automatic link bring up, use the **automatic-link-bringup** command. To disable automatic link bring up, use the no form of the command.

### automatic-link-bringup

### no automatic-link-bringup

<b>Command Modes</b>	(config-olc)
----------------------	--------------

**bfr-pause**

Command History	Release	Modification
	Cisco IOS XR Release 7.7.1	This command was introduced.

**Example**

The following sample configuration enables automatic link bring up.

```
RP/0/RP0/CPU0:ios#configure
RP/0/RP0/CPU0:ios(config)#optical-line-control
RP/0/RP0/CPU0:ios(config-olc)#automatic-link-bringup
RP/0/RP0/CPU0:ios(config-olc)#commit
RP/0/RP0/CPU0:ios(config-olc)#end
```

The following sample configuration disables automatic link bring up.

```
RP/0/RP0/CPU0:ios#configure
RP/0/RP0/CPU0:ios(config)#optical-line-control
RP/0/RP0/CPU0:ios(config-olc)#no automatic-link-bringup
RP/0/RP0/CPU0:ios(config-olc)#commit
RP/0/RP0/CPU0:ios(config-olc)#end
```

**bfr-pause**

Use the **bfr-pause** command to pause Band Failure Recovery(BFR). When BFR is paused, the recovery and failure procedures are not initiated in case of band failure. To resume BFR, use the **no** form of this command.

**bfr-pause****no bfr-pause**

Syntax Description	This command has no keywords or arguments.
--------------------	--

Command Modes	Controller configuration mode
---------------	-------------------------------

Command History	Release	Modification
	Cisco IOS XR Release 7.10.1	This command was introduced.

**Example 1**

The following is a sample output to pause BFR on the controller 0/0/0/0.

```
RP/0/RP0/CPU0:#configure
RP/0/RP0/CPU0: (config)#optical-line-control
RP/0/RP0/CPU0: (config-olc)#controller ots 0/0/0/0
RP/0/RP0/CPU0: (config-olc-ots) #bfr-pause
RP/0/RP0/CPU0: (config-olc-ots)#commit
```

**Example 2**

The following is a sample output to resume BFR on the controller 0/0/0.

```
RP/0/RP0/CPU0:#configure
RP/0/RP0/CPU0: (config)#optical-line-control
RP/0/RP0/CPU0: (config-olc)#controller ots 0/0/0/0
RP/0/RP0/CPU0: (config-olc-ots)#no bfr-pause
RP/0/RP0/CPU0: (config-olc-ots)#commit
```

## bridge-port routed-interface

Use the **bridge-port routed-interface** command to bridge traffic between two interfaces. For example, when connecting multiple NCS 1010 device in a Daisy Chain topology, use this command to bridge traffic between a NCS 1010 management interface and a TOR switch interface.

**bridge-port routed-interface** *type* *interface-path-id*

<b>Syntax Description</b>	<i>type</i>	Specify the Management Ethernet interface.				
	<i>interface-path-id</i>	Specify the physical or virtual interface.				
<b>Command Default</b>	None					
<b>Command Modes</b>	Interface Configuration mode					
<b>Command History</b>	<table border="1"> <thead> <tr> <th><b>Release</b></th> <th><b>Modification</b></th> </tr> </thead> <tbody> <tr> <td>Release 7.10.1</td><td>This command was introduced.</td></tr> </tbody> </table>		<b>Release</b>	<b>Modification</b>	Release 7.10.1	This command was introduced.
<b>Release</b>	<b>Modification</b>					
Release 7.10.1	This command was introduced.					
<b>Usage Guidelines</b>	None					
<b>Task ID</b>	<table border="1"> <thead> <tr> <th><b>Task ID</b></th> <th><b>Operation</b></th> </tr> </thead> <tbody> <tr> <td>Ethernet-services</td><td>read, write</td></tr> </tbody> </table>		<b>Task ID</b>	<b>Operation</b>	Ethernet-services	read, write
<b>Task ID</b>	<b>Operation</b>					
Ethernet-services	read, write					

**Example**

The following example shows how to bridge traffic between a NCS 1010 management port and TOR port:

```
RP/0/RP0/CPU0:Box(config)#interface mgmtEth0/RP0/CPU0/1
RP/0/RP0/CPU0:Box(config-if)# no ipv4 address
RP/0/RP0/CPU0:Box(config-if)# no ipv6 address
RP/0/RP0/CPU0:Box(config-if)# bridge-port routed-interface mgmtEth 0/RP0/CPU0/0
```

**cdp**

# cdp

To enable Cisco Discovery Protocol (CDP) globally or on an interface, use the **cdp** command in global configuration mode or in interface configuration mode. To disable CDP, use the **no** form of this command.

**cdp**

**no cdp**

<b>Syntax Description</b>	This command has no arguments or keywords.
---------------------------	--

<b>Command Default</b>	This command is enabled both at the global configuration level and at the interface configuration level.
------------------------	--

<b>Command Modes</b>	Global configuration (config) and Interface configuration (config-if)
----------------------	---

<b>Command History</b>	<b>Release</b>	<b>Modification</b>
	Release 7.10.1	This command was introduced.

## Example

The following example enables CDP globally.

```
RP/0/RP0/CPU0:ios#configure
RP/0/RP0/CPU0:ios(config)#cdp
RP/0/RP0/CPU0:ios(config)#commit
```

The following example enables CDP on the management interface.

```
RP/0/RP0/CPU0:ios#configure
RP/0/RP0/CPU0:ios(config)#interface mgmtEth 0/RP0/CPU0/1
RP/0/RP0/CPU0:ios(config-if)#cdp
RP/0/RP0/CPU0:ios(config-if)#commit
```

# cdp advertise

To enable CDP Version 1 advertising functionality on a device, use the **cdp advertise** command in global configuration mode. To disable CDP Version 1 functionality, use the **no** form of this command.

**cdp advertise v1**

**no cdp advertise v1**

<b>Syntax Description</b>	This command has no arguments or keywords.
---------------------------	--

<b>Command Default</b>	Enabled	
<b>Command Modes</b>	Global configuration (config)	
<b>Command History</b>	<b>Release</b>	<b>Modification</b>
	Release 7.10.1	This command was introduced.

**Usage Guidelines** When CDP is enabled, the device sends CDPv2 packets by default. CDP sends and receives CDPv1 packets if the device with which CDP is interacting does not process CDPv2 packets.

**Example**

The following example configures CDP to use CDP Version 1 in communicating with neighboring devices.

```
RP/0/RP0/CPU0:ios#configure
RP/0/RP0/CPU0:ios(config)#cdp advertise v1
RP/0/RP0/CPU0:ios(config)#commit
```

## cdp holdtime

To specify the amount of time the receiving device must hold a CDP packet sent from another device before discarding it, use the **cdp holdtime** command in global configuration mode. To revert to the default setting, use the **no** form of this command.

**cdp holdtime seconds**

**no cdp holdtime**

<b>Syntax Description</b>	<i>seconds</i>	Specifies the hold time to be sent in the CDP update packets. The default is 180 seconds. The range is 10 to 255 seconds.
<b>Command Default</b>	180 seconds	
<b>Command Modes</b>	Global configuration (config)	
<b>Command History</b>	<b>Release</b>	<b>Modification</b>
	Release 7.10.1	This command was introduced.

**Usage Guidelines** CDP packets are sent with a time to live, or hold time, value. The receiving device will discard the CDP information in the CDP packet after the hold time has elapsed.

You can set the hold time lower than the default setting of 180 seconds if you want the receiving devices to update their CDP information more rapidly.

**cdp timer**

The CDP hold time must be set to a higher number of seconds than the time between CDP transmissions, which is set using the **cdp timer** command.

**Example**

The following example configures CDP holdtime to 120 seconds.

```
RP/0/RP0/CPU0:ios#configure
RP/0/RP0/CPU0:ios(config)#cdp holdtime 120
RP/0/RP0/CPU0:ios(config)#commit
```

## **cdp timer**

To specify the frequency at which CDP update packets are sent., use the **cdp timer** command in global configuration mode. To revert to the default setting, use the **no** form of this command.

**cdp timer** *seconds*

**no cdp timer**

<b>Syntax Description</b>	<i>seconds</i> Specifies the frequency at which CDP update packets are sent. The default is 60 seconds. The range is 5 to 254 seconds.				
<b>Command Default</b>	60 seconds				
<b>Command Modes</b>	Global configuration (config)				
<b>Command History</b>	<table border="1"> <thead> <tr> <th><b>Release</b></th> <th><b>Modification</b></th> </tr> </thead> <tbody> <tr> <td>7.10.1</td> <td>This command was introduced.</td> </tr> </tbody> </table>	<b>Release</b>	<b>Modification</b>	7.10.1	This command was introduced.
<b>Release</b>	<b>Modification</b>				
7.10.1	This command was introduced.				
<b>Usage Guidelines</b>	A lower timer setting causes CDP update packets to be sent more frequently.				

**Example**

The following example configures CDP timer to 65 seconds.

```
RP/0/RP0/CPU0:ios#configure
RP/0/RP0/CPU0:ios(config)#cdp timer 65
RP/0/RP0/CPU0:ios(config)#commit
```

## **commit**

To commit the target configuration to the active (running) configuration, use the **commit** command in any configuration mode.

**commit [ replace ]**

<b>Syntax Description</b>	<b>replace</b> Replaces the entire running configuration with the contents of the target configuration.				
<b>Command Default</b>	None				
<b>Command Modes</b>	Cisco IOS XR Configuration				
<b>Command History</b>	<table border="1"> <thead> <tr> <th><b>Release</b></th> <th><b>Modification</b></th> </tr> </thead> <tbody> <tr> <td>7.7.1</td> <td>This command was introduced.</td> </tr> </tbody> </table>	<b>Release</b>	<b>Modification</b>	7.7.1	This command was introduced.
<b>Release</b>	<b>Modification</b>				
7.7.1	This command was introduced.				
<b>Usage Guidelines</b>	None				

### Example

To remove the entire running configuration on the NCS 1010 node, use the following command:

```
Fri Apr 29 06:48:46.236 UTC
RP/0/RP0/CPU0:P2B_DT_02(config)#commit replace
Fri Apr 29 06:48:53.199 UTC
This commit will replace or remove the entire running configuration. This
operation can be service affecting.
Do you wish to proceed? [no]: yes
RP/0/RP0/CPU0:ios(config)#
RP/0/RP0/CPU0:ios(config)#end
```

## connector-loss

To configure connector loss, use the **connector-loss** command.

**connector-loss { rx | tx } value**

<b>Syntax Description</b>	<b>rx</b> Connector loss at receive point
	<b>tx</b> Connector loss at transmit point
	<b>value</b> Connector loss value ranges from 0 to 20 with a unit value of 1 dB. Although the CLI description indicates the unit value as 1 dB, you can also input values in decimal format, up to five decimal places.
<b>Command Default</b>	The default connector loss is: <ul style="list-style-type: none"> <li>• 0.25 dB for ports without Raman module</li> <li>• 0.3 dB for ports with Raman module</li> </ul>
<b>Command Modes</b>	(config-olc-ots)

**controller ots**

Command History	Release	Modification
	Cisco IOS XR Release 7.7.1	This command was introduced.

**Example**

The following example is a sample configuration that configures rx and tx connector losses to 0.1 dB.

```
RP/0/RP0/CPU0:ios#configure
RP/0/RP0/CPU0:ios(config)#optical-line-control
RP/0/RP0/CPU0:ios(config-olc)#controller ots 0/0/0/0
RP/0/RP0/CPU0:ios(config-olc-ots)#connector-loss rx 1
RP/0/RP0/CPU0:ios(config-olc-ots)#connector-loss tx 1
RP/0/RP0/CPU0:ios(config-olc-ots)#commit
RP/0/RP0/CPU0:ios(config-olc-ots)#end
```

## controller ots

To configure the OTS controller, use the **controller ots** command in the controller OTS configuration mode. Use the following parameters to configure different configurations for an OTS controller on an ILA node.

```
controller ots R/S/I/P [ tx-voa-attenuation value ] [ egress-ampli-gain-range {normal | extended} ]
[ egress-ampli-gain value ] [ egress-ampli-tilt value ] [ egress-ampli-osri {on | off} ] [ egress-ampli-safety-control-mode {auto | disabled} ] [ egress-ampli-force-apr {on | off} ] [ ingress-ampli-gain-range {normal | extended} ] [ ingress-ampli-gain value ] [ raman-tx-power Raman-transmit-pump-instance ] [ power power-value ] [ raman-tx-power-disable Raman-transmit-pump-instance ] [ raman-force-apr {on | off} ] [ raman-osri {on | off} ] [ otdr scan-mode expert ] [ otdr rx auto reflectance-threshold value ] [ otdr rx auto splice-loss-threshold value ] [ otdr rx expert pulse-width value ] [ otdr tx auto reflectance-threshold value ] [ otdr tx auto splice-loss-threshold value ] [ raman-tx-power <1-N> value value ] [ otdr rx auto raman-setpoint value ] [ otdr tx auto raman-setpoint value ] [ otdr rx auto excess-reflection-threshold value ] [ otdr tx auto excess-reflection-threshold value ] [ otdr rx back-scattering value ] [ otdr tx back-scattering value ] [ otdr rx refractive-index value ] [ otdr tx refractive-index value ] [ otdr rx expert pulse-width value ] [ otdr tx expert pulse-width value ] [ otdr rx expert capture-end value ] [ otdr tx expert capture-end value ] [ otdr rx expert capture-start value ] [ otdr tx expert capture-start value ] [ otdr rx expert scan duration value ] [ otdr tx expert scan duration value ] [ otdr rx auto excess-olr-threshold value ] [ otdr tx auto excess-olr-threshold value ] [ otdr rx auto excess-attenuation-threshold value ] [ otdr tx auto excess-attenuation-threshold value ]
```

```
controller ots R/S/I/P [ tone-rate ] [ tone-pattern-expected ] [ tone-frequency ]
```

<b>Syntax Description</b>	<b>R/S/I/P</b>	Rack/Slot/Instance/Port of the OTS controller.
	<b>tx-voa-attenuationvalue</b>	Configures the TX VoA attenuation set point.
	<b>egress-ampli-gain-range {normal   extended}</b>	Configures egress amplification gain range to normal or extended.

<b>egress-ampli-gain</b> <i>value</i>	Configures egress amplification gain.
<b>egress-ampli-tilt</b> <i>value</i>	Configures egress amplifier tilt.
<b>egress-ampli-osri</b> {on   off}	Enables or disables egress optical safety remote interlock (OSRI).
<b>egress-ampli-safety-control-mode</b> {auto   disabled}	Configure egress amplification safety control mode to auto or disables it.
<b>egress-ampli-force-apr</b> {on   off}	Enables or disables egress amplification force automatic power reduction.
<b>raman-tx-power</b> <i>Raman-transmit-pump-instance</i> <b>power</b> <i>power-value</i>	Configures Raman transmit power parameters.
<b>raman-tx-power-disable</b> <i>Raman-transmit-pump-instance</i>	Disables Raman transmit power.
<b>raman-force-apr</b> {on   off}	Enables or disables Raman force APR.
<b>raman-osri</b> {on   off}	Enables or disables Raman optical safety remote interlock (OSRI).
<b>ingress-ampli-gain-range</b> {normal   extended}	Configure ingress amplification safety control mode to auto or disables it.
<b>ingress-ampli-gain</b> <i>value</i>	Configures ingress amplification gain.
<b>otdr rx auto reflectance-threshold</b> <i>value</i>	Configures OTDR reflectance threshold in RX direction in auto mode.
<b>otdr rx auto splice-loss-threshold</b> <i>value</i>	Configures OTDR splice loss threshold in RX direction in auto mode.
<b>otdr rx expert pulse-width</b> <i>value</i>	Configures OTDR pulse width threshold in RX direction in expert mode.
<b>otdr tx auto reflectance-threshold</b> <i>value</i>	Configures OTDR reflectance threshold in TX direction in auto mode.
<b>otdr tx auto splice-loss-threshold</b> <i>value</i>	Configures OTDR splice loss threshold in TX direction in auto mode.
<b>otdr scan-mode</b> expert	Configures OTDR scan in expert.
<b>raman-tx-power</b> <1-N> <i>value value</i>	Configures the target Raman transmit power value for multiple instances.
<b>otdr rx auto raman-setpoint</b> <i>value</i>	Configures OTDR Raman in RX direction in auto mode.
<b>otdr tx auto raman-setpoint</b> <i>value</i>	Configures OTDR Raman in TX direction in auto mode.

<b>otdr rx auto excess-reflection-threshold</b> <i>value</i>	Configures OTDR excess reflection threshold in RX direction in auto mode.
<b>otdr tx auto excess-reflection-threshold</b> <i>value</i>	Configures OTDR excess reflection threshold in TX direction in auto mode.
<b>otdr rx back- scattering</b> <i>value</i>	Configures OTDR back scattering in RX direction in auto mode.
<b>otdr tx back- scattering</b> <i>value</i>	Configures OTDR back scattering in TX direction in auto mode.
<b>otdr rx refractive-index</b> <i>value</i>	Configures OTDR refractive index in RX direction in auto mode.
<b>otdr tx refractive-index</b> <i>value</i>	Configures OTDR refractive index in TX direction in auto mode.
<b>otdr rx expert pulse-width</b> <i>value</i>	Configures OTDR pulse width in RX direction in expert mode.
<b>otdr tx expert pulse-width</b> <i>value</i>	Configures OTDR pulse width in TX direction in expert mode.
<b>otdr rx expert capture-end</b> <i>value</i>	Configures OTDR capture end time in RX direction in expert mode.
<b>otdr tx expert capture-end</b> <i>value</i>	Configures OTDR capture end time in TX direction in expert mode.
<b>otdr rx expert capture-start</b> <i>value</i>	Configures OTDR capture start time in RX direction in expert mode.
<b>otdr tx expert capture-start</b> <i>value</i>	Configures OTDR capture start time in TX direction in expert mode.
<b>otdr rx expert scan duration</b> <i>value</i>	Configures OTDR scan duration in RX direction in expert mode.
<b>otdr tx expert scan duration</b> <i>value</i>	Configures OTDR scan duration in TX direction in expert mode.
<b>otdr rx auto excess-orl-threshold</b> <i>value</i>	Configures OTDR excess Optical Return Loss (ORL) threshold in RX direction in auto mode.
<b>otdr tx auto excess-orl-threshold</b> <i>value</i>	Configures OTDR excess ORL threshold in TX direction in auto mode.
<b>otdr rx auto excess-attenuation-threshold</b> <i>value</i>	Configures OTDR excess attenuation threshold in RX direction in auto mode.
<b>otdr tx auto excess-attenuation-threshold</b> <i>value</i>	Configures OTDR excess attenuation threshold in TX direction in auto mode.
<b>tone-rate</b> <i>value</i>	Configures the tone rate for tone generation.

<b>tone-pattern</b> <i>value</i>	Configures the tone pattern for tone generation.						
<b>tone-frequency</b> <i>value</i>	Configures the tone frequency for tone generation.						
<b>Command Default</b>	None						
<b>Command Modes</b>	controller configuration mode						
<b>Command History</b>	<table border="1"> <thead> <tr> <th><b>Release</b></th> <th><b>Modification</b></th> </tr> </thead> <tbody> <tr> <td>Release 7.7.1</td> <td>Introduced this command.</td> </tr> <tr> <td>7.11.1</td> <td>           The following keywords are added:  <ul style="list-style-type: none"> <li>• <b>otdr rx auto excess-orl-threshold</b></li> <li>• <b>otdr tx auto excess-orl-threshold</b></li> <li>• <b>otdr rx auto excess-attenuation-threshold</b></li> <li>• <b>otdr tx auto excess-attenuation-threshold</b></li> </ul> </td> </tr> </tbody> </table>	<b>Release</b>	<b>Modification</b>	Release 7.7.1	Introduced this command.	7.11.1	The following keywords are added: <ul style="list-style-type: none"> <li>• <b>otdr rx auto excess-orl-threshold</b></li> <li>• <b>otdr tx auto excess-orl-threshold</b></li> <li>• <b>otdr rx auto excess-attenuation-threshold</b></li> <li>• <b>otdr tx auto excess-attenuation-threshold</b></li> </ul>
<b>Release</b>	<b>Modification</b>						
Release 7.7.1	Introduced this command.						
7.11.1	The following keywords are added: <ul style="list-style-type: none"> <li>• <b>otdr rx auto excess-orl-threshold</b></li> <li>• <b>otdr tx auto excess-orl-threshold</b></li> <li>• <b>otdr rx auto excess-attenuation-threshold</b></li> <li>• <b>otdr tx auto excess-attenuation-threshold</b></li> </ul>						

### Example

The following output is a sample of configuring various otdr parameters using the **controller ots 0/0/0** command.

```
RP/0/RP0/CPU0:ios#RP/0/RP0/CPU0:ios#config
RP/0/RP0/CPU0:ios(config)#controller ots 0/0/0/0
RP/0/RP0/CPU0:ios(config-Ots)#otdr scan-mode expert
RP/0/RP0/CPU0:ios(config-Ots)#otdr rx auto reflectance-threshold -50
RP/0/RP0/CPU0:ios(config-Ots)#otdr rx auto splice-loss-threshold 200
RP/0/RP0/CPU0:ios(config-Ots)#otdr rx expert pulse-width 6000
RP/0/RP0/CPU0:ios(config-Ots)#otdr rx auto excess-orl-threshold 600
RP/0/RP0/CPU0:ios(config-Ots)#otdr rx auto excess-reflection-threshold -35
RP/0/RP0/CPU0:ios(config-Ots)#otdr rx auto excess-attenuation-threshold 5
RP/0/RP0/CPU0:ios(config-Ots)#otdr tx auto reflectance-threshold -50
RP/0/RP0/CPU0:ios(config-Ots)#otdr tx auto splice-loss-threshold 200
RP/0/RP0/CPU0:ios(config-Ots)#otdr tx auto excess-orl-threshold 600
RP/0/RP0/CPU0:ios(config-Ots)#otdr tx auto excess-reflection-threshold -50
RP/0/RP0/CPU0:ios(config-Ots)#otdr tx auto excess-attenuation-threshold 5
RP/0/RP0/CPU0:ios(config-Ots)#commit
```

The following output is a sample of configuring various tone generation parameters using the **controller ots 0/0/0/3** command.

```
RP/0/RP0/CPU0:(config)#controller ots 0/0/0/3
RP/0/RP0/CPU0:(config-Ots)#tone-rate 25
RP/0/RP0/CPU0:(config-Ots)#tone-frequency 191.175 ( OOB frequency )
RP/0/RP0/CPU0:(config-Ots)#tone-pattern abcd1234
RP/0/RP0/CPU0:(config-Ots)#commit
```

# controller dfb

To configure the DFB controller, use the **controller dfb** command in the controller configuration mode.

```
controller dfb R/S/I/P [ tx-voa-attenuation value | tx-low-threshold value | sec-admin-state {normal | maintenance} | transmit-shutdown | shutdown ]
```

<b>Syntax Description</b>	<p><b>R/S/I/P</b> Rack/Slot/Instance/Port of the DFB controller.</p> <p><b>tx-voa-attenuation</b><i>value</i> Configures the DFB TX VoA attenuation set point.</p> <p><b>tx-low-threshold</b><i>value</i> Configures the low transmit power threshold.</p> <p><b>sec-admin-state</b> Configures the administrative state of the controller. The values are maintenance or normal.</p> <p><b>transmit-shutdown</b> Shuts down the DFB laser.</p> <p><b>shutdown</b> Disables the configuration of the controller.</p>				
<b>Command Default</b>	None				
<b>Command Modes</b>	controller configuration mode				
<b>Command History</b>	<table border="1"> <thead> <tr> <th><b>Release</b></th> <th><b>Modification</b></th> </tr> </thead> <tbody> <tr> <td>Release 7.7.1</td> <td>This command was introduced.</td> </tr> </tbody> </table>	<b>Release</b>	<b>Modification</b>	Release 7.7.1	This command was introduced.
<b>Release</b>	<b>Modification</b>				
Release 7.7.1	This command was introduced.				
<b>Usage Guidelines</b>	None				

## Example

In the following sample, the tx-voa-attenuation is set to 2 dB.

```
RP/0/RP0/CPU0:ios#config
Thu Apr 21 17:00:57.654 UTC
RP/0/RP0/CPU0:ios(config)#
RP/0/RP0/CPU0:ios(config)#controller dfb 0/0/0/0 tx-voa-attenuation 20
RP/0/RP0/CPU0:ios(config)#commit
RP/0/RP0/CPU0:ios(config)#end
```

To view the configured value, use the following command:

```
RP/0/RP0/CPU0:ios#sh controller dfb 0/0/0/0
Thu Apr 21 17:02:06.316 UTC
Controller State: Up
Transport Admin State: In Service
Laser State: On
Alarm Status:
-----
Detected Alarms: None
Alarm Statistics:
-----
```

```

RX-LOS-P = 0
TX-POWER-FAIL-LOW = 0
Parameter Statistics:
-----
Total TX Power = 20.00 dBm
Total RX Power = 10.00 dBm
TX Voa Attenuation = 2.0 dB
Configured Parameters:
-----
TX Voa Attenuation = 2.0 dB

```

The DFB laser attenuates based on the updated value and the TX power changes accordingly.

In the following sample, the sec-admin-state is set to maintenance.

```

RP/0/RP0/CPU0:ios#config
RP/0/RP0/CPU0:ios(config)#controller dfb 0/0/0/0 sec-admin-state maintenance
RP/0/RP0/CPU0:ios(config)#commit
RP/0/RP0/CPU0:ios(config)#end
RP/0/RP0/CPU0:ios#sh controllers dfb 0/0/0/0
Thu Apr 21 17:05:41.311 UTC
Controller State: Up
Transport Admin State: Maintenance
Laser State: On
Alarm Status:
-----
Detected Alarms: None
Alarm Statistics:
-----
RX-LOS-P = 0
TX-POWER-FAIL-LOW = 0
Parameter Statistics:
-----
Total TX Power = 20.00 dBm
Total RX Power = 10.00 dBm
TX Voa Attenuation = 2.0 dB
Configured Parameters:
-----
TX Voa Attenuation = 2.0 dB

```

In the following sample, the DFB controller is shut down.

```

RP/0/RP0/CPU0:ios#config
RP/0/RP0/CPU0:ios(config)#controller dfb 0/0/0/0 shutdown
RP/0/RP0/CPU0:ios(config)#commit
RP/0/RP0/CPU0:ios(config)#end
RP/0/RP0/CPU0:ios#sh controllers dfb 0/0/0/0
Thu Apr 21 17:08:40.211 UTC
Controller State: Administratively Down
Transport Admin State: Out Of Service
Laser State: Off
Alarm Status:
-----
Detected Alarms: None
Alarm Statistics:
-----
RX-LOS-P = 0
TX-POWER-FAIL-LOW = 0
Parameter Statistics:
-----
Total TX Power = -50.00 dBm
Total RX Power = 10.00 dBm
TX Voa Attenuation = 2.0 dB
Configured Parameters:

```

```
-----  
TX Voa Attenuation = 2.0 dB
```

## controller osc

To configure the OSC controller, use the **controller osc** command in the controller configuration mode.

```
controller osc R/S/I/P [ transmit-power value | sec-admin-state {normal | maintenance} | tx-low-threshold value | shutdown ]
```

<b>Syntax Description</b>	<b>R/S/I/P</b> Rack/Slot/Instance/Port of the OSC controller. <b>transmit-power value</b> Configures the transmit power. <b>sec-admin-state</b> Configures the administrative state of the controller. The values are maintenance or normal. <b>tx-low-threshold value</b> Configures low transmit power threshold <b>shutdown</b> Disables the configuration of the controller.				
<b>Command Default</b>	None				
<b>Command Modes</b>	Controller configuration mode				
<b>Command History</b>	<table border="1"> <thead> <tr> <th><b>Release</b></th> <th><b>Modification</b></th> </tr> </thead> <tbody> <tr> <td>Release 7.7.1</td> <td>This command was introduced.</td> </tr> </tbody> </table>	<b>Release</b>	<b>Modification</b>	Release 7.7.1	This command was introduced.
<b>Release</b>	<b>Modification</b>				
Release 7.7.1	This command was introduced.				
<b>Usage Guidelines</b>	None				

### Example

In the following sample, the transmit-power is set to 2 dBm. The transmit power can be changed only after the OSC laser probing loop is closed and the OSC transmit power is stable. The OSC transmit power depends on the span length. If the span loss is high, the OSC Tx power is low and vice versa.

```
RP/0/RP0/CPU0:ios(config)#controller osc 0/0/0/0 transmit-power 20
Fri May 13 11:26:53.445 UTC
WARNING! Changing TX power can impact traffic
RP/0/RP0/CPU0:ios(config)#commit
Fri May 13 11:26:55.127 UTC
RP/0/RP0/CPU0:ios(config)#end
RP/0/RP0/CPU0:ios#sh controllers osc 0/0/0/0
Fri May 13 11:26:59.542 UTC
Controller State: Up
Transport Admin State: In Service
Laser State: On
Alarm Status:
-----
```

```

Detected Alarms: None
Alarm Statistics:
-----
RX-LOS-P = 0
TX-POWER-FAIL-LOW = 0
Parameter Statistics:
-----
Total TX Power = 1.89 dBm
Total RX Power = -17.30 dBm

```

Configured Parameters:

-----

In the following sample, the sec-admin-state is set to maintenance.

```

RP/0/RP0/CPU0:ios#config
RP/0/RP0/CPU0:ios(config)#controller osc 0/0/0/0 sec-admin-state maintenance
RP/0/RP0/CPU0:ios(config)#commit
RP/0/RP0/CPU0:ios(config)#end
RP/0/RP0/CPU0:ios#sh controllers osc 0/0/0/0
Fri Apr 22 15:55:36.324 UTC
Controller State: Up
Transport Admin State: Maintenance
Laser State: On
Alarm Status:
-----
Detected Alarms: None
Alarm Statistics:
-----
RX-LOS-P = 0
TX-POWER-FAIL-LOW = 0
Parameter Statistics:
-----
Total TX Power = -10.00 dBm
Total RX Power = -30.00 dBm
Configured Parameters:
-----
```

In the following sample, the OSC controller is shut down.

```

RP/0/RP0/CPU0:ios#config
RP/0/RP0/CPU0:ios(config)#controller osc 0/0/0/0 shutdown
RP/0/RP0/CPU0:ios(config)#commit
RP/0/RP0/CPU0:ios(config)#end
RP/0/RP0/CPU0:ios#sh controllers os 0/0/0/0
Tue Apr 12 17:33:12.998 UTC
Controller State: Administratively Down
Transport Admin State: Out Of Service
Laser State: Off
Alarm Status:
-----
Detected Alarms: None
Alarm Statistics:
-----
RX-LOS-P = 0
TX-POWER-FAIL-LOW = 0
Parameter Statistics:
-----
Total TX Power = -50.00 dBm
Total RX Power = -30.00 dBm
Configured Parameters:
-----
```

# controller ots-och

To configure the OTS-OCH controller on the add-drop port to which the cross-connection is made on the COM side, use the **controller ots-och** command in the controller configuration mode.

**controller ots-och R/S/I/P/channel-id add-drop-channel ots-och R/S/I/P/channel-id**

<b>Syntax Description</b>	<i>R/S/I/P/channel-id</i> Rack/Slot/Instance/Port/Channel-id of the OTS-OCH controller.				
	<b>add-drop-channel</b> Creates the add/drop channel on the COM side.				
<b>Command Default</b>	None				
<b>Command Modes</b>	Controller configuration mode				
<b>Command History</b>	<table border="1"> <thead> <tr> <th>Release</th> <th>Modification</th> </tr> </thead> <tbody> <tr> <td>7.7.1</td> <td>This command was introduced.</td> </tr> </tbody> </table>	Release	Modification	7.7.1	This command was introduced.
Release	Modification				
7.7.1	This command was introduced.				
<b>Usage Guidelines</b>	None				

## Example

To configure the optical cross-connect, use the following commands:

```
Mon Apr 4 14:54:32.834 UTC
RP/0/RP0/CPU0:ios(config)#controller ots-och 0/0/0/0/1 add-drop-channel ots-och 0/0/0/33/1
RP/0/RP0/CPU0:ios(config)#commit
RP/0/RP0/CPU0:ios(config)
```

To view the OTS-OCH controllers, use the following command:

```
RP/0/RP0/CPU0:ios#sh controller ots-och ?
0/0/0/0/1 Ots-Och Interface Instance
0/0/0/33/1 Ots-Och Interface Instance
R/S/I/P/B or R/S/I/P Forward interface in Rack/Slot/Instance/Port/Breakout format or
R/S/I/P format
```

To view the parameters of the OTS-OCH controller (LINE side), use the following command:

```
RP/0/RP0/CPU0:ios#sh controllers ots-och 0/0/0/0/1
Tue Apr 5 06:32:29.696 UTC
```

Controller State: Up

Transport Admin State: In Service

```
Alarm Status:
-----
Detected Alarms: None
```

```
Alarm Statistics:
-----
RX-LOS-P = 0
```

```

TX-POWER-FAIL-LOW = 0

Parameter Statistics:
-----
Total RX Power = -10.50 dBm
Total TX Power = -10.50 dBm

Cross Connect Info:
-----
Add-Drop Channel = Ots-Och0/0/0/33/1

Configured Parameters:
-----

RP/0/RP0/CPU0:ios#

```



**Note** The Add/Drop channel that is cross connected to the line port, 0/0/0/0/1 is displayed in the output.

## drop-psd

Use the **drop-psd** command to set the target PSD for drop ports.

**drop-psd** *value*

<b>Syntax Description</b>	<i>value</i> PSD in range -30.0 dBm per 12.5 GHz to 23.0 dBm per 12.5 GHz in increments of 0.1 dBm per 12.5 GHz.				
<b>Command Default</b>	The default target PSD for drop ports is -9.4 dB.				
<b>Command Modes</b>	(config-olc-ots)				
<b>Command History</b>	<table border="1"> <thead> <tr> <th><b>Release</b></th><th><b>Modification</b></th></tr> </thead> <tbody> <tr> <td>Cisco IOS XR Release 7.7.1</td><td>This command was introduced.</td></tr> </tbody> </table>	<b>Release</b>	<b>Modification</b>	Cisco IOS XR Release 7.7.1	This command was introduced.
<b>Release</b>	<b>Modification</b>				
Cisco IOS XR Release 7.7.1	This command was introduced.				
<b>Usage Guidelines</b>	The NCS 1010 applies drop PSD configuration for channels with cross connect configurations.				

### Example

The following is a sample configuration that sets the target PSD at drop ports to -25 dB.

```

RP/0/RP0/CPU0:ios#configure
RP/0/RP0/CPU0:ios(config)#optical-line-control
RP/0/RP0/CPU0:ios(config-olc)#controller ots 0/0/0/0
RP/0/RP0/CPU0:ios(config-olc-ots)#drop-psd -250

```

**dual-band-psd**

```
RP/0/RP0/CPU0:ios(config-olc-ots)#commit
Tue Apr 26 09:50:12.055 UTC
RP/0/RP0/CPU0:ios(config-olc-ots)#end
```

## **dual-band-psd**

Use the **dual-band-psd** command to set the target dual-band PSDs when using C+L band configuration.

**dual-band-psd index value**

**Syntax Description**


---

*index* PSD index 1–33.

---

*value* PSD in range -50.0 dBm per 12.5 GHz to -32.0 dBm per 12.5 GHz in increments of 0.1 dBm per 12.5 GHz.

---

**Command Modes**

(config-olc-ots)

**Command History****Release****Modification**


---

Cisco IOS XR Release 7.9.1	This command was introduced.
----------------------------	------------------------------

---

**Example**

The following example shows how to set the dual band psd values -50 and -49 on setpoints 1 and 2 respectively, on the 0/0/0 controller .

```
RP/0/RP0/CPU0:ios#configure
RP/0/RP0/CPU0:ios(config)#optical-line-control
RP/0/RP0/CPU0:ios(config-olc)#controller ots 0/0/0/0
RP/0/RP0/CPU0:ios(config-olc-ots)#dual-band-psd 1 -50
RP/0/RP0/CPU0:ios(config-olc-ots)#dual-band-psd 2 -49
RP/0/RP0/CPU0:ios(config-olc-ots)#commit
RP/0/RP0/CPU0:ios(config-olc-ots)#end
```

## **fiber-type**

To configure fiber type, use **fiber-type** command.

**fiber-type type**

<b>Syntax Description</b>	<i>type</i> Fiber type. Possible fiber types are:
	<ul style="list-style-type: none"> <li>• E-LEAF</li> <li>• FREE-LIGHT</li> <li>• METRO-CORE</li> <li>• SMF</li> <li>• SMF-28E</li> <li>• TERA-LIGHT</li> <li>• TW-RS</li> <li>• TW-Reach</li> <li>• TW-minus</li> <li>• TW-plus</li> <li>• ULL-SMF28</li> </ul>

<b>Command Default</b>	SMF is the default fiber-type.
------------------------	--------------------------------

<b>Command Modes</b>	(config-olc-ots)
----------------------	------------------

<b>Command History</b>	<b>Release</b>	<b>Modification</b>
	Cisco IOS XR Release 7.7.1	This command was introduced.

### Example

The following example is a sample configuration that configures fiber-type to SMF.

```
RP/0/RP0/CPU0:ios#configure
RP/0/RP0/CPU0:ios(config)#optical-line-control
RP/0/RP0/CPU0:ios(config-olc)#controller ots 0/0/0/0
RP/0/RP0/CPU0:ios(config-olc-ots)#fiber-type SMF
RP/0/RP0/CPU0:ios(config-olc-ots)#commit
RP/0/RP0/CPU0:ios(config-olc-ots)#end
```

## fpd auto-upgrade

To enable or disable automatic FPD upgrade, use the **fpd auto-upgrade** command in Cisco IOS XR Configuration mode.

```
fpd auto-upgrade { enable | disable }
```

<b>Syntax Description</b>	<b>enable   disable</b> Enables or disables automatic FPD upgrade
---------------------------	---

**gain-estimator**

**Command Default** Automatic FPD upgrade is enabled.

**Command Modes** Cisco IOS XR Configuration

**Command History**

Release	Modification
Release 7.7.1	This command was introduced.

**Example**

The following example shows how to disable automatic FPD upgrade.

```
RP/0/RP0/CPU0:ios#configure
RP/0/RP0/CPU0:ios(config)#fpd auto-upgrade disable
RP/0/RP0/CPU0:ios(config)#commit
RP/0/RP0/CPU0:ios(config)#end
```

## gain-estimator

To enable or disable Gain Estimator, use the **gain-estimator** command.

```
gain-estimator { disable | enable }
```

**Syntax Description**

<b>disable</b>	Disable Gain Estimator
----------------	------------------------

<b>enable</b>	Enable Gain Estimator
---------------	-----------------------

**Command Modes** (config-olc-ots)

**Command History**

Release	Modification
Cisco IOS XR Release 7.7.1	This command was introduced.

**Example**

The following output is a sample configuration that disables Gain Estimator.

```
RP/0/RP0/CPU0:ios#configure terminal
Mon Jun 13 05:35:20.510 UTC
RP/0/RP0/CPU0:ios(config)#optical-line-control
RP/0/RP0/CPU0:ios(config-olc)#controller ots 0/0/0/0
RP/0/RP0/CPU0:ios(config-olc-ots)#gain-estimator disable
RP/0/RP0/CPU0:ios(config-olc-ots)#commit
```

The following output is a sample configuration that enables Gain Estimator.

```
RP/0/RP0/CPU0:ios#configure terminal
Mon Jun 13 05:35:27.511 UTC
```

```
RP/0/RP0/CPU0:ios(config)#optical-line-control
RP/0/RP0/CPU0:ios(config-olc)#controller ots 0/0/0/0
RP/0/RP0/CPU0:ios(config-olc-ots)#gain-estimator enable
RP/0/RP0/CPU0:ios(config-olc-ots)#commit
```

## http client connection

To configure the connection for http client, use the **http client connection** command in XR Config mode. To restore the default value, use the **no** form of this command.

```
http client connection { retry count | timeout seconds }
```

Syntax Description	<b>retry count</b>	Specifies how many times HTTP Client resends a connection request. Range is from 1 to 5. The default value is 0.
	<b>timeout seconds</b>	The time interval (in seconds) that HTTP client waits for a server connection to establish before giving up. Range is from 1 to 60 seconds. The default value is 10 seconds.

**Command Default** The connection retry is not configured by default. The default connection timeout is set to 10 seconds.

Command History	Release	Modification
	Release 7.10.1	This command was introduced.

**Command Modes** HTTP configuration

**Usage Guidelines** Use this command to set the connection timeout or connection retry count.

Task ID	Task ID	Operations
	config-services	read, write

The following example shows how to configure the connection request retry to two times:

```
RP/0/RP0/CPU0:router(config)#http client connection retry 2
```

The following example shows how to configure the connection request timeout to 20 seconds:

```
RP/0/RP0/CPU0:router(config)#http client connection timeout 20
```

## http client response

To configure the time interval (in seconds) for HTTP Client to wait for a response from the server before giving up, use the **http client response** command in XR Config mode. To restore the default value, use the **no** form of this command.

**http client ssl**


---

**http client response { timeout *seconds* }**

<b>Syntax Description</b>	<b>timeout</b> The time interval (in seconds) that HTTP client waits for a response from the server before giving up. Range is from 1 to 300 seconds. The default value is 30 seconds.
---------------------------	--

<b>Command Default</b>	The response timeout is 30 seconds by default.
------------------------	--

<b>Command History</b>	<b>Release</b>	<b>Modification</b>
	Release 7.10.1	This command was introduced.

<b>Command Modes</b>	HTTP configuration
----------------------	--------------------

<b>Usage Guidelines</b>	Use this command to configure the response timeout.
-------------------------	---

<b>Task ID</b>	<b>Task ID</b>	<b>Operations</b>
	config-services	read, write

The following example shows how to configure the response timeout to 40 seconds:

```
RP/0/RP0/CPU0:router(config)#http client response timeout 40
```

## http client ssl

To configure Secure Socket Layer (SSL) version to be used for HTTPS requests, use the **http client ssl** command in XR Config mode. To restore the default value, use the **no** form of this command.

**http client ssl *version***

<b>Syntax Description</b>	<b>ssl <i>version</i></b> Specify the SSL version to be used for HTTPS requests. Select one of the following versions: <ul style="list-style-type: none"> <li>• <b>tls1.0</b> - Forces TLSv1.0 to be used for HTTPS requests.</li> <li>• <b>tls1.1</b> - Forces TLSv1.1 to be used for HTTPS requests.</li> <li>• <b>tls1.2</b> - Forces TLSv1.2 to be used for HTTPS requests.</li> </ul>
---------------------------	--

By default libcurl does not force the TLS version.

<b>Command History</b>	<b>Release</b>	<b>Modification</b>
	Release 7.10.1	This command was introduced.

<b>Command Default</b>	By default, the SSL version is not configured.
------------------------	--

<b>Command Modes</b>	HTTP configuration
<b>Usage Guidelines</b>	Use this command to configure the ssl version to be used in HTTPS requests.

Task ID	Task ID	Operations
	config-services	read, write

The following example shows how to configure the SSL version to tls1.1:

```
RP/0/RP0/CPU0:router(config)#http client ssl tls1.1
```

## http client secure-verify-host

To enable verifying host in peer's certificate, use the **http client secure-verify-host** command in XR Config mode. To restore the default value, use the **no** form of this command.

### http client secure-verify-host

<b>Syntax Description</b>	<b>secure-verify-host</b> Verifies the host in peer's certificate. This is enabled by default. To disable, use the command <b>http client secure-verify-host disable</b>				
<b>Command Default</b>	Host verification is enabled by default.				
<b>Command History</b>	<table border="1"> <thead> <tr> <th>Release</th> <th>Modification</th> </tr> </thead> <tbody> <tr> <td>Release 7.10.1</td> <td>This command was introduced.</td> </tr> </tbody> </table>	Release	Modification	Release 7.10.1	This command was introduced.
Release	Modification				
Release 7.10.1	This command was introduced.				
<b>Command Modes</b>	HTTP configuration				
<b>Usage Guidelines</b>	Use the <b>http client secure-verify-host</b> command to disable the host verification.				
<b>Task ID</b>	<table border="1"> <thead> <tr> <th>Task ID</th> <th>Operations</th> </tr> </thead> <tbody> <tr> <td>config-services</td> <td>read, write</td> </tr> </tbody> </table>	Task ID	Operations	config-services	read, write
Task ID	Operations				
config-services	read, write				

The following example shows how to disable host verification :

```
RP/0/RP0/CPU0:router(config)#http client secure-verify-host disable
```

**http client secure-verify-peer**

## http client secure-verify-peer

To enable verifying authenticity of the peer certificate, use the **http client secure-verify-peer** command in XR Config mode. To restore the default value, use the **no** form of this command.

**http client secure-verify-peer**

<b>Syntax Description</b>	secure-verify-peer Verifies authenticity of the peer certificate. This is enabled by default. To disable, use the command <b>http client secure-verify-peer disable</b>				
<b>Command Default</b>	Peer verification is enabled by default.				
<b>Command History</b>	<table border="1"> <thead> <tr> <th>Release</th> <th>Modification</th> </tr> </thead> <tbody> <tr> <td>Release 7.10.1</td> <td>This command was introduced.</td> </tr> </tbody> </table>	Release	Modification	Release 7.10.1	This command was introduced.
Release	Modification				
Release 7.10.1	This command was introduced.				
<b>Command Modes</b>	HTTP configuration				
<b>Usage Guidelines</b>	Use the <b>http client secure-verify-peer</b> command to disable the peer verification.				
<b>Task ID</b>	<table border="1"> <thead> <tr> <th>Task ID</th> <th>Operations</th> </tr> </thead> <tbody> <tr> <td>config-services</td> <td>read, write</td> </tr> </tbody> </table>	Task ID	Operations	config-services	read, write
Task ID	Operations				
config-services	read, write				

The following example shows how to disable peer verification :

```
RP/0/RP0/CPU0:router(config) #http client secure-verify-peer disable
```

## http client source interface

To specify the interface for source address for Hypertext Transfer Protocol (HTTP) connections, use the **http client source-interface** command in XR Config mode. To remove the **http client source-interface** command from the configuration file and restore the system to its default condition, use the **no** form of this command.

**http client source-interface { ipv4 | ipv6 }**

<b>Syntax Description</b>	<table> <tr> <td><b>ipv4</b></td><td>Enter ipv4 address from interface. <i>ip-address</i></td></tr> <tr> <td><b>ipv6</b></td><td>Enter ipv6 address from interface. <i>ip-address</i></td></tr> </table>	<b>ipv4</b>	Enter ipv4 address from interface. <i>ip-address</i>	<b>ipv6</b>	Enter ipv6 address from interface. <i>ip-address</i>
<b>ipv4</b>	Enter ipv4 address from interface. <i>ip-address</i>				
<b>ipv6</b>	Enter ipv6 address from interface. <i>ip-address</i>				
<b>Command Default</b>	No default behavior or values.				

Command History	Release	Modification
	Release 7.10.1	This command was introduced.
Command Modes	HTTP configuration	
Usage Guidelines	Use the <b>http client source-interface</b> command to configure ipv4 and ipv6 source interfaces. If both the source interfaces are configured, then the source interface is selected depending on the host DNS resolution.	
Task ID	Task ID	Operations
	config-services	read, write

The following example shows how to configure ipv4 source interface for HTTP connection:

```
RP/0/RP0/CPU0:router(config)#http client source-interface ipv4 gigabitEthernet 0/0/0/0
```

The following example shows how to configure ipv6 source interface for HTTP connection:

```
RP/0/RP0/CPU0:router(config)#http client source-interface ipv6 gigabitEthernet 0/0/0/0
```

## http client tcp-window-scale

To configure the TCP window scale factor for high latency links, use the **http client tcp-window-scale** command in XR Config mode. To restore the default value, use the **no** form of this command.

**http client tcp-window-scale scale**

Syntax Description	<i>scale</i> Specify the TCP window scale for HTTP requests. Range is 1 to 14.	
Command Default	By default, TCP window scale is disabled.	
Command History	Release	Modification
	Release 7.10.1	This command was introduced.
Command Modes	HTTP configuration	
Usage Guidelines	Use this command to configure the TCP window scale for HTTP requests.	
 <b>Note</b> Currently, this is enabled for copying of files using HTTP.		

**http client version**

Task ID	Task ID	Operations
	config-services	read, write

The following example shows how to set the TCP window scale to 10:

```
RP/0/RP0/CPU0:router(config)#http client tcp-window-scale 10
```

## http client version

To configure the HTTP version to be used for HTTP requests, use the **http client version** command in XR Config mode. To restore the default value, use the **no** form of this command.

**http client version** *version*

<b>Syntax Description</b>	<b>version</b> <i>version</i> Specify the HTTP version to be used for HTTP requests. Select one of the following versions: <ul style="list-style-type: none"> <li>• <b>1.0</b> - Forces HTTP1.0 to be used for all HTTP requests.</li> <li>• <b>1.1</b> - Forces HTTP1.1 to be used for all HTTP requests.</li> <li>• <b>default</b> - libcurl picks up HTTP version automatically.</li> </ul>
---------------------------	--

<b>Command Default</b>	By default, libcurl does not force the HTTP version.
------------------------	--



**Note** HTTP Client uses libcurl version 7.30

Command History	Release	Modification
	Release 7.10.1	This command was introduced.

<b>Command Modes</b>	HTTP configuration
----------------------	--------------------

<b>Usage Guidelines</b>	Use this command to configure the HTTP version to be used in HTTP requests.
-------------------------	---

Task ID	Task ID	Operations
	config-services	read, write

The following example shows how to configure the HTTP version to 1.1:

```
Router(config)#http client version 1.1
```

## http client vrf

To configure a new VRF to be used by the HTTP client, use the **http client vrf** command. To remove the specified vrf, use the **no** form of this command.

**http client vrf *vrf-name***

<b>Syntax Description</b>	<i>vrf-name</i> Specifies the name of the VRF to be used by the HTTP client.	
<b>Command Default</b>	If not configured, the default VRF "default-vrf" will be used.	
<b>Command History</b>	<b>Release</b>	<b>Modification</b>
	Release 7.10.1	This command was introduced.
<b>Command Modes</b>	HTTP configuration	
<b>Usage Guidelines</b>	A HTTP client can have only one VRF. If a specific VRF is not configured for the HTTP client, the default VRF is assumed.	
<b>Task ID</b>	<b>Task ID</b>	<b>Operations</b>
	config-services	read, write

The following example shows the HTTP client being configured to start with the specified VRF:

```
RP/0/RP0/CPU0:router# configure
RP/0/RP0/CPU0:router(config)# http client vrf green
```

## hw-module

To create the OTS-OCH controller, use the **hw-module location** command in IOS XR configuration mode.

**hw-module location *location* *terminal-ampli* | *inline-ampli* *grid-mode* *mode* *channel-id* *channel-id* *centre-freq* *frequency* *width* *channel width***

<b>Syntax Description</b>	<i>location</i>	Specifies the location of the hardware module. The location is 0/0/NXR0.
	<b>terminal-ampli</b>   <b>inline-ampli</b>	terminal-ampli is used for OLT nodes and inline-ampli is used for ILA nodes.
	<b>grid-mode</b> <i>value</i>	Specifies the optical spectrum on the interfaces.
	<b>centre-freq</b> <i>frequency</i>	Defines the central frequency of the channel.

**interface**

<b>width</b> <i>channel-width</i>	Defines the width of the channel.				
<b>Command Default</b>	None				
<b>Command Modes</b>	Cisco IOS XR Configuration				
<b>Command History</b>	<table border="1"> <thead> <tr> <th>Release</th> <th>Modification</th> </tr> </thead> <tbody> <tr> <td>7.7.1</td> <td>This command was introduced.</td> </tr> </tbody> </table>	Release	Modification	7.7.1	This command was introduced.
Release	Modification				
7.7.1	This command was introduced.				
<b>Usage Guidelines</b>	None				

**Example**

To create the OTS-OCH controller on the LINE side of an ILA-C node, use the following commands:

```
RP/0/RP0/CPU0:ios#config
Thu Apr 7 13:14:49.841 UTC
RP/0/RP0/CPU0:ios(config)#
RP/0/RP0/CPU0:ios(config)#hw-module location 0/0/NXR0 inline-ampli grid-mode flex
RP/0/RP0/CPU0:ios(config-hwmod-ila-flexi)#channel-id 1 centre-freq 196.1 width 75
RP/0/RP0/CPU0:ios(config-hwmod-ila-flexi)#commit
```

To create the OTS-OCH controller on the LINE side of an OLT-R-C node, use the following commands:

```
RP/0/RP0/CPU0:ios#config
RP/0/RP0/CPU0:ios(config)#hw-module location 0/0/nxr0 terminal-ampli grid-mode flex
RP/0/RP0/CPU0:ios(config-hwmod-olt-flexi)#channel-id 1 centre-freq 196.1 width 75
RP/0/RP0/CPU0:ios(config-hwmod-olt-flexi)#commit
```

## interface

Use the **interface** command in the config mode to enter the configuration mode of a management interface. To delete the configuration, use the **no** form of this command.

```
interface type interface-path-id
no interface type interface-path-id
```

<b>Syntax Description</b>	<table border="1"> <tr> <td><i>type</i></td><td>Interface type.</td></tr> <tr> <td><i>interface-path-id</i></td><td>Physical interface or virtual interface.</td></tr> </table>	<i>type</i>	Interface type.	<i>interface-path-id</i>	Physical interface or virtual interface.
<i>type</i>	Interface type.				
<i>interface-path-id</i>	Physical interface or virtual interface.				
<b>Command Default</b>	None				
<b>Command Modes</b>	Configuration Mode				

Command History	Release	Modification
	Release 7.10.1	This command was introduced.
Usage Guidelines	To use this command, you must be in a user group associated with a task group that includes appropriate task ID's. If the user group assignment is preventing you from using a command, contact your AAA administrator for assistance.	
Task ID	Task ID	Operations
	otn	write
Examples	<p>This example shows how to enter the configuration mode of <i>mgmtEth</i> interface:</p> <pre>RP/0/RP0/CPU0:Box(config)#interface mgmtEth0/RP0/CPU0/1</pre>	

## ipv4-access-group

To control access to an interface, use the **ipv4 access-group** command in interface configuration mode. To remove the specified access group, use the **no** form of this command.

**ipv4 access-group *access-list-name* { ingress | egress } [ compress level *compression-level* ]**

Syntax Description	<i>access-list-name</i>	Name of an IPv4 access list as specified by an <b>ipv4 access-list</b> command.
	<b>ingress</b>	Filters on inbound packets.
	<b>egress</b>	Filters on outbound packets.
	<b>compress level <i>compression-level</i></b>	Configures compression level for interface ACLs. Compression level values range from zero and two.
Command Default	The interface does not have an IPv4 access list applied to it.	
Command Modes	Interface configuration	
Command History	Release	Modification
	Cisco IOS XR Release 7.11.1 This command was introduced.	
Usage Guidelines	Use the <b>ipv4 access-group</b> command to control access to an interface. To remove the specified access group, use the <b>no</b> form of the command. Use the <i>access-list-name</i> argument to specify a particular IPv4 access list.	

**ipv6-access-group**

If the access list permits the addresses, the software continues to process the packet. If the access list denies the address, the software discards the packet and returns an Internet Control Message Protocol (ICMP) host unreachable message.

If the specified access list does not exist, all packets are passed.

Task ID	Task ID	Operations
acl	read, write	

**Examples**

The following example shows how to apply the access list named IPV4-ACL to the management interface:

```
RP/0/RP0/CPU0:ios(config)# interface mgmtEth 0/RP0/CPU0/0
RP/0/RP0/CPU0:ios(config-if)# ipv4 access-group IPV4-ACL ingress
RP/0/RP0/CPU0:ios(config-if)# commit
```

## ipv6-access-group

To control access to an interface, use the **ipv6 access-group** command in interface configuration mode. To remove the specified access group, use the **no** form of this command.

**ipv6 access-group *access-list-name* { ingress | egress } [ compress level *compression-level* ]**

<b>Syntax Description</b>	<i>access-list-name</i>	Name of an IPv6 access list as specified by an <b>ipv6 access-list</b> command.
	<b>ingress</b>	Filters on inbound packets.
	<b>egress</b>	Filters on outbound packets.
	<b>compress level <i>compression-level</i></b>	Configures compression level for interface ACLs. Compression level values range from zero and two.

**Command Default** The interface does not have an IPv6 access list applied to it.

**Command Modes** Interface configuration

<b>Command History</b>	<b>Release</b>	<b>Modification</b>
Cisco IOS XR Release 7.11.1	This command was introduced.	

**Usage Guidelines** Use compression level two to create Hybrid ACLs with an ACE that uses IPv6 extension headers to filter ingress and egress IPv6 packets.

Task ID	Task ID	Operations
	acl	read, write

**Examples**

The following example shows how to apply the access list named IPV6-ACL to the management interface:

```
RP/0/RP0/CPU0:ios(config)# interface mgmtEth 0/RP0/CPU0/0
RP/0/RP0/CPU0:ios(config-if)# ipv6 access-group IPV6-ACL ingress
RP/0/RP0/CPU0:ios(config-if)# commit
```

## ipv4-access-list

To define an IPv4 access list by name, use the **ipv4 access-list** command in IOS XR Config mode. To remove all entries in an IPv4 access list, use the **no** form of this command.

```
ipv4 access-list name
no ipv4 access-list name
```

<b>Syntax Description</b>	<i>name</i> Name of the access list. Names cannot contain a space or quotation marks.
---------------------------	---

<b>Command Default</b>	No IPv4 access list is defined.
------------------------	---------------------------------

<b>Command Modes</b>	IOS XR Config mode
----------------------	--------------------

Command History	Release	Modification
	Cisco IOS XR Release 7.11.1	This command was introduced.

<b>Usage Guidelines</b>	Use the <b>ipv4 access-list</b> command to configure an IPv4 access list. This command places the system in access list configuration mode, in which the denied or permitted access conditions must be defined with the <b>deny</b> or <b>permit</b> command.
-------------------------	---

Use the **ipv4 access-group** command to apply the access list to an interface.

Task ID	Task ID	Operations
	acl	read, write

**Examples**

This example shows how to define a standard access list named ACL:

**ipv6-access-list**

```
RP/0/RP0/CPU0:ios(config)# ipv4 access-list ACL
RP/0/RP0/CPU0:ios(config-ipv4-acl)# 10 permit tcp 192.0.2.2 255.255.255.0 any
RP/0/RP0/CPU0:ios(config-ipv4-acl)# 20 deny udp any any
RP/0/RP0/CPU0:ios(config-ipv4-acl)# 30 permit ipv4 192.0.2.64 255.255.255.0 any
RP/0/RP0/CPU0:ios(config-ipv4-acl)# commit
```

# ipv6-access-list

To define an IPv6 access list by name, use the **ipv6 access-list** command in IOS XR Config mode. To remove all entries in an IPv6 access list, use the **no** form of this command.

**ipv6 access-list name**  
**no ipv6 access-list name**

<b>Syntax Description</b>	<i>name</i> Name of the access list. Names cannot contain a space or quotation mark, or begin with a numeric.					
<b>Command Default</b>	No IPv6 access list is defined.					
<b>Command Modes</b>	IOS XR Config mode					
<b>Command History</b>	<table border="1"> <thead> <tr> <th>Release</th> <th>Modification</th> </tr> </thead> <tbody> <tr> <td>Cisco IOS XR Release 7.11.1</td> <td>This command was introduced.</td> </tr> </tbody> </table>		Release	Modification	Cisco IOS XR Release 7.11.1	This command was introduced.
Release	Modification					
Cisco IOS XR Release 7.11.1	This command was introduced.					
<b>Usage Guidelines</b>	<p>The IPv6 access lists are used for traffic filtering based on source and destination addresses, IPv6 option headers, and optional, upper-layer protocol type information for finer granularity of control. IPv6 access lists are defined by using the <b>ipv6 access-list</b> command in XR Config mode mode and their permit and deny conditions are set by using the <b>deny</b> and <b>permit</b> commands in IPv6 access list configuration mode. From IPv6 access list configuration mode, permit and deny conditions can be set for the defined IPv6 access list.</p> <p>The <b>ipv6 access-list</b> command is similar to the <b>ipv4 access-list</b> command, except that it is IPv6-specific.</p> <p>Use the <b>ipv6 access-group</b> command to apply the access list to an interface.</p> <p>Every IPv6 access list has an implicit <b>deny ipv6 any any</b> statement as its last match condition. An IPv6 access list must contain at least one entry for the implicit <b>deny ipv6 any any</b> statement to take effect.</p>					

Task ID	Task Operations
ID	acl read, write

<b>Examples</b>	This example shows how to define a standard access list named ACL:
-----------------	--

```
RP/0/RP0/CPU0:ios(config)# ipv6 access-list ACL
RP/0/RP0/CPU0:ios(config-ipv6-acl)# 10 permit ipv6 any any
RP/0/RP0/CPU0:ios(config-ipv6-acl)# 20 deny udp any any
RP/0/RP0/CPU0:ios(config-ipv6-acl)# commit
```

# ipv4 address

Use the **ipv4 address** command in the interface configuration mode to configure IPv4 address for an interface. To remove the IPv4 address from an interface, use the **no** form of this command.

**ipv4 address *ipv4-address mask***  
**no ipv4 address *ipv4-address mask***

## Syntax Description

*ipv4-address* IPv4 address.

*mask* Mask for the associated IP subnet. The network mask can be specified in either of two ways:

- The network mask can be a four-part dotted decimal address. For example, 255.0.0.0 indicates that each bit equal to 1 means the corresponding address bit belongs to the network address.
- The network mask can be indicated as a slash (/) and number. For example, /8 indicates that the first 8 bits of the mask are ones, and the corresponding bits of the address are network address.

## Command Default

None

## Command Modes

Interface Configuration mode

## Command History

Release	Modification
7.10.1	This command was introduced.

## Usage Guidelines

To use this command, you must be in a user group associated with a task group that includes appropriate task IDs. If the user group assignment is preventing you from using a command, contact your AAA administrator for assistance.

## Task ID

Task ID	Operation
otn	write

## Example

This example shows how to configure IPv4 address on an interface.

```
RP/0/RP0/CPU0:Box(config-if)# ipv4 address 192.0.2.6/24
```

## Example

This example shows how to remove IPv4 address from an interface.

```
RP/0/RP0/CPU0:Box(config-if)# no ipv4 address
```

**ipv6 address**

# ipv6 address

Use the **ipv6 address** command in the interface configuration mode to configure IPv6 address for an interface. To remove the IPv6 address from an interface, use the **no** form of this command.

**ipv6 address** *ipv6-prefix/ prefix-length*  
**no ipv6 address** *ipv6-prefix/ prefix-length*

**Syntax Description**

*ipv6-prefix/* The IPv6 network assigned to the interface.

This argument must be in the form documented in RFC 2373 where the address is specified in hexadecimal using 16-bit values between colons.

*prefix-length* The length of the IPv6 prefix. A decimal value that indicates how many of the high-order contiguous bits of the address compose the prefix (the network portion of the address). A slash (/) must precede the decimal value.

**Command Default**

None

**Command Modes**

Interface Configuration mode

**Command History**

<b>Release</b>	<b>Modification</b>
Release 7.10.1	This command was introduced.

**Usage Guidelines**

To use this command, you must be in a user group associated with a task group that includes appropriate task IDs. If the user group assignment is preventing you from using a command, contact your AAA administrator for assistance.

**Task ID**

<b>Task ID</b>	<b>Operation</b>
otn	write

**Example**

This example shows how to configure IPv6 address on an interface.

```
RP/0/RP0/CPU0:Box(config-if)# ipv6 address 0:0:0:7272::72/64
```

**Example**

This example shows how to remove IPv6 address from an interface.

```
RP/0/RP0/CPU0:Box(config-if)# no ipv6 address
```

# link-tuner

To enable and disable link tuner and to configure the spectrum density, use the **link-tuner** command.

**link-tuner { enable | disable | spectrum-density value }**

Syntax Description	<b>enable</b> Enable Link-Tuner <b>disable</b> Disable Link-Tuner <b>spectrum-density</b> Configure spectrum density <b>value</b> Spectrum density in range 1–100 in increments of 1
<b>Command Default</b>	The default spectrum density is 81.
<b>Command Modes</b>	(config-olc-ots)
Command History	<b>Release</b> <b>Modification</b> Cisco IOS XR Release 7.7.1      This command was introduced.

## Example

The following is a sample configuration that enables link tuner.

```
RP/0/RP0/CPU0:ios#configure
RP/0/RP0/CPU0:ios(config)#optical-line-control
RP/0/RP0/CPU0:ios(config-olc)#controller ots 0/0/0/0
RP/0/RP0/CPU0:ios(config-olc-ots)#link-tuner enable
RP/0/RP0/CPU0:ios(config-olc-ots)#commit
RP/0/RP0/CPU0:ios(config-olc-ots)#end
```

The following is a sample configuration that disables link tuner.

```
RP/0/RP0/CPU0:ios#configure
RP/0/RP0/CPU0:ios(config)#optical-line-control
RP/0/RP0/CPU0:ios(config-olc)#controller ots 0/0/0/0
RP/0/RP0/CPU0:ios(config-olc-ots)#link-tuner disable
RP/0/RP0/CPU0:ios(config-olc-ots)#commit
RP/0/RP0/CPU0:ios(config-olc-ots)#end
```

The following example is a sample configuration that configures the spectrum density to 80%.

```
RP/0/RP0/CPU0:ios#configure
RP/0/RP0/CPU0:ios(config)#optical-line-control
RP/0/RP0/CPU0:ios(config-olc)#controller ots 0/0/0/0
RP/0/RP0/CPU0:ios(config-olc-ots)#link-tuner spectrum-density 80
RP/0/RP0/CPU0:ios(config-olc-ots)#commit
RP/0/RP0/CPU0:ios(config-olc-ots)#end
```

**license smart deregister**

## license smart deregister

To cancel the registration of your device, use the **license smart deregister** command.

**license smart deregister**

---

**Command Default** None

---

**Command Modes** None

---

**Command History** **Release Modification**

R7.7.1 This command was introduced.

---

**Usage Guidelines** When your device is taken off the inventory, shipped elsewhere for redeployment or returned to Cisco for replacement using the return merchandise authorization (RMA) process, you can use this command to cancel the registration on your device. All smart licensing entitlements and certificates on the platform are removed.

The following example deregisters NCS 1010.

```
RP/0/RP0/CPU0:ios#license smart deregister
```

## license smart register

To register the device instance with Cisco licensing cloud, use the **license smart register idtoken token-id [ force ]** command.

**license smart register idtoken token-id [ force ]**

---

**Syntax Description** *token\_id* Specifies the token generated in smart manager.

**force** If the registration fails due to communication failure between the device and the portal, the system waits for 24 hours before attempting to register the device again. Use this option to force the registration.

---



---

**Command Default** None

---

**Command Modes** None

---

**Command History** **Release Modification**

Release This command was introduced.  
7.7.1

---

**Usage Guidelines** Use this command to register the device instance with Cisco licensing cloud.

The following example registers and sets the token ID required for registration of NCS 1004.

```
RP/0/RP0/CPU0:ios#license smart register
YzY2ZjYyNjktY2N1OS00NTc4LWIxNTAtMjZkNmNiNzMxMTY1LTE2NjAzNjQ3
%0ANzY4Nj18ZVJSckxKN2pFV2tIeHVoMUkxbGxTazFDVm9kc1B5MG1HQmlFWUJi%0Ac3VNRT0%3D%0A
```

## license smart renew

To manually renew the ID certification or authorization, use the **license smart renew** command.

**license smart renew { ID | auth }**

<b>Syntax Description</b>	<b>ID</b> ID certificates are renewed automatically after six months. In case, the renewal fails, the product instance goes into unidentified state. You can manually renew the ID certificate using this option. <b>auth</b> Authorization periods are renewed by the Smart Licensing system every 30 days. As long as the license is in an 'Authorized' or 'Out-of-compliance' (OOC), the authorization period is renewed. Use this command to make an on-demand manual update of your registration. Thus, instead of waiting 30 days for the next registration renewal cycle, you can use this option to instantly find out the status of your license. After 90 days, the authorization period expires and the status of the associated licenses display "AUTH EXPIRED". Use this option to retry the authorization period renewal. If the retry is successful, a new authorization period begins.				
<b>Command Default</b>	None				
<b>Command Modes</b>	None				
<b>Command History</b>	<table border="1"> <thead> <tr> <th>Release</th> <th>Modification</th> </tr> </thead> <tbody> <tr> <td>Release 7.7.1</td> <td>This command was introduced.</td> </tr> </tbody> </table>	Release	Modification	Release 7.7.1	This command was introduced.
Release	Modification				
Release 7.7.1	This command was introduced.				
<b>Usage Guidelines</b>	None				

The following example manually renews the ID certificate for the NCS 1010:

```
RP/0/RP0:ios#license smart renew id
```

The following example manually renews the authorization for the NCS 1010:

```
RP/0/RP0:ios#license smart renew auth
```

## license smart reservation install file

To register the device using the authorization code that is copied as a file, and to activate smart licensing reservation for your device, use the **license smart reservation install file** command.

**license smart transport****license smart reservation install file *file name***

<b>Syntax Description</b>	file name	Name of the file where the authorization code is saved.
<b>Command Default</b>	None	
<b>Command Modes</b>	None	
<b>Command History</b>	<b>Release</b>	<b>Modification</b>
	Release 7.7.1	This command was introduced.

<b>Usage Guidelines</b>	None
The following example registers and activates the registration and license for NCS 1010:	

```
RP/0/RP0/CPU0:ios#license smart reservation install file /disk0:/smart1
Tue Jul 19 13:46:22.877 UTC
RP/0/RP0/CPU0:Jul 19 13:46:22.946 UTC: plat_sl_client[368]:
%LICENSE-PLAT-CLIENT-6-STATE_CHANGE :
Licensing platform state changing from UNREGISTERED to REGISTERED
RP/0/RP0/CPU0:Jul 19 13:46:22.946 UTC: smartlicserver[247]:
%LICENSE-SMART_LIC-6-AGENT_REG_SUCCESS
: Smart Agent for Licensing Registration successful. udi PID:NCS1010-SA,SN:FCB2546B08T
Reservation install file successful
Last Confirmation code 8572aa81
```

## license smart transport

To configure the smart transport as an alternative option to Call Home,use the **license smart transport** command.

**license smart transport smart**

<b>Command Default</b>	None
<b>Command Modes</b>	None
<b>Command History</b>	<b>Release</b>
	Release 7.7.1

<b>Usage Guidelines</b>	None
The following example configures the smart transport option to connect to the CSSM.	

```
RP/0/RP0/CPU0:ios#license smart transport smart
Thu Jul 19 13:34:47.251 UTC
```

```
RP/0/RP0/CPU0:ios#commit
```

## ntp

To enter Network Time Protocol (NTP) configuration mode and run NTP configuration commands, use the **ntp** command in global configuration mode.

**ntp**

<b>Syntax Description</b>	This command has no keywords or arguments.	
<b>Command Default</b>	No default behavior or values.	
<b>Command Modes</b>	Global configuration	
<b>Command History</b>	<b>Release</b>	<b>Modification</b>
	Cisco IOS XR Release 7.11.1	This command was introduced.
<b>Task ID</b>	<b>Task ID</b>	<b>Operations</b>
	ip-services	read, write

The following example shows how to enter NTP configuration mode:

```
RP/0/RP0/CPU0:ios(config)#ntp
RP/0/RP0/CPU0:ios(config-ntp)#
```

## olc bfr-initialize

Use the **olc bfr-initialize** command to initialize the Band Failure Recovery(BFR) feature.

**olc bfr-initialize controller ots R/S/I/P**

<b>Syntax Description</b>	<i>R/S/I/P</i>	Rack/Slot/Instance/Port of the OTS controller.
	<b>controller Ots</b>	Use this parameter to choose a particular controller.
<b>Command Modes</b>	Privileged EXEC mode	

**olc bfr-pause**

Command History	Release	Modification
	Cisco IOS XR Release 7.9.1	This command was introduced.

**Example**

The following is a sample output of the **olc bfr-initialize** command that initializes BFR.

```
RP/0/RP0/CPU0:ios#olc bfr-initialize controller ots 0/0/0/0
```

## olc bfr-pause

Use the **olc bfr-pause** command to enable or disable Band Failure Recovery(BFR) pause. In case of band failure, when BFR pause is enabled, the recovery procedure is not initiated and the surviving band is not switched to single-band PSD profile.

**olc bfr-pause controller ots   Rack/Slot/Instance/Port { enable | disable }**

<b>Syntax Description</b>	<b>controller Ots</b> Use this parameter to choose a particular controller.
	<b>R/S/I/P</b> Rack/Slot/Instance/Port of the OTS controller.
	<b>enable</b> Use this keyword to temporarily pause BFR.
	<b>disable</b> Use this keyword to disable BFR pause.

**Command Modes**   Privileged EXEC mode

Command History	Release	Modification
	Cisco IOS XR Release 7.9.1	This command was introduced.

The following is a sample output of the **olc bfr-pause** command that enables the BFR pause feature and temporarily pauses BFR.

```
RP/0/RP0/CPU0:ios#olc bfr-pause controller ots 0/0/0/0 enable
```

The following is a sample output of the **olc bfr-pause** command that disables the BFR pause feature.

```
RP/0/RP0/CPU0:ios#olc bfr-pause controller ots 0/0/0/0 disable
```

## olc force-raman-turn-up

Use the **olc force-raman-turn-up** command to turn on the Raman pumps, when the RAMAN-TURNUP-FAIL alarm is raised due to failure of Raman turn-up fiber check.

**olc force-raman-turn-up controller ots R/S/I/P**

<b>Syntax Description</b>	<i>R/S/I/P</i>	Rack/Slot/Instance/Port of the OSC controller.
	<b>controller Ots</b>	Use this parameter to choose a particular controller.
<b>Command Modes</b>	Privileged EXEC mode	
<b>Command History</b>	<b>Release</b>	<b>Modification</b>
	Cisco IOS XR Release 7.11.1	This command was introduced.

### Example

The following is a sample configuration to forcefully turn up the Raman pumps:

```
RP/0/RP0/CPU0:IOS#olc force-raman-turn-up controller ots 0/0/0/0
Thu Nov  2 10:12:26.668 UTC
```

## olc otdr raman-turn-up

Use the **olc otdr raman-turn-up** command to configure the OTDR for Raman turn-up.

**olc otdr raman-turn-up [ enable | disable ] [ relaxation factor value ]**

<b>Syntax Description</b>	<b>enable</b>	Enables OTDR for Raman turn-up.
	<b>disable</b>	Disables OTDR for Raman turn-up.
	<b>relaxation factor value</b>	Configures the percentage of relaxation factor to ignore the reflective events evaluated by Raman turn-up.
<b>Command Modes</b>	Controller configuration mode	
<b>Command History</b>	<b>Release</b>	<b>Modification</b>
	Cisco IOS XR Release 7.11.1	This command was introduced.

**olc start-raman-turn-up****Example**

The following are the sample configurations that enable and disable the Raman Turn-up and set up the relaxation factor for Ramam turn-up.

```
RP/0/RP0/CPU0:IOS#configure
Thu Nov  2 10:10:53.812 UTC
RP/0/RP0/CPU0:IOS(config)#optical-line-control controller Ots 0/0/0/0
RP/0/RP0/CPU0:IOS(config-olc-ots)#otdr raman-turn-up enable
RP/0/RP0/CPU0:IOS(config-olc-ots)#commit
Thu Nov  2 10:11:20.514 UTC

RP/0/RP0/CPU0:IOS#configure
Fri Nov  3 11:12:34.631 UTC
RP/0/RP0/CPU0:IOS(config)#optical-line-control controller Ots 0/0/0/0
RP/0/RP0/CPU0:IOS(config-olc-ots)#otdr raman-turn-up disable
RP/0/RP0/CPU0:IOS(config-olc-ots)#commit
Fri Nov  3 11:13:23.514 UTC

RP/0/RP0/CPU0:IOS#configure
Thu Nov  2 10:24:55.778 UTC
RP/0/RP0/CPU0:IOS(config)#optical-line-control controller Ots 0/0/0/0
RP/0/RP0/CPU0:IOS(config-olc-ots)#otdr raman-turn-up relaxation-factor 40
RP/0/RP0/CPU0:IOS(config-olc-ots)#commit
Thu Nov  2 10:25:06.733 UTC
RP/0/RP0/CPU0:IOS(config-olc-ots)#end
RP/0/RP0/CPU0:IOS#olc start-raman-turn-up controller Ots 0/0/0/0
Thu Nov  2 10:25:24.143 UTC
```

## **olc start-raman-turn-up**

Use the **olc start-raman-turn-up** command to trigger Raman turn-up.

**olc start-raman-turn-up controller ots R/S/I/P**

<b>Syntax Description</b>	<i>R/S/I/P</i> Rack/Slot/Instance/Port of the OSC controller.				
	<b>controller Ots</b> Use this parameter to choose a particular controller.				
<b>Command Modes</b>	Controller configuration mode				
<b>Command History</b>	<table border="1"> <thead> <tr> <th><b>Release</b></th> <th><b>Modification</b></th> </tr> </thead> <tbody> <tr> <td>Cisco IOS XR Release 7.11.1</td> <td>This command was introduced.</td> </tr> </tbody> </table>	<b>Release</b>	<b>Modification</b>	Cisco IOS XR Release 7.11.1	This command was introduced.
<b>Release</b>	<b>Modification</b>				
Cisco IOS XR Release 7.11.1	This command was introduced.				

**Example**

The following output is a sample of the **olc start-raman-turn-up controller ots 0/0/0/0** command.

```
RP/0/RP0/CPU0:IOS#olc start-raman-turn-up controller Ots 0/0/0/0
Thu Nov  2 10:28:41.529 UTC
```

## olc start-gain-estimation

Use the **olc start-gain-estimation** command to trigger the gain estimation operation.

**olc start-gain-estimation controller ots R/S/I/P**

<b>Syntax Description</b>	<i>R/S/I/P</i> Rack/Slot/Instance/Port of the OSC controller.				
	<b>controller Ots</b> Use this parameter to choose a particular controller.				
<b>Command Modes</b>	Privileged EXEC mode				
<b>Command History</b>	<table border="1"> <thead> <tr> <th><b>Release</b></th><th><b>Modification</b></th></tr> </thead> <tbody> <tr> <td>Cisco IOS XR Release 7.7.1</td><td>This command was introduced.</td></tr> </tbody> </table>	<b>Release</b>	<b>Modification</b>	Cisco IOS XR Release 7.7.1	This command was introduced.
<b>Release</b>	<b>Modification</b>				
Cisco IOS XR Release 7.7.1	This command was introduced.				

### Example

The following output is a sample of the **olc start-gain-estimation controller ots 0/0/0/0** command.

```
RP/0/RP0/CPU0:ios#olc start-gain-estimation controller ots 0/0/0/0
```

## olc start-raman-tuning

Use the **olc start-raman-tuning** command to trigger Raman tuning.

**olc start-raman-tuning controller ots R/S/I/P**

<b>Syntax Description</b>	<i>R/S/I/P</i> Rack/Slot/Instance/Port of the OSC controller.				
	<b>controller Ots</b> Use this parameter to choose a particular controller.				
<b>Command Modes</b>	Privileged EXEC mode				
<b>Command History</b>	<table border="1"> <thead> <tr> <th><b>Release</b></th><th><b>Modification</b></th></tr> </thead> <tbody> <tr> <td>Cisco IOS XR Release 7.7.1</td><td>This command was introduced.</td></tr> </tbody> </table>	<b>Release</b>	<b>Modification</b>	Cisco IOS XR Release 7.7.1	This command was introduced.
<b>Release</b>	<b>Modification</b>				
Cisco IOS XR Release 7.7.1	This command was introduced.				

## optical-line-control

To use the optical applications configuration mode, use the **optical-line-control** command.

**optical-line-control**

**otdr auto-scan**

<b>Command Modes</b>	Global configuration mode (config)	
<b>Command History</b>	<b>Release</b>	<b>Modification</b>
	Cisco IOS XR Release 7.7.1	This command was introduced.

## otdr auto-scan

Use the **otdr auto-scan** command to enable or disable the auto otdr scan

**otdr auto-scan [ enable | disable ]**

<b>Syntax Description</b>	<b>enable</b> Enables OTDR auto scan.  <b>disable</b> Disables OTDR auto scan.	
<b>Command Modes</b>	Controller configuration mode	
<b>Command History</b>	<b>Release</b>	<b>Modification</b>
	Cisco IOS XR Release 7.11.1	This command was introduced.

### Example

The following are sample configurations that enable and disable automatic OTDR scan.

```
RP/0/RP0/CPU0:ios#configure
Mon Sep 18 13:11:53.812 UTC
RP/0/RP0/CPU0:IOS(config)#optical-line-control controller Ots 0/0/0/0
RP/0/RP0/CPU0:IOS(config-olc-ots)#otdr auto-scan enable
RP/0/RP0/CPU0:IOS(config-olc-ots)#commit

RP/0/RP0/CPU0:ios#configure
Mon Sep 3 13:28:34.631 UTC
RP/0/RP0/CPU0:IOS(config)#optical-line-control controller Ots 0/0/0/0
RP/0/RP0/CPU0:IOS(config-olc-ots)#otdr auto-scan disable
RP/0/RP0/CPU0:IOS(config-olc-ots)#commit
```

## otdr start

Use the **otdr-start controller ots** command to start the otdr operation.

**otdr-start controller ots R/S/I/P direction**

<b>Syntax Description</b>	<b>R/S/I/P</b>	Rack/Slot/Instance/Port of the OTS controller.
---------------------------	----------------	--

---

**otdr-start controller ots** Use this parameter to start the otdr operation in a particular direction.

---

*direction* Scan direction (RX or TX)

---

**Command Modes** Privileged EXEC mode

---

<b>Release</b>	<b>Modification</b>
Cisco IOS XR Release 7.7.1	This command was introduced.

---

### Example

The following output is a sample of enabling and disabling automatic OTDR scan.

## otdr stop

Use the **otdr-stop controller ots** command to stop the otdr operation.

**otdr-stop controller ots R/S/I/P direction**

---

<b>Syntax Description</b>	<b>R/S/I/P</b>	Rack/Slot/Instance/Port of the OTS controller.
---------------------------	----------------	--

---

<b>otdr-stop controller ots</b>	Use this parameter to stop the otdr operation in a particular direction.
---------------------------------	--

---

<i>direction</i>	Scan direction (RX or TX)
------------------	---------------------------

---

**Command Modes** Privileged EXEC mode

---

<b>Release</b>	<b>Modification</b>
----------------	---------------------

---

Cisco IOS XR Release 7.7.1	This command was introduced.
----------------------------	------------------------------

---

### Example

```
RP/0/RP0/CPU0:ios#otdr-stop controller ots 0/0/0/0 tx
OTS OTDR Scan Stopped at TX
```

## partner-band-port

Use the **partner-band-port** command to establish a connection between C and L-band nodes by configuring the L-band peer IP on C-band node and C-band peer IP on L-band node.

**partner-band-port ipv4 address controller ots Rack/Slot/Instance/Port**

<b>Syntax Description</b>	<i>R/S/I/P</i>	Rack/Slot/Instance/Port of the OTS controller.
	<b>ipv4 address</b>	Specify the IP address of the peer node.
	<b>controller Ots</b>	Use this parameter to choose a particular controller.
	<i>R/S/I/P</i>	Rack/Slot/Instance/Port of the OTS controller.

<b>Command Modes</b>	Privileged EXEC mode
----------------------	----------------------

<b>Command History</b>	<b>Release</b>	<b>Modification</b>
	Cisco IOS XR Release 7.9.1	This command was introduced.

### Example 1

The following is a sample output of the **partner-band-port** command that configures the peer node IP address 192.0.2.1 on the C-band node.

```
RP/0/RP0/CPU0:ios# optical-line-control controller Ots0/0/0/0
RP/0/RP0/CPU0:ios# partner-band-port ipv4 address 192.0.2.1 controller Ots0/0/0/0
```

## pm

To configure the performance monitoring parameters of the OTS, OTS-OCH, OSC, and DFB controllers, use the **pm** command in the controller configuration mode.

For more information about PM threshold values for the controllers, see the section, Monitor performance.

```
pm [ flex-bin | 15-min | 30-sec | 24-hour ] [ ots | ots-och | osc | dfb ] [ report | threshold ] [ eagn
| eatl | iagn | iatl | slr-cl | slt-cl | opbr | opr | opr-cl | opt | opt-s | raman-1
| raman-2 | raman-3 | raman-4 | raman-5 | raman-tot ] [ max-tca | min-tca ] [
enable | value ]
```

<b>Syntax Description</b>	<b>flex-bin  15-min   30-sec   24-hour</b>	Configures performance monitoring parameters for 10 seconds, 15 minutes, 30 seconds, or 24-hour intervals.
	<b>ots   ots-och   osc   dfb</b>	Specifies whether to configure performance monitoring parameters for the OTS, OTS-OCH, OSC, or DFB controllers.
	<b>history</b>	Displays the historical values of the <b>pm</b> command.
	<b>report</b>	Configures the TCA reporting status for optics (OTS-OCH, OSC, or DFB) or OTS parameters.
	<b>threshold</b>	Configures thresholds on optics (OTS-OCH, OSC, or DFB) or OTS parameters.
	<b>iagn   eagn</b>	Configures thresholds for ingress or egress amplifier gain.

<b>iatl   eatl</b>	Configures the thresholds for ingress or egress amplifier tilt.
<b>slr-cl   slt-cl</b>	Configures the thresholds for span loss in Rx or Tx direction.
<b>opr   opr-cl   opr-s</b>	Configures thresholds for total Rx power, total Rx power for C and L band, or total C band signal power.
<b>opbr</b>	Configures thresholds for back reflection power.
<b>opt   opt-s</b>	Configures thresholds for total Tx power or total C band signal power.
<b>raman-1   raman-2   raman-3   raman-4   raman-5   raman-tot</b>	Configures thresholds for Raman power (1, 2, 3, 4, or 5) or total Raman pump power.
<b>max-tca   min-tca enable</b>	Enable the maximum or minimum TCA reporting status.
<i>value</i>	Value of the thresholds.

**Command Default** None**Command Modes** Controller configuration

<b>Command History</b>	<b>Release</b>	<b>Modification</b>
	Release 7.11.1	<ul style="list-style-type: none"> <li>The <b>slr-cl</b> and <b>slt-cl</b> parameters were added to the <b>pm</b> configuration command.</li> <li>The <b>SLR (C+L)</b> and <b>SLT (C+L)</b> fields were added to the output of the <b>show controllers ots R/S/I/P pm</b> command.</li> </ul>
Release 7.7.1 This command was introduced.		

**Usage Guidelines** None

### Examples

The following examples shows how to view the configured maximum and minimum threshold values and the current span loss values for both Tx and Rx direction.

```
RP/0/RP0/CPU0:ios#show controllers ots 0/0/0/0 pm current 15-min optics 1
Optics in the current interval [06:30:00 - 06:37:00 Tue May 17 2022]
Optics current bucket type : Valid
      MIN      AVG      MAX     Operational Configured      TCA     Operational
Configured TCA
                                         Threshold(min) Threshold(min(min))
Threshold(max) Threshold(max(max)
OPT [dBm] : 20.00    20.00    20.00   -20.00    NA        NO    40.00    NA
          NO
OPR [dBm] : 20.00    20.00    20.00   -30.00    NA        NO    18.00    NA
          NO
OPT (C+L) [dBm] : 20.00    20.00    20.00   -20.00    NA        NO    60.85    NA
          NO
OPR (C+L) [dBm] : -10.00   -10.00   -10.00  -30.00    NA        NO    36.00    NA
```

NO	OPT (S) [dBm]	: 20.00	20.00	20.00	-5.00	NA	NO	28.00	NA
NO	OPR (S) [dBm]	: 20.00	20.00	20.00	-30.00	NA	NO	18.00	NA
NO	OPBR [dBm]	: -30.00	-30.00	-30.00	-30.00	NA	NO	-14.09	NA
NO	EAGN [dB]	: 30.00	30.00	30.00	16.00	NA	NO	20.00	20.00
YES	<b>SLR (C+L) [dB]</b>	<b>: 4.46</b>	<b>4.49</b>	<b>4.50</b>	<b>0.00</b>	<b>NA</b>	<b>NO</b>	<b>42.00</b>	<b>NA</b>
NO	<b>SLT (C+L) [dB]</b>	<b>: 0.09</b>	<b>0.09</b>	<b>0.09</b>	<b>0.00</b>	<b>NA</b>	<b>NO</b>	<b>42.00</b>	<b>NA</b>
NO	EATL [dB]	: -4.80	-4.80	-4.80	-5.00	NA	NO	5.00	NA
NO	IAGN [dB]	: 25.00	25.00	25.00	12.00	NA	NO	25.00	NA
NO	IATL [dB]	: -2.40	-2.40	-2.40	-5.00	NA	NO	5.00	NA
NO	RAMAN-TOT [mW]	: 300.00	300.00	300.00	200.00	NA	NO	1410.00	NA
NO	RAMAN-1 [mW]	: 45.00	45.00	45.00	45.00	NA	NO	390.00	NA
NO	RAMAN-2 [mW]	: 40.00	40.00	40.00	40.00	NA	NO	390.00	NA
NO	RAMAN-3 [mW]	: 40.00	40.00	40.00	40.00	NA	NO	220.00	NA
NO	RAMAN-4 [mW]	: 40.00	40.00	40.00	40.00	NA	NO	220.00	NA
NO	RAMAN-5 [mW]	: 35.00	35.00	35.00	35.00	NA	NO	190.00	NA

Last clearing of "show controllers OPTICS" counters never

The following sample sets the reporting status to maximum TCA for the eagn parameter of the OTS controller for a 15-minute interval.

```
RP/0/RP0/CPU0:ios#config
RP/0/RP0/CPU0:ios(config)#controller ots 0/0/0/0 pm 15-min ots report eagn max-tca enable
RP/0/RP0/CPU0:ios(config)#commit
RP/0/RP0/CPU0:ios(config)#end
```

The following sample configures the maximum threshold for the eagn parameter of the OTS controller to 20 dB.

```
RP/0/RP0/CPU0:ios#config
RP/0/RP0/CPU0:ios(config)#controller ots 0/0/0/0 pm 15-min ots threshold eagn max 2000
RP/0/RP0/CPU0:ios(config)#commit
RP/0/RP0/CPU0:ios(config)#end
```

To view the current PM parameters on an OTS controller for a 15 minute interval, use the following command:

```
RP/0/RP0/CPU0:ios#sh controllers ots 0/0/0/0 pm current 15-min optics 1
Tue May 17 06:37:00.529 UTC
```

Optics in the current interval [06:30:00 - 06:37:00 Tue May 17 2022]

Optics current bucket type : Valid	MIN	AVG	MAX	Operational	Configured	TCA	Operational
Configured	TCA						
Threshold(max)		Threshold(max)		Threshold(min)		Threshold(min)	

OPT [dBm]	:	20.00	20.00	20.00	-20.00	NA	NO	40.00	NA	
OPR [dBm]	NO	:	20.00	20.00	20.00	-30.00	NA	NO	18.00	NA
OPT (C+L) [dBm]	NO	:	20.00	20.00	20.00	-20.00	NA	NO	60.85	NA
OPR (C+L) [dBm]	NO	:	-10.00	-10.00	-10.00	-30.00	NA	NO	36.00	NA
OPT (S) [dBm]	NO	:	20.00	20.00	20.00	-5.00	NA	NO	28.00	NA
OPR (S) [dBm]	NO	:	20.00	20.00	20.00	-30.00	NA	NO	18.00	NA
OPBR [dBm]	NO	:	-30.00	-30.00	-30.00	-30.00	NA	NO	-14.09	NA
<b>EAGN [dB]</b>	<b>YES</b>	<b>:</b>	<b>30.00</b>	<b>30.00</b>	<b>30.00</b>	<b>16.00</b>	<b>NA</b>	<b>NO</b>	<b>20.00</b>	<b>20.00</b>
EATL [dB]	NO	:	-4.80	-4.80	-4.80	-5.00	NA	NO	5.00	NA
IAGN [dB]	NO	:	25.00	25.00	25.00	12.00	NA	NO	25.00	NA
IATL [dB]	NO	:	-2.40	-2.40	-2.40	-5.00	NA	NO	5.00	NA
RAMAN-TOT [mW]	NO	:	300.00	300.00	300.00	200.00	NA	NO	1410.00	NA
RAMAN-1 [mW]	NO	:	45.00	45.00	45.00	45.00	NA	NO	390.00	NA
RAMAN-2 [mW]	NO	:	40.00	40.00	40.00	40.00	NA	NO	390.00	NA
RAMAN-3 [mW]	NO	:	40.00	40.00	40.00	40.00	NA	NO	220.00	NA
RAMAN-4 [mW]	NO	:	40.00	40.00	40.00	40.00	NA	NO	220.00	NA
RAMAN-5 [mW]	NO	:	35.00	35.00	35.00	35.00	NA	NO	190.00	NA

Last clearing of "show controllers OPTICS" counters never

To view the historical PM parameters on an OTS controller for a 15 minute interval, use the following command:

```
RP/0/RP0/CPU0:ios#sh controllers ots 0/0/0/0 pm history 15-min optics 1 bucket 1
Tue May 17 07:02:26.911 UTC
```

Optics in interval 1 [06:45:00 - 07:00:00 Tue May 17 2022]

Optics history bucket type : Valid			
	MIN	AVG	MAX
OPT [dBm]	: 20.00	20.00	20.00
OPR [dBm]	: 20.00	20.00	20.00
OPT (C+L) [dBm]	: 20.00	20.00	20.00
OPR (C+L) [dBm]	: -10.00	-10.00	-10.00
OPT (S) [dBm]	: 20.00	20.00	20.00
OPR (S) [dBm]	: 20.00	20.00	20.00
OPBR [dBm]	: -30.00	-30.00	-30.00
EAGN [dB]	: 30.00	30.00	30.00
EATL [dB]	: -4.80	-4.80	-4.80
IAGN [dB]	: 25.00	25.00	25.00
IATL [dB]	: -2.40	-2.40	-2.40
RAMAN-TOT [mW]	: 300.00	300.00	300.00
RAMAN-1 [mW]	: 45.00	45.00	45.00
RAMAN-2 [mW]	: 40.00	40.00	40.00
RAMAN-3 [mW]	: 40.00	40.00	40.00
RAMAN-4 [mW]	: 40.00	40.00	40.00
RAMAN-5 [mW]	: 35.00	35.00	35.00

To view the current PM parameters on an OTS-OCH controller for a 15 minute interval, use the following command:

```
P/0/RP0/CPU0:ios#sh controllers ots-och 0/0/0/0/1 pm current 15-min optics 1
Tue May 17 10:27:20.387 UTC

Optics in the current interval [10:15:00 - 10:27:20 Tue May 17 2022]

Optics current bucket type : Valid
      MIN    AVG    MAX Operational Configured   TCA     Operational Configured   TCA
                  Threshold(min) Threshold(min) (min)   Threshold(max) Threshold(max) (max)
OPT[dBm] : 1.20 1.30 1.30    -30.00        NA       NO      15.00      NA      NO
OPR[dBm] : -12.31-12.25-12.20 -30.00        NA       NO      15.00      NA      NO
Last clearing of "show controllers OPTICS" counters never
```

To view the current PM parameters on an OSC controller for a 15 minute interval, use the following command:

```
RP/0/RP0/CPU0:ios#sh controller osc 0/0/0/0 pm current 15-min optics 1
Tue May 17 08:24:32.642 UTC

Optics in the current interval [08:15:00 - 08:24:32 Tue May 17 2022]

Optics current bucket type : Valid
      MIN    AVG    MAX Operational Configured   TCA     Operational Configured
      TCA
                  Threshold(min) Threshold(min) (min)
Threshold(max) Threshold(max) (max)
OPT[dBm] : -10.00 -10.00 -10.00 -20.00        NA       NO      12.00      NA
NO
OPR[dBm] : -30.00 -30.00 -30.00 -30.00        NA       NO      0.00      NA
NO

Last clearing of "show controllers OPTICS" counters never
```

To view the current PM parameters on an DFB controller for a 15 minute interval, use the following command:

```
RP/0/RP0/CPU0:ios#sh controller dfb 0/0/0/0 pm current 15-min optics 1
Tue May 17 08:28:37.455 UTC

Optics in the current interval [08:15:00 - 08:28:37 Tue May 17 2022]

Optics current bucket type : Valid
      MIN    AVG    MAX Operational Configured   TCA     Operational Configured   TCA
                  Threshold Threshold
                  (min)   (min)   (min)   (max)   (max)   (max)
OPT[dBm]: 20.00 20.00 20.00 -25.23        NA       NO      18.00      NA      NO
OPR[dBm]: 10.00 10.00 10.00 -30.00        NA       NO      12.00      NA      NO

Last clearing of "show controllers OPTICS" counters never
```

To view the current PM parameters for an OCH controller for a 30-second interval, use the following command:

```
RP/0/RP0/CPU0:ios#show controllers och 0/1/0/0 pm current 30-sec optics 1
Tue May 10 11:28:29.896 UTC

Optics in the current interval [11:28:00 - 11:28:29 Tue May 10 2022]

Optics current bucket type : Valid
      MIN    AVG    MAX Operational Configured   TCA     Operational
      Configured   TCA
                  Threshold(min) Threshold(min) (min)   Threshold(max)
Threshold(max) (max)
OPT[dBm] : -50.00 -50.00 -50.00 -30.00        NA       NO      15.00      NA
NO
OPR[dBm] : -50.00 -50.00 -50.00 -30.00        NA       NO      15.00      NA
NO
```

Last clearing of "show controllers OPTICS" counters never

To view the historical PM parameters on an OCH controller for a 30-second interval, use the following command:

```
RP/0/RP0/CPU0:ios#show controllers och 0/1/0/0 pm history 30-sec optics 1 bucket 1
```

Mon Jul 25 05:35:52.176 UTC

Optics in interval 1 [05:35:00 - 05:35:30 Mon Jul 25 2022]

```

Optics history bucket type : Valid
                                MIN      AVG      MAX
OPT[dBm]   : -50.00    -50.00    -50.00
OPR[dBm]   : -50.00    -50.00    -50.00

```

Last clearing of "show controllers OPTICS" counters never

To view the current PM parameters for an OCH controller for a 15-minute interval, use the following command:

```
RP/0/RP0/CPU0:ios#show controllers och 0/1/0/0 pm current 15-min optics 1
```

Tue May 10 11:28:50.952 UTC

Optics in the current interval [11:15:00 - 11:28:50 Tue May 10 2022]

Optics current bucket type : Valid					Configured	TCA	Operational
Configured	MIN	Avg	MAX	Operational	Configured	TCA	Operational
	TCA				Threshold(min)	Threshold(min)	Threshold(max)
Threshold(max)	(max)						
OPT[dBm]	: -50.00	-50.00	-50.00	-30.00	NA	NO	15.00
	NO						
OPR[dBm]	: -50.00	-50.00	-50.00	-30.00	NA	NO	15.00
	NO						

Last clearing of "show controllers OPTICS" counters never

To view the historical PM parameters for an OCH controller for a 15-minute interval, use the following command:

```
RP/0/RP0/CPU0:ios#show controllers och 0/1/0/0 pm history 15-min optics 1 bucket 1
```

Mon Jul 25 05:36:12.167 UTC

Optics in interval 1 [05:15:00 - 05:30:00 Mon Jul 25 2022]

```

Optics history bucket type : Valid
                                MIN      AVG      MAX
OPT[dBm]   : -50.00    -50.00    -50.00
OPR[dBm]   : -50.00    -50.00    -50.00

```

Last clearing of "show controllers OPTICS" counters never

To view the current PM parameters on an OCH controller for a 24-hour interval, use the following command:

RP/0/RP0/CPU0:ios#show controllers och 0/1/0/0 pm current 24-hour optics 1

Tue May 10 11:29:09 270 UTC

Optics in the current interval [00:00:00 - 11:29:09 Tue May 10 2022]

```

Optics current bucket type : Invalid
          MIN      AVG      MAX     Operational     Configured     TCA   Operational
Configured     TCA

```

Threshold(max)	(max)		Threshold(min)	Threshold(min)	(min)	Threshold(max)
OPT[dBm]	:	-50.00	-50.00	-50.00	-30.00	NA
	NO					NO
OPR[dBm]	:	-50.00	-50.00	-50.00	-30.00	NA
	NO					NO
						NA

Last clearing of "show controllers OPTICS" counters never  
RP/0/RP0/CPU0:ios#

To view the historical PM parameters on an OCH controller for a 24-hour interval, use the following command:

```
RP/0/RP0/CPU0:ios#show controllers och 0/1/0/0 pm history 24-hour optics 1
```

Mon Jul 25 05:36:35.165 UTC

Optics in interval 1 [00:00:00 - 24:00:00 Sun Jul 24 2022]

Optics history bucket type : Valid

	MIN	AVG	MAX	
OPT[dBm]	:	-50.00	-50.00	-50.00
OPR[dBm]	:	-50.00	-50.00	-50.00

Last clearing of "show controllers OPTICS" counters never

To view the current PM parameters for an OMS controller for a 30-second interval, use the following command:

```
RP/0/RP0/CPU0:ios#show controllers oms 0/3/0/8 pm current 30-sec optics 1
```

Mon Jul 25 07:24:38.319 UTC

Optics in the current interval [07:24:30 - 07:24:38 Mon Jul 25 2022]

Optics current bucket type : Valid

MIN	AVG	MAX	Operational	Configured	TCA	Operational	Configured	TCA		
Threshold(min)	Threshold(min)	(min)	Threshold(max)	Threshold(max)	(max)	Threshold(max)	(max)	Threshold(max)		
OPT[dBm]	:	-50.00	-50.00	-50.00	-30.00	NA	NO	15.00	NA	NO
OPR[dBm]	:	-50.00	-50.00	-50.00	-30.00	NA	NO	15.00	NA	NO

Last clearing of "show controllers OPTICS" counters never

To view the historical PM parameters on an OMS controller for a 30-second interval, use the following command:

```
RP/0/RP0/CPU0:ios#show controllers oms 0/3/0/8 pm history 30-sec optics 1 bucket 1
```

Mon Jul 25 07:13:51.228 UTC

Optics in interval 1 [07:13:00 - 07:13:30 Mon Jul 25 2022]

Optics history bucket type : Valid

	MIN	AVG	MAX	
OPT[dBm]	:	-50.00	-50.00	-50.00
OPR[dBm]	:	-50.00	-50.00	-50.00

Last clearing of "show controllers OPTICS" counters never

To view the current PM parameters for an OMS controller for a 15-minute interval, use the following command:

```
RP/0/RP0/CPU0:ios#show controllers oms 0/3/0/8 pm current 15-min optics 1
```

Mon Jul 25 07:25:00.183 UTC

Optics in the current interval [07:15:00 - 07:25:00 Mon Jul 25 2022]

Optics current bucket type : Valid  
 MIN AVG MAX Operational Configured TCA Operational Configured TCA  
 Threshold(min) Threshold(min) (min) Threshold(max) Threshold(max) (max)  
 OPT[dBm] : -50.00 -50.00 -50.00 -30.00 NA NO 15.00 NA NO  
 OPR[dBm] : -50.00 -50.00 -50.00 -30.00 NA NO 15.00 NA NO

Last clearing of "show controllers OPTICS" counters never

To view the historical PM parameters for an OMS controller for a 15-minute interval, use the following command:

```
RP/0/RP0/CPU0:ios#show controllers oms 0/3/0/8 pm history 15-min optics 1 bucket 1
```

Mon Jul 25 07:14:03.090 UTC

Optics in interval 1 [06:45:00 - 07:00:00 Mon Jul 25 2022]

Optics history bucket type : Valid  
 MIN AVG MAX  
 OPT[dBm] : -50.00 -50.00 -50.00  
 OPR[dBm] : -50.00 -50.00 -50.00

Last clearing of "show controllers OPTICS" counters never

To view the current PM parameters on an OMS controller for a 24-hour interval, use the following command:

```
RP/0/RP0/CPU0:ios#show controllers oms 0/3/0/8 pm current 24-hour optics 1
```

Mon Jul 25 07:26:09.817 UTC

Optics in the current interval [00:00:00 - 07:26:09 Mon Jul 25 2022]

Optics current bucket type : Valid  
 MIN AVG MAX Operational Configured TCA Operational Configured TCA  
 Threshold(min) Threshold(min) (min) Threshold(max) Threshold(max) (max)  
 OPT[dBm] : -50.00 -50.00 -50.00 -30.00 NA NO 15.00 NA NO  
 OPR[dBm] : -50.00 -50.00 -50.00 -30.00 NA NO 15.00 NA NO

Last clearing of "show controllers OPTICS" counters never

To view the historical PM parameters on an OMS controller for a 24-hour interval, use the following command:

```
RP/0/RP0/CPU0:ios#show controllers oms 0/3/0/8 pm history 24-hour optics 1
```

Mon Jul 25 07:18:13.532 UTC

Optics in interval 1 [00:00:00 - 24:00:00 Sun Jul 24 2022]

Optics history bucket type : Valid  
 MIN AVG MAX  
 OPT[dBm] : -50.00 -50.00 -50.00  
 OPR[dBm] : -50.00 -50.00 -50.00

Last clearing of "show controllers OPTICS" counters never

**process restart**

## process restart

To restart the license registration process, use the **license smart reservation** command.

**process restart smartlicserver location *location***

---

**Syntax Description** *location* Specifies the node-id.

---

**Command Default** None

---

**Command Modes** None

---

	<b>Release</b>	<b>Modification</b>
Release	This command was introduced.	
7.7.1		

---

**Usage Guidelines** None

The following example restarts the smart licensing process:

```
RP/0/RP0/CPU0:ios#RP/0/RP0/CPU0:ios(config)#process restart smartlicserver location
0/RP0/CPU0
```

## psd

Use the **psd** command to set the target PSDs.

**psd** *index* *value*

---

**Syntax Description** *index* PSD index 1–33.

---

*value* PSD in range -30.0 dBm per 12.5 GHz to 23.0 dBm per 12.5 GHz in increments of 0.1 dBm per 12.5 GHz.

---

**Command Modes** (config-olc-ots)

---

	<b>Release</b>	<b>Modification</b>
Cisco IOS XR Release 7.7.1	This command was introduced.	

---

**Usage Guidelines** You can configure the target power spectral densities for 33 points across the band. The 33 PSD values divide the entire spectrum into 150-GHz steps. APC uses the corresponding PSD value if the channel frequency corresponds to a configured point. If the central frequency is not on a configured position, APC computes the target PSD for a channel by extrapolating from the two adjacent steps.

**Example**

The following is a sample configuration that sets the psd to 15 dB for the setpoints 1 and 2.

```
RP/0/RP0/CPU0:ios#configure
RP/0/RP0/CPU0:ios(config)#optical-line-control
RP/0/RP0/CPU0:ios(config-olc)#controller ots 0/0/0/0
RP/0/RP0/CPU0:ios(config-olc-ots)#psd 1 150
RP/0/RP0/CPU0:ios(config-olc-ots)#psd 2 150
RP/0/RP0/CPU0:ios(config-olc-ots)#commit
RP/0/RP0/CPU0:ios(config-olc-ots)#end
```

## psd-min

Use the **psd-min** command to set the desired minimum PSD.

**psd-min** *value*

<b>Syntax Description</b>	<i>value</i> PSD in range -40.0 dBm per 12.5 GHz to 23.0 dBm per 12.5 GHz in increments of 0.1 dBm per 12.5 GHz.				
<b>Command Default</b>	The default minimum PSD is -24 dB.				
<b>Command Modes</b>	(config-olc-ots)				
<b>Command History</b>	<table border="1"> <thead> <tr> <th><b>Release</b></th> <th><b>Modification</b></th> </tr> </thead> <tbody> <tr> <td>Cisco IOS XR Release 7.7.1</td> <td>This command was introduced.</td> </tr> </tbody> </table>	<b>Release</b>	<b>Modification</b>	Cisco IOS XR Release 7.7.1	This command was introduced.
<b>Release</b>	<b>Modification</b>				
Cisco IOS XR Release 7.7.1	This command was introduced.				

**Example**

The following is a sample configuration that sets the minimum PSD to -25 dB.

```
RP/0/RP0/CPU0:ios#configure
RP/0/RP0/CPU0:ios(config)#optical-line-control
RP/0/RP0/CPU0:ios(config-olc)#controller ots 0/0/0/0
RP/0/RP0/CPU0:ios(config-olc-ots)#psd-min -250
RP/0/RP0/CPU0:ios(config-olc-ots)#commit
Tue Apr 26 09:50:12.055 UTC
RP/0/RP0/CPU0:ios(config-olc-ots)#end
```

## raman-tuning

Use the **raman-tuning** command to disable and enable Raman tuning and to configure Raman gain target manually.

**raman-tuning** { disable | enable | { raman-gain-target *value* } }

<b>Syntax Description</b>	<b>disable</b>	Disable Automatic Raman Tuner
	<b>enable</b>	Enable Automatic Raman Tune
	<b>raman-gain-target</b>	Configure Raman Gain Target manually
	<i>value</i>	Target Raman Gain in the range 8.0 to 25.0 dB in increments of 0.1 dB.
<b>Command Modes</b>	(config-olc-ots)	
<b>Command History</b>	<b>Release</b>	<b>Modification</b>
	Cisco IOS XR Release 7.7.1	This command was introduced.
<b>Usage Guidelines</b>	You can configure Target Raman Gain of 8.0 to 25.0 dB in multiples of 0.1 dB.	

### Example

The following is a sample configuration that disables Raman tuning.

```
RP/0/RP0/CPU0:ios#configure
RP/0/RP0/CPU0:ios(config)#optical-line-control
RP/0/RP0/CPU0:ios(config-olc)#controller ots 0/0/0/0
RP/0/RP0/CPU0:ios(config-olc-ots)#raman-tuning disable
RP/0/RP0/CPU0:ios(config-olc-ots)#commit
RP/0/RP0/CPU0:ios(config-olc-ots)#end
```

The following is a sample configuration that enables Raman tuning.

```
RP/0/RP0/CPU0:ios#configure
RP/0/RP0/CPU0:ios(config)#optical-line-control
RP/0/RP0/CPU0:ios(config-olc)#controller ots 0/0/0/0
RP/0/RP0/CPU0:ios(config-olc-ots)#raman-tuning enable
RP/0/RP0/CPU0:ios(config-olc-ots)#commit
RP/0/RP0/CPU0:ios(config-olc-ots)#end
```

The following is a sample configuration that configures the Raman gain target to 18 dB.

```
RP/0/RP0/CPU0:ios#configure
RP/0/RP0/CPU0:ios(config)#optical-line-control
RP/0/RP0/CPU0:ios(config-olc)#controller ots 0/0/0/0
RP/0/RP0/CPU0:ios(config-olc-ots)#raman-tuning raman-gain-target 180
RP/0/RP0/CPU0:ios(config-olc-ots)#commit
RP/0/RP0/CPU0:ios(config-olc-ots)#end
```

## raman-tx-power

Use the **raman-tx-power** command to set the Raman pump powers manually.

**raman-tx-power** *pump* *value* *value*

<b>Syntax Description</b>	<i>pump</i> RAMAN Transmit Pump Instance
---------------------------	--

---

**value** Power level (in units of 0.01mW). Range: 3500-39000

---

<b>Command Modes</b>	(config-Ots)
----------------------	--------------

<b>Command History</b>	<b>Release</b>	<b>Modification</b>
	Cisco IOS XR Release 7.7.1	This command was introduced.

### Example

The following is a sample configuration that sets the pump power of the first Raman pump to 211 mW.

```
RP/0/RP0/CPU0:ios#configure
RP/0/RP0/CPU0:ios(config-olc)#controller ots 0/0/0/0
RP/0/RP0/CPU0:ios(config-olc-ots)#raman-tx-power 1 value 21100
RP/0/RP0/CPU0:ios(config-olc-ots)#commit
RP/0/RP0/CPU0:ios(config-olc-ots)#end
```

## reload

To perform the reload operation on the NCS 1010 unit and its modules, use the **reload** command.

### reload location *location*

<b>Syntax Description</b>	<b>location</b>   <i>location</i>	(Optional) Enter the location for the unit or module which you want to reload.
---------------------------	-----------------------------------	--

**Command Default** All slots are reloaded.

**Command Modes** Cisco IOS XR

<b>Command History</b>	<b>Release</b>	<b>Modification</b>
	7.7.1	This command was introduced.

**Usage Guidelines** None

### Example

To reboot the Cisco NCS 1010 system, use the following command.

```
RP/0/RP0/CPU0:ios#reload
Fri Apr 29 06:50:12.312 UTC
Proceed with reload? [confirm]
RP/0/RP0/CPU0:ios#
Preparing system for backup. This may take a few minutes especially for large configurations.
Status report: node0_RP0_CPU0: BACKUP INPROGRESS
```

**reload**

```
Status report: node0_RP0_CPU0: BACKUP HAS COMPLETED SUCCESSFULLY
[Done]
```

To reboot the entire Cisco NCS 1010 system along with its modules, use the following command.

```
RP/0/RP0/CPU0:ios#reload location all noprompt
Fri Jul 15 14:53:25.775 UTC
RP/0/RP0/CPU0:ios#yes
% Invalid input detected at '^' marker.
RP/0/RP0/CPU0:ios#
*****Completed Card Reload of all *****
##### Rack reload : all#####
##### Iteration under Test : 7 #####
Waiting for 1000 seconds...
Waiting for 990 seconds...
Waiting for 980 seconds...
Waiting for 970 seconds...
.
.
output snipped
.

Waiting for 110 seconds...
Waiting for 100 seconds...
Waiting for 90 seconds...
Waiting for 80 seconds...
Waiting for 70 seconds...
Waiting for 60 seconds...
Waiting for 50 seconds...
Waiting for 40 seconds...
Waiting for 30 seconds...
Waiting for 20 seconds...
Waiting for 10 seconds...
XR Prompt = RP/0/RP0/CPU0:P2A_DT_08#
Login sucessfull

type is <class 'telnetlib.Telnet'>
clear logging
Fri Jul 15 15:10:17.840 UTC
Clear logging buffer [confirm]
[y/n] :y
RP/0/RP0/CPU0:ios#
*****XR Logging Cleared*****
*****Started Sanity Verification Tests *****
The term length 0 op is term length 0
Fri Jul 15 15:10:17.925 UTC
```

To reboot the Cisco NCS 1010 RP, use the following command.

```
RP/0/RP0/CPU0:ios#reload location 0/RP0 noprompt
Fri Jul 15 18:21:13.785 UTC
RP/0/RP0/CPU0:ios#yes
% Invalid input detected at '^' marker.
RP/0/RP0/CPU0:ios#
*****Completed Card Reload of 0/RP0 *****
##### Rack reload : 0/RP0#####
##### Iteration under Test : 1 #####
Waiting for 900 seconds...
Waiting for 890 seconds...
.
.
output snipped
.

Waiting for 110 seconds...
```

```

Waiting for 100 seconds...
Waiting for 90 seconds...
Waiting for 80 seconds...
Waiting for 70 seconds...
Waiting for 60 seconds...
Waiting for 50 seconds...
Waiting for 40 seconds...
Waiting for 30 seconds...
Waiting for 20 seconds...
Waiting for 10 seconds...
XR Prompt = RP/0/RP0/CPU0:ios#
Login sucessfull

type is <class 'telnetlib.Telnet'>
clear logging
Fri Jul 15 18:36:25.996 UTC
Clear logging buffer [confirm]
[y/n] :y
RP/0/RP0/CPU0:ios#
*****XR Logging Cleared*****
*****Started Sanity Verification Tests *****
The term length 0 op is term length 0
Fri Jul 15 18:36:26.062 UTC

RP/0/RP0/CPU0:ios#reload location 0/0/NXR0 noprompt
Sat Jul 16 05:03:51.547 UTC
RP/0/RP0/CPU0:ios#yes
% Invalid input detected at '^' marker.
RP/0/RP0/CPU0:ios#
*****Completed Card Reload of 0/0/NXR0 *****
##### Rack reload : 0/0/NXR0#####
##### Iteration under Test : 1 #####
Waiting for 900 seconds...
Waiting for 890 seconds...
Waiting for 880 seconds...
Waiting for 870 seconds...
.
.
output snipped
.

.

Waiting for 40 seconds...
Waiting for 30 seconds...
Waiting for 20 seconds...
Waiting for 10 seconds...
XR Prompt = RP/0/RP0/CPU0:ios#
Login sucessfull

type is <class 'telnetlib.Telnet'>
clear logging
Sat Jul 16 05:19:03.274 UTC
Clear logging buffer [confirm]
[y/n] :y
RP/0/RP0/CPU0:ios#
*****XR Logging Cleared*****
*****Started Sanity Verification Tests *****
The term length 0 op is term length 0
Sat Jul 16 05:19:03.350 UTC

```

To warm reboot the Cisco NCS 1010 line card, use the following command.

```

RP/0/RP0/CPU0:ios#reload location 0/0 noprompt
Fri Jul 15 23:42:33.536 UTC
RP/0/RP0/CPU0:ios#yes
% Invalid input detected at '^' marker.

```

reload

```

RP/0/RP0/CPU0:ios#
*****Completed Card Reload of 0/0 *****
##### Rack reload : 0/RP0#####
##### Iteration under Test : 1 #####
Waiting for 900 seconds...
Waiting for 890 seconds...
Waiting for 880 seconds...
Waiting for 870 seconds...

.
output snipped
.

.

Waiting for 80 seconds...
Waiting for 70 seconds...
Waiting for 60 seconds...
Waiting for 50 seconds...
Waiting for 40 seconds...
Waiting for 30 seconds...
Waiting for 20 seconds...
Waiting for 10 seconds...
XR Prompt = RP/0/RP0/CPU0:ios#
Login sucessfull

type is <class 'telnetlib.Telnet'>
clear logging
Fri Jul 15 23:57:45.284 UTC
Clear logging buffer [confirm]
[y/n] :y
RP/0/RP0/CPU0:ios#
*****XR Logging Cleared*****
*****Started Sanity Verification Tests *****
The term length 0 op is term length 0
Fri Jul 15 23:57:45.348 UTC

```

To warm reboot the Cisco NCS 1010 RP card, use the following command.

```

RP/0/RP0/CPU0:ios#reload location 0/RP0/CPU0 noprompt
Sat Jul 16 10:25:10.102 UTC
RP/0/RP0/CPU0:ios#yes
% Invalid input detected at '^' marker.
RP/0/RP0/CPU0:ios#
*****Completed Card Reload of 0/RP0/CPU0 *****
##### Rack reload : 0/RP0/CPU0#####
##### Iteration under Test : 1 #####
Waiting for 900 seconds...
Waiting for 890 seconds...
Waiting for 880 seconds...
Waiting for 870 seconds...
Waiting for 860 seconds...

.
output snipped
.

.

Waiting for 70 seconds...
Waiting for 60 seconds...
Waiting for 50 seconds...
Waiting for 40 seconds...
Waiting for 30 seconds...
Waiting for 20 seconds...
Waiting for 10 seconds...
XR Prompt = RP/0/RP0/CPU0:P2A_DT_08#
Login sucessfull

```

```

type is <class 'telnetlib.Telnet'>
clear logging
Sat Jul 16 10:40:22.211 UTC
Clear logging buffer [confirm]
[y/n] :y
RP/0/RP0/CPU0:ios#
*****XR Logging Cleared*****
*****Started Sanity Verification Tests *****
The term length 0 op is term length 0
Sat Jul 16 10:40:22.292 UTC

```

## server

To allow the system clock to be synchronized by a NTP time server, use the **server** command in one of the NTP configuration modes. To remove the **server** command from the configuration file and restore the system to its default condition with respect to this command, use the **no** form of this command.

```

server
[ ipv4 | ipv6 ] ip-address [ version number ] [ key key-id ] [ minpoll interval ] [ maxpoll interval ] [ source type interface-path-id ] [ prefer ] [ burst ] [ iburst ]
no server
[ ipv4 | ipv6 ] ip-address

```

### Syntax Description

<b>ipv4</b>	(Optional) Specifies an IPv4 IP address.
<b>ipv6</b>	(Optional) Specifies an IPv6 IP address.
<i>ip-address</i>	IPv4 or IPv6 address of the time server providing the clock synchronization.
<b>version</b> <i>number</i>	(Optional) Defines the Network Time Protocol (NTP) version number, where the <i>number</i> argument is a value from 1 to 4. The default is 4.
<b>key</b> <i>key-id</i>	(Optional) Defines the authentication key, where the <i>key-id</i> argument is the authentication key to use when packets are sent to this peer. By default, no authentication key is used.
<b>minpoll</b> <i>interval</i>	(Optional) Defines the shortest polling interval, where the <i>interval</i> argument is specified in powers of two seconds. Range is from 4 to 17. The default value is 6.
<b>maxpoll</b> <i>interval</i>	(Optional) Defines the longest polling interval, where the <i>interval</i> argument is specified in powers of two seconds. Range is from 4 to 17. The default value is 10.
<b>source</b>	(Optional) Specifies the IP source address. The default is the outgoing interface.
<i>type</i>	(Optional) Interface type. For more information, use the question mark ( ? ) online help function.
<i>interface-path-id</i>	(Optional) Physical interface or virtual interface.
<b>Note</b>	Use the <b>show interfaces</b> command to see a list of all interfaces currently configured on the device.
<b>prefer</b>	(Optional) Makes this peer the preferred server that provides synchronization.

**show access-lists-ipv4**

---

<b>burst</b>	(Optional) Sends a series of packets instead of a single packet within each synchronization interval to achieve faster synchronization.
--------------	---

---

<b>iburst</b>	(Optional) Sends a series of packets instead of a single packet within the initial synchronization interval to achieve faster initial synchronization.
---------------	--

---

<b>Command Default</b>	No servers are configured by default.
------------------------	---------------------------------------

---

<b>Command Modes</b>	NTP configuration
----------------------	-------------------

---

<b>Command History</b>	<b>Release</b>	<b>Modification</b>
------------------------	----------------	---------------------

---

Cisco IOS XR Release 7.11.1	This command was introduced.
-----------------------------	------------------------------

---

<b>Usage Guidelines</b>	The value for the <b>minpoll</b> keyword must be less than or equal to the value for the <b>maxpoll</b> keyword. If this is not the case, the system issues an error message.
-------------------------	---

Using the **prefer** keyword reduces switching back and forth among servers.

---

<b>Task ID</b>	<b>Task ID</b>	<b>Operations</b>
----------------	----------------	-------------------

---

ip-services	read, write
-------------	----------------

---

The following example shows how to configure the device to allow its system clock to be synchronized with the clock of the peer at IP address 203.0.113.51 using NTP.

```
RP/0/RP0/CPU0:ios(config)#ntp
RP/0/RP0/CPU0:ios(config-ntp)#server 203.0.113.51 minpoll 8 maxpoll 12 prefer iburst
```

## show access-lists-ipv4

To display the contents of current IPv4 access lists, use the **show access-lists ipv4** command in IOS XR EXEC mode.

```
show access-lists ipv4 [ access-list-name hardware { ingress | egress } [ interface type
interface-path-id ] { sequence number | location node-id | [ usage pfilter { location node-id
} ] } ]
```

---

<b>Syntax Description</b>	<b>access-list-name</b>	(Optional) Name of a particular IPv4 access list. The name cannot contain spaces or quotation marks, but can include numbers.
---------------------------	-------------------------	---

---

<b>hardware</b>	(Optional) Identifies the access list as an access list for an interface.
-----------------	---

---

<b>ingress</b>	(Optional) Specifies an inbound interface.
<b>interface</b>	(Optional) Displays interface statistics.
<b>type</b>	(Optional) Interface type.
<i>interface-path-id</i>	Physical interface or virtual interface.
	<b>Note</b> Use the <b>show interfaces</b> command to see a list of all interfaces currently configured on the router.
<b>sequence number</b>	(Optional) Sequence number of a particular IPv4 access list. Range is 1 to 2147483644.
<b>location node-id</b>	(Optional) Location of a particular IPv4 access list. The <i>node-id</i> argument is entered in the <i>rack/slot/module</i> notation.
<b>summary</b>	(Optional) Displays a summary of all current IPv4 access lists.
<i>sequence-number</i>	(Optional) Sequence number of a particular IPv4 access list. Range is 1 to 2147483644.
<b>usage</b>	(Optional) Displays the usage of the access list on a given line card.
<b>pfilter</b>	(Optional) Displays the packet filtering usage for the specified line card.

**Command Default** The default displays all IPv4 access lists.

**Command Modes** IOS XR EXEC

Command History	Release	Modification
Cisco IOS XR Release 7.11.1	This command was introduced.	

**Usage Guidelines** Use the **show access-lists ipv4** command to display the contents of all IPv4 access lists. To display the contents of a specific IPv4 access list, use the *name* argument. Use the *sequence-number* argument to specify the sequence number of the access list.

**show access-lists ipv6**

Use the **hardware**, **ingress** and **location** keywords to display the access list hardware contents and counters for all interfaces that use the specified access list in a given direction. To display the contents of a specific access list entry, use the **sequence number** keyword and argument. The access group for an interface must be configured using the **ipv4 access-group** command for access list hardware counters to be enabled.

Use the **show access-lists ipv4 summary** command to display a summary of all current IPv4 access lists. To display a summary of a specific IPv4 access list, use the *name* argument.

Use the **show access-list ipv4 usage** command to display a summary of all interfaces and access lists programmed on the specified line card.

Task ID	Task Operations ID
acl	read

**Examples**

In the following example, the contents of all IPv4 access lists are displayed:

```
RP/0/RP0/CPU0:ios# show access-lists ipv4 acl_1
Fri Oct 20 06:22:17.223 UTC
ipv4 access-list acl_1
10 permit ipv4 172.16.0.0 0.0.255.255 any
20 deny ipv4 192.168.34.0 0.0.0.255 any
```

## show access-lists ipv6

To display the contents of current IPv6 access lists, use the **show access-lists ipv6** command in IOS XR EXEC mode.

```
show access-lists ipv6 [ access-list-name hardware { ingress | egress } [ interface type interface-path-id ] { sequence number | location node-id | [ usage pfilter { location node-id } ] } ]
```

<b>Syntax Description</b>	<i>access-list-name</i>	(Optional) Name of a particular IPv6 access list. The name cannot contain a spaces or quotation marks, but can include numbers.
	<b>hardware</b>	(Optional) Identifies the access list as an access list for an interface.
	<b>ingress</b>	(Optional) Specifies an inbound interface.
	<b>interface</b>	(Optional) Displays interface statistics.
	<i>type</i>	(Optional) Interface type.

---

*interface-path-id* (Optional) Either a physical interface instance or a virtual interface instance as follows:

- Physical interface instance. Naming notation is *rack/slot/instance/port* and a slash between values is required as part of the notation.
  - *rack*: Chassis number of the rack.
  - *slot*: Physical slot number of the modular services card or line card.
  - *instance*: Module number.
  - *port*: Physical port number of the interface.
- Virtual interface instance. Number range varies depending on interface type.

---

**sequence** *number* (Optional) Sequence number of a particular IPv6 access list. Range is 1 to 2147483644.

---

**location** *node-id* (Optional) Location of a particular IPv6 access list. The *node-id* argument is entered in the *rack/slot/instance* notation.

---

**summary** (Optional) Displays a summary of all current IPv6 access lists.

---

**sequence-number** (Optional) Sequence number of a particular IPv6 access list. Range is 1 to 2147483644.

---

**usage** (Optional) Displays the usage of the access list on a given line card.

---

**pfilter** (Optional) Displays the packet filtering usage for the specified line card.

---

**all** (Optional) Displays the location of all the line cards.

---

**Command Default** Displays all IPv6 access lists.

---

**Command Modes** IOS XR EXEC

---

Command History	Release	Modification
Cisco IOS XR Release 7.11.1	This command was introduced.	

---

**Usage Guidelines** The **show access-lists ipv6** command is similar to the **show access-lists ipv4** command, except that it is IPv6 specific.

Use the **show access-lists ipv6** command to display the contents of all IPv6 access lists. To display the contents of a specific IPv6 access list, use the *name* argument. Use the *sequence-number* argument to specify the sequence number of the access list.

Use the **hardware**, **ingress** and **location** keywords to display the access list hardware contents and counters for all interfaces that use the specified access list in a given direction. To display the contents of a specific access list entry, use the **sequence** *number* keyword and argument. The access group for an interface must be configured using the **ipv6 access-group** command for access list hardware counters to be enabled.

Use the **show access-lists ipv6 summary** command to display a summary of all current IPv6 access lists. To display a summary of a specific IPv6 access list, use the *name* argument.

**show alarms**

Use the **show access-list ipv6 usage** command to display a summary of all interfaces and access lists programmed on the specified line card.

Task ID	Task Operations ID
acl	read

**Examples**

In the following example, the contents of all IPv6 access lists are displayed:

```
RP/0/RP0/CPU0:ios# show access-lists ipv6
Fri Oct 20 05:29:01.125 UTC
ipv6 access-list V6-INGRESS-ACL
10 permit ipv6 any any
20 deny udp any any
```

## show alarms

To view alarm information, use the **show alarms** command in XR EXEC mode or Administration EXEC mode.

**show alarms** [ **brief** ] [ **system** ] [ **active** ]

**Syntax Description**

**brief** Displays alarms in brief.

**system** Displays system scope alarms related data.

**active** Displays active alarms.

**Command Default**

None

**Command Modes**

XR EXEC

Administration EXEC

**Command History**

Release	Modification
---------	--------------

Cisco IOS XR Release 7.7.1 This command was introduced.

**Usage Guidelines**

This command displays the alarm information. The command displays only the administration alarms in admin EXEC mode and all the alarms in XR EXEC mode.

**Example**

The following example shows the output of the **show alarms brief system active** command.

```
RP/0/RP0/CPU0:P1AL 05#show alarms brief system active
Thu Feb 9 11:33:03.137 UTC
-----
```

```

Active Alarms
-----
Location      Severity      Group      Set time      Description
-----
0/PM1          Major         Environ    01/25/2023 05:21:37 UTC      Power Module
Error (PM VIN VOLT 00R)

0/PM1 DISABLED Major         Environ    01/25/2023 05:21:37 UTC      Power Module
Output Disabled (PM OUTPUT_DISABLED)

RP/0/RPO/CPUO:P1AL 05#RP/0/RPO/CPU:Feb 9 11:33:05.115 UTC: phyl mgmt [152]: %PKT INFRA-FM-2
-FAULT CRITICAL : AL
ARM CRITICAL : PHYI-MDIO-ACCESS-ERROR : DECLARE : 0: Phyl MDIO access failure detected

```

## show cdp

To display global CDP information (including timer and hold-time information, information about neighboring devices, interfaces on which CDP is enabled, traffic between devices), use the **show cdp** command in EXEC mode.

```
show cdp { traffic | neighbors [ type number | detail ] | interface [ type number ] | entry { * | device-name [ * ] } [ version ] [ protocol ] }
```

<b>Syntax Description</b>	<p><b>type</b> (Optional) Interface type that is connected to the neighbors about which you want information.</p> <p><b>number</b> (Optional) Number of the interface connected to the neighbors about which you want information.</p> <p><b>detail</b> (Optional) Displays detailed information about a neighbor (or neighbors) including network address, enabled protocols, hold time, and software version.</p> <p><b>*</b> Displays all CDP neighbors.</p> <p><b>device-name</b> Name of the neighbor about which you want information. You can enter an optional asterisk (*) at the end of a <i>device-name</i> as a wildcard. For example, entering <b>show cdp entry dev*</b> will match all device names that begin with <b>dev</b>.</p> <p><b>version</b> (Optional) Limits the display to information about the software version running on the device.</p> <p><b>protocol</b> (Optional) Limits the display to information about the protocols enabled on the device.</p>
---------------------------	--

<b>Command Default</b>	No default behavior or values.
------------------------	--------------------------------

<b>Command Modes</b>	EXEC
----------------------	------

<b>Command History</b>	<b>Release</b>	<b>Modification</b>
	Release 7.10.1	This command was introduced.

**show cdp**

### Example

Use the **show cdp** command to display global CDP information.

```
RP/0/RP0/CPU0:ios#show cdp
Tue Feb 14 16:59:38.255 UTC
Global CDP information:
    Sending CDP packets every 60 seconds
    Sending a holdtime value of 180 seconds
    Sending CDPv2 advertisements is enabled
```

Use the **show cdp neighbors** command to display detailed information about neighboring devices discovered using CDP.

```
RP/0/RP0/CPU0:R2#show cdp neighbors mgmtEth 0/RP0/CPU0/1
Mon Apr 10 12:30:30.902 UTC
Capability Codes: R - Router, T - Trans Bridge, B - Source Route Bridge
                  S - Switch, H - Host, I - IGMP, r - Repeater

Device ID      Local Intrfce     Holdtme Capability Platform  Port ID
R1             Mg0/RP0/CPU0/1   172        R           NCS1010   Mg0/RP0/CPU0/1
RP/0/RP0/CPU0:R2#show cdp neighbors
Mon Apr 10 12:30:39.251 UTC
Capability Codes: R - Router, T - Trans Bridge, B - Source Route Bridge
                  S - Switch, H - Host, I - IGMP, r - Repeater

Device ID      Local Intrfce     Holdtme Capability Platform  Port ID
R1             Mg0/RP0/CPU0/1   164        R           NCS1010   Mg0/RP0/CPU0/1
```

```
RP/0/RP0/CPU0:R2#show cdp neighbors mgmtEth 0/RP0/CPU0/1 detail
Mon Apr 10 12:31:23.622 UTC
```

```
-----
Device ID: R1
SysName : R1
Entry address(es):
    IPv4 address: 192.168.0.2
    IPv6 address: 2000:110::1
Platform: cisco NCS1010, Capabilities: Router
Interface: MgmtEth0/RP0/CPU0/1
Port ID (outgoing port): MgmtEth0/RP0/CPU0/1
Holdtime : 120 sec
```

```
Version :
7.10.1.19I
```

```
advertisement version: 2
Duplex: full
```

Use the **show cdp entry entry-name** command to display information about a specific neighboring device or all the neighboring devices discovered using CDP.

```
RP/0/RP0/CPU0:R2#show cdp entry R1
Mon Apr 10 12:22:22.564 UTC

-----
Device ID: R1
SysName : R1
Entry address(es):
    IPv4 address: 192.168.0.2
```

```
IPv6 address: 2000:110::1
Platform: cisco NCS1010, Capabilities: Router
Interface: MgmtEth0/RP0/CPU0/1
Port ID (outgoing port): MgmtEth0/RP0/CPU0/1
Holdtime : 121 sec
```

```
Version :
7.10.1.19I
```

```
advertisement version: 2
Duplex: full
```

```
RP/0/RP0/CPU0:R2#show cdp entry *
Mon Apr 10 12:24:59.927 UTC
```

```
-----
Device ID: R1
SysName : R1
Entry address(es):
    IPv4 address: 192.168.0.2
    IPv6 address: 2000:110::1
Platform: cisco NCS1010, Capabilities: Router
Interface: MgmtEth0/RP0/CPU0/1
Port ID (outgoing port): MgmtEth0/RP0/CPU0/1
Holdtime : 143 sec
```

```
Version :
7.10.1.19I
```

```
advertisement version: 2
Duplex: full
```

Use the **show cdp interface [interface-name]** command to display information about the interfaces on which CDP is enabled.

```
RP/0/RP0/CPU0:R2#show cdp interface Mg0/RP0/CPU0/1
Mon Apr 10 12:24:27.253 UTC
MgmtEth0/RP0/CPU0/1 is Up
    Encapsulation ether
    Sending CDP packets every 60 seconds
    Holdtime is 180 seconds
```

Use the **show cdp traffic** command to display information about the traffic gathered between devices using CDP.

```
RP/0/RP0/CPU0:ios#show cdp traffic
Mon Apr 10 12:32:09.247 UTC

CDP counters :
    Packets output: 11, Input: 5
    Hdr syntax: 0, Chksum error: 0, Encaps failed: 0
    No memory: 0, Invalid packet: 0, Truncated: 0
    CDP version 1 advertisements output: 0, Input: 0
    CDP version 2 advertisements output: 11, Input: 5
    Unrecognize Hdr version: 0, File open failed: 0
```

---

show configuration commit changes

# show configuration commit changes

To display the changes made to the running configuration by previous configuration commits, a configuration commit, or for a range of configuration commits, use the **show configuration commit changes** command in EXEC, administration EXEC, administration configuration, or global configuration mode.

```
show configuration commit changes { commit-id | since commit-id | last number-of-commits
| original last-modified | all } [diff]
```

Syntax Description		
	<b>since</b>	Displays all changes committed to the running configuration since (and including) a specific configuration commit.
	<i>commit-id</i>	Displays configuration changes for a specific configuration commit.
	<b>last</b> <i>number-of-commits</i>	Displays the changes made to the running configuration during the last number of configuration commits specified for the <i>number-of-commits</i> argument.
	<b>original</b> <i>last-modified</i>	Displays the original content of the actual commit operation before policy modifications by commit scripts.
	<b>all</b>	Displays commit ID and configurations completed for last 100 commits.
	<b>diff</b>	(Optional) Displays added lines, changed lines, and deleted lines.
<b>Command Default</b>	None	
<b>Command Modes</b>	EXEC Administration EXEC Administration configuration Global configuration	
<b>Command History</b>	<b>Release</b>	<b>Modification</b>
	Release 7.7.1	This command was introduced.

**Usage Guidelines**

Each time a configuration is committed with the **commit** command, the configuration commit operation is assigned a commit ID. The **show configuration commit changes** command displays the configuration changes made since the specified commit.

To display a list of the available commit IDs, enter the **show configuration commit list** command. You can also display the commit IDs by entering the **show configuration commit changes** command with the online help function (?).

You cannot view commit IDs from a different release if the syntax or semantics of the configuration changed in the current release.



**Note** Syntax of a configuration refers to its structure and format, while the semantics of a configuration refers to its backend interpretation.

The following example shows sample output from the **show configuration commit changes** command with the *commit-id* argument. In this example, the output displays the changes made in the configuration commit assigned commit ID 1000000006.

```
RP/0/RP0/CPU0:ios#show configuration commit changes 1000000006
Building configuration...

controller Ots0/0/0/0
    raman-osri off
    raman-force-apr off
    raman-tx-power 1 value 22300
    raman-tx-power 2 value 26800
    raman-tx-power 3 value 6400
    raman-tx-power 4 value 12900
    raman-tx-power 5 value 19000
    raman-safety-control-mode auto
!
end
```

The following example shows sample output from the **show configuration commit changes** command with the **since commit-id** keyword and argument. In this example, the output displays the configuration changes made since the configuration commit assigned commit ID 1000000006 was committed.

```
RP/0/RP0/CPU0:ios#show configuration commit changes since 1000000006
Tue Feb 28 11:41:04.643 UTC
Building configuration...
controller Ots0/0/0/0
    otdr rx auto reflectance-threshold -45
    otdr rx auto splice-loss-threshold 200
    otdr rx auto excess-reflection-threshold -20
    otdr rx expert capture-end 8000000
    otdr rx expert pulse-width 20000
    otdr rx expert capture-start 5000000
    otdr rx expert scan-duration 160
    otdr rx back-scattering -8200
    otdr rx refractive-index 1468000
    otdr tx auto reflectance-threshold -48
    otdr tx auto splice-loss-threshold 250
    otdr tx auto excess-reflection-threshold -22
    otdr tx expert capture-end 9000000
    otdr tx expert pulse-width 5000
```

**show configuration commit changes**

```

otdr tx expert capture-start 6000000
otdr tx back-scattering -8300
otdr tx refractive-index 1468200
otdr scan-mode expert
raman-osri off
raman-force-apr off
raman-tx-power 1 value 22300
raman-tx-power 2 value 26800
raman-tx-power 3 value 6400
raman-tx-power 4 value 12900
raman-tx-power 5 value 19000
raman-safety-control-mode auto
!
end

```

The following example shows sample output from the **show configuration commit changes** command with the **diff** keyword. In the display, the following symbols signify changes:

+ indicates an added line.

- indicates a deleted line.

# indicates a modified line.

```

RP/0/RP0/CPU0:R1#show configuration commit changes since 1000000006 diffBuilding
configuration...
+ controller Ots0/0/0/0
+   otdr rx auto reflectance-threshold -45
+   otdr rx auto splice-loss-threshold 200
+   otdr rx auto excess-reflection-threshold -20
+   otdr rx expert capture-end 8000000
+   otdr rx expert pulse-width 20000
+   otdr rx expert capture-start 5000000
+   otdr rx expert scan-duration 160
+   otdr rx back-scattering -8200
+   otdr rx refractive-index 1468000
+   otdr tx auto reflectance-threshold -48
+   otdr tx auto splice-loss-threshold 250
+   otdr tx auto excess-reflection-threshold -22
+   otdr tx expert capture-end 9000000
+   otdr tx expert pulse-width 5000
+   otdr tx expert capture-start 6000000
+   otdr tx back-scattering -8300
+   otdr tx refractive-index 1468200
+   otdr scan-mode expert
+   raman-osri off
+   raman-force-apr off
+   raman-tx-power 1 value 22300
+   raman-tx-power 2 value 26800
+   raman-tx-power 3 value 6400
+   raman-tx-power 4 value 12900
+   raman-tx-power 5 value 19000
+   raman-safety-control-mode auto
+ !
end

```

The following example shows sample output from the **show configuration commit changes** command with the **all** keyword. In this example, the output displays the list of configurations that are committed in last 100 commits along with their commit-ID.

```
RP/0/RP0/CPU0:ios#show configuration commit changes all
Tue Feb 28 11:38:42.876 UTC

Commit ID : 1000000001
-----
Building configuration...
username cisco
group root-lr
group cisco-support
secret 10
$6$PAYio/1d9RuG5o/. $daupPZwNJCuPsJqAGa8IlhAq8U1O2Qa8UdtVszh4MaRWixFfGvNfFq/FPB36DH07v77oCOssLTZ4LUXn88QT.
!
end

Commit ID : 1000000002
-----
Building configuration...
call-home
  service active
  contact smart-licensing
  profile CiscoTAC-1
    active
    destination transport-method email disable
    destination transport-method http
  !
!
end

Commit ID : 1000000003
-----
Building configuration...

hostname R1
logging console disable
line console
  exec-timeout 0 0
  absolute-timeout 0
  session-timeout 0
!
line default
  exec-timeout 0 0
  absolute-timeout 0
  session-timeout 0
!
end

Commit ID : 1000000004
-----
Building configuration...

line console
  exec-timeout 0 0
  absolute-timeout 0
  session-timeout 0
!
line default
  exec-timeout 0 0
  absolute-timeout 0
  session-timeout 0
!
end
```

**show configuration commit changes**

```

Commit ID : 1000000005
-----
Building configuration...

controller Ots0/0/0/0
  egress-ampli-br enable
  egress-ampli-force-apr off
  egress-ampli-osri off
  egress-ampli-tilt 11
  egress-ampli-br-high-threshold -170
  ingress-ampli-force-apr off
  egress-ampli-gain 190
  ingress-ampli-osri off
  ingress-ampli-tilt -11
  ingress-ampli-gain 200
  ingress-ampli-gain-range normal
  egress-ampli-safety-control-mode auto
  ingress-ampli-safety-control-mode auto
!
end

Commit ID : 1000000006
-----
Building configuration...

controller Ots0/0/0/0
  raman-osri off
  raman-force-apr off
  raman-tx-power 1 value 22300
  raman-tx-power 2 value 26800
  raman-tx-power 3 value 6400
  raman-tx-power 4 value 12900
  raman-tx-power 5 value 19000
  raman-safety-control-mode auto
!
end

Commit ID : 1000000007
-----
Building configuration...

controller Ots0/0/0/0
  otdr rx auto reflectance-threshold -45
  otdr rx auto splice-loss-threshold 200
  otdr rx auto excess-reflection-threshold -20
  otdr rx expert capture-end 8000000
  otdr rx expert pulse-width 20000
  otdr rx expert capture-start 5000000
  otdr rx expert scan-duration 160
  otdr rx back-scattering -8200
  otdr rx refractive-index 1468000
  otdr tx auto reflectance-threshold -48
  otdr tx auto splice-loss-threshold 250
  otdr tx auto excess-reflection-threshold -22
  otdr tx expert capture-end 9000000
  otdr tx expert pulse-width 5000
  otdr tx expert capture-start 6000000
  otdr tx back-scattering -8300
  otdr tx refractive-index 1468200
  otdr scan-mode expert

```

```
!
end
```

## show controllers

To display status and configuration information about the interfaces on a specific node, use the **show controllers** command in XR EXEC mode.

**Show controllers** [ **description** ] [ *Controller-type R/S/I/P* ] [ **spectrum-info** ] [ **otdr-info direction** ] [ **tone-info** ]

<b>Syntax Description</b>	<b>description</b> Displays the controller status. <i>Controller-type R/S/I/P</i> Rack/Slot/Instance/Port of the controller.				
	<b>spectrum-info</b> Displays the Optical Channel Monitoring (OCM) raw data at slice level, such as Tx-power and Rx-power.				
	<b>otdr-info</b> Displays the OTDR scan status and location of the SOR file, and the OTDR events.				
	<b>direction</b> Scan direction (RX or TX)				
	<b>tone-info</b> Displays the Tone Generation parameters that are set for connection verification and the status of the connection verification operation.				
<b>Command Default</b>	None				
<b>Command Modes</b>	XR EXEC mode				
<b>Command History</b>	<table border="1"> <thead> <tr> <th><b>Release</b></th> <th><b>Modification</b></th> </tr> </thead> <tbody> <tr> <td>7.7.1</td> <td>This command was introduced.</td> </tr> </tbody> </table>	<b>Release</b>	<b>Modification</b>	7.7.1	This command was introduced.
<b>Release</b>	<b>Modification</b>				
7.7.1	This command was introduced.				
<b>Usage Guidelines</b>	None				

### Example

To view the OTS controller status on the ILA cards, use the sh controller description command.

```
RP/0/RP0/CPU0:ios#sh controller description
Fri Mar 25 09:24:53.386 UTC
Interface Status Description
-----
Osc0/0/0/0 up
Osc0/0/0/2 up
Ots0/0/0/0 up
Ots0/0/0/1 up
```

**show controllers**

```
Ots0/0/0/2 up
Ots0/0/0/3 up
RP/0/RP0/CPU0:ios#
```

To view the parameters of the LINE 0 OTS controller, use the following command:

```
RP/0/RP0/CPU0:ios#sh controllers ots 0/0/0/0
Wed Mar 23 06:00:37.097 UTC
Controller State: Up
Transport Admin State: In Service
LED State: Red
Alarm Status:
-----
Detected Alarms:
RX-LOS-P
EGRESS-AUTO-LASER-SHUT
HIGH-RX-BR-PWR
Alarm Statistics:
-----
LOW-TX-PWR = 0
RX-LOS-P = 1
RX-LOC = 1
TX-POWER-FAIL-LOW = 1
INGRESS-AUTO-LASER-SHUT = 0
INGRESS-AUTO-POW-RED = 0
INGRESS-AMPLI-GAIN-LOW = 0
INGRESS-AMPLI-GAIN-HIGH = 0
EGRESS-AUTO-LASER-SHUT = 1
EGRESS-AUTO-POW-RED = 0
EGRESS-AMPLI-GAIN-LOW = 0
EGRESS-AMPLI-GAIN-HIGH = 0
HIGH-TX-BR-PWR = 0
HIGH-RX-BR-PWR = 1
SPAN-TOO-SHORT-TX = 0
SPAN-TOO-SHORT-RX = 0
Parameter Statistics:
-----
Total RX Power(C+L) = -50.00 dBm
Total TX Power(C+L) = -50.00 dBm
Total RX Power = -50.00 dBm
Total TX Power = -50.00 dBm
RX Signal Power = -50.00 dBm
TX Signal Power = -50.00 dBm
TX Voa Attenuation = 0.0 dB
Ingress Ampli Gain = -1.1 dB
Ingress Ampli Tilt = 0.0 dB
Ingress Ampli Gain Range = Normal
Ingress Ampli Safety Control mode = auto
Ingress Ampli Osri = OFF
Ingress Ampli Force Apr = OFF
Egress Ampli Gain = -0.7 dB
Egress Ampli Tilt = 0.0 dB
Egress Ampli Safety Control mode = auto
Egress Ampli Osri = OFF
Egress Ampli Force Apr = OFF
Configured Parameters:
-----
TX Voa Attenuation = 0.0 dB
Ingress Ampli Gain = 10.9 dB
Ingress Ampli Tilt = 0.0 dB
Ingress Ampli Gain Range = Normal
Ingress Ampli Safety Control mode = auto
Ingress Ampli Osri = OFF
Ingress Ampli Force Apr = OFF
Egress Ampli Gain = 15.3 dB
```

```
Egress Ampli Tilt = 0.0 dB
Egress Ampli Safety Control mode = auto
Egress Ampli Osri = OFF
Egress Ampli Force Apr = OFF
RP/0/RP0/CPU0:ios#
```

### Example

To view the raw OCM data (slice level channel power) use the following commands:

```
RP/0/RP0/CPU0:ios#sh controllers ots 0/0/0/0 spectrum-info
Fri Feb 4 13:12:49.841UTC
Spectrum Slices spacing      :          3.125 GHz
Spectrum Slices Range        :          1 - 1548
Slice start wavelength       :          1566.82 nm
Slice start frequency        :          191337.50 GHz
Spectrum power information :
Rx power :
-----
spectrum-slice num           Rx-power values (dBm)
-----
 1 - 12          -88.8  -88.8  -88.8  -88.8    -88.8  -88.8  -88.8  -88.8
-88.8  -88.8  -88.8  -88.8
 13 - 24          -88.8  -88.8  -88.8  -88.8    -88.8  -88.8  -88.8  -88.8
-88.8  -88.8  -88.8  -88.8
.....
.....
.....
1537 - 1548          -88.8  -88.8  -88.8  -88.8    -88.8  -88.8  -88.8  -88.8
-88.8  -88.8  -88.8  -88.8
-----
Tx power :
-----
spectrum-slice num           Tx-power values (dBm)
-----
 1 - 12          -9.5   -7.3   -6.0   -5.2    -4.9   -4.8   -4.6   -4.4   -4.4
-4.4  -4.4  -4.4
 13 - 24          -4.4   -4.5   -4.6   -4.8    -5.1   -5.5   -6.4   -7.7   -9.6
-12.0  -13.2  -11.4
 25 - 36          -9.2   -7.7   -6.7   -6.2    -6.0   -5.9   -5.7   -5.6   -5.6
-5.5  -5.4  -5.4
 37 - 48          -5.3   -5.3   -5.4   -5.5    -5.8   -6.1   -6.6   -7.3   -8.6
-10.4  -12.2  -11.8
.....
.....
.....
1525 - 1536          -2.4   -2.4   -2.4   -2.4    -2.4   -2.3   -2.3   -3.0
-4.2  -6.5  -10.3  -14.9
1537 - 1548          -19.3  -22.6  -24.3  -25.3   -26.1  -26.6  -27.1  -27.6
-27.9  -28.2  -28.4  -28.6
```

To view the OTDR scan status and events use the following commands:

```
RP/0/RP0/CPU0:ios#show controllers ots 0/0/0/0 otdr-info rx
Wed Feb 9 05:55:19.791 UTC
  Scan Direction: RX
  Scan Status: Data Ready
  SOR file: /hddisk:/otdr/P1D_DT_01_NCS1010_OTDR_Ots0_0_0_0_RX_20220209-055045.sor

  Total Events detected: 11
  Scan Timestamp: Wed Feb 9 05:50:45 2022 UTC
  Event Type Legend: NR:Non-Reflective R:Reflective FE:Fiber-End
  ER:Excess-Reflection
```

**show controllers**

Event#	Detected Event(s)	Location (km)	Accuracy (m)	Magnitude (dB)	Attenuation/km (dB)
1	R	50.4709	52.47	-39.87	0.18
2	NR	50.4709	52.47	1.17	0.18
3	R	100.9261	102.92	-37.73	0.21
4	NR	100.9261	102.92	1.01	0.21
5	R	105.9500	107.94	-38.52	0.24
6	NR	105.9500	107.94	0.85	0.24
7	R	112.7458	114.74	-40.56	0.00
8	NR	112.7458	114.74	1.48	0.00
9	NR	117.9873	119.98	0.66	-0.02
10	R FE	120.1206	122.12	-35.55	0.00
11	NR FE	120.1206	122.12	21.65	0.00

The following sample displays the Optical Return Loss as part of the OTDR status:

```
RP/0/RP0/CPU0:NCS1010#show controllers Ots 0/0/0/2 otdr-info rx
Mon Oct 2 11:55:48.552 UTC
    Scan Direction: RX
    Scan Status: Data Ready
Optical Return Loss: 39.0 dB
    SOR file: /harddisk:/otdr/NCS1010_NCS1010_OTDR_Ots0_0_0_2_RX_20231001-110754.sor
    Total Events detected: 8
    Scan Timestamp: Sun Oct 1 11:07:54 2023 UTC
    Event Type Legend: NR:Non-Reflective R:Reflective FE:Fiber-End
    ER:Excess-Reflection EA:Excess-Attenuation

    Event# | Detected Event(s) | Location(m) | Accuracy(m) | Magnitude(dB) |
    Attenuation/km(dB)
    1      | NR EA           | 4.4100     | 2.00       | 0.69        | 0.00
    2      | NR              | 664.3200   | 2.66       | 0.21        | 0.00
    3      | R ER            | 18222.3900 | 20.22      | -33.78      | 0.19
    4      | NR              | 18222.3900 | 20.22      | 0.35        | 0.19
    5      | R ER            | 68674.4800 | 70.67      | -32.25      | 0.20
    6      | NR              | 68674.4800 | 70.67      | 0.36        | 0.20
    7      | R FE ER         | 118765.2600 | 120.76     | -28.55      | 0.23
    8      | NR FE           | 118765.2600 | 120.76     | 25.86       | 0.23
```

To view the parameter values set for Tone Generation and the status of connection verification on port 4 OTS controller, use the following command:

```
RP/0/RP0/CPU0:ios#show controllers ots 0/0/0/4 tone-info
Fri Sep 15 14:53:22.579 UTC
Tone Info:
Tone Frequency : 191.3750000 THz
Tone Rate : 2 bits/second
Tone Pattern(Hex value) : abcd1234
Tone Pattern Expected(Hex value) : abcd1234
Tone Pattern Received(Hex value) : 00000000
Tone Detected OOB : Enabled
Detection State: Inprogress
```

To view the parameter values set for Tone Generation and the status of connection verification on port 4 OMS controller, use the following command:

```
RP/0/RP0/CPU0:#show controllers oms 0/0/0/4 tone-info
Tue May 10 11:41:18.847 UTC
Tone Info:
Tone Rate : 25 bits/second
Tone Pattern Expected(Hex value) : abcd1234
Tone Pattern Received(Hex value) : abcd1234
Tone Detected OOB : Enabled
Detection State: Success
```

To view the parameter values set for Tone Generation and the status of connection verification on port 4 OCH controller, use the following command:

```
RP/0/RP0/CPU0:#show controllers och 0/0/0/4 tone-info
Tue May 10 11:41:18.847 UTC
Tone Info:
Tone Rate : 25 bits/second
Tone Pattern Expected(Hex value) : abcd1234
Tone Pattern Received(Hex value) : abcd1234
Tone Detected OOB : Enabled
Detection State: Success
```

## show controllers raman-info

To view the individual Raman pump information and other parameters, use the **show controllers ots r/s/i/p raman-info** command.

**show controllers ots R/S/I/P raman-info**

<b>Syntax Description</b>	<i>R/S/I/P</i> Rack/Slot/Instance/Port of the OSC controller.				
<b>Command Modes</b>	User EXEC mode				
<b>Command History</b>	<table border="1"> <thead> <tr> <th><b>Release</b></th> <th><b>Modification</b></th> </tr> </thead> <tbody> <tr> <td>Cisco IOS XR Release 7.7.1</td> <td>This command was introduced.</td> </tr> </tbody> </table>	<b>Release</b>	<b>Modification</b>	Cisco IOS XR Release 7.7.1	This command was introduced.
<b>Release</b>	<b>Modification</b>				
Cisco IOS XR Release 7.7.1	This command was introduced.				

### Example

The following sample shows the output of the **show controllers ots r/s/i/p raman-info** command.

```
RP/0/RP0/CPU0:ios#show controllers ots 0/0/0/0 raman-info
Fri Apr 1 06:40:33.849 UTC

      Alarm Status:
      -----
      Detected Alarms: None

      Alarm Statistics:
      -----
      RAMAN-AUTO-POW-RED = 0
      RAMAN-1-LOW-POW = 0
      RAMAN-2-LOW-POW = 0
      RAMAN-3-LOW-POW = 0
```

**show environment**

```

RAMAN-4-LOW-POW = 0
RAMAN-5-LOW-POW = 0
RAMAN-1-HIGH-POW = 1
RAMAN-2-HIGH-POW = 0
RAMAN-3-HIGH-POW = 0
RAMAN-4-HIGH-POW = 0
RAMAN-5-HIGH-POW = 0

Parameter Statistics:
-----
Raman Safety Control mode = auto
Raman Osri = OFF
Raman Force Apr = OFF
Composite Raman Power = 886.60 mW

RAMAN Pump Info:
-----
Instance      Wavelength (nm)    Power (mW)
1            1424.00           257.60
2            1438.00           255.10
3            1457.00            71.60
4            1470.00           127.50
5            1495.00           170.10

Configured Parameters:
-----
Raman Safety Control mode = auto
Raman Osri = OFF
Raman Force Apr = OFF

RAMAN Pump Info:
-----
Instance      Power (mW)
1            45.00
2            40.00
3            40.00
4            40.00
5            35.00

```

## show environment

To display environmental monitor parameters for the system, use the **show environment** command.

```
show environment [ alarm-contact | all | altitude | current | fan | humidity | power | voltages [ location | location ] | temperature [ location | location ] ]
```

---

**Syntax Description**

<b>alarm-contact</b>	(Optional) Displays information about the alarm ports.
<b>all</b>	(Optional) Displays information for all the environmental monitor parameters.
<b>altitude</b>	(Optional) Displays information about the altitude.
<b>current</b>	(Optional) Displays current sensor information.
<b>fan</b>	(Optional) Displays information about the fans.

---

<b>humidity</b>	(Optional) Displays information about the humidity.
<b>power</b>	(Optional) Displays power supply voltage and current information.
<b>temperature</b>	(Optional) Displays system temperature information.
<b>voltages</b>	(Optional) Displays system voltage information.
<b>location</b>   <i>location</i>	(Optional) Enter the location for which the environmental information needs to be displayed.

**Command Default** All environmental monitor parameters are displayed.

**Command Modes** Cisco IOS XR

Command History	Release	Modification
	Release 7.7.1	This command was introduced.

**Usage Guidelines** The **show environment** command displays information about the hardware that is installed in the system, including fans, power supply voltage, current information, and temperatures.

### Example

The following example shows sample output from the **show environment** command with the **fan** keyword.

```
sysadmin-vm:0_RP0# show environment fan
```

Thu May 26 04:15:37.765 UTC

```
=====
Location      FRU Type          Fan speed (rpm)
              FAN_0   FAN_1   FAN_2
-----
0/PM0        NCS1010-AC-PSU    5368
0/PM1        NCS1010-AC-PSU    5336
0/FT0        NCS1010-FAN      10020   10020   10020
0/FT1        NCS1010-FAN      10020   10020   9960
=====
```

The following example shows sample output from the **show environment** command with the **temperature** keyword.

```
sysadmin-vm:0_RP0# show environment temperature location 0/RP0
```

Thu May 26 04:16:39.832 UTC

```
=====
Location      TEMPERATURE          Value   Crit   Major   Minor   Minor   Major
Crit           Sensor             (deg C)  (Lo)   (Lo)   (Lo)   (Hi)   (Hi)
(Hi)
-----
0/RP0/CPU0    RP_TEMP_PCB       30      -10     -5      0      70      75
80            RP_TEMP_HOT_SPOT  33      -10     -5      0      70      75
=====
```

**show environment**

```

80      RP_TEMP_LTM4638          49    -10     -5    0    80    85
90      RP_TEMP_LTM4644_0        36    -10     -5    0    80    85
90      RP_TEMP_LTM4644_1        39    -10     -5    0    80    85
90      RP_JMAC_1V0_VCCP_TMON   33    -10     -5    0    80    85
90      RP_JMAC_1V0_VNN_TMON   33    -10     -5    0    80    85
90      RP_JMAC_1V0_VCC_RAM_TMON 32    -10     -5    0    80    85
90      RP_JMAC_1V2_DDR_VDDQ_TMON 33    -10     -5    0    80    85
90
=====
```

The following example shows sample output from the **show environment** command with the **power** keyword.

```
sysadmin-vm:0_RP0# show environment power
```

```

Thu May 26 04:17:55.592 UTC
=====
CHASSIS LEVEL POWER INFO: 0
=====
Total output power capacity (Group 0 + Group 1) : 1050W + 1050W
Total output power required : 700W
Total power input : 228W
Total power output : 140W

Power Group 0:
=====
Power      Supply      -----Input-----      -----Output---      Status
Module     Type       Volts     Amps      Volts     Amps
=====
0/PM0      NCS1010-AC-PSU 228.5     0.5      12.1      5.6      OK

Total of Group 0: 114W/0.5A           67W/5.6A

Power Group 1:
=====
Power      Supply      -----Input-----      -----Output---      Status
Module     Type       Volts     Amps      Volts     Amps
=====
0/PM1      NCS1010-AC-PSU 228.5     0.5      12.1      6.1      OK

Total of Group 1: 114W/0.5A           73W/6.1A

=====
Location    Card Type      Power      Power      Status
          Allocated     Used
          Watts        Watts
=====
0/RP0/CPU0  NCS1010-CNTLR-K9  90        14        ON
0/FT0       NCS1010-FAN      110       17        ON
0/FT1       NCS1010-FAN      110       15        ON
0/0/NXR0    NCS1K-OLT-C     350       61        ON
0/Rack      NCS1010-SA      40        19        ON
=====
```

The following example shows sample output from the **show environment** command with the **voltages** keyword.

```
sysadmin-vm:0_RP0# show environment voltages location 0/RP0
```

Thu May 26 04:19:16.636 UTC

Location	VOLTAGE Sensor	Value (mV)	Crit (Lo)	Minor (Lo)	Minor (Hi)	Crit (Hi)
<hr/>						
0/RP0/CPU0	RP_ADM1266_12V0	12094	10800	11280	12720	13200
	RP_ADM1266_1V8_CPU	1806	1670	1750	1850	1930
	RP_ADM1266_1V24_VCCREF	1238	1150	1200	1280	1330
	RP_ADM1266_1V05_CPU	1047	980	1020	1080	1120
	RP_ADM1266_1V2_DDR_VDDQ	1204	1120	1160	1240	1280
	RP_ADM1266_1V0_VCC_RAM	988	650	700	1250	1300
	RP_ADM1266_1V0_VNN	869	550	600	1250	1300
	RP_ADM1266_1V0_VCCP	1018	450	500	1250	1300
	RP_ADM1266_0V6_DDR_VTT	599	560	580	620	640
	RP_ADM1266_3V3_STAND_BY	3301	3070	3200	3400	3530
	RP_ADM1266_5V0	5004	4650	4850	5150	5350
	RP_ADM1266_3V3	3325	3070	3200	3400	3530
	RP_ADM1266_2V5_PLL	2489	2330	2430	2580	2680
	RP_ADM1266_2V5_FPGA	2502	2330	2430	2580	2680
	RP_ADM1266_1V2_FPGA	1202	1120	1160	1240	1280
	RP_ADM1266_3V3_CPU	3332	3070	3200	3400	3530
	RP_ADM1266_2V5_CPU	2498	2330	2430	2580	2680

---

The following example shows a sample output of the **show environment current** command.

```
RP/0/RP0/CPU0:P2C_DT_02#show environment current
```

Tue Jul 5 08:36:22.132 UTC

Location	CURRENT Sensor	Value (mA)
<hr/>		
0/RP0/CPU0	RP_CURRMON_LTM4638	395
	RP_CURRMON_LTM4644_0	179
	RP_CURRMON_LTM4644_1	307
	RP_JMAC_1V0_VCCP_IMON	187
	RP_JMAC_1V0_VNN_IMON	62
	RP_JMAC_1V0_VCC_RAM_IMON	0
	RP_JMAC_1V2_DDR_VDDQ_IMON	187
0/Rack	SA_ADM1275_12V_MODO_IMON	4154
	SA_ADM1275_12V_MOD1_IMON	43
	SA_ADM1275_12V_MOD2_IMON	18
	SA_ADM1275_12V_FAN0_IMON	1356
	SA_ADM1275_12V_FAN1_IMON	1517
	SA_INA230_5V0_IMON	129
	SA_INA230_3V3_IMON	2998
	SA_INA230_1V0_XGE_CORE_IMON	2464
	SA_INA230_1V0_FPGA_CORE_IMON	787
	SA_ADM1275_12V_SA_IMON	1668
	SA_ADM1275_12V_CPU_IMON	1147

The following example shows a sample output from the **show environment altitude** command.

```
RP/0/RP0/CPU0:P2C_DT_02#show environment altitude
```

Tue Jul 5 08:36:51.710 UTC

Location	Altitude	Value (Meters)	Source
<hr/>			
0	760		sensor

The following example shows sample output from the **show environment** command.

```
sysadmin-vm:0_RP0# show environment
```

show environment

Thu May 26 04:20:09.507 UTC

Location	TEMPERATURE	Value	Crit	Major	Minor	Minor
Major	Crit	(deg C)	(Lo)	(Lo)	(Lo)	(Hi)
	Sensor					
(Hi)	(Hi)					
<hr/>						
0/RP0/CPU0	RP_TEMP_PCB	30	-10	-5	0	70
75	80					
75	RP_TEMP_HOT_SPOT	33	-10	-5	0	70
75	80					
85	RP_TEMP_LTM4638	49	-10	-5	0	80
85	90					
85	RP_TEMP_LTM4644_0	36	-10	-5	0	80
85	90					
85	RP_TEMP_LTM4644_1	39	-10	-5	0	80
85	90					
85	RP_JMAC_1V0_VCCP_TMON	33	-10	-5	0	80
85	90					
85	RP_JMAC_1V0_VNN_TMON	33	-10	-5	0	80
85	90					
85	RP_JMAC_1V0_VCC_RAM_TMON	32	-10	-5	0	80
85	90					
85	RP_JMAC_1V2_DDR_VDDQ_TMON	34	-10	-5	0	80
85	90					
0/PM0	Ambient Temp	30	-10	-5	0	55
60	65					
70	Secondary HotSpot Temp	49	-10	-5	0	65
70	75					
90	Primary HotSpot Temp	40	-10	-5	0	85
90	95					
0/PM1	Ambient Temp	29	-10	-5	0	55
60	65					
70	Secondary HotSpot Temp	48	-10	-5	0	65
70	75					
90	Primary HotSpot Temp	40	-10	-5	0	85
90	95					
0/0/NXR0	OLTC_LT_P0_iEDFA0	24	18	19	20	30
31	32					
31	OLTC_LT_P0_iEDFA1	25	18	19	20	30
31	32					
31	OLTC_LT_P0_iEDFA2	24	18	19	20	30
31	32					
31	OLTC_LT_P2_iEDFA0	25	18	19	20	30
31	32					
31	OLTC_LT_P3_iEDFA0	25	18	19	20	30
31	32					
31	OLTC_LT_P0_eEDFA0	24	18	19	20	30
31	32					
77	OLTC_CT_1	32	-10	-7	-5	75
77	80					
31	OLTC_LT_P0_eEDFA1	24	18	19	20	30
31	32					
73	OLTC_CT_2	27	-10	-7	-5	70
73	75					
73	OLTC_CT_3	30	-10	-7	-5	70
73	75					
73	OLTC_CT_4	30	-10	-7	-5	70
73	75					
	OLTC_FT_P0_iEDFA0	60	55	57	58	62

64	65	OLTC_FT_P2_iEDFA0	60	55	57	58	62
64	65	OLTC_FT_P3_iEDFA0	60	55	57	58	62
64	65	OLTC_FT_P0_eEDFA0	60	55	57	58	62
64	65						
0/Rack	SA_TEMP_AIR_INLETO	27	-10	-5	0	45	
	60						
	SA_TEMP_AIR_INLET1	28	-10	-5	0	45	
	60						
	SA_TEMP_AIR_EXAUST0	30	-10	-5	0	75	
	90						
	SA_TEMP_AIR_EXAUST1	28	-10	-5	0	75	
	90						
	SA_TEMP_PCB_HOT_SPOT0	31	-10	-5	0	80	
	90						
85	SA_TEMP_PCB_HOT_SPOT1	34	-10	-5	0	80	
	90						
	SA_TEMP_PCB_HOT_SPOT2	31	-10	-5	0	80	
	90						
	SA_TEMP_PCB_HOT_SPOT3	32	-10	-5	0	80	
	90						
0/RP0/CPU0	RP ADM1266_12V0	12094	10800	11280	12720	13200	
	RP ADM1266_1V8_CPU	1806	1670	1750	1850	1930	
	RP ADM1266_1V24_VCCREF	1238	1150	1200	1280	1330	
	RP ADM1266_1V05_CPU	1052	980	1020	1080	1120	
	RP ADM1266_1V2_DDR_VDDQ	1204	1120	1160	1240	1280	
	RP ADM1266_1V0_VCC_RAM	988	650	700	1250	1300	
	RP ADM1266_1V0_VNN	871	550	600	1250	1300	
	RP ADM1266_1V0_VCCP	1018	450	500	1250	1300	
	RP ADM1266_0V6_DDR_VTT	599	560	580	620	640	
	RP ADM1266_3V3_STAND_BY	3301	3070	3200	3400	3530	
	RP ADM1266_5V0	5004	4650	4850	5150	5350	
	RP ADM1266_3V3	3325	3070	3200	3400	3530	
	RP ADM1266_2V5_PLL	2489	2330	2430	2580	2680	
	RP ADM1266_2V5_FPGA	2502	2330	2430	2580	2680	
	RP ADM1266_1V2_FPGA	1197	1120	1160	1240	1280	
	RP ADM1266_3V3_CPU	3332	3070	3200	3400	3530	
	RP ADM1266_2V5_CPU	2498	2330	2430	2580	2680	
0/Rack	SA ADM1266_12V_BUS_EITU	12065	10800	11280	12720	13200	
	SA ADM1266_5V0	5033	4650	4800	5200	5350	
	SA ADM1266_1V8_ZARLINK_DPLL	1808	1670	1730	1870	1930	
	SA ADM1266_1V0_PHY	1009	930	960	1040	1070	
	SA ADM1266_1V0_ALDRIN_CORE	981	910	930	1070	1090	
	SA ADM1266_1V0_ALDRIN_SERDES	1006	930	960	1040	1070	
	SA ADM1266_1V0_FPGA	1010	930	960	1040	1070	
	SA ADM1266_1V2_FPGA	1211	1120	1150	1250	1280	
	SA ADM1266_1V8	1804	1670	1730	1870	1930	
	SA ADM1266_2V5	2498	2330	2400	2600	2680	
	SA ADM1266_3V3	3308	3070	3170	3430	3530	
	SA ADM1275_12V_SA_BP	12073	10800	11280	12720	13200	
	SA ADM1275_12V_CPU_BP	12058	10800	11280	12720	13200	
	SA ADM1275_12V_MOD0_BP	12063	10800	11280	12720	13200	
	SA ADM1275_12V_MOD1_BP	12037	10800	11280	12720	13200	
	SA ADM1275_12V_MOD2_BP	12053	10800	11280	12720	13200	
	SA ADM1275_12V_FAN0_BP	12037	10800	11280	12720	13200	

show environment

		SA_ADM1275_12V_FAN1_BP	12063	10800	11280	12720	13200
Location	CURRENT Sensor		Value (mA)				
<hr/>							
0/RP0/CPU0	RP_CURRMON_LTM4638		395				
	RP_CURRMON_LTM4644_0		179				
	RP_CURRMON_LTM4644_1		311				
	RP_JMAC_1V0_VCCP_IMON		62				
	RP_JMAC_1V0_VNN_IMON		93				
	RP_JMAC_1V0_VCC_RAM_IMON		62				
	RP_JMAC_1V2_DDR_VDDQ_IMON		187				
<hr/>							
0/Rack	SA_ADM1275_12V_MOD0_IMON		5495				
	SA_ADM1275_12V_MOD1_IMON		6				
	SA_ADM1275_12V_MOD2_IMON		6				
	SA_ADM1275_12V_FAN0_IMON		1146				
	SA_ADM1275_12V_FAN1_IMON		1381				
	SA_INA230_5V0_IMON		323				
	SA_INA230_3V3_IMON		2584				
	SA_INA230_1V0_XGE_CORE_IMON		2459				
	SA_INA230_1V0_FPGA_CORE_IMON		784				
	SA_ADM1275_12V_SA_IMON		1603				
	SA_ADM1275_12V_CPU_IMON		1222				
<hr/>							
Fan speed (rpm)							
Location	FRU Type		FAN_0	FAN_1	FAN_2		
<hr/>							
0/PM0	NCS1010-AC-PSU		5456				
0/PM1	NCS1010-AC-PSU		5336				
0/FT0	NCS1010-FAN		10020	10020	10020		
0/FT1	NCS1010-FAN		9960	10020	9960		
<hr/>							
Location	Altitude	Value (Meters)	Source				
<hr/>							
0	772		sensor				
<hr/>							
CHASSIS LEVEL POWER INFO: 0							
<hr/>							
Total output power capacity (Group 0 + Group 1) :		1050W	+ 1050W				
Total output power required :		700W					
Total power input :		206W					
Total power output :		138W					
<hr/>							
Power Group 0:							
<hr/>							
Power Module	Supply Type	-----Input-----		-----Output---		Status	
		Volts	Amps	Volts	Amps		
<hr/>							
0/PM0	NCS1010-AC-PSU	229.0	0.4	12.1	5.5	OK	
<hr/>							
Total of Group 0: 91W/0.4A 66W/5.5A							
<hr/>							
Power Group 1:							
<hr/>							
Power Module	Supply Type	-----Input-----		-----Output---		Status	
		Volts	Amps	Volts	Amps		
<hr/>							
0/PM1	NCS1010-AC-PSU	229.0	0.5	12.1	6.0	OK	
<hr/>							
Total of Group 1: 114W/0.5A 72W/6.0A							

Location	Card Type	Power Allocated Watts	Power Used Watts	Status
0/RP0/CPU0	NCS1010-CNTLR-K9	90	14	ON
0/FT0	NCS1010-FAN	110	16	ON
0/FT1	NCS1010-FAN	110	16	ON
0/0/NXR0	NCS1K-OLT-C	350	71	ON
0/Rack	NCS1010-SA	40	19	ON

## show fpd package

To determine the FPDs that are supported with the current software release and the minimum hardware requirements for each FPD, use the **show fpd package** command in Cisco IOS XR mode.

**show fpd package [ detail ]**

### Syntax Description

**detail** (Optional) Displays detailed information about FPD upgrade.

### Command Default

Firmware information of all the hardware components is displayed.

### Command Modes

Cisco IOS XR EXEC

### Command History

#### Release Modification

Release This command was introduced.  
7.7.1

### Example

The following example shows sample output from the **show fpd package** command.

```
RP/0/RP0/CPU0:ios#show fpd package
Wed Jun 29 08:50:21.057 UTC
=====
                                         Field Programmable Device Package
=====
                                         Req      SW      Min Req   Min Req
Card Type          FPD Description       Reload Ver     SW Ver Board Ver
=====
                                         =====  =====  =====  =====  =====
NCS1010-AC-PSU    AP-PrimMCU           NO       1.03    1.03    0.0
                  AP-SecMCU           NO       2.01    2.01    0.0
-----
NCS1010-CNTLR-K9 ADMConfig            NO       2.30    2.30    0.0
                  ADMConfig            NO       2.30    2.30    0.0
                  ADMConfig            NO       3.40    3.30    1.0
                  BIOS                 YES      4.10    4.10    0.0
                  BIOS                 YES      4.10    4.10    0.0
                  BIOS-Golden          YES      4.10    4.10    0.0
```

```
show hw-module fpd
```

	BIOS-Golden	YES	4.10	4.10	0.0
	CpuFpga	YES	1.02	1.02	0.0
	CpuFpga	YES	1.02	1.02	0.0
	CpuFpgaGolden	YES	1.01	1.01	0.0
	CpuFpgaGolden	YES	1.01	1.01	0.0
	SsdIntels4510	YES	11.32	11.32	0.0
	SsdIntels4510	YES	11.32	11.32	0.0
	SsdMicron5300	YES	0.01	0.01	0.0
	SsdMicron5300	YES	0.01	0.01	0.0
	SsdSmartModular	YES	13.06	13.06	0.0
	SsdSmartModular	YES	13.06	13.06	0.0
	TamFw	YES	6.13	6.13	0.0
	TamFw	YES	6.13	6.13	0.0
	TamFwGolden	YES	6.11	6.11	0.0
	TamFwGolden	YES	6.11	6.11	0.0
<hr/>					
NCS1010-SA	EITU-ADMConfig	NO	1.04	1.04	0.0
	EITU-ADMConfig	NO	2.10	2.10	1.0
	EITU-ADMConfig	NO	1.04	1.04	0.0
	EITU-ADMConfig	NO	2.10	2.10	1.0
	IoFpga	NO	1.04	1.04	0.0
	IoFpga	NO	1.04	1.04	0.0
	IoFpgaGolden	NO	1.01	1.01	0.0
	IoFpgaGolden	NO	1.01	1.01	0.0
	SsdIntels4510	YES	11.32	11.32	0.0
	SsdIntels4510	YES	11.32	11.32	0.0
	SsdMicron5300	YES	0.01	0.01	0.0
	SsdMicron5300	YES	0.01	0.01	0.0
	SsdSmartModular	YES	13.06	13.06	0.0
	SsdSmartModular	YES	13.06	13.06	0.0
<hr/>					
NCS1K-ILA-2R-C	ILA	NO	1.00	1.00	0.1
	ILA	NO	0.23	0.23	99.1
	Raman-1	NO	1.00	1.00	0.1
	Raman-1	NO	0.23	0.23	99.1
	Raman-2	NO	1.00	1.00	0.1
	Raman-2	NO	0.23	0.23	99.1
<hr/>					
NCS1K-ILA-C	ILA	NO	1.00	1.00	0.1
	ILA	NO	0.23	0.23	99.1
<hr/>					
NCS1K-ILA-R-C	ILA	NO	1.00	1.00	0.1
	ILA	NO	0.23	0.23	99.1
	Raman-1	NO	1.00	1.00	0.1
	Raman-1	NO	0.23	0.23	99.1
<hr/>					
NCS1K-OLT-C	OLT	NO	1.00	1.00	0.1
	OLT	NO	0.23	0.23	99.1
<hr/>					
NCS1K-OLT-R-C	OLT	NO	1.00	1.00	0.1
	OLT	NO	0.23	0.23	99.1
	Raman-1	NO	1.00	1.00	0.1
	Raman-1	NO	0.23	0.23	99.1

## show hw-module fpd

To display the firmware information of various hardware components of NCS 1010, use the **show hw-module fpd** command in Cisco IOS XR mode.

```
show hw-module fpd [ fpd-name ]
```

<b>Syntax Description</b>	<i>fpd-name</i> (Optional) Name of the FPD.				
<b>Command Default</b>	Firmware information of all the hardware components is displayed.				
<b>Command Modes</b>	Cisco IOS XR EXEC				
<b>Command History</b>	<table border="1"> <thead> <tr> <th>Release</th> <th>Modification</th> </tr> </thead> <tbody> <tr> <td>7.7.1</td> <td>This command was introduced.</td> </tr> </tbody> </table>	Release	Modification	7.7.1	This command was introduced.
Release	Modification				
7.7.1	This command was introduced.				

### Example

The following example shows sample output from the **show hw-module fpd** command.

```
RP/0/RP0/CPU0:ios# show hw-module fpd
```

```
Wed Jun 29 08:50:21.057 UTC
```

```
Auto-upgrade:Disabled
```

Location	Card type	HWver	FPD device	ATR	Status	FPD Versions	Running	Programd
Reload Loc						=====		
0/RP0/CPU0 NCS1010-CNTLR-K9 NOT REQ		1.0	ADMConfig		CURRENT	3.40	3.40	
0/RP0/CPU0 NCS1010-CNTLR-K9 0/RP0		1.0	BIOS	S	CURRENT	4.10	4.10	
0/RP0/CPU0 NCS1010-CNTLR-K9 0/RP0		1.0	BIOS-Golden	BS	CURRENT			4.10
0/RP0/CPU0 NCS1010-CNTLR-K9 0/RP0		1.0	CpuFpga	S	CURRENT	1.02	1.02	
0/RP0/CPU0 NCS1010-CNTLR-K9 0/RP0		1.0	CpuFpgaGolden	BS	CURRENT			1.01
0/RP0/CPU0 NCS1010-CNTLR-K9 0/RP0		1.0	SsdIntels4510	S	CURRENT	11.32	11.32	
0/RP0/CPU0 NCS1010-CNTLR-K9 0/RP0		1.0	TamFw	S	CURRENT	6.13	6.13	
0/RP0/CPU0 NCS1010-CNTLR-K9 0/RP0		1.0	TamFwGolden	BS	CURRENT			6.11
0/PM0 NCS1010-AC-PSU NOT REQ		0.0	AP-PriMCU		CURRENT	1.03	1.03	
0/PM0 NCS1010-AC-PSU NOT REQ		0.0	AP-SecMCU		CURRENT	2.01	2.01	
0/PM1 NCS1010-AC-PSU NOT REQ		0.0	AP-PriMCU		CURRENT	1.03	1.03	
0/PM1 NCS1010-AC-PSU NOT REQ		0.0	AP-SecMCU		CURRENT	2.01	2.01	
0/0/NXR0 NCS1K-IIA-C NOT REQ		1.0	IIA	S	CURRENT	1.00	1.00	
0/Rack NCS1010-SA NOT REQ		1.0	EITU-ADMConfig		CURRENT	2.10	2.10	
0/Rack NCS1010-SA NOT REQ		1.0	IoFpga	S	CURRENT	1.04	1.04	
0/Rack NCS1010-SA NOT REQ		1.0	IoFpgaGolden	BS	CURRENT			1.01
0/Rack NCS1010-SA		1.0	SsdIntels4510	S	CURRENT	11.32	11.32	

**show inventory**

0/Rack

# show inventory

To retrieve and display the physical inventory information of the system, use the **show inventory** command in Cisco IOS XR mode.

```
show environment [ WORD | all | chassis | details | fan | location | power ]
[ raw | vendor-type ]
```

<b>Syntax Description</b>	
<b>WORD</b>	(Optional) Displays partially qualified location specification.
<b>all</b>	(Optional) Displays inventory information for all the physical entities.
<b>chassis</b>	(Optional) Displays inventory information for the entire chassis.
<b>details</b>	(Optional) Displays detailed entity information.
<b>fan</b>	(Optional) Displays inventory information for the fans.
<b>location   location</b>	(Optional) Displays inventory information for a specific node, or for all nodes in the chassis.
<b>power</b>	(Optional) Displays inventory information for the power supply.
<b>raw</b>	(Optional) Displays raw information about the chassis for diagnostic purposes.
<b>vendor-type</b>	(Optional) Displays vendor-type information.

<b>Command Default</b>	All hardware inventory information is displayed.
------------------------	--

<b>Command Modes</b>	Cisco IOS XR EXEC
----------------------	-------------------

<b>Command History</b>	<b>Release</b>	<b>Modification</b>
	Release 7.7.1	This command was introduced.

<b>Usage Guidelines</b>	Enter the <b>show inventory</b> command with the <b>raw</b> keyword to display every RFC 2737 entity installed in NCS 1004, including those without a PID, unique device identifier (UDI), or other physical identification. The <b>raw</b> keyword is primarily intended for troubleshooting problems with the <b>show inventory</b> command itself.
-------------------------	---

## Example

The following example shows a sample output from the **show inventory** command with the **chassis** keyword.

```
RP/0/RP0/CPU0:P2B_DT_02#show inventory chassis
```

Thu May 26 04:24:52.892 UTC

```
NAME: "Rack 0", DESCRIPTOR: "NCS 1010 Shelf Assembly"
PID: NCS1010-SA          , VID: V00, SN: FCB2544B0KC
```

---

The following example shows a sample output from the **show inventory** command with the **fan** keyword.

**RP/0/RP0/CPU0:P2B\_DT\_02#show inventory fan**

Thu May 26 04:25:23.655 UTC

```
NAME: "0/FT0", DESCRIPTOR: "NCS1010 - Shelf Fan"
PID: NCS1010-FAN          , VID: V00, SN: FCB2541B0BJ

NAME: "0/FT1", DESCRIPTOR: "NCS1010 - Shelf Fan"
PID: NCS1010-FAN          , VID: V00, SN: FCB2544B1GM
```

---

The following example shows a sample output from the **show inventory** command with the **power** keyword.

**RP/0/RP0/CPU0:P2B\_DT\_02#show inventory power**

Thu May 26 04:25:58.164 UTC

```
NAME: "0/PM0", DESCRIPTOR: "NCS 1010 - AC Power Supply Unit"
PID: NCS1010-AC-PSU      , VID: V00, SN: APS2534003Z

NAME: "0/PM1", DESCRIPTOR: "NCS 1010 - AC Power Supply Unit"
PID: NCS1010-AC-PSU      , VID: V00, SN: APS2534007Q
```

---

The following example shows a sample output from the **show inventory** command with the **all** keyword.

**RP/0/RP0/CPU0:P2B\_DT\_02#show inventory all**

Thu May 26 04:26:49.509 UTC

```
NAME: "Rack 0", DESCRIPTOR: "NCS 1010 Shelf Assembly"
PID: NCS1010-SA          , VID: V00, SN: FCB2544B0KC

NAME: "0/RP0/CPU0", DESCRIPTOR: "NCS1010 - Controller"
PID: NCS1010-CNTLR-K9    , VID: V00, SN: FCB2541B0JD

NAME: "0/RP0-PTP0", DESCRIPTOR: "Cisco Pluggable Optics Module"
PID: GLC-SX-MMD         , VID: V01, SN: OPM22160169

NAME: "0/RP0-PTP1", DESCRIPTOR: "Cisco Pluggable Optics Module"
PID: SFP-GE-S            , VID: V01, SN: FNS12450CHY

NAME: "0/0/NXR0", DESCRIPTOR: "NCS 1010 - Optical Line Terminal - C-band"
PID: NCS1K-OLT-C         , VID: V00, SN: FCB2543B002

NAME: "0/1", DESCRIPTOR: "NCS 1000 32 chs Odd Mux/Demux Patch Panel - 150GHz - C-band"
PID: NCS1K-MD-320-C       , VID: V00, SN: ACW2529Y020

NAME: "0/2", DESCRIPTOR: "NCS 1000 32 chs Even Mux/Demux Patch Panel - 150GHz - C-band"
PID: NCS1K-MD-32E-C       , VID: V00, SN: ACW2529YB15
```

**show license all**

```

NAME: "0/FT0", DESCRIPTOR: "NCS1010 - Shelf Fan"
PID: NCS1010-FAN , VID: V00, SN: FCB2541B0BJ

NAME: "0/FT1", DESCRIPTOR: "NCS1010 - Shelf Fan"
PID: NCS1010-FAN , VID: V00, SN: FCB2544B1GM

NAME: "0/PM0", DESCRIPTOR: "NCS 1010 - AC Power Supply Unit"
PID: NCS1010-AC-PSU , VID: V00, SN: APS2534003Z

NAME: "0/PM1", DESCRIPTOR: "NCS 1010 - AC Power Supply Unit"
PID: NCS1010-AC-PSU , VID: V00, SN: APS2534007Q
=====
```

## show license all

To display all licensing information, use the **show license all** command. This command displays status, authorization, UDI, and usage information, all combined.

### **show license all**

<b>Syntax Description</b>	This command has no keywords or arguments.				
<b>Command Default</b>	None				
<b>Command Modes</b>	Administration for Cisco IOS XR				
<b>Command History</b>	<table border="1"> <thead> <tr> <th>Release</th> <th>Modification</th> </tr> </thead> <tbody> <tr> <td>Release 7.7.1</td> <td>This command was introduced.</td> </tr> </tbody> </table>	Release	Modification	Release 7.7.1	This command was introduced.
Release	Modification				
Release 7.7.1	This command was introduced.				
<b>Usage Guidelines</b>	None.				

This example shows you how to use the **show license all** command, and the sample output.

```

RP/0/RP0/CPU0:ios#show license all
Fri Jul 15 05:32:02.678 UTC
Smart Licensing Status
=====
Smart Licensing is ENABLED
Registration:
Status: REGISTERED
Smart Account: InternalTestDemoAccount8.cisco.com
Virtual Account: NCS1010-PROD
Export-Controlled Functionality: ALLOWED
Initial Registration: SUCCEEDED on Jul 15 2022 04:58:24 UTC
Last Renewal Attempt: None
Next Renewal Attempt: Jan 11 2023 04:58:23 UTC
Registration Expires: Jul 15 2023 04:53:20 UTC
License Authorization:
Status: AUTHORIZED on Jul 15 2022 04:58:40 UTC
Last Communication Attempt: SUCCEEDED on Jul 15 2022 04:58:40 UTC
Next Communication Attempt: Aug 14 2022 04:58:40 UTC
Communication Deadline: Oct 13 2022 04:53:41 UTC
Export Authorization Key:
```

```

Features Authorized:
<none>
Utility:
Status: DISABLED
Data Privacy:
Sending Hostname: yes
Callhome hostname privacy: DISABLED
Smart Licensing hostname privacy: DISABLED
Version privacy: DISABLED
Transport:
Type: Callhome
Miscellaneous:
Smart Licensing
10
Smart Licensing
Verify Smart Licensing Configuration
REVIEW DRAFT - CISCO CONFIDENTIAL
Custom Id: <empty>
License Usage
=====
NCS1010 - Essentials - OLT RTU (NCS1010_ESSENTIALS_OLT_RTU):
Description: NCS1010 - Essentials Tier - Optical Line Terminal RTU (Per Port)
Count: 2
Version: 1.0
Status: AUTHORIZED
Export status: NOT RESTRICTED
NCS1010 - Essentials - OLT SIA (NCS1010_ESSENTIALS_OLT_SIA):
Description: NCS1010 - Essentials Subscription - Optical Line Terminal - SIA
(Per Port)
Count: 2
Version: 1.0
Status: AUTHORIZED
Export status: NOT RESTRICTED
Product Information
=====
UDI: PID:NCS1010-SA,SN:FCB2546B08T
Agent Version
=====
Smart Agent for Licensing: 5.4.16_rel/63
Reservation Info
=====
License reservation: DISABLED

```

## show license summary

To display the license summary, use the **show license summary** command.

### show license summary

<b>Syntax Description</b>	This command has no keywords or arguments.
<b>Command Default</b>	None
<b>Command Modes</b>	Administration for Cisco IOS XR

**show license summary**

Command History	Release	Modification
	Release 7.7.1	This command was introduced.

<b>Usage Guidelines</b>	None.
-------------------------	-------

This example shows you how to use the **show license summary** command, and the sample output.

```
RP/0/RP0/CPU0:ios#show license summary

Tue Jul 19 15:21:49.227 UTC

Smart Licensing is ENABLED
License Reservation is ENABLED

Registration:
Status: REGISTERED - SPECIFIC LICENSE RESERVATION
Export-Controlled Functionality: ALLOWED

License Authorization:
Status: AUTHORIZED - RESERVED

License Usage:
License Entitlement Tag Count Status
-----
NCS1010 - Essentials... (NCS1010_ESS_OLT_RTU) 3 AUTHORIZED
NCS1010 - Essentials... (NCS1010_ESS_OLT_SIA) 3 AUTHORIZED
RP/0/RP0/CPU0:P2A_DT_08#show license usage
Tue Jul 19 15:22:11.234 UTC

License Authorization:
Status: AUTHORIZED - RESERVED on Jul 19 2022 15:21:24 UTC

NCS1010 - Essentials - OLT RTU (NCS1010_ESS_OLT_RTU):
Description: NCS1010 - Essentials Tier - Optical Line Terminal RTU (Per
Port)
Count: 3
Version: 1.0
Status: AUTHORIZED
Export status: NOT RESTRICTED
Reservation:
Reservation status: SPECIFIC INSTALLED
Total reserved count: 3

NCS1010 - Essentials - OLT SIA (NCS1010_ESS_OLT_SIA):
Description: NCS1010 - Essentials Subscription - Optical Line Terminal
- SIA
(Per Port)
Count: 3
Version: 1.0
Status: AUTHORIZED
Export status: NOT RESTRICTED
Reservation:
Reservation status: SPECIFIC INSTALLED
Total reserved count: 3
RP/0/RP0/CPU0:P2A_DT_08#show license platform summary
Tue Jul 19 15:22:35.859 UTC
Collection: LAST: (unavailable)
NEXT: (pending in 1 minute(s))
Reporting: LAST: (unavailable)
```

```

NEXT: (pending in 1 minute(s))

*****IMPORTANT*****
SIA Status: Out of Compliance(Remaining Grace Period: 89 days, 23 hours)

SIA license(s) status is Not Authorized.
SW Upgrade will still be allowed as SIA Grace Period is remaining

*****
Count                               Last
Feature/Area      Entitlement
Next
=====
=====
0          FCM      NCS1010 - Essentials Tier - Optical Line Terminal R   3
0          FCM      NCS1010 - Essentials Subscription - Optical Line Te    3
0

```

## show logging onboard

Use the **show logging onboard** command to view the Onboard Failure Logs (OBFL).

**show logging onboard { alarm | | location *location* }**

<b>Syntax Description</b>	<b>alarm</b> Displays the alarm events.				
	<b>location <i>location</i></b> Specify the location of the hardware module.				
<b>Command Modes</b>	User EXEC mode				
<b>Command History</b>	<table border="1"> <thead> <tr> <th><b>Release</b></th> <th><b>Modification</b></th> </tr> </thead> <tbody> <tr> <td>Cisco IOS XR Release 7.9.1</td> <td>This command was introduced.</td> </tr> </tbody> </table>	<b>Release</b>	<b>Modification</b>	Cisco IOS XR Release 7.9.1	This command was introduced.
<b>Release</b>	<b>Modification</b>				
Cisco IOS XR Release 7.9.1	This command was introduced.				

### Example

The following example shows how to display the Onboard Failure Logs (OBFL) details for the **show logging onboard** command.

```

RP/0/RPO/CPUE:PIAL 05#show logging onboard alarm location 0/ rp0/CPUE
Thu Feb 9 11:34:25.158 UTC
OBFL alarm information for: 0/RPO/CPUE

2022-12-09 09:50:31 DECLARE      ALARM MAJOR      Power Group redundancy lost
2022-12-14 11:25:41 DECLARE      ALARM MAJOR      Power Group redundancy lost
2022-12-09 09:50:31 DECLARE      ALARM MAJOR      Power Group redundancy lost
2022-12-14 11:25:41 DECLARE      ALARM MAJOR      Power Group redundancy lost
2023-02-09 11:33:05 DECLARE      ALARM CRITICAL   PHY1-MDIO-ACCESS-ERROR Phy1 MDIO access
failure detected

```

**show license platform detail**

# show license platform detail

To display the detailed summary of all Flexible Consumption Models (FCM) licenses in the NCS 1010 platform, use the **show license platform detail** command.

## show license platform detail

<b>Syntax Description</b>	This command has no keywords or arguments.	
<b>Command Default</b>	None	
<b>Command Modes</b>	Administration for Cisco IOS XR	
<b>Command History</b>	<b>Release</b>	<b>Modification</b>
	Release 7.7.1	This command was introduced.

**Usage Guidelines**

This example shows you how to use the **show license platform detail** command, and the sample output.

```
RP/0/RP0/CPU0:ios#show license platform detail
Mon Jul 18 10:52:46.333 UTC
Collection: LAST: Mon Jul 18 2022 10:52:07 UTC
              NEXT: Mon Jul 18 2022 10:54:07 UTC
Reporting:  LAST: Mon Jul 18 2022 10:52:07 UTC
              NEXT: Mon Jul 18 2022 10:54:07 UTC
SIA Status: In Compliance
Parameters: Collection interval:          2 minute(s)
            Reporting interval:        2 minute(s)
            Throughput gauge:       1000000 Kbps
=====
Feature/Area 'FCM'
  Name: FCM
  Status: ACTIVE
  Flags:

[ 1] Name: NCS1010 - Essentials Tier - In-Line Amplifier RTU
    Entitlement Tag:
    regid.2022-05.com.cisco.NCS1010_ESS_ILA_RTU,1.0_9b4322b1-bff3-4ddf-944c-16ec9aab1cc
      Count: Last reported: 0
              Next report: 0
[ 2] Name: NCS1010 - Essentials Subscription - In-Line Amplifier - SIA
    Entitlement Tag:
    regid.2022-05.com.cisco.NCS1010_ESS_ILA_SIA,1.0_67243ac7-1a7c-41e4-a160-f13df80fd0e4
      Count: Last reported: 0
              Next report: 0
[ 3] Name: NCS1010 - Essentials Tier - Optical Line Terminal RTU (Per Port)
    Entitlement Tag:
    regid.2022-05.com.cisco.NCS1010_ESS_OLT_RTU,1.0_e4309530-2085-40e6-9aa6-5f3137ff49b2
      Count: Last reported: 9
```

```

        Next report:      0
[ 4] Name: NCS1010 - Essentials Subscription - Optical Line Terminal - SIA (Per Port)
    Entitlement Tag:
regid.2022-05.com.cisco.NCS1010_ESS_OLT_SIA,1.0_b3c976c1-e509-474f-8cac-b9db62f28f2b
    Count: Last reported:   9
        Next report:      0
[ 5] Name: NCS1010 - Advantage Tier- In-Line Amplifier RTU
    Entitlement Tag:
regid.2022-05.com.cisco.NCS1010_ADV_ILA_RTU,1.0_cf1746b7-def4-4c0e-ab90-de30614507d8
    Count: Last reported:   0
        Next report:      0
[ 6] Name: NCS1010 - Advantage Subscription - In-Line Amplifier - SIA
    Entitlement Tag:
regid.2022-05.com.cisco.NCS1010_ADV_ILA_SIA,1.0_ea769b05-9363-47dd-9991-2122c37479eb
    Count: Last reported:   0
        Next report:      0
[ 7] Name: NCS1010 - Advantage Tier - Optical Line Terminal RTU (Per Port)
    Entitlement Tag:
regid.2022-05.com.cisco.NCS1010_ADV_OLT_RTU,1.0_7a6ce8f3-3336-4ce2-8803-431227dabfff
    Count: Last reported:   0
        Next report:      0
[ 8] Name: NCS1010 - Advantage Subscription - Optical Line Terminal - SIA (Per Port)
    Entitlement Tag:
regid.2022-05.com.cisco.NCS1010_ADV_OLT_SIA,1.0_5f283f1c-143e-4c6e-9af7-73e088fb77a5
    Count: Last reported:   0
        Next report:      0

```

## show license platform summary

To display the summary of FCM licenses in the NCS 1010 platform, use the **show license platform summary** command.

### show license platform summary

<b>Syntax Description</b>	This command has no keywords or arguments.	
<b>Command Default</b>	None	
<b>Command Modes</b>	Administration for Cisco IOS XR	
<b>Command History</b>	<b>Release</b>	<b>Modification</b>
	Release 7.7.1	This command was introduced.
<b>Usage Guidelines</b>	None.	

This example shows you how to use the **show license platform summary** command, and the sample output.

```

RP/0/RP0/CPU0:ios#show license platform summary
Mon Jul 18 10:50:59.263 UTC
Collection: LAST: Mon Jul 18 2022 10:50:07 UTC
              NEXT: Mon Jul 18 2022 10:52:07 UTC

```

**show license summary**

```

Reporting: LAST: Mon Jul 18 2022 10:50:07 UTC
NEXT: Mon Jul 18 2022 10:52:07 UTC
*****IMPORTANT*****
SIA Status: Out of Compliance(Remaining Grace Period: 89 days, 23 hours)
Device is in Authorization Expired state.
SW Upgrade will still be allowed as SIA Grace Period is remaining
*****
Count
Feature/Area      Entitlement          Last Next
=====
FCM              NCS1010 - Essentials Tier - Optical Line Terminal R   9   0
FCM              NCS1010 - Essentials Subscription - Optical Line Te    9   0

```

## show license summary

To display the license summary, use the **show license summary** command.

### **show license summary**

<b>Syntax Description</b>	This command has no keywords or arguments.				
<b>Command Default</b>	None				
<b>Command Modes</b>	Administration for Cisco IOS XR				
<b>Command History</b>	<table border="1"> <thead> <tr> <th>Release</th> <th>Modification</th> </tr> </thead> <tbody> <tr> <td>Release 7.7.1</td> <td>This command was introduced.</td> </tr> </tbody> </table>	Release	Modification	Release 7.7.1	This command was introduced.
Release	Modification				
Release 7.7.1	This command was introduced.				
<b>Usage Guidelines</b>	None.				

This example shows you how to use the **show license summary** command, and the sample output.

```

RP/0/RP0/CPU0:ios#show license summary
Tue Jul 19 15:21:49.227 UTC
Smart Licensing is ENABLED
License Reservation is ENABLED

Registration:
  Status: REGISTERED - SPECIFIC LICENSE RESERVATION
  Export-Controlled Functionality: ALLOWED

License Authorization:
  Status: AUTHORIZED - RESERVED

License Usage:
  License          Entitlement Tag          Count Status
  -----
  NCS1010 - Essentials... (NCS1010_ESS_OLT_RTU) 3 AUTHORIZED
  NCS1010 - Essentials... (NCS1010_ESS_OLT_SIA) 3 AUTHORIZED
R

```

## show license udi

To display the smart licensing UDI, use the **show license udi** command.

### show license udi

<b>Syntax Description</b>	This command has no keywords or arguments.					
<b>Command Default</b>	None					
<b>Command Modes</b>	None					
<b>Command History</b>	<table border="1"> <thead> <tr> <th>Release</th> <th>Modification</th> </tr> </thead> <tbody> <tr> <td>Release 7.7.1</td> <td>This command was introduced.</td> </tr> </tbody> </table>		Release	Modification	Release 7.7.1	This command was introduced.
Release	Modification					
Release 7.7.1	This command was introduced.					
<b>Usage Guidelines</b>	None.					

This example shows you how to use the **show license udi** command, and the sample output.

```
RP/0/RP0/CPU0:ios#show license udi
Tue Jul 19 13:43:19.731 UTC
UDI: PID:NCS1010-SA, SN:FCB2546B08T
```

## show license usage

To display the license usage count, use the **show license usage** command.

### show license usage

<b>Syntax Description</b>	This command has no keywords or arguments.					
<b>Command Default</b>	None					
<b>Command Modes</b>	Administration for Cisco IOS XR					
<b>Command History</b>	<table border="1"> <thead> <tr> <th>Release</th> <th>Modification</th> </tr> </thead> <tbody> <tr> <td>Release 7.7.1</td> <td>This command was introduced.</td> </tr> </tbody> </table>		Release	Modification	Release 7.7.1	This command was introduced.
Release	Modification					
Release 7.7.1	This command was introduced.					
<b>Usage Guidelines</b>	None.					

This example shows you how to use the **show license usage** command, and the sample output.

**show ntp associations**

```

RP/0/RP0/CPU0:iso#show license usage
Fri Jul 15 08:17:40.048 UTC
License Authorization:
Status: OUT OF COMPLIANCE on Jul 15 2022 07:01:00 UTC
NCS1010 - Essentials - OLT RTU (NCS1010_ESSENTIALS_OLT_RTU):
Description: NCS1010 - Essentials Tier - Optical Line Terminal RTU (Per Port)
Count: 32
Version: 1.0
Status: OUT OF COMPLIANCE
Export status: NOT RESTRICTED
NCS1010 - Essentials - OLT SIA (NCS1010_ESSENTIALS_OLT_SIA):
Description: NCS1010 - Essentials Subscription - Optical Line Terminal - SIA
Smart Licensing
13
Smart Licensing
Verify Smart Licensing Configuration
REVIEW DRAFT - CISCO CONFIDENTIAL
(Per Port)
Count: 32
Version: 1.0
Status: OUT OF COMPLIANCE
Export status: NOT RESTRICTED

```

## show ntp associations

To display the status of Network Time Protocol (NTP) associations, use the **show ntp associations** command in privileged EXEC mode.

**show ntp associations [detail] [ location node-id ]**

<b>Syntax Description</b>	<b>detail</b> (Optional) Displays detailed information about each NTP association. <b>location node-id</b> (Optional) Displays the status of NTP associations from the designated node. The <i>node-id</i> argument is entered in the <i>rack/slot</i> notation.				
<b>Command Default</b>	None				
<b>Command Modes</b>	EXEC				
<b>Command History</b>	<table border="1"> <thead> <tr> <th><b>Release</b></th><th><b>Modification</b></th></tr> </thead> <tbody> <tr> <td>Cisco IOS XR Release 7.11.1</td><td>This command was introduced.</td></tr> </tbody> </table>	<b>Release</b>	<b>Modification</b>	Cisco IOS XR Release 7.11.1	This command was introduced.
<b>Release</b>	<b>Modification</b>				
Cisco IOS XR Release 7.11.1	This command was introduced.				
<b>Usage Guidelines</b>	Output for the <b>show ntp associations</b> command is displayed only if NTP is configured.				
<b>Task ID</b>	<table border="1"> <thead> <tr> <th><b>Task ID</b></th><th><b>Operations</b></th></tr> </thead> <tbody> <tr> <td>ip-services</td><td>read</td></tr> </tbody> </table>	<b>Task ID</b>	<b>Operations</b>	ip-services	read
<b>Task ID</b>	<b>Operations</b>				
ip-services	read				

This example shows sample output from the **show ntp associations** command:

```
RP/0/RP0/CPU0:ios#show ntp associations
Sun Nov 5 15:14:44.128 UTC

address ref clock st when poll reach delay offset disp
*~203.0.113.51 10.64.58.50 2 81 128 377 1.84 7.802 2.129
* sys_peer, # selected, + candidate, - outlayer, x falseticker, ~ configured
```

**Table 1: show ntp associations Field Descriptions**

Field	Description
*	Peer has been declared the system peer and lends its variables to the system variables.
#	A pound sign (#) displayed next to a configured peer indicates that the router does not synchronize with the peer even though NTP request and response packets are exchanged.  In this case, check the output of the <b>show ntp associations detail</b> command or the NTP debugs to see why the clocks are not synchronized.  Use the <b>show ntp associations detail</b> and <b>show ntp status</b> commands to obtain additional information about the state of NTP.  One possible reason for the # sign is that the NTP client clock differs by more than 4000 seconds from the NTP server clock. On Cisco routers, a time difference of greater than 4000 seconds is considered out of range and prevents the router from synchronization to the server. This does not apply when you first configure an NTP peer on a Cisco router or on reload. In this case, the NTP client clock is changed to match the NTP server clock. Verify the time zone of the client clock; local time is displayed, but time values in NTP messages are in UTC (GMT) time zone. You can manually change the client clock to within a few minutes of the NTP server clock.
+	Peer is a survivor and a candidate for the combining algorithm.
-	Peer is discarded by the clustering algorithm as an outlier.
x	Peer is discarded by the intersection algorithm as a falseticker.
~	Indicates peer is statically configured.
address	IPv4 or IPv6 address of the peer. If a nondefault VRF is configured for the peer, the VRF follows the address.
ref clock	Reference clock type or address for the peer.
st	Stratum setting for the peer.
when	Time since last NTP packet was received from peer, in milliseconds.
poll	Polling interval between NTP poll packets, in seconds. As the NTP server and client are better synced (and there are no dropped packets), this number increases to a maximum of 1024.

**show ntp associations**

Field	Description
reach	Peer reachability (bit string, in octal).  The reach field is a circular bit buffer. It gives you the status of the last eight NTP messages (eight bits in octal is 377, so you want to see a reach field value of 377).  If an NTP response packet is lost, the lost packet is tracked over the next eight NTP update intervals in the reach field.
delay	Round-trip delay to peer, in milliseconds.
offset	Relative time difference between the client time and server time, in milliseconds. The client slows down or speeds up its clock to match the server time value.  The offset decreases toward zero over time. It likely never reaches zero since the packet delay between the client and server is never exactly the same. Therefore, the client NTP cannot ever exactly match its clock with the server.  If there is an asterisk (*) next to a configured peer, then you are synchronized to this peer and use them as the primary clock.
disp	Dispersion.

This example shows sample output from the **show ntp associations** command with the **detail** keyword:

```
RP/0/RP0/CPU0:ios#show ntp associations detail
Sun Nov 5 15:14:48.763 UTC

203.0.113.51 configured, our_master, stratum 2
ref ID 10.64.58.50, time E8F22BB9.79D4A841 (14:56:57.475 UTC Sun Nov 5 2023)
our mode client, peer mode server, our poll intvl 128, peer poll intvl 128
root delay 0.6866 msec, root disp 1.04, reach 377, sync dist 6.2590
delay 1.84 msec, offset 7.802 msec, dispersion 2.129
precision 2**23, version 4
org time E8F22F92.B647E8FC (15:13:22.712 UTC Sun Nov 5 2023)
rcv time E8F22F92.B88F303C (15:13:22.720 UTC Sun Nov 5 2023)
xmt time E8F22F92.B88F303C (15:13:22.720 UTC Sun Nov 5 2023)
filtdelay = 1.844 1.772 1.983 1.954 1.945 2.000 1.902 1.778
filtoffset = 7.857 7.802 8.065 8.063 8.332 8.397 8.664 8.684
filterror = 0.000 0.060 1.995 2.055 4.050 4.110 6.060 6.120
```

**Table 2: show ntp associations detail Field Descriptions**

Field	Descriptions
vrf	Nondefault VRF, if specified for this peer.
configured	Statically configured peer.
dynamic	Dynamically discovered peer.
our_master	Synchronization of the local machine to this peer.
sane	Passing of basic sanity checks by this peer.
ref ID	Address of machine to which the peer is synchronized.

Field	Descriptions
time	Last time stamp that the peer received from its master.
our mode	Mode relative to peer (active/passive/client/server/broadcast/broadcast client).
peer mode	Mode of peer relative.
our poll intvl	Poll interval to peer.
peer poll intvl	Poll interval of interval.
root delay	Delay along path to root (ultimate stratum 1 time source).
root disp	Dispersion of path to root.
reach	Peer reachability (bit string in octal).
sync dist	Peer synchronization distance.
delay	Round-trip delay to peer.
offset	Offset of peer clock relative to this clock.
dispersion	Dispersion of peer clock.
precision	Precision of peer clock in (Hertz) Hz.
version	NTP version number that peer is using.
org time	Originate time stamp.
rcv time	Receive time stamp.
xmt time	Transmit time stamp.
filtdelay	Round-trip delay of each sample, in milliseconds.
filtoffset	Clock offset of each sample, in milliseconds.
filterror	Approximate error of each sample.

## show ntp status

To display the status of Network Time Protocol (NTP), use the **show ntp status** command in XR EXEC mode.

**show ntp status [ location node-id ]**

**show ntp status**

<b>Syntax Description</b>	<b>location node-id</b> (Optional) Displays the status of NTP from the designated node. The <i>node-id</i> argument is entered in the <i>rack/slot</i> notation.				
<b>Command Default</b>	None				
<b>Command Modes</b>	XR EXEC mode				
<b>Command History</b>	<table border="1"> <thead> <tr> <th><b>Release</b></th><th><b>Modification</b></th></tr> </thead> <tbody> <tr> <td>Cisco IOS XR Release 7.11.1</td><td>This command was introduced.</td></tr> </tbody> </table>	<b>Release</b>	<b>Modification</b>	Cisco IOS XR Release 7.11.1	This command was introduced.
<b>Release</b>	<b>Modification</b>				
Cisco IOS XR Release 7.11.1	This command was introduced.				
<b>Usage Guidelines</b>	None				
<b>Task ID</b>	<table border="1"> <thead> <tr> <th><b>Task ID</b></th><th><b>Operations</b></th></tr> </thead> <tbody> <tr> <td>ip-services</td><td>read</td></tr> </tbody> </table>	<b>Task ID</b>	<b>Operations</b>	ip-services	read
<b>Task ID</b>	<b>Operations</b>				
ip-services	read				

This example shows sample output from the **show ntp status** command:

```
RP/0/RP0/CPU0:ios#show ntp status
Sun Nov 5 15:14:36.949 UTC

Clock is synchronized, stratum 3, reference is 203.0.113..51
nominal freq is 1000000000.0000 Hz, actual freq is 44881851.3383 Hz, precision is 2**24
reference time is E8F22D7A.AB020D97 (15:04:26.668 UTC Sun Nov 5 2023)
clock offset is 9.690 msec, root delay is 2.553 msec
root dispersion is 24.15 msec, peer dispersion is 2.13 msec
loopfilter state is 'CTRL' (Normal Controlled Loop), drift is 0.0000212807 s/s
system poll interval is 128, last update was 610 sec ago
authenticate is disabled, panic handling is disabled,
hostname resolution retry interval is 1440 minutes.
```

**Table 3: show ntp status Field Descriptions**

<b>Field</b>	<b>Description</b>
synchronized	Synchronized system to an NTP peer.
stratum	NTP stratum of this system.
reference	IPv4 address or first 32 bits of the MD5 hash of the IPv6 address of the peer to which clock is synchronized.
nominal freq	Nominal frequency in Hertz (Hz) of the system hardware clock.
actual freq	Measured frequency in Hz of the system hardware clock.
precision	Precision of the clock of this system in Hz.
reference time	Reference time stamp.
clock offset	Offset of clock to synchronized peer, in milliseconds.

Field	Description
root delay	Total delay along path to root clock, in milliseconds.
root dispersion	Dispersion of root path.
peer dispersion	Dispersion of synchronized peer.
loopfilter state	The state of the clock state machine transition function.
drift	Drift of the hardware clock.
system poll interval	Poll interval of the peer.
last update	Time the router last updated its NTP information.

## show olc apc

Use the **show olc apc** command to view APC status.

**show olc apc { controller Ots R/S/I/P }**

<b>Syntax Description</b>	<i>R/S/I/P</i> Rack/Slot/Instance/Port of the OSC controller.				
	<b>controller Ots</b> Use this parameter to view the information for a particular controller.				
<b>Command Modes</b>	User EXEC mode				
<b>Command History</b>	<table border="1"> <thead> <tr> <th><b>Release</b></th> <th><b>Modification</b></th> </tr> </thead> <tbody> <tr> <td>Cisco IOS XR Release 7.7.1</td> <td>This command was introduced.</td> </tr> </tbody> </table>	<b>Release</b>	<b>Modification</b>	Cisco IOS XR Release 7.7.1	This command was introduced.
<b>Release</b>	<b>Modification</b>				
Cisco IOS XR Release 7.7.1	This command was introduced.				

### Example

The following sample is an output of **show olc apc** command.

```
RP/0/RP0/CPU0:OLT1#show olc apc

Controller      : Ots0/0/0/0
APC Status     : WORKING

Node RID       : 10.1.1.1
Internal State : IDLE

Node RID       : 10.99.1.2
Internal State : IDLE

Node RID       : 10.99.2.2
Internal State : IDLE

Node RID       : 10.99.4.1
```

**show olc apc-local**

```

Internal State : IDLE
Node RID      : 10.1.1.5
Internal State : DISCREPANCY

```

## show olc apc-local

To view the local status of APC on each node, use the **show olc apc-local** command.

```
show olc apc-local { regulation-info { controller Ots R/S/I/P | { tx | rx } } | target-psd-profile } { controller Ots R/S/I/P }
```

### Syntax Description

<b>regulation-info</b>	Displays APC regulation information.
<b>target-psd-profile</b>	Displays target PSD profile information
<b>R/S/I/P</b>	Rack/Slot/Instance/Port of the OSC controller.
<b>controller Ots</b>	Use this parameter to view the information for a particular controller.

### Command Modes

User EXEC mode

### Command History

Release	Modification
Cisco IOS XR Release 7.7.1	This command was introduced.

### Example

The following sample is an output of **show olc apc-local** command.

```

RP/0/RP0/CPU0:ios#show olc apc-local
Mon Apr 11 06:59:14.679 UTC

Controller : Ots0/0/0/0

TX Status : ENABLED
RX Status : ENABLED

```

The following sample is an output of **show olc apc-local target-psd-profile** command.

```

RP/0/RP0/CPU0:ios#show olc apc-local target-psd-profile
Tue Apr 26 10:19:24.910 UTC
Controller      : Ots0/0/0/0
Target PSD source : Configuration

-----  

Setpoint          Frequency           Target PSD
                  (THz)                (dBm/12.5 GHz)
-----  

01               191.337494        15.0
02               191.488678        15.0
03               191.639847       -4.1
04               191.791016       -4.1
05               191.942184       -4.1
06               192.093353       -4.1

```

07	192.244537	-4.1
08	192.395706	-4.1
09	192.546875	-4.1
10	192.698044	-4.1
11	192.849213	-4.1
12	193.000397	-4.1
13	193.151566	-4.1
14	193.302734	-4.1
15	193.453903	-4.1
16	193.605072	-4.1
17	193.756256	-4.1
18	193.907425	-4.1
19	194.058594	-4.1
20	194.209763	-4.1
21	194.360931	-4.1
22	194.512115	-4.1
23	194.663284	-4.1
24	194.814453	-4.1
25	194.965622	-4.1
26	195.116791	-4.1
27	195.267975	-4.1
28	195.419144	-4.1
29	195.570312	-4.1
30	195.721481	-4.1
31	195.872650	-4.1
32	196.023834	-4.1
33	196.175003	-4.1

The following sample is an output of **show olc apc-local regulation-info controller ots 0/0/0/0 tx** command.

```
RP/0/RP0/CPU0:ios#show olc apc-local regulation-info controller ots 0/0/0/0 tx
Wed Jul  6 05:01:45.177 UTC
Controller      : Ots0/0/0/0
Domain Manager  : 10.1.1.1
Internal Status : OOR
Direction       : TX
PSD Minimum    : -24.0 (dBm/12.5 GHz)
Gain Range     : Normal
Last Correction : 2022-07-06 05:01:28

Device Parameters          Min   Max Configuration Operational
=====
Egress Ampli Gain (dB)    :15.4  29.4 19.5      19.5
Egress Ampli Tilt (dB)    :-5.0   3.1  -2.2      -2.2
TX Ampli Power (dBm)      : -     22.4  -        21.4
TX VOA Attenuation (dB)   :0.0    20.0  0.0      0.0
Egress WSS/DGE Attenuation (dB) :0.0    25.0  -        -
                                         (dBm/12.5 GHz) (dBm/12.5 GHz) (dBm/12.5 GHz)

Channel Center Channel Channel Spectrum Ampli-Input Target Current
Discrepancy Channel Slice
Frequency      Width   ID   Source  Slice Num   PSD
Attn Config
(THz)          (GHz)   (dB)          (dB)          (dB)          (dB)
(dB)           (dB)          (dB)          (dB)          (dB)          (dB)

191.375000    75.00   1    OCh     13        -23.2      -4.6      -4.9
0.2           7.1
191.449997    75.00   -    ASE     37        -23.0      -4.6      -4.7
0.1           9.2
191.524994    75.00   -    ASE     61        -23.1      -4.6      -4.7
0.1           9.3
```

show olc apc-local

191.600006	75.00	4	OCh	85	-23.1	-4.5	-4.7
0.1	8.0						
191.675003	75.00	-	ASE	109	-23.0	-4.5	-4.5
0.0	9.1						
191.750000	75.00	6	OCh	133	-23.0	-4.4	-4.6
0.1	8.0						
191.824997	75.00	-	ASE	157	-23.1	-4.4	-4.6
0.1	9.3						
191.899994	75.00	8	OCh	181	-23.0	-4.4	-4.4
0.0	8.0						
191.975006	75.00	-	ASE	205	-23.0	-4.3	-4.5
0.1	9.1						
192.050003	75.00	10	OCh	229	-23.0	-4.3	-4.5
0.1	8.2						
192.125000	75.00	-	ASE	253	-22.9	-4.3	-4.3
0.0	9.0						
192.199997	75.00	12	OCh	277	-22.8	-4.2	-4.3
0.0	8.3						
192.274994	75.00	-	ASE	301	-22.9	-4.2	-4.4
0.1	9.0						
192.350006	75.00	14	OCh	325	-22.6	-4.2	-4.2
0.0	8.3						
192.425003	75.00	-	ASE	349	-22.8	-4.2	-4.3
0.1	8.7						
192.500000	75.00	16	OCh	373	-22.4	-4.1	-3.9
-0.2	8.1						
192.574997	75.00	-	ASE	397	-22.7	-4.1	-4.2
0.1	8.6						
192.649994	75.00	18	OCh	421	-22.6	-4.1	-4.2
0.1	8.1						
192.725006	75.00	-	ASE	445	-22.7	-4.0	-4.2
0.1	8.6						
192.800003	75.00	20	OCh	469	-22.7	-4.0	-4.1
0.1	7.9						
192.875000	75.00	-	ASE	493	-22.6	-4.0	-4.0
0.0	8.4						
192.949997	75.00	22	OCh	517	-22.6	-3.9	-4.1
0.1	7.6						
193.024994	75.00	-	ASE	541	-22.5	-3.9	-4.0
0.1	8.2						
193.100006	75.00	24	OCh	565	-22.7	-3.8	-4.0
0.1	7.5						
193.175003	75.00	-	ASE	589	-22.7	-3.8	-4.0
0.1	8.2						
193.250000	75.00	26	OCh	613	-22.5	-3.8	-3.9
0.1	7.2						
193.324997	75.00	-	ASE	637	-22.6	-3.8	-4.0
0.2	8.1						
193.399994	75.00	28	OCh	661	-22.7	-3.7	-3.9
0.1	7.2						
193.475006	75.00	-	ASE	685	-22.5	-3.7	-3.8
0.1	8.0						
193.550003	75.00	30	OCh	709	-22.7	-3.7	-3.8
0.1	7.0						
193.625000	75.00	-	ASE	733	-22.7	-3.6	-3.8
0.1	8.1						
193.699997	75.00	32	OCh	757	-22.7	-3.6	-3.7
0.1	6.7						
193.774994	75.00	-	ASE	781	-22.7	-3.5	-3.7
0.1	8.2						
193.850006	75.00	34	OCh	805	-22.7	-3.5	-3.7
0.1	6.6						
193.925003	75.00	-	ASE	829	-22.7	-3.5	-3.6
0.1	8.1						

194.000000	75.00	36	OCh	853	-22.8	-3.5	-3.7
0.2	6.6						
194.074997	75.00	-	ASE	877	-22.8	-3.4	-3.6
0.1	8.3						
194.149994	75.00	38	OCh	901	-22.7	-3.4	-3.5
0.1	10.9						
194.225006	75.00	-	ASE	925	-22.8	-3.3	-3.5
0.1	8.2						
194.300003	75.00	40	OCh	949	-22.9	-3.3	-3.5
0.1	7.1						
194.375000	75.00	-	ASE	973	-22.8	-3.3	-3.4
0.1	8.4						
194.449997	75.00	42	OCh	997	-22.9	-3.2	-3.5
0.2	7.3						
194.524994	75.00	-	ASE	1021	-22.9	-3.2	-3.4
0.1	8.4						
194.600006	75.00	44	OCh	1045	-22.8	-3.2	-3.3
0.1	7.2						
194.675003	75.00	-	ASE	1069	-22.8	-3.2	-3.3
0.1	8.4						
194.750000	75.00	46	OCh	1093	-22.9	-3.1	-3.4
0.2	7.3						
194.824997	75.00	-	ASE	1117	-22.8	-3.1	-3.2
0.1	8.2						
194.899994	75.00	48	OCh	1141	-22.8	-3.0	-3.3
0.2	6.9						
194.975006	75.00	-	ASE	1165	-22.9	-3.0	-3.2
0.1	8.3						
195.050003	75.00	50	OCh	1189	-22.8	-3.0	-3.1
0.1	6.6						
195.125000	75.00	-	ASE	1213	-22.9	-3.0	-3.1
0.1	8.3						
195.199997	75.00	52	OCh	1237	-22.9	-2.9	-3.1
0.1	6.3						
195.274994	75.00	-	ASE	1261	-23.0	-2.9	-3.0
0.1	8.1						
195.350006	75.00	54	OCh	1285	-23.1	-2.8	-3.0
0.1	6.4						
195.425003	75.00	-	ASE	1309	-23.2	-2.8	-3.0
0.1	8.3						
195.500000	75.00	56	OCh	1333	-23.1	-2.8	-2.9
0.1	6.2						
195.574997	75.00	-	ASE	1357	-23.4	-2.8	-3.0
0.2	8.2						
195.649994	75.00	58	OCh	1381	-23.4	-2.7	-2.9
0.1	6.4						
195.725006	75.00	-	ASE	1405	-23.4	-2.7	-2.8
0.1	8.5						
195.800003	75.00	60	OCh	1429	-23.6	-2.7	-2.8
0.1	6.6						
195.875000	75.00	-	ASE	1453	-23.7	-2.6	-2.9
0.2	8.7						
195.949997	75.00	62	OCh	1477	-23.7	-2.6	-2.8
0.2	6.9						
196.024994	75.00	-	ASE	1501	-23.6	-2.5	-2.7
0.1	9.0						
196.100006	75.00	64	OCh	1525	-23.7	-2.5	-2.7
0.1	7.1						

ASE - Noise Loaded Channel

OCh - Optical Channel

**show olc band-status**

# show olc band-status

Use the **show olc band-status** command to display the status of all the nodes in the controller.

## show olc band-status

*Table 4: Syntax Description*

This command has no keywords or arguments.
--

<b>Command Modes</b>	(config-olc-ots)
----------------------	------------------

<b>Command History</b>	<b>Release</b>	<b>Modification</b>
------------------------	----------------	---------------------

Cisco IOS XR Release 7.9.1	This command was introduced.	
----------------------------	------------------------------	--

## Example

The following example shows how to view the status of BFR on each node.

```
RP/0/RP0/CPU0#sh olc band-status
Tue Dec 13 10:45:30.594 UTC

Controller          : Ots0/0/0/0
Self-Band          : C-Band
BFR status         : Running

Node RID           : 10.1.1.1
Self IP Address    : 192.0.2.1
Self Controller     : Ots0/0/0/0
Partner IP address : 192.0.2.2
Partner Controller  : Ots0/0/0/0
Partner link status: UP
C-Band status      : ACTIVE
C-Band PSD         : Dual Band
L-Band status      : ACTIVE
L-Band PSD         : Dual Band

Node RID           : 10.1.1.2
Self IP Address    : 192.0.2.6
Self Controller     : Ots0/0/0/0
Partner IP address : 192.0.2.7
Partner Controller  : Ots0/0/0/2
Partner link status: UP
C-Band status      : ACTIVE
C-Band PSD         : Dual Band
L-Band status      : ACTIVE
L-Band PSD         : Dual Band

Node RID           : 10.1.1.3
Self IP Address    : 198.51.100.1
Self Controller     : Ots0/0/0/0
Partner IP address : 198.51.100.2
Partner Controller  : Ots0/0/0/2
Partner link status: UP
```

```

C-Band status      : ACTIVE
C-Band PSD        : Dual Band
L-Band status      : ACTIVE
L-Band PSD        : Dual Band

Node RID          : 10.1.1.4
Self IP Address   : 203.0.113.1
Self Controller    : Ots0/0/0/0
Partner IP address: 203.0.113.2
Partner Controller : Ots0/0/0/0
Partner link status: UP
C-Band status      : ACTIVE
C-Band PSD        : Dual Band
L-Band status      : ACTIVE
L-Band PSD        : Dual Band

Node RID          : 10.1.1.5
Self IP Address   : 203.0.113.45
Self Controller    : Ots0/0/0/0
Partner IP address: 203.0.113.46
Partner Controller : Ots0/0/0/0
Partner link status: UP
C-Band status      : ACTIVE
C-Band PSD        : Dual Band
L-Band status      : ACTIVE
L-Band PSD        : Dual Band

```

The following table describes the different fields that are displayed in the output of the *show olc band-status* command.

Status	Description
Controller	Name of the controller.
Self-Band	<p>Name of the band.</p> <p>Values:</p> <ul style="list-style-type: none"> <li>• C-Band</li> <li>• L-Band</li> <li>• None</li> </ul>
BFR status	<p>Status of BFR.</p> <p>Values:</p> <ul style="list-style-type: none"> <li>• Running</li> <li>• Paused</li> <li>• NA</li> </ul>
Node RID	Node router ID.
Self IP Address	<p>IP address of the current node on which the command is running.</p> <p><b>Note</b> This field displays NA if BFR is paused.</p>

**show olc band-status**

<b>Status</b>	<b>Description</b>
Self Controller	<p>Controller details of the current node on which the command is running.</p> <p><b>Note</b> This field displays <i>NA</i> if BFR is paused.</p>
Partner IP address	<p>IP address of the partner node that is connected to the self node in the <i>Node RID</i>. This IP address is used to communicate between the L-band and C-band device.</p> <p><b>Note</b> This field displays <i>NA</i> if BFR is paused.</p>
Partner Controller	<p>Controller details of the partner node.</p> <p><b>Note</b> This field displays <i>NA</i> if BFR is paused.</p>
Partner link status	<p>Connection status of the C and L band nodes.</p> <p>Values:</p> <ul style="list-style-type: none"> <li>• UP</li> <li>• DOWN</li> </ul> <p><b>Note</b> This field displays <i>NA</i> if BFR is paused.</p>
C-Band status	<p>C band node status.</p> <p>Valid values:</p> <ul style="list-style-type: none"> <li>• ACTIVE</li> <li>• FAILED</li> <li>• RECOVERING</li> <li>• NA</li> </ul> <p><b>Note</b> This field displays <i>NA</i> if BFR is paused.</p>
C-Band PSD	<p>The active PSD profile on the C-Band node.</p> <p>Valid values:</p> <ul style="list-style-type: none"> <li>• Dual Band</li> <li>• Single Band</li> </ul> <p><b>Note</b> This field displays <i>NA</i> if BFR is paused.</p>

Status	Description
L-Band status	<p>L band node status.</p> <p>Valid values:</p> <ul style="list-style-type: none"> <li>• ACTIVE</li> <li>• FAILED</li> <li>• RECOVERING</li> <li>• NA</li> </ul> <p><b>Note</b> This field displays <i>NA</i> if BFR is paused.</p>
L-Band PSD	<p>The active PSD profile on the L-Band node.</p> <p>Valid values:</p> <ul style="list-style-type: none"> <li>• Dual Band</li> <li>• Single Band</li> </ul> <p><b>Note</b> This field displays <i>NA</i> if BFR is paused.</p>

## show olc gain-estimator

Use the **show olc gain-estimator** command to view the gain estimation details.

**show olc gain-estimator { controller Ots R/S/I/P }**

<b>Syntax Description</b>	<p><b>R/S/I/P</b> Rack/Slot/Instance/Port of the OSC controller.</p>				
	<p><b>controller Ots</b> Use this parameter to view the information for a particular controller.</p>				
<b>Command Modes</b>	User EXEC mode				
<b>Command History</b>	<table border="1" data-bbox="372 1421 1024 1577"> <thead> <tr> <th data-bbox="372 1421 649 1453"><b>Release</b></th> <th data-bbox="649 1421 1024 1453"><b>Modification</b></th> </tr> </thead> <tbody> <tr> <td data-bbox="372 1463 649 1577">Cisco IOS XR Release 7.7.1</td> <td data-bbox="649 1463 1024 1577">This command was introduced.</td> </tr> </tbody> </table>	<b>Release</b>	<b>Modification</b>	Cisco IOS XR Release 7.7.1	This command was introduced.
<b>Release</b>	<b>Modification</b>				
Cisco IOS XR Release 7.7.1	This command was introduced.				

### Example

The following output is a sample of the **show olc gain-estimator** command.

```
RP/0/RP0/CPU0:ios#show olc gain-estimator
Thu May 12 09:30:39.987 UTC
Controller : Ots0/0/0/0
Egress Gain Estimator Status : IDLE
Egress Estimated Gain : 25.9 dB
```

**show olc link-tuner**

```

Egress Estimated Gain Mode      : Extended
Egress Gain Estimation Timestamp : 2022-05-07 09:16:53

Controller                      : Ots0/0/0/2
Egress Gain Estimator Status    : IDLE
Egress Estimated Gain           : 11.7 dB
Egress Estimated Gain Mode     : Normal
Egress Gain Estimation Timestamp : 2022-05-07 10:13:53

```

The following output is a sample of the **show olc gain-estimator controller ots R/S/I/P** command.

```

RP/0/RP0/CPU0:ios#show olc gain-estimator controller Ots 0/0/0/0
Fri Jun 10 05:47:21.119 UTC
Controller                      : Ots0/0/0/0
Ingress Gain Estimator Status   : IDLE
Ingress Estimated Gain          : 21.7 dB
Ingress Estimated Gain Mode    : Normal
Ingress Gain Estimation Timestamp : 2022-06-10 05:46:48

```

## show olc link-tuner

To view link tuner status and PSD computation information, use **show olc link-tuner** command.

**show olc link-tuner { detail } { { controller Ots R/S/I/P } }**

<b>Syntax Description</b>	<b>detail</b> Displays link tuner status, PSD computation information, and computed total noise. <b>R/S/I/P</b> Rack/Slot/Instance/Port of the OSC controller. <b>controller Ots</b> Use this parameter to view the information for a particular controller.				
<b>Command Modes</b>	User EXEC mode				
<b>Command History</b>	<table border="1"> <thead> <tr> <th><b>Release</b></th> <th><b>Modification</b></th> </tr> </thead> <tbody> <tr> <td>Cisco IOS XR Release 7.7.1</td> <td>This command was introduced.</td> </tr> </tbody> </table>	<b>Release</b>	<b>Modification</b>	Cisco IOS XR Release 7.7.1	This command was introduced.
<b>Release</b>	<b>Modification</b>				
Cisco IOS XR Release 7.7.1	This command was introduced.				

### Example

The following sample is an output of **show olc link-tuner** command.

```

RP/0/RP0/CPU0:ios#show olc link-tuner
Controller          : Ots0/0/0/0
Link Tuner Status   : OPERATIONAL
Last PSD computation: 2022-05-06 10:59:51
-----
Setpoint            : Computed PSD
                     (dBm/12.5 GHz)
-----
01                 -5.7
02                 -5.6
03                 -5.6
04                 -5.5
05                 -5.5

```

06	-5.4
07	-5.4
08	-5.3
09	-5.3
10	-5.2
11	-5.2
12	-5.1
13	-5.1
14	-5.0
15	-5.0
16	-4.9
17	-4.9
18	-4.8
19	-4.8
20	-4.7
21	-4.7
22	-4.6
23	-4.6
24	-4.5
25	-4.4
26	-4.4
27	-4.3
28	-4.3
29	-4.2
30	-4.2
31	-4.1
32	-4.1
33	-4.0

The following sample is an output of **show olc link-tuner detail** command.

```
RP/0/RP0/CPU0:ios#show olc link-tuner detail
Controller      : Ots0/0/0/0
Link Tuner Status : OPERATIONAL
Last PSD computation: 2022-05-06 10:59:51
Computed Total Noise: -35.4 dB
-----
Setpoint       : Computed PSD
(dBm/12.5 GHz)
-----
01            -5.7
02            -5.6
03            -5.6
04            -5.5
05            -5.5
06            -5.4
07            -5.4
08            -5.3
09            -5.3
10            -5.2
11            -5.2
12            -5.1
13            -5.1
14            -5.0
15            -5.0
16            -4.9
17            -4.9
18            -4.8
19            -4.8
20            -4.7
21            -4.7
22            -4.6
23            -4.6
24            -4.5
25            -4.4
```

**show olc otdr-status**

```

26          -4.4
27          -4.3
28          -4.3
29          -4.2
30          -4.2
31          -4.1
32          -4.1
33          -4.0

```

## show olc otdr-status

Use the **show olc otdr-status** command to display the status of OTDR scan.

**show olc otdr-status [ details ]**

<b>Syntax Description</b>	<b>details</b> Displays detailed OTDR scan status information.				
<b>Command Modes</b>	Controller configuration mode				
<b>Command History</b>	<table border="1"> <thead> <tr> <th><b>Release</b></th> <th><b>Modification</b></th> </tr> </thead> <tbody> <tr> <td>Cisco IOS XR Release 7.11.1</td> <td>This command was introduced.</td> </tr> </tbody> </table>	<b>Release</b>	<b>Modification</b>	Cisco IOS XR Release 7.11.1	This command was introduced.
<b>Release</b>	<b>Modification</b>				
Cisco IOS XR Release 7.11.1	This command was introduced.				

### Example

The following sample displays the results of Raman Turn-up evaluation for Go-condition.

```

RP/0/RP0/CPU0:IOS#show olc otdr-status
Thu Nov  2 10:35:29.338 UTC

Controller                      : Ots0/0/0/0
Auto-scan Start Time           : 2023-11-02 10:32:56
OTDR Auto-scan Status          : COMPLETED
Status Detail                  : Completed on Span Up
Raman Turn Up Fiber Check   : Success
Optical Span Status            : Up
Trigger Event                  : Span Restore

RP/0/RP0/CPU0:IOS#show olc otdr-status details
Thu Nov  2 10:35:37.969 UTC

Controller                      : Ots0/0/0/0
Auto-scan Start Time           : 2023-11-02 10:32:56
OTDR Auto-scan Status          : COMPLETED
Status Detail                  : Completed on Span Up
Raman Turn Up Fiber Check   : Success
Optical Span Status            : Up
Trigger Event                  : Span Restore
Last Raman Turn Up Scan Time  : 2023-11-02 10:32:56
Last Raman Turn Up Fiber Check: Success
Last Trigger Event             : Span Restore

Critical Distance (m)          : 10200.00
Raman Turn Up Relaxation Factor (%): 40
Total Events detected          : 0

```

**NO-GO Events List**

Event Type Legend: NR:Non-Reflective R:Reflective FE:Fiber-End ER:Excess-Reflection  
EA:Excess-Attenuation

Event# (dB)	Detected Event(s)   Min Relaxation Factor (%)	Location (m)	Accuracy (m)	Magnitude
----------------	--	--------------	--------------	-----------

The following samples display the various status of OTDR automatic scan during span fault:

```
RP/0/RP0/CPU0:ios#show olc otdr-status details
Mon Sep 18 13:16:16.461 UTC
Controller : Ots0/0/0/0
Auto-scan Start Time : NA
OTDR Auto-scan Status : RUNNING
Status Detail : Starting on Span Down
Optical Span Status : Down
Trigger Event : Span Fault
Last Trigger Event : Span Restore

RP/0/RP0/CPU0:ios#show olc otdr-status details
Mon Sep 18 13:16:33.304 UTC
Controller : Ots0/0/0/0
Auto-scan Start Time : 2023-09-18 13:16:27
OTDR Auto-scan Status : RUNNING
Status Detail : Waiting Scan Completion on Span Down
Optical Span Status : Down
Trigger Event : Span Fault
Last Trigger Event : Span Restore

RP/0/RP0/CPU0:ios#show olc otdr-status details
Mon Sep 18 13:18:54.154 UTC
Controller : Ots0/0/0/0
Auto-scan Start Time : 2023-09-18 13:16:27
OTDR Auto-scan Status : COMPLETED
Status Detail : Completed on Span Down
Optical Span Status : Down
Trigger Event : Span Fault
Last Trigger Event : Span Fault
```

## show olc raman-tuning

To view the Raman tuning status using **show olc raman-tuning** command.

**show olc raman-tuning { controller Ots R/S/I/P }**

---

**Syntax Description**

**R/S/I/P** Rack/Slot/Instance/Port of the OSC controller.

**controller Ots** Use this parameter to view the information for a particular controller.

---

**Command Modes**

User EXEC mode

**show olc span-loss**

Command History	Release	Modification
	Cisco IOS XR Release 7.7.1	This command was introduced.

### Example

The following sample is an output of the **show olc raman-tuning** command.

```
RP/0/RP0/CPU0:ios#sh olc raman-tuning
Fri Apr 1 06:38:34.330 UTC

Controller : Ots0/0/0/0
Raman-Tuning Status : TUNED
Tuning Complete Timestamp : 2022-04-01 05:49:30.407029
Estimated Max Possible Gain : 21.7 dB
Raman Gain Target : 14.7 dB
Gain Achieved on Tuning Complete : 14.6 dB
```

The following sample is an output of the **show olc raman-tuning controller ots r/s/i/p** command.

```
RP/0/RP0/CPU0:ios#sh olc raman-tuning controller ots 0/0/0/0
Fri Apr 1 06:42:49.538 UTC

Controller : Ots0/0/0/0
Raman-Tuning Status : TUNED
Tuning Complete Timestamp : 2022-04-01 05:50:19.934044
Estimated Max Possible Gain : 21.1 dB
Raman Gain Target : 18.0 dB
Gain Achieved on Tuning Complete : 18.1 dB
```

## show olc span-loss

Use the **show olc span-loss** command to view the Tx span loss and Rx span loss.

**show olc span-loss { controller Ots R/S/I/P }**

<b>Syntax Description</b>	<i>R/S/I/P</i> Rack/Slot/Instance/Port of the OSC controller.				
	<b>controller Ots</b> Use this parameter to view the span loss for a particular controller.				
<b>Command Modes</b>	User EXEC mode				
<b>Command History</b>	<table border="1"> <thead> <tr> <th>Release</th> <th>Modification</th> </tr> </thead> <tbody> <tr> <td>Cisco IOS XR Release 7.7.1</td> <td>This command was introduced.</td> </tr> </tbody> </table>	Release	Modification	Cisco IOS XR Release 7.7.1	This command was introduced.
Release	Modification				
Cisco IOS XR Release 7.7.1	This command was introduced.				

### Example 1

This example shows the span loss values on a Raman span.

```
RP/0/RP0/CPU0:ios#show olc span-loss

Controller name : Ots0/0/0/0
Neighbour RID   : 10.1.1.2
Apparent Rx Span Loss : 21.1 dB

Rx Span Loss (with pumps off) : NA
Rx Span Loss (with pumps off) measured at : 2024-09-02 07:42:56
Estimated Rx Span Loss : NA
Apparent Tx Span Loss : 20.8 dB

Tx Span Loss (with pumps off) : NA
Tx Span Loss (with pumps off) measured at : 2024-09-02 07:42:56
Estimated Tx Span Loss : NA
```

### Example 2

This example shows the span loss values on a non-Raman span.

```
RP/0/RP0/CPU0:ios#show olc span-loss

Controller name : Ots0/0/0/0
Neighbour RID   : 10.1.1.2
Rx Span Loss    : 21.1 dB

Rx Span Loss (with pumps off) : NA
Estimated Rx Span Loss : NA
Tx Span Loss      : 20.8 dB
Tx Span Loss (with pumps off) : NA
Estimated Tx Span Loss : NA
```

## show platform

To display information and status for each node in the network, use the **show platform** command in the XR EXEC mode.

### Show platform

<b>Syntax Description</b>	<b>show platform</b>	Displays the status of the node
<b>Command Default</b>	None	
<b>Command Modes</b>	XR EXEC mode	
<b>Command History</b>	<b>Release</b>	<b>Modification</b>
	Release 7.7.1	This command was introduced.
<b>Usage Guidelines</b>	None	

**show tcp dump-file****Example**

To view the information of the node, use the following command:

```
RP/0/RP0/CPU0:R3#sh platform
Wed May 11 15:58:41.627 UTC
Node          Type           State        Config state
-----
0/RP0/CPU0    NCS1010-CNTLR-K9(Active)  IOS XR RUN   NSHUT,NMON
0/PM0         NCS1010-AC-PSU          OPERATIONAL  NSHUT,NMON
0/PM1         NCS1010-AC-PSU          OPERATIONAL  NSHUT,NMON
0/FT0         NCS1010-FAN           OPERATIONAL  NSHUT,NMON
0/FT1         NCS1010-FAN           OPERATIONAL  NSHUT,NMON
0/0/NXR0      NCS1K-OLT-R-C          OPERATIONAL  NSHUT,NMON
0/2           NCS1K-BRK-SA          OPERATIONAL  NSHUT,NMON
0/2/0         NCS1K-BRK-8           OPERATIONAL  NSHUT,NMON
0/2/1         NCS1K-BRK-16          OPERATIONAL  NSHUT,NMON
0/2/2         NCS1K-BRK-24          OPERATIONAL  NSHUT,NMON
0/2/3         NCS1K-BRK-24-SIM       OPERATIONAL  NSHUT,NMON
```

## show tcp dump-file

To display the details of the PCB state from a dump file, use the **show tcp dump-file** command in EXEC mode.

```
show tcp dump-file { dump-file-name | | all | | list | { ipv4-address-of-dumpfiles | 
ipv6-address-of-dumpfiles | | all } } { location node-id }
```

**Syntax Description**

**all** Displays all connections information.

**location node-id** Displays RAW statistics for the designated node. The *node-id* argument is entered in the *rack/slot/module* notation.

**Command Default**

No default behavior or values

**Command Modes**

EXEC

**Command History**

Release	Modification
---------	--------------

Release R24.2.1	This command was introduced.
--------------------	------------------------------

**Usage Guidelines**

The basic use of this command is to provide information about the list of all TCP dump files, details of any specific or all TCP dumpfile file. You can also use this command for debugging purpose or to monitor the flow of TCP packets for a TCP connection.

**Task ID**

Task ID	Operations
---------	------------

transport read
----------------

**Examples**

The following is sample output from the **show tcp dumpfile all location 0/RP0/CPU0** command:

```
RP/0/RP0/CPU0:ios# show tcp dumpfile list all location 0/RP0/CPU0
total 4
-rw-r--r-- 1 rpathark eng 3884 May 11 20:16 80_80_80_80.26355.179.cl.15892
```

## show version

To display the software version and details such as system uptime, use the **show version** command.

**show version ]**

<b>Syntax Description</b>	This command has no keywords or arguments.				
<b>Command Default</b>	The software version and details such as system uptime are displayed for all the nodes in the system.				
<b>Command Modes</b>	Cisco IOS XR				
<b>Command History</b>	<table border="1"> <thead> <tr> <th>Release</th> <th>Modification</th> </tr> </thead> <tbody> <tr> <td>7.7.1</td> <td>This command was introduced.</td> </tr> </tbody> </table>	Release	Modification	7.7.1	This command was introduced.
Release	Modification				
7.7.1	This command was introduced.				
<b>Usage Guidelines</b>	Enter the <b>show version</b> command to display the software version, build information and system uptime.				

**Example**

The following example shows a sample output from the **show version** command.

```
sysadmin-vm:0_RP0# show version
Thu Apr 28 05:47:48.980 UTC
Cisco IOS XR Software, Version 7.7.1.19I LNT
Copyright (c) 2013-2022 by Cisco Systems, Inc.

Build Information:
Built By      : ingunawa
Built On      : Tue Apr 12 18:27:51 UTC 2022
Build Host    : iox-lnx-109
Workspace    : /auto/iox-lnx-109-san1/prod/7.7.1.19I.SIT_IMAGE/ncs1010/ws
Version       : 7.7.1.19I
Label         : 7.7.1.19I-PROD_BUILD_7_7_1_19I_SIT_IMAGE

cisco NCS1010 (C3758 @ 2.20GHz)
cisco NCS1010-SA (C3758 @ 2.20GHz) processor with 32GB of memory
ios uptime is 2 minutes
NCS 1010 - Chassis
```

**span-length**

## span-length

To configure span length, use the **span-length** command.

**span-length** *length*

---

<b>Syntax Description</b>	<i>length</i> Span length in 0.1 km. Range: 1-2000
---------------------------	--

---

<b>Command Modes</b>	(config-olc-ots)
----------------------	------------------

---

<b>Command History</b>	<b>Release</b>	<b>Modification</b>
------------------------	----------------	---------------------

---

Cisco IOS XR Release 7.7.1	This command was introduced.
----------------------------	------------------------------

---

### Example

The following example is a sample configuration that configures span-length to 10 km.

```
RP/0/RP0/CPU0:ios#configure
RP/0/RP0/CPU0:ios(config)#optical-line-control
RP/0/RP0/CPU0:ios(config-olc)#controller ots 0/0/0/0
RP/0/RP0/CPU0:ios(config-olc-ots)#span-length 100
RP/0/RP0/CPU0:ios(config-olc-ots)#commit
RP/0/RP0/CPU0:ios(config-olc-ots)#end
```

## span-loss

To configure the span loss thresholds, use the **span-loss** command.

**span-loss** **min | max** *threshold*

---

<b>Syntax Description</b>	<b>max</b> Sets the maximum span loss threshold.
---------------------------	--

---

<b>min</b>	Sets the minimum span loss threshold.
------------	---------------------------------------

---

<b>threshold</b>	The threshold is set within the range of 0.0 to 42.0 dB, in increments of 0.1 dB. If the threshold value is configured to 42 dB, the actual span loss value is 4.2 dB.
------------------	--

---



---

<b>Command Modes</b>	(config-olc-ots)
----------------------	------------------

---

<b>Command History</b>	<b>Release</b>	<b>Modification</b>
------------------------	----------------	---------------------

---

Cisco IOS XR Release 7.7.1	This command was introduced.
----------------------------	------------------------------

---

**Example 1**

This example sets the span loss minimum threshold to 14 dB and the maximum threshold to 35 dB.

```
RP/0/RP0/CPU0:ios#configure
RP/0/RP0/CPU0:ios(config)#optical-line-control
RP/0/RP0/CPU0:ios(config-olc)#controller ots 0/0/0/0
RP/0/RP0/CPU0:ios(config-olc-ots)#span-loss max 350
RP/0/RP0/CPU0:ios(config-olc-ots)#span-loss min 140
RP/0/RP0/CPU0:ios(config-olc-ots)#commit
RP/0/RP0/CPU0:ios(config-olc-ots)#end
```

## tcp dump-file convert

Use the **tcp dump-file convert** command in EXEC mode to convert the TCP dump packet traces files to other readable formats such as pcap, text, or both.

```
tcp dump-file convert {pcap | text | all-formats} {all | binary_file_name | ipaddress} location {node-id} file {absolute file path}
```

<b>Syntax Description</b>	<p><b>pcap</b> Converts TCP dump packet files to packet capture (pcap) format.</p> <p><b>text</b> Converts TCP dump packet traces files to text format.</p> <p><b>all-format</b> Converts TCP dump packet traces files to both pcap and text format.</p> <p><b>all</b> Collects TCP dump file data from all peers and nodes.</p> <p><b>binary_file_name</b> Specifies the name of the dump file to be converted.</p> <p><b>ipaddress</b> Specifies the IP address of the peer node.</p> <p><b>location {node-id}</b> (Optional) Specifies the node to store the converted TCP dump file. The <i>node-id</i> is entered in the <i>rack/slot/module</i> notation, for example <b>location 0/RP0/CPU0</b>. By default, the files are stored in the current node where the CLI command is executed.</p> <p><b>file {absolute file path }</b> (Optional) Specifies the absolute file path where you want to store the converted TCP dump files. The file path is entered in the <i>node/filename</i> notation, for example <i>/harddisk:/demo1</i>. By default, the converted files are stored inside the file "decoded_dumpfiles" in the current node where the CLI command is executed or if you have provided the location the files are stored in that location.</p>				
<b>Command Default</b>	By default, the converted files are stored inside the <i>decoded_dumpfiles</i> file.				
<b>Command Modes</b>	EXEC				
<b>Command History</b>	<table border="1"> <thead> <tr> <th><b>Release</b></th><th><b>Modification</b></th></tr> </thead> <tbody> <tr> <td>Release R24.2.1</td><td>This command was introduced.</td></tr> </tbody> </table>	<b>Release</b>	<b>Modification</b>	Release R24.2.1	This command was introduced.
<b>Release</b>	<b>Modification</b>				
Release R24.2.1	This command was introduced.				

**tone-pattern controller**

**Usage Guidelines** Use this command to convert TCP dump packet traces files into text, pcap, or both readable formats.

**Task ID****Task ID Operations**

transport read,  
write

**Examples**

The following example shows how to convert TCP packet traces files into text and pcap readable formats:

```
RP/0/RP0/CPU0:ios# tcp dump-file convert all-formats all
ascii file is saved at :
/harddisk:/decoded_dumpfiles/text_tcpdump_peer_all_node0_RP0_CPU0_2024_3_19_10_8_53.462070.txt
pcap file is saved at :
/harddisk:/decoded_dumpfiles/pcap_tcpdump_peer_all_node0_RP0_CPU0_2024_3_19_10_8_40.154838.pcap
[OK]
```

The following example shows how to filter TCP dump packet traces by IP address and convert them into text and pcap readable format:

```
RP/0/RP0/CPU0:ios# tcp dump-file convert all-formats ipaddress 192.0.2.121
ascii file is saved at :
/harddisk:/decoded_dumpfiles/text_tcpdump_peer_1_1_1_2_node0_RSP0_CPU0_2024_3_19_10_9_20.539021.txt
pcap file is saved at :
/harddisk:/decoded_dumpfiles/pcap_tcpdump_peer_1_1_1_2_node0_RSP0_CPU0_2024_3_19_10_9_20.539021.pcap
[OK]
```

The following example specifies a location where you want to store the converted TCP dump file:

```
RP/0/RP0/CPU0:ios# tcp dump-file convert all-formats all location 0/RP0/CPU0
ascii file is saved at :
/harddisk:/decoded_dumpfiles/text_tcpdump_peer_all_node0_RP0_CPU0_2024_3_19_12_53_35.12323.txt
pcap file is saved at :
/harddisk:/decoded_dumpfiles/pcap_tcpdump_peer_all_node0_RP0_CPU0_2024_3_19_12_53_35.12323.pcap
[OK]
```

The following example specifies the absolute file path where you want to store the converted TCP dump files:

```
RP/0/RP0/CPU0:ios# tcp dump-file convert text all file /harddisk:/demo2
ascii file is saved at : /harddisk:/demo2.txt
[OK]
```

## tone-pattern controller

Use the **tone-pattern controller** command to start or stop initiating the tone pattern from the OTS controller.

**tone-pattern controller ots R/S/I/P [ start | stop ]**

**Syntax Description**

**tone-pattern controller ots** Use this parameter to stop or start the tone pattern operation in the OTS controller.

**R/S/I/P** Rack/Slot/Instance/Port of the OTS controller.

**start** Use this parameter to start the tone-pattern operation in the OTS controller.

	<b>stop</b>	Use this parameter to stop the tone-pattern operation in the OTS controller.
<b>Command Default</b>	None	
<b>Command Modes</b>	controller configuration mode	
<b>Command History</b>	<b>Release</b>	<b>Modification</b>
	Cisco IOS XR Release 7.7.1	This command was introduced.
<b>Usage Guidelines</b>	None	

**Example**

The following is a sample configuration of the **tone-pattern controller ots** command that starts the tone pattern on port 2 OTS controller.

```
RP/0/RP0/CPU0:ios#tone-pattern controller ots 0/0/0/2 start
Wed May 25 12:00:03.271 UTC
Tone pattern started
```

The following is a sample configuration of the **tone-pattern controller ots** command that stops the tone pattern on port 2 OTS controller.

```
RP/0/RP0/CPU0:ios#tone-pattern controller ots 0/0/0/2 stop
Wed May 25 12:00:03.271 UTC
Tone pattern detect started
```

## tone-pattern-detect controller

Use the **tone-pattern-detect controller** command to start or stop detecting the tone pattern that is initiated from the OTS controller.

**tone-pattern-detect controller** *controllertype R/S/I/P* [ **start** | **stop** ]

<b>Syntax Description</b>	<b>tone-pattern-detect controller</b>	Use this parameter to stop or start the tone-pattern detect operation in a particular controller.
	<i>controllertype R/S/I/P</i>	Rack/Slot/Instance/Port of the controller.
	<b>start</b>	Use this parameter to start the tone-pattern detect operation in a particular controller.
	<b>stop</b>	Use this parameter to stop the tone-pattern detect operation in a particular controller.
<b>Command Default</b>	None	
<b>Command Modes</b>	controller configuration mode	

**upgrade hw-module**

Command History	Release	Modification
	Cisco IOS XR Release 7.7.1	This command was introduced.

Usage Guidelines	None
------------------	------

**Example**

The following is a sample configuration of the **tone-pattern-detect controller** command that starts the tone pattern detection on port 2 OTS controller.

```
RP/0/RP0/CPU0:ios#tone-pattern-detect controller ots 0/0/0/2 start
Wed May 25 12:00:03.271 UTC
Tone pattern detect started
```

The following is a sample configuration of the **tone-pattern-detect controller** command that starts the tone pattern detection on port 2 OMS controller.

```
RP/0/RP0/CPU0:ios#tone-pattern-detect controller oms 0/0/0/2 start
Wed May 25 12:00:03.271 UTC
Tone pattern detect started
```

The following is a sample configuration of the **tone-pattern-detect controller** command that starts the tone pattern detection on port 2 OCH controller.

```
RP/0/RP0/CPU0:ios#tone-pattern-detect controller och 0/0/0/2 start
Wed May 25 12:00:03.271 UTC
Tone pattern detect started
```

The following is a sample configuration of the **tone-pattern-detect controller** command that stops the tone pattern detection on port 2 OTS controller.

```
RP/0/RP0/CPU0:ios#tone-pattern-detect controller ots 0/0/0/2 stop
Wed May 25 12:00:03.271 UTC
Tone pattern detect started
```

The following is a sample configuration of the **tone-pattern-detect controller** command that stops the tone pattern detection on port 2 OMS controller.

```
RP/0/RP0/CPU0:ios#tone-pattern-detect controller oms 0/0/0/2 stop
Wed May 25 12:00:03.271 UTC
Tone pattern detect started
```

The following is a sample configuration of the **tone-pattern-detect controller** command that stops the tone pattern detection on port 2 OCH controller.

```
RP/0/RP0/CPU0:ios#tone-pattern-detect controller och 0/0/0/2 stop
Wed May 25 12:00:03.271 UTC
Tone pattern detect started
```

## upgrade hw-module

To upgrade a specific FPD, all the FPDs, or the FPDs belonging to a specific location, use the **upgrade-hw-module** command in Cisco IOS XR mode.

**upgrade hw-module [location [ location-id | all]] [fpd [ fpd-name ] | all]**

<b>Syntax Description</b>	<b>location [location-id   all]</b> Upgrades the FPDs belonging to a specific location.				
	<b>fpd [fpd-name   all]</b> Upgrades a specific FPD or all the FPDs.				
<b>Command Default</b>	None				
<b>Command Modes</b>	Cisco IOS XR				
<b>Command History</b>	<table border="1"> <thead> <tr> <th><b>Release</b></th> <th><b>Modification</b></th> </tr> </thead> <tbody> <tr> <td>Release 7.7.1</td> <td>This command was introduced.</td> </tr> </tbody> </table>	<b>Release</b>	<b>Modification</b>	Release 7.7.1	This command was introduced.
<b>Release</b>	<b>Modification</b>				
Release 7.7.1	This command was introduced.				

**Example**

The following example shows how to upgrade IoFpga FPD.

```
RP/0/RP0/CPU0:ios# upgrade hw-module location 0/Rack fpd IoFpga
```

## ztp clean

To remove all Zero Touch Provisioning (ZTP) logs and settings that are saved on the node, use the ztp clean command in EXEC mode.

**ztp clean**

<b>Syntax Description</b>	This command has no keywords or arguments.				
<b>Command Default</b>	None				
<b>Command Modes</b>	Cisco IOS XR Configuration				
<b>Command History</b>	<table border="1"> <thead> <tr> <th><b>Release</b></th> <th><b>Modification</b></th> </tr> </thead> <tbody> <tr> <td>Release 7.7.1</td> <td>This command was introduced.</td> </tr> </tbody> </table>	<b>Release</b>	<b>Modification</b>	Release 7.7.1	This command was introduced.
<b>Release</b>	<b>Modification</b>				
Release 7.7.1	This command was introduced.				
<b>Usage Guidelines</b>	None				

To remove all the ZTP logs and saved settings use the following command.

```
RP/0/RP0/CPU0:ios#ztp clean
Fri Apr 29 06:49:29.760 UTC
This would remove all ZTP temporary files.
Would you like to proceed? [no]: yes
All ZTP operation files have been removed.
ZTP logs are present in /var/log/ztp*.log for logrotate.
```

**ztp initiate**

Please remove manually if needed.  
If you now wish ZTP to run again from boot, do 'conf t/commit replace' followed by reload.

## **ztp initiate**

To remove all Zero Touch Provisioning (ZTP) logs and settings that are saved on the node, use the ztp clean command in EXEC mode.

**ztp clean**

<b>Syntax Description</b>	This command has no keywords or arguments.				
<b>Command Default</b>	None				
<b>Command Modes</b>	Cisco IOS XR Configuration				
<b>Command History</b>	<table border="1"> <thead> <tr> <th><b>Release</b></th> <th><b>Modification</b></th> </tr> </thead> <tbody> <tr> <td>7.7.1</td> <td>This command was introduced.</td> </tr> </tbody> </table>	<b>Release</b>	<b>Modification</b>	7.7.1	This command was introduced.
<b>Release</b>	<b>Modification</b>				
7.7.1	This command was introduced.				
<b>Usage Guidelines</b>	None				

**Example**

To initiate the ZTP use the following command.

```
RP/0/RP0/CPU0:ios#ztp initiate
Fri Jun 17 11:44:08.791 UTC
Initiating ZTP may change your configuration.
Interfaces might be brought up if they are in shutdown state
Would you like to proceed? [no]: yes
ZTP will now run in the background.
Please use "show logging" or look at /var/log/ztp.log to check progress.
RP/0/RP0/CPU0:ios#
```

## **ztp terminate**

To terminate all existing Zero Touch Provisioning (ZTP) processes, use the ztp terminate command in EXEC mode.

**ztp terminate**

<b>Syntax Description</b>	This command has no keywords or arguments.
<b>Command Default</b>	None
<b>Command Modes</b>	Cisco IOS XR Configuration

Command History	Release	Modification
	Release 7.7.1	This command was introduced.

Usage Guidelines	None
------------------	------

### Example

To terminate the ZTP process use the following command.

```
RP/0/RP0/CPU0:ios#ztp terminate
Fri Apr 29 06:38:59.238 UTC
This would terminate active ZTP session if any (this may leave your system in a partially
configured
state)
Would you like to proceed? [no]: yes
Terminating ZTP
No ZTP process running
```

ztp terminate