



## **Cisco Cyber Vision Network Sensor Installation Guide for Cisco IR1101, Release 4.2.0**

**First Published:** 2019-01-01

**Last Modified:** 2023-06-05

### **Americas Headquarters**

Cisco Systems, Inc.  
170 West Tasman Drive  
San Jose, CA 95134-1706  
USA  
<http://www.cisco.com>  
Tel: 408 526-4000  
800 553-NETS (6387)  
Fax: 408 527-0883





## CONTENTS

---

<b>CHAPTER 1</b>	<b>About this documentation</b>	<b>1</b>
	Document purpose	1
	Warnings and notices	1

---

<b>CHAPTER 2</b>	<b>Overview</b>	<b>3</b>
	Overview	3

---

<b>CHAPTER 3</b>	<b>Requirements</b>	<b>5</b>
	Requirements	5

---

<b>CHAPTER 4</b>	<b>Hardware front view</b>	<b>7</b>
	Hardware front view	7

---

<b>CHAPTER 5</b>	<b>Known issues</b>	<b>9</b>
------------------	---------------------	----------

---

<b>CHAPTER 6</b>	<b>Initial configuration</b>	<b>11</b>
	Check the software version	11
	Check date and time	11
	Enable IOx	12
	Setup ERSPAN	13
	Setup NAT	14

---

<b>CHAPTER 7</b>	<b>Procedure with the Cisco Cyber Vision sensor management extension</b>	<b>17</b>
	Install the sensor management extension	17
	Management jobs	18
	Create a sensor	19

Configure the sensor 20

---

**CHAPTER 8**

**Procedure with the Local Manager 23**

- Access the IOx Local Manager 23
- Install the sensor virtual application 25
- Configure the sensor virtual application 26
- Generate the provisioning package 32
- Import the provisioning package 34

---

**CHAPTER 9**

**Procedure with the CLI 37**

- Configure the sensor application 37
  - without SSD 37
  - with SSD 38
- Install the sensor application 38
- Copy the sensor application's provisioning package 39

---

**CHAPTER 10**

**Upgrade procedures 41**

- Upgrade through the Cisco Cyber Vision sensor management extension 41
  - Update the sensor management extension 41
  - Update the sensors 42
- Upgrade through the IOx Local Manager 44



# CHAPTER 1

## About this documentation

---

- [Document purpose, on page 1](#)
- [Warnings and notices, on page 1](#)

### Document purpose

This installation guide describes how to perform a clean installation of Cisco Cyber Vision on a Cisco IR1101 and how to upgrade a Cisco IR1101 sensor through different methods.

This documentation is applicable to **system version 4.1.0** and later.



---

**Note** To be able to use the Cisco Cyber Vision sensor management extension, an IP address reachable by the Center Collection interface must be set on the Collection VLAN.

---

### Warnings and notices

This manual contains notices you have to observe to ensure your personal safety as well as to prevent damage to property.

The notices referring to your personal safety and to your property damage are highlighted in the manual by a safety alert symbol described below. These notices are graded according to the degree of danger.



---

**Warning** Indicates risks that involve industrial network safety or production failure that could possibly result in personal injury or severe property damage if proper precautions are not taken.

---



---

**Important** Indicates risks that could involve property or Cisco equipment damage and minor personal injury if proper precautions are not taken.

---



---

**Note** Indicates important information on the product described in the documentation to which attention should be paid.

---



## CHAPTER 2

### Overview

---

- [Overview, on page 3](#)

### Overview

The architecture proposed and described in this document is for demonstration. The local network engineer should be consulted before applying the parameters used in this document. IP addresses, port numbers and VLAN IDs used should be verified beforehand as wrong configurations could stop normal exchanges and stop the process.


The schema below explains the architecture virtually deployed in the router to embed the sensor application. VLAN and physical ports configuration will allow OT traffic to be copied and communication with the Cisco Cyber Vision Center to be established.

The communication between the Cisco Cyber Vision Center and the sensor is represented in black on the schema. Mirrored OT traffic is represented in yellow.

Any port of the router can be used for the communication with the Center.

Only the routed traffic to the port gi0/0/0 can be spanned to the sensor.

Figure 1: Cisco IR1101 Integrated Services Router Rugged:

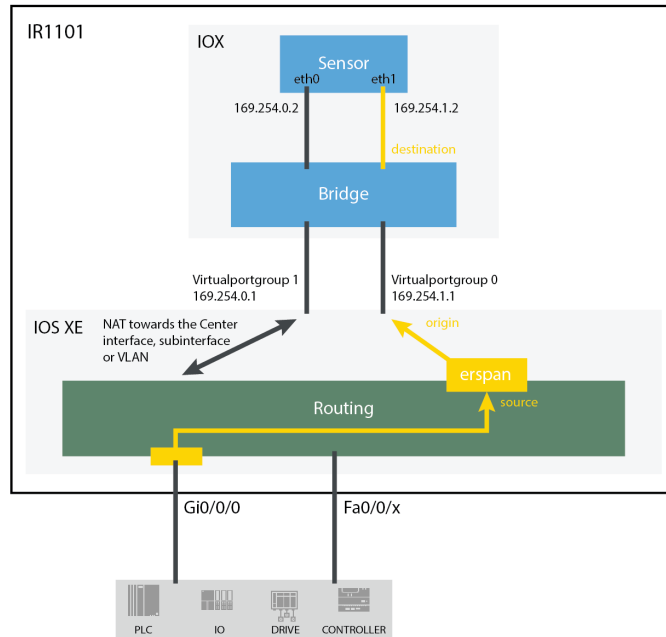

The sensor can be installed on the Cisco IR1101 with different disk configurations: on a SSD, or on the flash if there is no SSD.

SD card is not supported and will be ignored.

In case the sensor management extension is used and if a SSD is detected, Cisco Cyber Vision will be automatically deployed on it. If there is none, the application will be installed on the flash memory.

For other deployment modes (IOx Local Manager or CLI), the procedures describe how the installation is done for both cases.





## CHAPTER 3

# Requirements

---

- [Requirements, on page 5](#)

## Requirements

The Cisco IR1101 needs to be configured with access to the CLI (ssh or console port). An access to the IOx Local Manager could be necessary depending on the installation procedure chosen.

To be able to use the Cisco Cyber Vision sensor management extension, it has to be deployed on the Center and an IP address reachable by the Center Collection interface must be set on the device.

In case of manual installation (IOx Local Manager or CLI), the Cisco Cyber Vision Sensor application must be collected from Cisco.com, i.e.

```
CiscoCyberVision-sensor-IOx-aarch64-<VERSION>.tar
```





# CHAPTER 4


## Hardware front view

- [Hardware front view, on page 7](#)

## Hardware front view

Before starting, take a moment to note the following parts you're going to use during the procedure.

**Cisco Cisco IR1101 Integrated Services Router Rugged:**

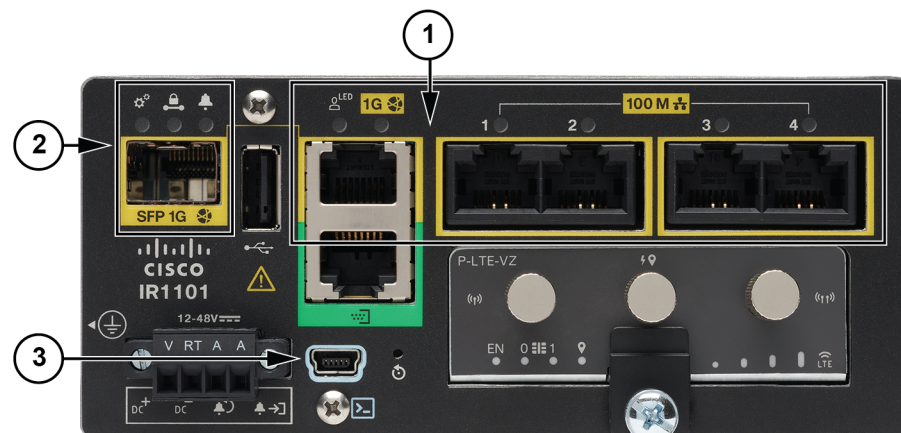

- 1x RJ45 10/100/1000 BaseT connector (the one on the left) (1)
- 4x RJ45 10/100 BaseT connector (the ones on the right) (1)
- SFP fiber port (2)
- mini-USB console connector (3)





## CHAPTER 5

### Known issues

---

- [Known issues, on page 9](#)

### Known issues

The deployment procedure with the Local Manager is not supported by firmware version 17.3.x.

Perform the procedure with [Procedure with the Cisco Cyber Vision sensor management extension](#) instead.





## CHAPTER 6

# Initial configuration

To install Cisco Cyber Vision on the Cisco IR1101, you must perform the Initial configuration which steps are described in this section.

- [Check the software version, on page 11](#)
- [Check date and time, on page 11](#)
- [Enable IOx, on page 12](#)
- [Setup ERSPAN, on page 13](#)
- [Setup NAT, on page 14](#)

## Check the software version

- Check the software version using the following command in the router's CLI:

```
Show version
```

The displayed version must be 17.2.1 or higher to be compatible with the Cisco Cyber Vision Sensor Application.

```
IR110CCV#  
IR110CCV#Show version  
Cisco IOS XE Software, Version 17.02.01r  
Cisco IOS Software [Amsterdam], ISR Software (ARMV8EL_LINUX_IOSD-UNIVERSALK9-M), Version 17.2.1r, RELEASE SOFTWARE (fc2)  
Technical Support: http://www.cisco.com/techsupport  
Copyright (c) 1986-2020 by Cisco Systems, Inc.  
Compiled Thu 09-Apr-20 22:45 by mcpre
```

If the version is lower, you must update the router firmware. To do so, go to [cisco.com](http://cisco.com) and refer to the Cisco IR1101's documentation.

## Check date and time

The internal clock of the router must be synchronized and configured properly.



**Note** The Cisco Cyber Vision IOx sensor application gets the time from the host. Therefore, it is critical that the host synchronizes its time with the Center or a valid NTP server. If the time difference is large (hours or more), the user should adjust the Cisco IR1101 time using the CLI or the WebUI so it is close to the reference time. If not, the synchronization may take many update cycles.

1. Check the date and time using the following command:

```
Show clock
```


```
IR110CCV#
IR110CCV#Show clock
*14:33:05.354 UTC Fri Apr 17 2020
IR110CCV#
```

- 2.

If needed, adjust to the UTC time using the following command:

```
clock set [hh:mm:ss] [month] [day] [year]
```

Or in the WebUI, navigate to Configuration > Time.

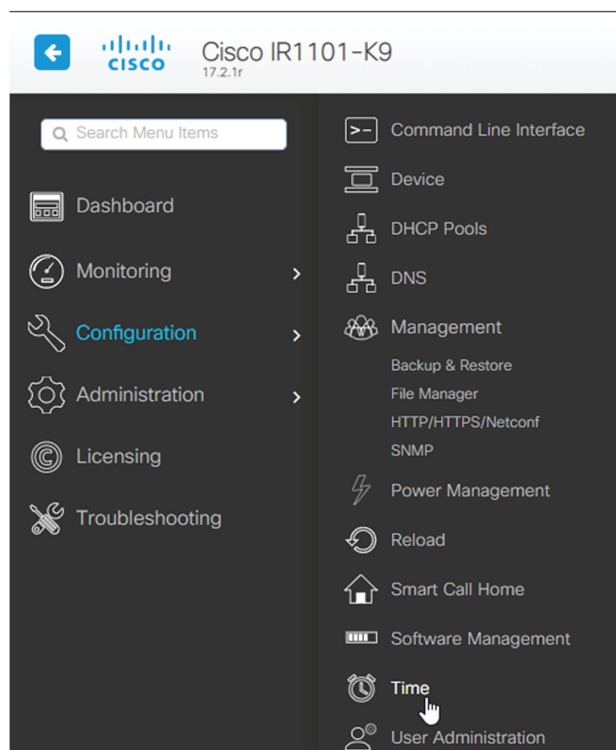

## Enable IOx

Before installing the Cisco Cyber Vision sensor on the Cisco IR1101, you must enable IOx.



## Procedure

---

**Step 1** Enable IOx using the following command.

```
configure terminal
iox
```

**Step 2** Check that the CAF and IOxman services are running using the following command.

```
exit
show iox
```

```
IR110CCV(config)#
IR110CCV(config)#exit
IR110CCV#show iox

IOx Infrastructure Summary:
-----
IOx service (CAF) 1.10.0.1 : Running
IOx service (HA)       : Not Supported
IOx service (IOxman)   : Running
IOx service (Sec storage) : Not Supported
Libvirtd 1.3.4         : Running
Dockerd 18.03.0       : Running

IR110CCV#
```

---

## Setup ERSPAN

In order to receive traffic in the Cisco Cyber Vision IOx application, the application:

- must be connected to a VirtualPortGroup,
- must have the correct IP address assigned,
- must have a monitor session created.

1. Connect the application to a VirtualPortGroup and set an IP address using the following commands:

```
Configure terminal
ip routing
interface virtualportgroup 0
ip address 169.254.1.1 255.255.255.252
exit
```

```

IR110CCV#
IR110CCV#Configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
IR110CCV(config)#ip routing
IR110CCV(config)#interface virtualportgroup 0
IR110CCV(config-if)#ip address 169.254.1.1 255.255.255.252
IR110CCV(config-if)#
IR110CCV(config-if)#
IR110CCV(config-if)#exit
IR110CCV(config)#

```

2. Create the monitor session using the following commands:

```

monitor session 1 type erspan-source
source interface Gi0/0/0
no shutdown
destination
erspan-id 1
mtu 1464
ip address 169.254.1.2
origin ip address 169.254.1.1
end

```

```

IR110CCV(config)#monitor session 1 type erspan-source
IR110CCV(config-mon-erspan-src)#source interface Gi0/0/0
IR110CCV(config-mon-erspan-src)#no shutdown
IR110CCV(config-mon-erspan-src)#destination
IR110CCV(config-mon-erspan-src-dst)#erspan-id 1
IR110CCV(config-mon-erspan-src-dst)#mtu 1464
IR110CCV(config-mon-erspan-src-dst)#ip address 169.254.1.2
IR110CCV(config-mon-erspan-src-dst)#origin ip address 169.254.1.1
IR110CCV(config-mon-erspan-src-dst)#end
IR110CCV#

```

## Setup NAT

You must add NAT rules so that the container can reach the outside. This will be on a different virtual port group from the ERSPAN to separate the traffic.

### Procedure

- Step 1** Type the following commands to achieve this configuration.

```

Configure terminal
interface GigabitEthernet 0/0/0
ip nat outside
media-type rj45
exit
interface VirtualPortGroup 1
ip address 169.254.0.1 255.255.255.252
ip nat inside

```

```
exit
ip nat inside source list NAT_ACL interface GigabitEthernet 0/0/0 overload
ip access-list standard NAT_ACL
10 permit 169.254.0.0 0.0.0.3
exit
```

```
IR110CCV#
IR110CCV#Configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
IR110CCV(config)#interface GigabitEthernet 0/0/0
IR110CCV(config-if)#ip nat outside
IR110CCV(config-if)#media-type rj45
IR110CCV(config-if)#exit
IR110CCV(config)#interface VirtualPortGroup 1
IR110CCV(config-if)#ip address 169.254.0.1 255.255.255.252
IR110CCV(config-if)#ip nat inside
IR110CCV(config-if)#exit
IR110CCV(config)#ip nat inside source list NAT_ACL interface GigabitEthernet 0/0/0 overload
IR110CCV(config)#ip access-list standard NAT_ACL
IR110CCV(config-std-nacl)#10 permit 169.254.0.0 0.0.0.3
IR110CCV(config-std-nacl)#exit
IR110CCV(config)#
```

## Step 2 Save the configuration.

```
exit
write mem
```

```
IR110CCV#
IR110CCV#write mem
Building configuration...

[OK]
IR110CCV#
*Apr 17 16:22:58.709: %SYS-2-PRIVCFG_ENCRYPT: Successfully encrypted private config file
IR110CCV#
```

## What to do next

Proceed with one of the following procedures:

- [Procedure with the Cisco Cyber Vision sensor management extension, on page 17](#)
- [Procedure with the Local Manager, on page 23](#)
- [Procedure with the CLI, on page 37](#)





## CHAPTER 7

# Procedure with the Cisco Cyber Vision sensor management extension

After the [Initial configuration](#), proceed to the steps described in this section.

- [Install the sensor management extension, on page 17](#)
- [Create a sensor, on page 19](#)
- [Configure the sensor, on page 20](#)

## Install the sensor management extension

To install the Sensor Management extension, you must:

### Procedure

- Step 1** Retrieve the extension file (i.e. CiscoCyberVision-sensor-management-<version>.ext) from [cisco.com](#).
- Step 2** Access the Extensions administration page in Cisco Cyber Vision.
- Step 3** Import the extension file.

Name	Version	Actions
Cyber Vision sensor management	4.1.0	<a href="#">Update</a> <a href="#">Remove</a>

Once the sensor management extension is installed, you will find a new management job under the sensor administration menu ([Management jobs](#)), and the Install via extension button will be enabled in the Sensor Explorer page.

## Management jobs

As some deployment tasks on sensors can take several minutes, this page shows the jobs execution status and advancement for each sensor deployed with the sensor management extension.

This page is only visible when the sensor management extension is installed in Cisco Cyber Vision.

Jobs	Steps	Duration
Single redeployment (FCW2435P3KW)	✓ — ✓ — ✓ — ✓	1m 11s
Single redeployment (FCW23500HDC)	✓ — ✓ — ✗ —	41s
Single redeployment (FOC2337L0CW)	✓ — ✓ — ✓ — ✓	1m 33s
Single redeployment (FCW23500HDC)	✓ — ✓ — ✗ —	35s
Single redeployment (FCW23500HDC)	✓ — ✓ — ✗ —	39s
Single redeployment (FCW23500HDC)	✓ — ✓ — ✗ —	43s
Single redeployment (FOC2334V045)	✓ — ✓ — ✓ — ✓	6m 52s

You will find the following jobs:

- Single deployment

This job is launched when clicking the Deploy Cisco device button in the sensor administration page, that is when a new IOx sensor is deployed.

- Single redeployment

This job is launched when clicking the Reconfigure Redeploy button in the sensor administration page, that is when deploying on a sensor that has already been deployed. This option is used for example to change the sensor's parameters like enabling active discovery.

- Single removal

This job is launched when clicking the Remove button from the sensor administration page.

- Update all devices

This job is launched when clicking the Update Cisco devices button from the sensor administration page. A unique job is created for all managed sensors that are being updated.

If a job fails, you can click on the error icon to view detailed logs.

Jobs	Steps
Single redeployment (FCW23500HDC)	
Single redeployment (FCW2435P3KW)	
Single redeployment (FCW23500HDC)	
Single redeployment (FOC2337L0CW)	
Single redeployment (FCW23500HDC)	

Enroll


Error

```
Fatal error: cannot upload provisioning package: UploadAppData failed: Fog Director API Error Code 0: {"message": "File upload failed. App data upload is not allowed since this app was installed with --rm option and currently app container is cleaned after stopping the app. Consider starting the app and retry."}
```

## Create a sensor

### Procedure

**Step 1** In Cisco Cyber Vision, navigate to Admin > Sensors > Sensor Explorer and click **Install sensor**, then **Install via extension**.

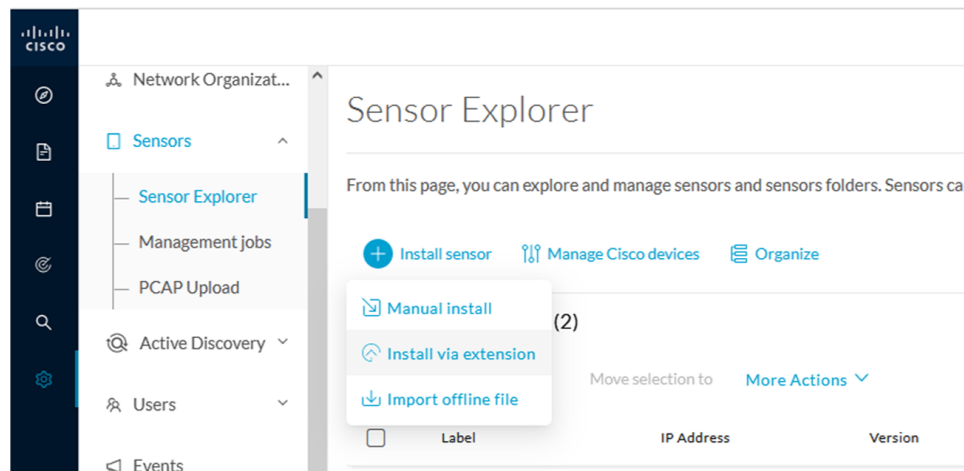

**Step 2** Fill the requested fields so Cisco Cyber Vision can reach the device:

- IP address: admin address of the device.

- Port: management port (443).
- Login: user with the admin rights of the device.
- Password: password of the admin user.
- Capture Mode: Optionally, select a capture mode.

Install via extension

---

### Reach Cisco device

Please fill the fields below to enable Cisco Cyber Vision to reach your device.

IP address\*  Port\*

For example 443 or 8443

Center collection IP

leave blank to use current collection IP

---

Credentials

Login\*

Password\*

---

Capture mode

Optimal (default): analyze the most relevant flows

All: analyze all the flows

Industrial only: analyze industrial flows

Custom: you set your filter using a packet filter in tcpdump-compatible syntax

[Exit](#)
Connect

### Step 3 Click **Connect**.

The Center will join the device and the second parameter list will be displayed. For this step to succeed, the device needs to be reachable by the Center on its eth1 connection.

## Configure the sensor

If the Center can join the device, the following form appears:



---

Install via extension

---

## Configure Cyber Vision IOx sensor app

The device requires additional parameters. Some parameters have been pre-filled. Please complete the remaining fields.

Cisco device: IR1101-K9

Capture IP address\*

Capture prefix length\*

Like 24, 16 or 8

Collection IP address\*

Collection prefix length\*

Like 24, 16 or 8

Collection gateway\*

[Exit](#)

[Deploy](#)

While some parameters are filled automatically, you can still change them if necessary.

### Procedure


---

- Step 1** Fill the following parameters for the Collection interface:
- Capture IP address: IP address destination of the monitor session in the Cisco IR1101
  - Capture prefix length: mask of the capture IP address
  - Collection IP address: IP address of the sensor in the Cisco IR1101
  - Collection prefix length: mask of the Collection IP address
  - Collection gateway: gateway of the Collection IP address

- Step 2** Click **Deploy**.

The Center starts deploying the sensor application on the target equipment. This can take a few minutes. You can go to the Management jobs page to check the deployment advancements.

Configure the sensor

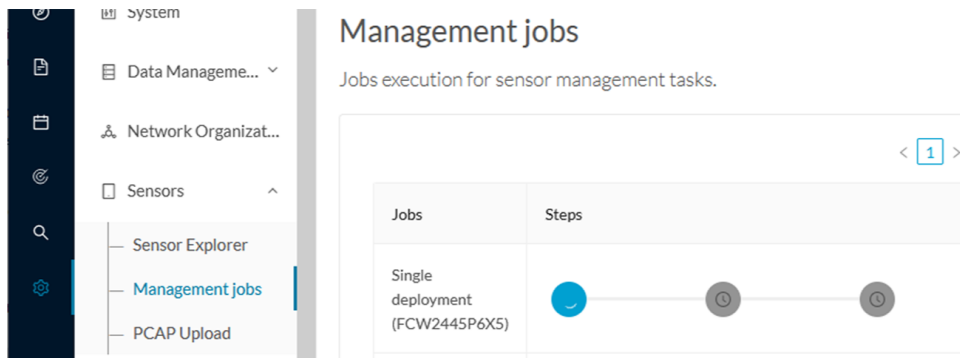

Once the deployment is finished, a new sensor appears in the sensors list of the Sensor Explorer page. The sensor's status will eventually turn to Connected.

<input type="checkbox"/>	FCW2445P6X5	192.168.49.21	4.1.0+202202151440	Connected	Pending data	Enabled	4 days
--------------------------	-------------	---------------	--------------------	-----------	--------------	---------	--------



## CHAPTER 8


# Procedure with the Local Manager


After the [Initial configuration](#), proceed to the steps described in this section.

- [Access the IOx Local Manager, on page 23](#)
- [Install the sensor virtual application, on page 25](#)
- [Configure the sensor virtual application, on page 26](#)
- [Generate the provisioning package, on page 32](#)
- [Import the provisioning package, on page 34](#)


## Access the IOx Local Manager

1. Open a browser and navigate to the IP address you configured on the interface you are connected to.
2. Log in using the Cisco IR1101 admin user account and password.

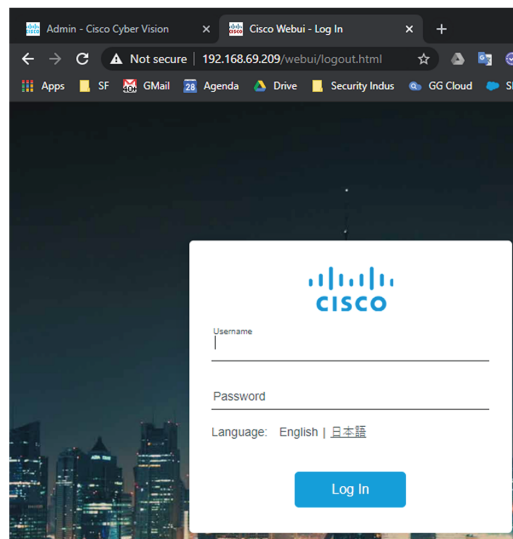

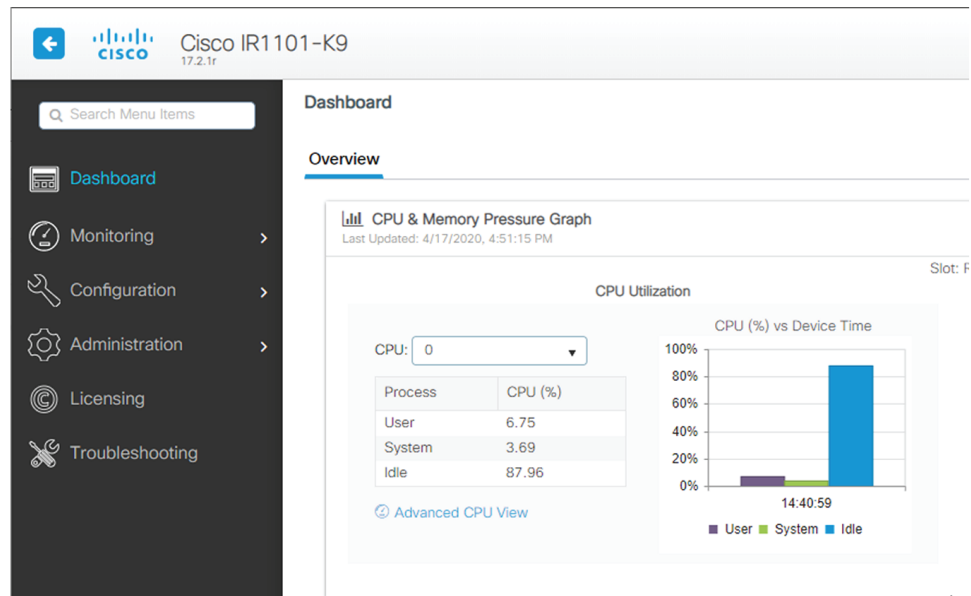

3. Once logged into the Local Manager, navigate to Configuration > Services > IOx.

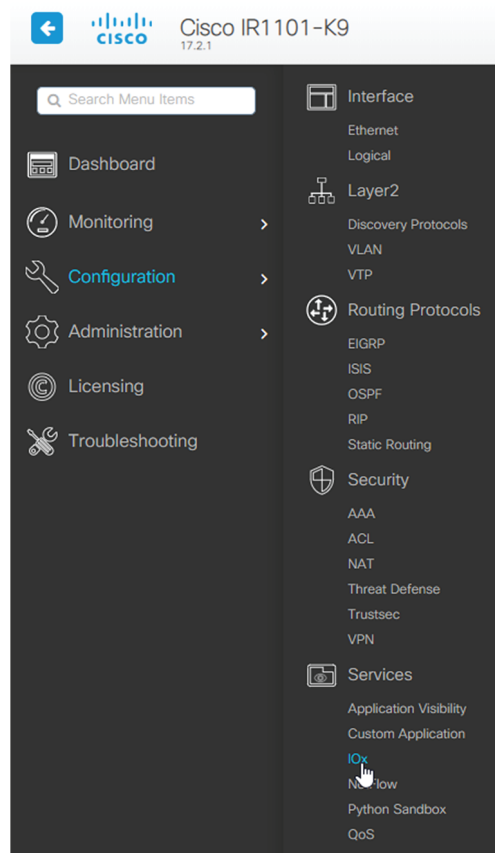


4. Log in using the user account and password.



## Install the sensor virtual application

Once logged in, the following menu appears:

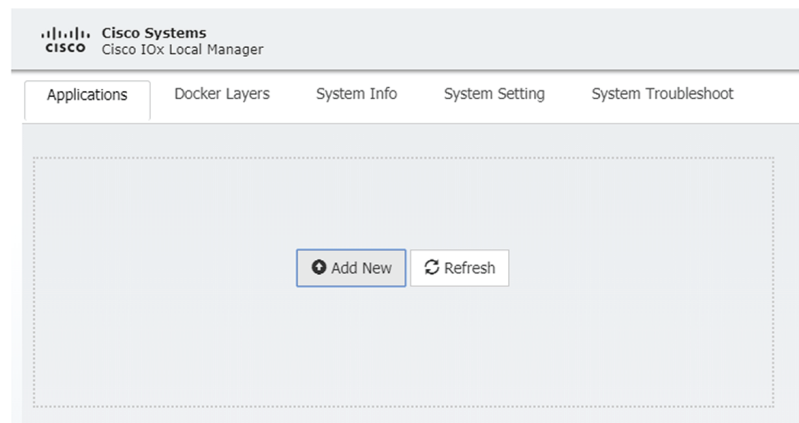


1. Click **Add New**.
2. Add an Application id name (e.g. CCVSensor).
3. Select the application archive file  
(i.e. "CiscoCyberVision-IOx-aarch64-<version>.tar").




**Note** If you aim to install a sensor with **Active Discovery**, select the required application archive file



(i.e. "CiscoCyberVision-IOx-Active-Discovery-aarch64-<version>.tar").

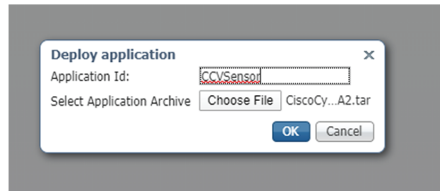

The installation takes a few minutes.

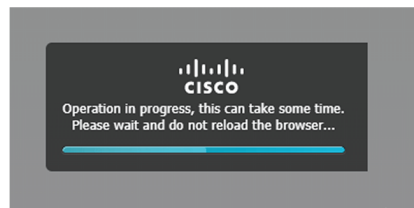


When the application is installed, the following message is displayed and the sensor application appears:

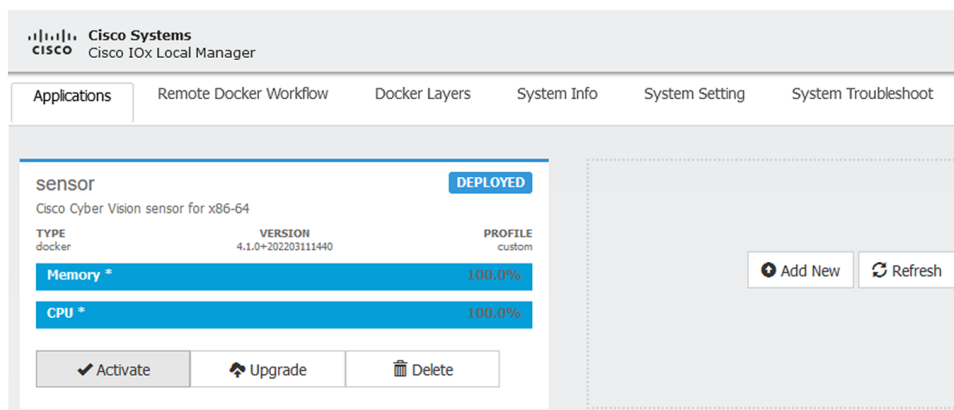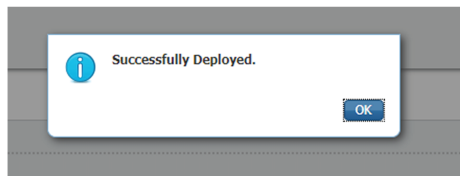

## Configure the sensor virtual application


### Procedure

- Step 1** Click **Activate** to launch the configuration of the sensor application.

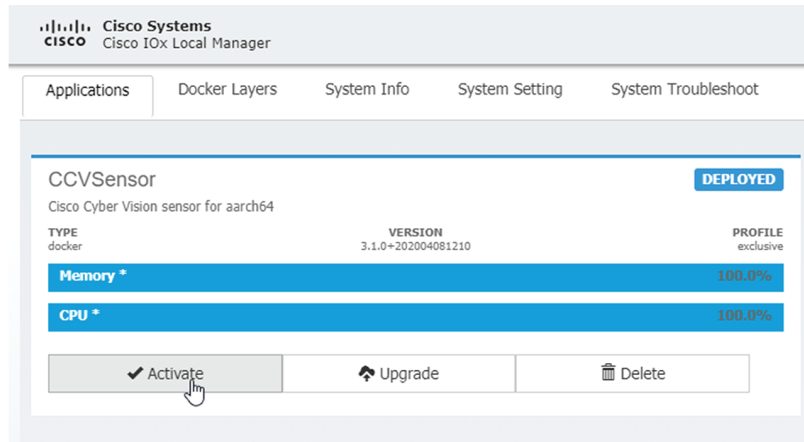

**Step 2** Deploy the Resource Profile menu and set the disk size. The procedure differs whether the device has a SSD or not:

- If the device has a SSD, set the necessary disk size. It should be at least 4GB.

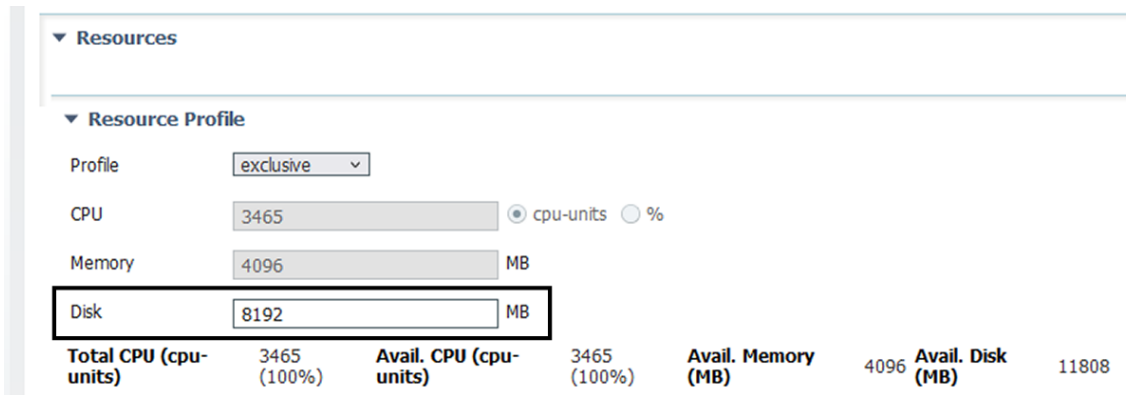

- If the device has no SSD, set the disk size to 128MB, then deploy the Advanced Settings menu and configure tmpfs by filling the docker options text area with:

```
--tmpfs /tmp:rw,size=128m
```

Configure the sensor virtual application

**▼ Resource Profile**

Profile:

CPU:   cpu-units  %

Memory:  MB

Disk:  MB

<b>Total CPU (cpu-units)</b>	3465 (100%)	<b>Avail. CPU (cpu-units)</b>	3465 (100%)	<b>Avail. Memory (MB)</b>	4096	<b>Avail. Disk (MB)</b>	1372
------------------------------	-------------	-------------------------------	-------------	---------------------------	------	-------------------------	------

---

**▼ Advanced Settings**

Specify "docker run" options to be used while spawning the container. These will override activation settings above.

Docker Options:

Auto delete container instance

**Step 3** Bind the eth0 and eth1 interfaces in the container to an interface on the host in the Network Configuration menu.

**eth0:**

a) Click **edit** in the eth0 line.

**▼ Network Configuration**

Name	Network Config	Description	Action
eth0	VPG0	none	<a href="#">edit</a>
eth1	Not Configured	none	<a href="#">edit</a>

b) Select the **VPG1** interface.

**▼ Network Configuration**

Name	Network Config
eth0	VPG0
eth1	Not Configured

eth0 [Interface Setting](#)

Description (optional):

c) Click **Interface setting**.



▼ Network Configuration

Name	Network Config
eth0	VPG0
eth1	Not Configured

eth0 VPG1 VirtualPortGroup via ints ▼ [Interface Setting](#)

Description (optional):

The Interface Setting window pops up.

- d) Apply the following configurations:
- Set IPv4 as **Static**.
  - IP/Mask: 169.254.0.2 / 30
  - Default gateway: 169.254.0.1

Interface Setting

IPv4 Setting

Static  Dynamic  Disable

IP/Mask:  /

DNS:

Default Gateway IP:

- e) Check that IPV6 is set to **Disable**.

IPv6 Setting

Static  Dynamic  Disable

- f) Click **OK** to save the interface settings.  
You're back to the Network Configuration menu.

▼ Network Configuration

Name	Network Config
eth0	VPG0
eth1	Not Configured

eth0  [Interface Setting](#)

Description (optional):

- g) Click **OK** to save the network configurations.  
A popup that confirms changes appears.



- h) Click **OK**.

#### Step 4

##### eth1:

- Click **edit** in the eth1 line.
- Select the **VPG0** interface.


▼ Network Configuration

Name	Network Config
eth0	VPG1
eth1	Not Configured


eth1  [Interface Setting](#)

Description (optional):

- Click **Interface setting**.
- Apply the following configurations:
  - Set IPv4 as **Static**.
  - IP/Mask: 169.254.1.2 / 30

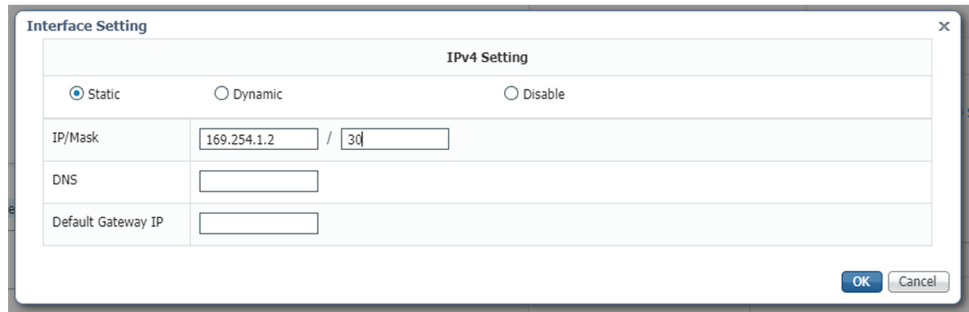


e) **Disable IPv6.**

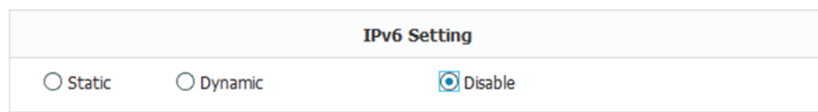

f) Click **OK**, and click **OK** again when you're back to the Network Configuration menu to save the interface settings.


**Step 5** Click the **Activate App** button.

The operation takes several seconds.

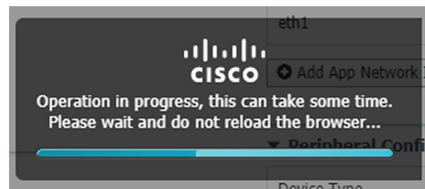


**Step 6** Go to the Applications menu to see the application's status.

The application is activated and needs to be started.

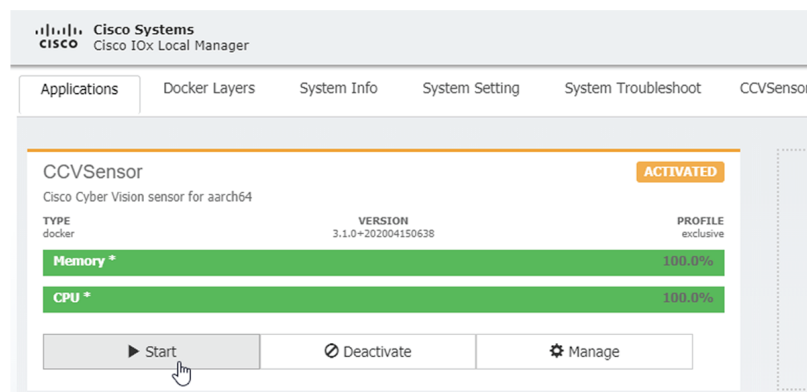


**Step 7** Click the **Start** button.

The operation takes several seconds.

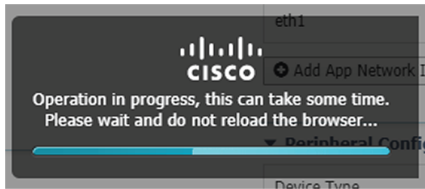


The applications' status changes to RUNNING.

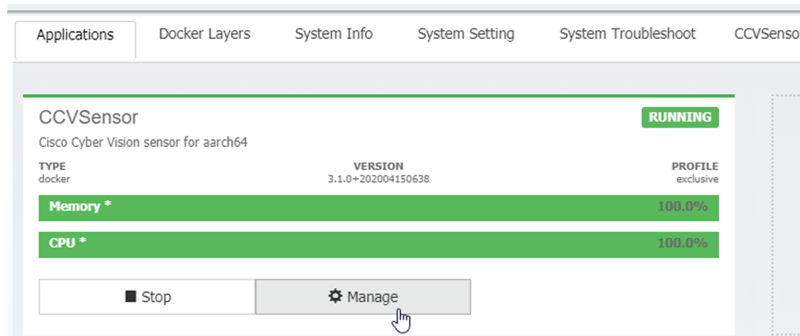

## Generate the provisioning package

1. In Cisco Cyber Vision, navigate to Admin > Sensors > Sensor Explorer and click **Install sensor**, then **Manual install**.

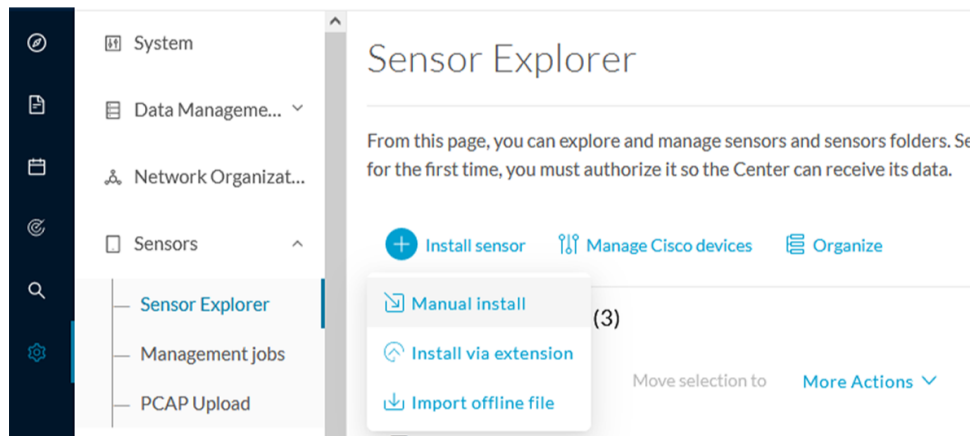

The manual install wizard appears.

2. Select **Cisco IOx Application** and click **Next**.

3. Fill the fields to configure the sensor provisioning package:

- The serial number of the hardware.
- Center IP: leave blank.
- Gateway: add if necessary.
- Optionally, select a capture mode.
- Optionally, select RSPAN (only with Catalyst 9x00 and if using ERSPAN is not possible).

### Configure provisioning package

Please fill in the fields below to add configuration to the provisioning package to install.

#### Sensor Application

Serial number\*

Center collection IP

leave blank to use current collection IP

Gateway

#### Capture mode

- Optimal (default): analyze the most relevant flows
- All: analyze all the flows
- Industrial only: analyze industrial flows
- Custom: set your filter using a packet filter in tcpdump-compatible syntax


#### Monitor session type

- ERSPAN: recommended choice for all devices
- RSPAN: use it only with Catalyst 9X00 and when using ERSPAN is not possible

4. Click **Create sensor**.

## Import the provisioning package

- Click the link to download the provisioning package.

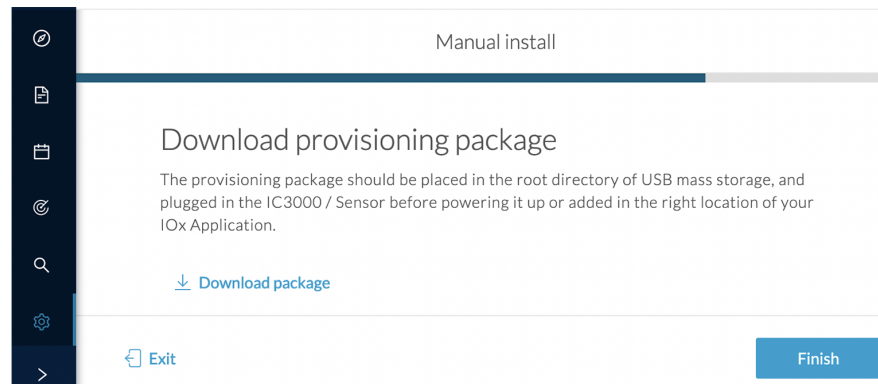

This will download the provisioning package which is a zip archive file with the following name structure: sbs-sensor-config-<serialnumber>.zip (e.g. "sbs-sensor-configFCW23500HDC.zip").


- Click **Finish**.
- A new entry for the sensor appears in the Sensor Explorer list.

The sensor status will switch from Disconnected to Connected.


<input type="checkbox"/>	Label	IP Address	Version	Location	Health status	Processing status	Active Discovery	Uptime
<input type="checkbox"/>					Disconnected	Disconnected		Not
<input type="checkbox"/>					Disconnected	Disconnected		Not
<input type="checkbox"/>	FCW2445P6X5	192.168.49.21	4.1.0+202202151440		Connected	Pending data	Enabled	4 days

## Import the provisioning package


- In the Local Manager, in the IOx configuration menu, click **Manage**.

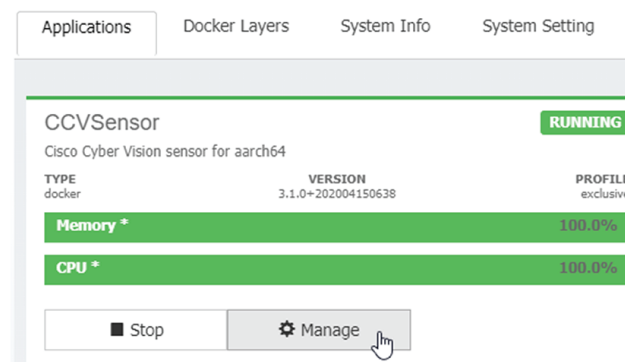

- Navigate to **App-DataDir**.

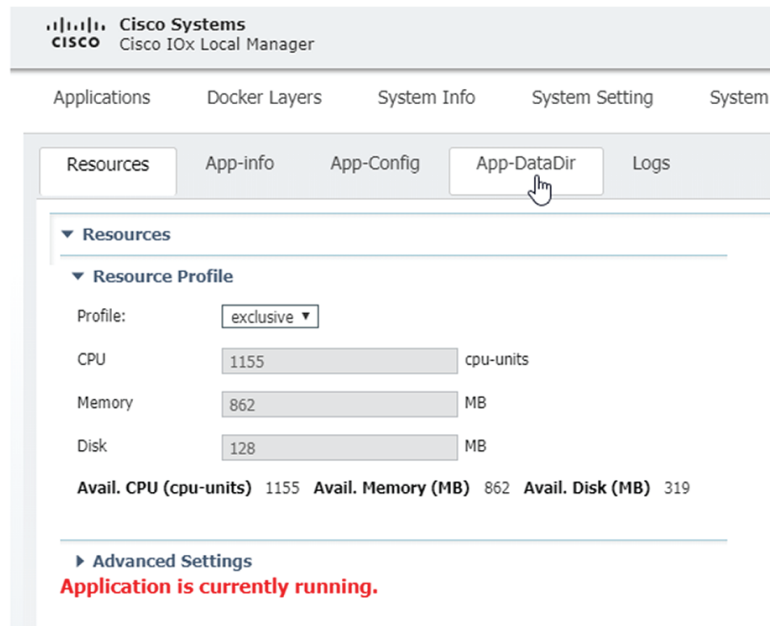


3. Click **Upload**.

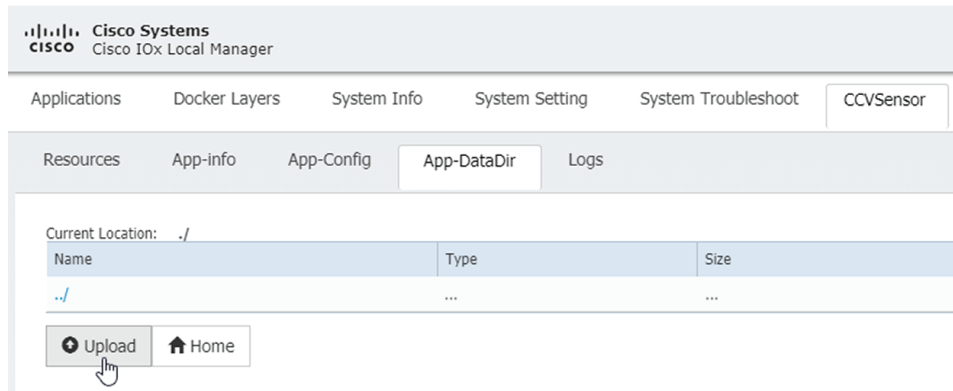

4. Choose the provisioning package downloaded (i.e. "sbs-sensor-config-FCW23500HDC.zip"), and add the exact file name in the path field (i.e. "sbs-sensor-config-FCW23500HDC.zip").

5. Click **OK**.

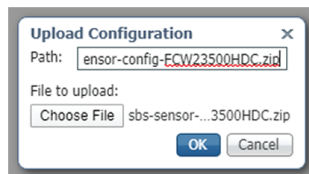

6. After a few seconds, the sensor appears as Connected in Cisco Cyber Vision.

Import the provisioning package

<input type="checkbox"/>	FCW2445P6X5	192.168.49.21	4.1.0+202202151440	Connected	Pending data	Enabled	4 days
--------------------------	-------------	---------------	--------------------	-----------	--------------	---------	--------





## CHAPTER 9

# Procedure with the CLI

---

After the [Initial configuration](#), proceed to the steps described in this section.

- [Configure the sensor application, on page 37](#)
- [Install the sensor application, on page 38](#)
- [Copy the sensor application's provisioning package, on page 39](#)

## Configure the sensor application

### without SSD



---

**Note** In this section, "CCVSensor" is used as the appid.

---

#### Procedure

---

- Step 1** Connect to the Cisco IR1101 through SSH or a console.
- Step 2** Configure the application payload by typing the following commands:

```
enable
configure terminal
app-hosting appid CCVSensor
  app-vnic gateway0 virtualportgroup 1 guest-interface 0
    guest-ipaddress 169.254.0.2 netmask 255.255.255.252
  app-vnic gateway1 virtualportgroup 0 guest-interface 1
    guest-ipaddress 169.254.1.2 netmask 255.255.255.252
  app-default-gateway 169.254.0.1 guest-interface 0
  app-resource docker
    run-opts 1 "--tmpfs /tmp:rw,size=128m"
end
```

---

## with SSD



**Note** In this section, "CCVSensor" is used as the appid.

### Procedure

- Step 1** Connect to the Cisco IR1101 through SSH or a console.
- Step 2** Configure the application payload by typing the following commands:

```
enable
configure terminal
app-hosting appid CCVSensor
  app-vnic gateway0 virtualportgroup 1 guest-interface 0
    guest-ipaddress 169.254.0.2 netmask 255.255.255.252
  app-vnic gateway1 virtualportgroup 0 guest-interface 1
    guest-ipaddress 169.254.1.2 netmask 255.255.255.252
  app-default-gateway 169.254.0.1 guest-interface 0
  app-resource docker
  run-opts 1
end
```

## Install the sensor application

The sensor package needs to be collected from [cisco.com](http://cisco.com). The file has the following name structure:

CiscoCyberVision-IOx-aarch64-<version>.tar.

1. Copy the package to a USB key or in the flash memory.
2. Type the following command on the Cisco IR1101's CLI:

```
app-hosting install appid CCVSensor package
usbflash0:CiscoCyberVision-IOx-aarch64-4.1.0.tar
```

```
IR110CCV#
IR110CCV#app-hosting install appid CCVSensor package usbflash0:CiscoCyberVision-IOx-aarch64-3.1.0-RC4.tar
Installing package 'usbflash0:CiscoCyberVision-IOx-aarch64-3.1.0-RC4.tar' for 'CCVSensor'. Use 'show app-hosting list' f
or progress.
IR110CCV#
```



**Note** Adjust "usbflash0:" in accordance with the sensor package's localization (USB port or flash memory).



**Note** Replace "CiscoCyberVision-IOx-aarch64-4.1.0.tar" with the right filename.

3. Check that the application is in DEPLOYED state:

```
show app-hosting list
```

```
IR110CCV#
IR110CCV#show app-hosting list
App id                               State
-----
CCVSensor                             DEPLOYED
IR110CCV#
```

4. Activate the application using the following command:

```
app-hosting activate appid CCVSensor
```

```
IR110CCV#
IR110CCV#app-hosting activate appid CCVSensor
CCVSensor activated successfully
Current state is: ACTIVATED
IR110CCV#
```

5. Start the application using the following command:

```
app-hosting start appid CCVSensor
```

```
IR110CCV#
IR110CCV#app-hosting start appid CCVSensor
CCVSensor started successfully
Current state is: RUNNING
IR110CCV#
```

## Copy the sensor application's provisioning package

- Copy the provisioning package from the USB key to the application by typing the following command:

```
app-hosting data appid CCVSensor copy usbflash0:sbs-sensor-config-<serialnumber>.zip
sbs-sensor-config-<serialnumber>.zip
```

```
IR110CCV#
IR110CCV#$ data appid CCVSensor copy usbflash0:sbs-sensor-config-FCW23500HDC.zip sbs-sensor-config-FCW23500HDC.zip
Successfully copied file /usbflash0/sbs-sensor-config-FCW23500HDC.zip to CCVSensor as sbs-sensor-config-FCW23500HDC.zip
IR110CCV#
```

The sensor will appear as Connected in Cisco Cyber Vision's Sensor Explorer page.

<input type="checkbox"/>	FCW2445P6X5	192.168.49.21	4.1.0+202202151440	Connected	Pending data	Enabled	4 days
--------------------------	-------------	---------------	--------------------	-----------	--------------	---------	--------

Copy the sensor application's provisioning package



## CHAPTER 10

# Upgrade procedures

---

- [Upgrade through the Cisco Cyber Vision sensor management extension, on page 41](#)
- [Upgrade through the IOx Local Manager, on page 44](#)

## Upgrade through the Cisco Cyber Vision sensor management extension

Before updating IOx sensors, the Cisco Cyber Vision sensor management extension must be up-to-date. It is possible to select which sensors to update. The update status will be visible in the [Management jobs, on page 18](#) page.

### Update the sensor management extension

The Cisco Cyber Vision sensor management extension must be up-to-date to update IOx sensors.

#### Procedure

---

- Step 1** Retrieve the sensor management extension file (i.e. CiscoCyberVision-sensor-management-<version>.ext) on [cisco.com](#).
- Step 2** In Cisco Cyber Vision, navigate to Admin > Extensions.
- Step 3** Click **Update** to browse the new version of the extension file.

**Extensions**

From this page, you can manage Cyber Vision Extensions. Extensions are optional add-ons to Cyber Vision Center which provide more features, such as the management of new device types, additional detection engines, or integrations with external services.

**Update**  
Uploading... Please do not quit or refresh the page.

**Installed extensions**

Name	Version	Actions
Cyber Vision sensor management	4.1.2	<input type="button" value="Update"/> <input type="button" value="Remove"/>

## Update the sensors

### Procedure

**Step 1** In Cisco Cyber Vision, navigate to Admin > Sensors > Sensor Explorer.

Sensors that are not up-to-date have their version displayed in red.

**Step 2** Click **Install sensor**, then **Update Cisco devices**.

**Sensor Explorer**


From this page, you can explore and manage sensors and sensors folders. Sensors can be remotely and securely rebooted, you must authorize it so the Center can receive its data.

**Folders and sensors**


0 Selected

	Label	IP Address	Version	Location	Health status
<input type="checkbox"/>	<b>FOLDER1</b>			Lyon	
<input type="checkbox"/>	<b>FOLDER2</b>			Paris	
<input type="checkbox"/>	IC3000	192.168.49.23	4.1.1+202205161124		Connected
<input type="checkbox"/>	IE3400	192.168.49.21	4.1.2+202207190948		Connected

The update Cisco devices window pops up listing all sensors that have been deployed with the sensor management extension.

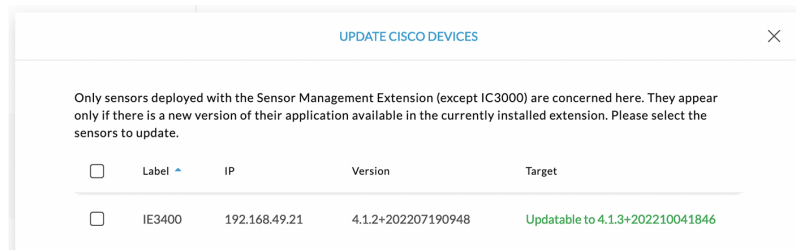


**Step 3** Select the sensors you want to update.

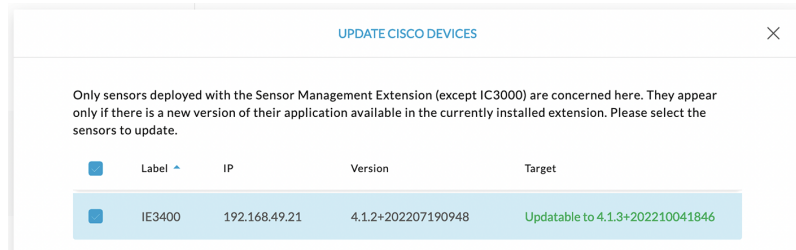


**Step 4** Click **Update**.


The sensors' update status appear in the Management jobs page in batches per sensor type and of maximum ten sensors per batch.

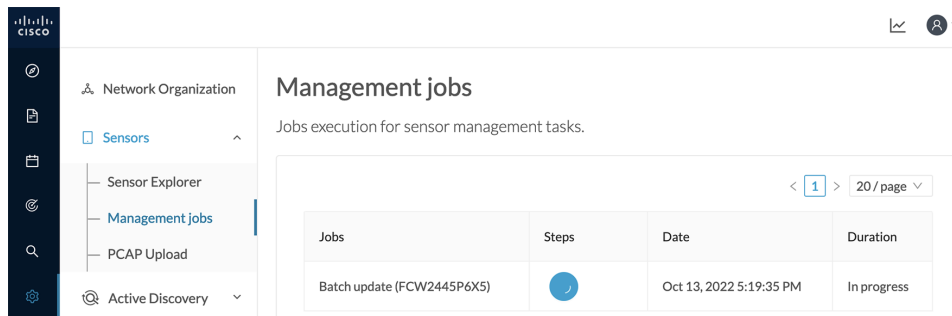

Herebelow the management jobs indicate that the batch of sensors updated successfully.

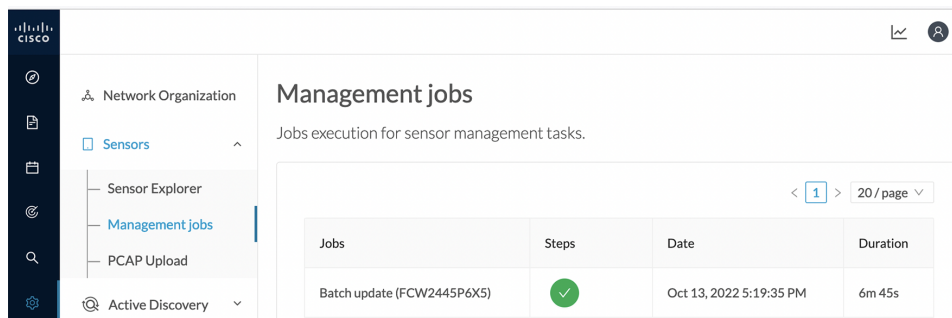

If the batch update fails, click the red update error icon to see logs.

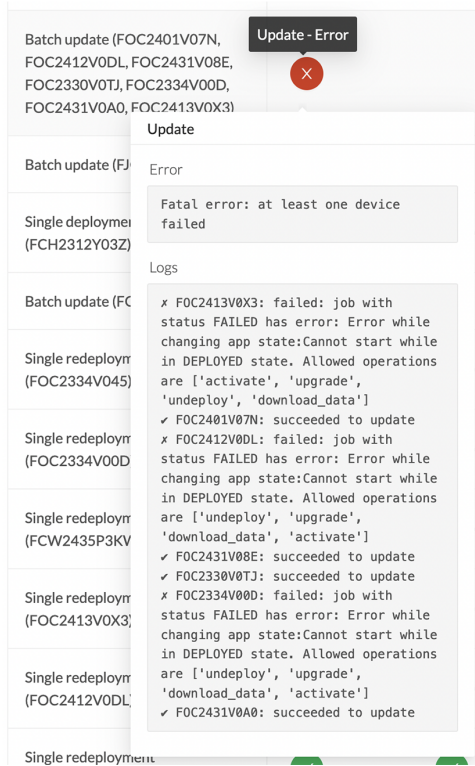


## Upgrade through the IOx Local Manager

The following section explains how to upgrade the sensor through the IOx Local Manager.


In the example below, the sensor is upgraded from Cisco Cyber Vision version 3.2.2 to version 3.2.3.

**Figure 2: The sensor in version 3.2.2 in the Sensors administration page of Cisco Cyber Vision**

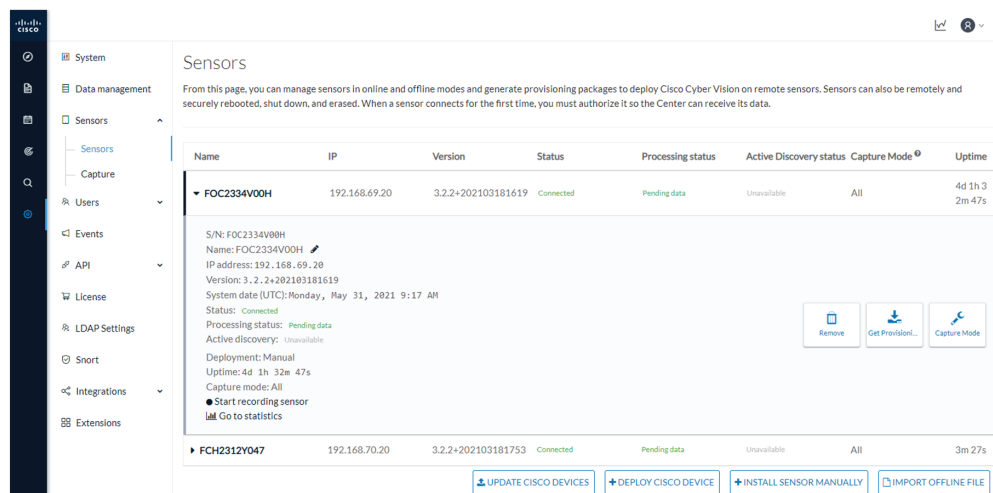




1. Access the IOx Local Manager.
2. Stop the application.

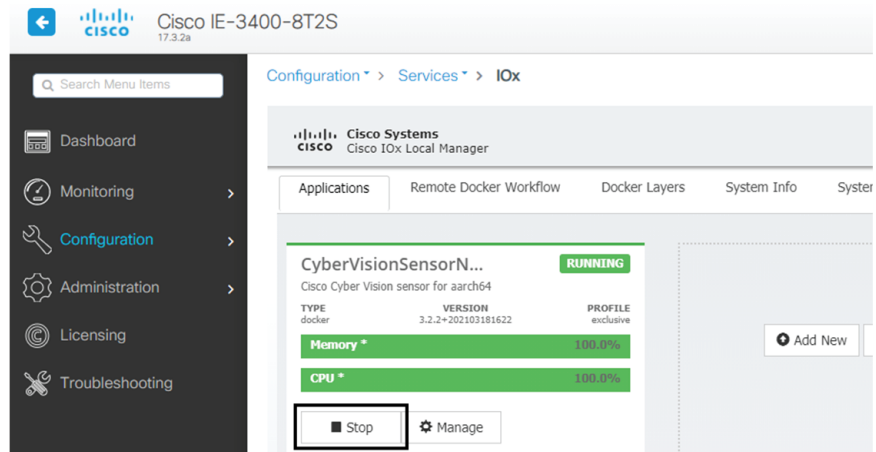

The operation takes a few moments.

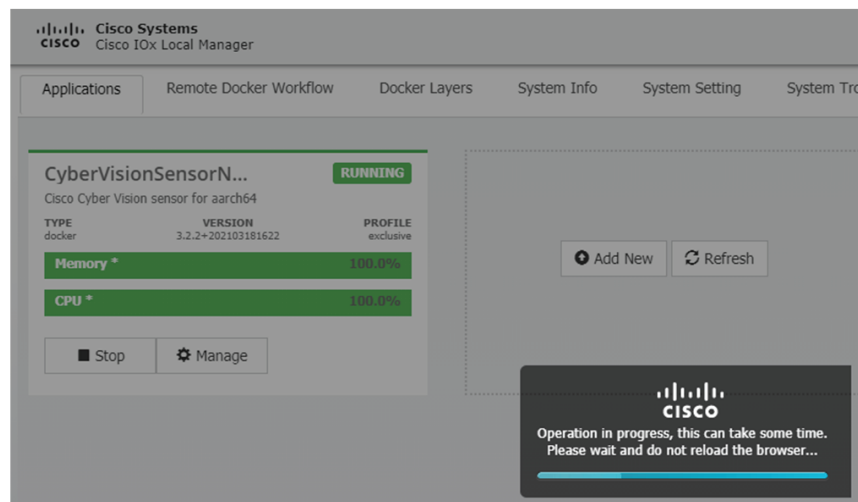

The application status switches to STOPPED.

In Cisco Cyber Vision, the sensor status switches to Disconnected.

**Sensors**

From this page, you can manage sensors in online and offline modes and generate provisioning packages to deploy Cisco Cyber Vision on remote sensors. Sensors can also be remotely and securely rebooted, shut down, and erased. When a sensor connects for the first time, you must authorize it so the Center can receive its data.

Name	IP	Version	Status	Processing status	Active Discovery status	Capture Mode	Uptime
FOC2334V00H	192.168.69.20	3.2.2+202103181619	Disconnected	Disconnected	Unavailable	All	N/A
S/N: FOC2334V00H Name: FOC2334V00H IP address: 192.168.69.20 Version: 3.2.2+202103181619 System date (UTC): Monday, May 31, 2021 9:20 AM Status: <b>Disconnected</b> Processing status: Disconnected Active discovery: Unavailable Deployment: Manual Capture mode: All Go to statistics							
FCH2312Y047	192.168.70.20	3.2.2+202103181753	Connected	Pending data	Unavailable	All	10m

[UPDATE CISCO DEVICES](#)
[+DEPLOY CISCO DEVICE](#)
[+INSTALL SENSOR MANUALLY](#)
[IMPORT OFFLINE FILE](#)

3. In the IOx Local Manager, click the **Deactivate** button.

The application status moves to DEPLOYED.

4. Click **Upgrade**.

CyberVisionSensorN... **DEPLOYED**

Cisco Cyber Vision sensor for aarch64

TYPE	VERSION	PROFILE
docker	3.2.2+202103181622	exclusive

Memory \* 100.0%

CPU \* 100.0%

Activate
  Upgrade
  Delete

The pop up Upgrade application appears.

**Upgrade application**

Application Id: CyberVisionSensorNetwork

Select Application Archive: Choose File No file chosen

Preserve Application Data

OK Cancel

5. Select the **Preserve Application Data** option.

6. Select the new version of the application archive file.

e.g. CiscoCyberVision-IOx-aarch64-3.2.3.tar

**Upgrade application**


Application Id: CyberVisionSensorNetwork

Select Application Archive: Choose File CiscoCyber...h64-3.2.3.tar


Preserve Application Data

OK Cancel


The operation takes a few moments.

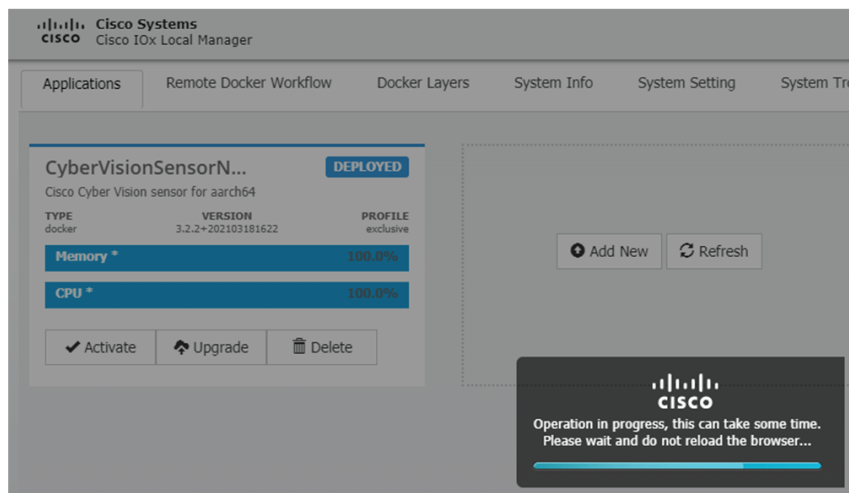

A message indicating that the sensor has been successfully upgraded is displayed.

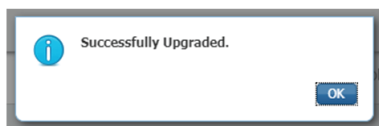

7. Check the number of the new version.
8. Click **Activate**.

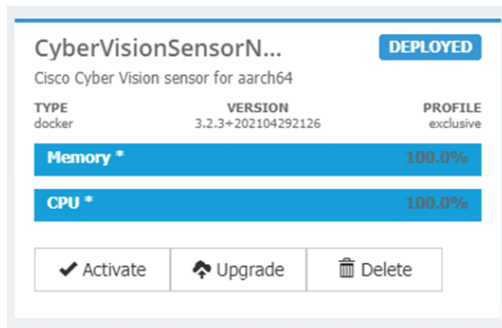

9. Check configurations.
10. Click the **Activate App** button.  
The application status moves to **ACTIVATED**.
11. Click the **Start** button.  
The application status changes to **RUNNING**.

In Cisco Cyber Vision, the sensor is upgraded from version 3.2.2 to 3.2.3 and its status moves to Connected.

- System
- Data management
- Sensors
  - Sensors
  - Capture
- Users
- Events
- API
- License
- LDAP Settings
- Short
- Integrations
- Extensions

## Sensors

From this page, you can manage sensors in online and offline modes and generate provisioning packages to deploy Cisco Cyber Vision on remote sensors. Sensors can also be remotely and securely rebooted, shut down, and erased. When a sensor connects for the first time, you must authorize it so the Center can receive its data.

Name	IP	Version	Status	Processing status	Active Discovery status	Capture Mode <sup>Ⓞ</sup>	Uptime
▼ FOC2334V00H	192.168.69.20	3.2.3+202104292032	Connected	Pending data	Unavailable	All	4d 1h 49m
<div style="border: 1px solid #ccc; padding: 5px;"> <p>S/N: FOC2334V00H                      Name: FOC2334V00H ✎                      IP address: 192.168.69.20                      Version: 3.2.3+202104292032                      System date (UTC): Monday, May 31, 2021 9:33 AM                      Status: Connected                      Processing status: Pending data                      Active discovery: Unavailable</p> <div style="display: flex; justify-content: flex-end; gap: 10px;"> <span>Remove</span> <span>Get Provision...</span> <span>Capture Mode</span> </div> <p>Deployment: Manual                      Uptime: 4d 1h 49m                      Capture mode: All                      ● Start recording sensor                      📊 Go to statistics</p> </div>							
▶ FCH2312Y047	192.168.70.20	3.2.2+202103181753	Connected	Pending data	Unavailable	All	19m 34s

UPDATE CISCO DEVICES
DEPLOY CISCO DEVICE
INSTALL SENSOR MANUALLY
IMPORT OFFLINE FILE