



Audio Video Bridging Configuration Guide, Cisco IOS XE Gibraltar 16.10.x(Catalyst 9300 Switches)

Americas Headquarters

Cisco Systems, Inc.
170 West Tasman Drive
San Jose, CA 95134-1706
USA
<http://www.cisco.com>
Tel: 408 526-4000
800 553-NETS (6387)
Fax: 408 527-0883



CONTENTS

CHAPTER 1

Audio Video Bridging 1

Introduction to Audio Video Bridging Networks	1
Information about Audio Video Bridging (AVB)	1
Licenses Supporting AVB	1
Benefits of AVB	2
Components of AVB Network	2
Supported SKUs for AVB	3
Information about Generalized Precision Time Protocol (gPTP)	4
Information about Multiple Stream Reservation Protocol (MSRP)	4
Functions of MSRP	4
Information about HQoS	5
Information about Multiple VLAN Registration Protocol (MVRP)	6
Configuring the AVB Network	6
Configuring AVB	6
Enabling AVB on the switch	6
Configuring AVB on the devices	7
Configuring gPTP	9
Enabling gPTP	9
Configuring the values of PTP clocks	11
Configuring HQoS	12
Enabling HQoS	12
Hierarchical QoS Policy Formats	12
Configuring MVRP	13
Enabling MVRP	13
Configuring MVRP on the switch interface	14
Monitoring the AVB Network	16

- Monitoring AVB 16
- Monitoring gPTP 16
- Monitoring MSRP 16
- Monitoring HQoS 16
- Monitoring MVRP 17
- Examples of AVB Configurations and Monitoring 17
 - Examples for AVB 17
 - Examples for gPTP 20
 - Examples for MSRP 23
 - Examples for HQoS 26
 - Examples for MVRP 37
- Feature Information for AVB 38



CHAPTER 1

Audio Video Bridging

- [Introduction to Audio Video Bridging Networks, on page 1](#)
- [Configuring the AVB Network, on page 6](#)
- [Monitoring the AVB Network, on page 16](#)
- [Examples of AVB Configurations and Monitoring, on page 17](#)
- [Feature Information for AVB, on page 38](#)

Introduction to Audio Video Bridging Networks

Information about Audio Video Bridging (AVB)

Audio and video equipment deployments have traditionally been analog single-purpose point-to-point one-way links. Migration to digital transmission also continued to retain the point-to-point one-way links architecture. The dedicated connection model resulted in a mass of cabling in professional and consumer applications, which was hard to manage and operate.

In order to accelerate the adoption to Ethernet based audio/video deployments in an interoperable way IEEE came up with the IEEE Audio Video Bridging standards - IEEE 802.1BA. This defines a mechanism where endpoints and the network will function as a whole to enable high quality A/V streaming across consumer applications to professional audio-video over an Ethernet infrastructure.



Note

- AVB is not supported on stacked systems
 - AVB is not supported on Etherchannel interfaces.
 - AVB is supported only on STP-enabled network.
-

Licenses Supporting AVB

AVB is supported on the Network Advantage license.

Benefits of AVB

AVB is a standard based mechanism to enable Ethernet based audio-video transmission which has the following benefits:

- Guaranteed max Latency
- Time Synchronized
- Bandwidth Guaranteed
- Professional Grade

Components of AVB Network

AVB protocols operate only in domains where every device is AVB capable. The AVB network comprises of the AVB talkers, AVB listeners, AVB switches and the grandmaster clock source.

- AVB Talker - An AVB end station that is the source or producer of a stream, i.e. microphones, video camera, and so on.
- AVB Listener - An AVB end station that is the destination or consumer of a stream, i.e. speaker, video screen, and so on.
- AVB Switch - An Ethernet switch that complies with IEEE802.1 AVB standards.
- AVB stream: A data stream associated with a stream reservation compliant with the Stream Reservation Protocol (SRP).




Note In some instances, the word “bridge” is used. In this context, it references to a switch.

The IEEE 802.1BA specification requires that an AVB talker must be grandmaster capable. In a typical deployment a network node can also be the grandmaster, provided it can either source or derive timing from a grandmaster capable device and provide the timing to the AVB network using IEEE 802.1AS.


Figure 1 shows a simple illustration of AVB network with different components.

Figure 1: Figure 1: AVB Network

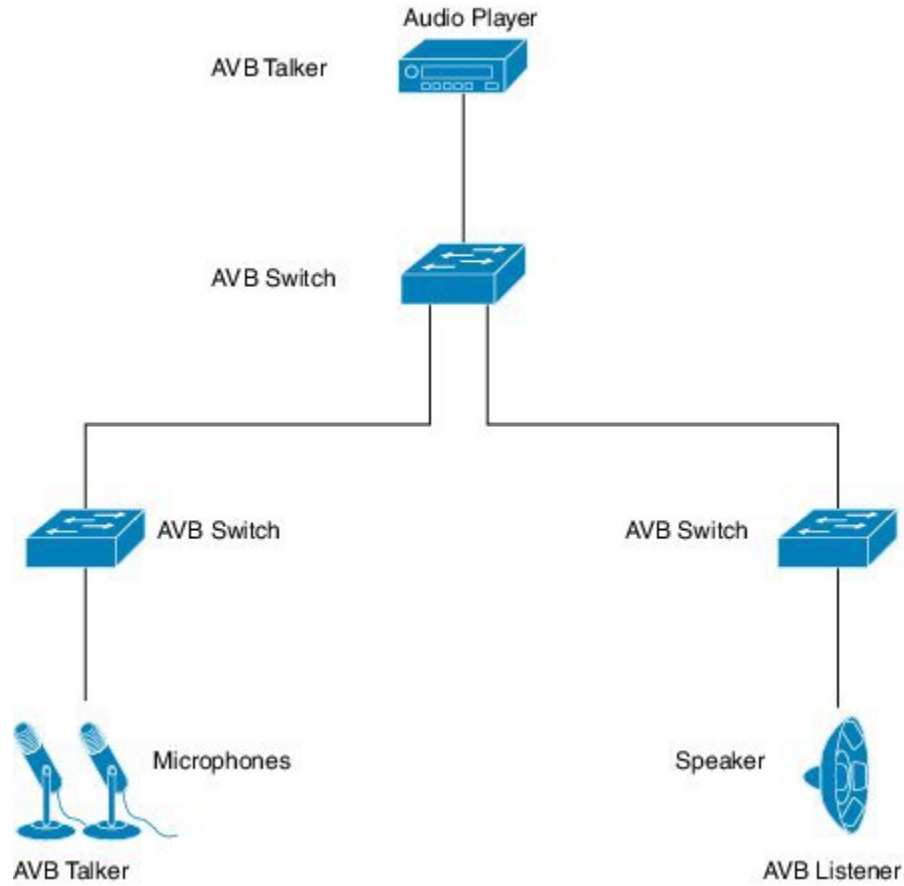

In many instances, the Audio/Video end points (Microphone, Speaker, etc.) are analog devices. AVB end-point vendors introduce Digital Signal Processors (DSP) and I/O devices that provide extensive audio/video processing and aggregate the end-points into an AVB Ethernet interface, as shown in Figure 2.

Figure 2: Figure 2: Vendor audio I/O System

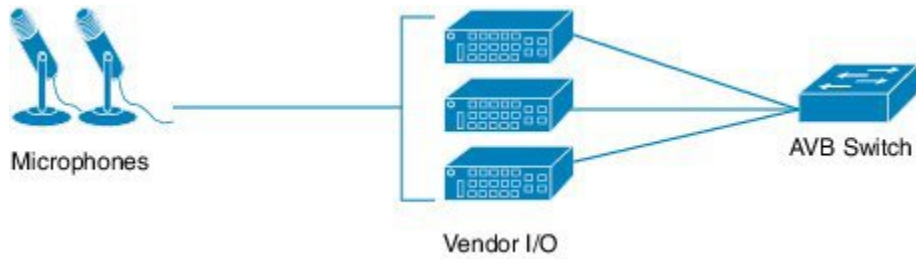

Supported SKUs for AVB

All Cisco Catalyst 9300 Series Switches support PTP or AVB on all ports (both uplink and downlink ports) except as listed below:

- C9300-48UXM: Supported on 1 to 16 downlink ports only and all uplink ports.
- C9300-48UN: Supported on 1 to 36 downlink ports only and all uplink ports.

Information about Generalized Precision Time Protocol (gPTP)

Generalized Precision Time Protocol (gPTP) is an IEEE 802.1AS standard, which provides a mechanism to synchronize clocks of the bridges and end point devices in an AVB network. It defines the mechanism to elect the grandmaster clock (BMCA) among the time-aware bridges and talker and listener. The grandmaster is the root of the timing hierarchy that gets established in the time-aware network and distributes time to nodes below to enable synchronization.

Time synchronization also requires determining the link delay and switch delays in the network nodes. The gptp switch is a IEEE 1588 boundary clock, which also determines the link delay using the peer-to-peer delay mechanism. The delays computed are included in the correction field of the PTP messages and relayed to the end-points. The talker and listener use this gPTP time as a shared clock reference, which is used to relay and recover the media clock. gPTP currently defines only domain 0, which is what the switch supports.

The peer to peer delay mechanism runs on STP blocked ports as well. No other PTP messages are sent over blocked ports.

In a PTP domain, Best Master Clock (BMC) algorithm organizes Clocks and Ports into a hierarchical fashion, which includes clocks and port states:

Clocks

- Grandmaster (GM/GMC)
- Boundary Clock (BC)

Port States

- Master (M)
- Slave (S)
- Passive (P)

Information about Multiple Stream Reservation Protocol (MSRP)

Multiple Stream Reservation Protocol (MSRP) provides a mechanism for end stations to reserve network resources that will guarantee the transmission and reception of data streams across a network with the requested QoS. It is one of the core protocols required on an AVB device (talker, listener and switches). It allows talkers to advertise streams across a network of AVB switches and listeners to register for receiving the streams.

MSRP is the key software protocol module for supporting AVB. It enables stream establishment and teardown. It interfaces with gPTP to update the latency information for the streams. It interfaces with the QoS module to setup the hardware resources that would guarantee requested bandwidth for the streams. It also provides the QoS shaping parameters required for the credit based shaper.

Functions of MSRP

MSRP performs the following functions:

- Allows Talkers to advertise Streams and Listeners to discover and register for Streams.
- Establishes a path through an Ethernet between a Talker and one or more Listeners.
- Provides guaranteed bandwidth for AVB Streams.

- Guarantees an upper bound on latency.
- Discovers and reports the worst case end-to-end latency between the Talker and each of its Listeners.
- Reports failure reason and location when a path between the Talker and a Listener cannot satisfy bandwidth requirements.
- Supports multiple classes of traffic with different latency targets.
- Protects best effort traffic from starvation by limiting AVB traffic.
- MSRP Talker declarations are not forwarded along the STP blocked ports.
- MSRP listens to the STP TCN notification to generate MSRP declarations tear /modify / establish streams.

Information about HQoS

AVB networks guarantee bandwidth and minimum bounded latency for the time-sensitive audio and video streams. AVB defines Class A and Class B as the time-sensitive streams, based on the worst-case latency targets of the traffic from talker to listener.

The latency targets for the two streams are listed as below:

- SR-Class A: 2ms
- SR-Class B: 50ms

The sum of the worst-case latency contributions per hop should result in an overall end-to-end latency of 2 ms or less for SR-Class A and 50ms or less for SR-Class B. A typical AVB deployment of 7 hops from talker to listener meets these latency requirements.

The priority code points map the traffic to the specific stream. Frame forwarding behavior is based on this priority. A credit-based shaper is used to shape the transmission of these streams in accordance with the bandwidth that has been reserved on a given outbound queue so that the latency targets are met.

AVB supports hierarchical QoS. AVB Hierarchical QoS policy is two level Parent-Child Policy. AVB Parent policy segregates audio, video traffic streams(SR-Class A , SR-Class B) and Network Control packets from standard best-effort ethernet traffic (Non-SR) and manage streams accordingly. Hierarchical QoS allows you to specify QoS behavior at multiple policy levels, which provides a high degree of granularity in traffic management. You can use hierarchical policies to:

- Allow a parent class to shape multiple queues in a child policy
- Apply specific policy map actions on the aggregate traffic
- Apply class-specific policy map actions

You can modify only ingress and egress HQoS child policy's class-map and its actions using **policy-map AVB-Output-Child-Policy** and **policy-map AVB-Input-Child-Policy** command.



Note You should not modify the PCP in child policy to map with PCP configured in Parent Policy, e.g. SR Class A cos 3 and SR Class B Cos 2.

Hierarchical Policing

Hierarchical policing is supported on ingress and egress interfaces. Hierarchical QoS separates the SR and Non-SR class related rules into parent and child policies respectively. AVB SR classes are completely controlled by MSRP client and hence, parent policies containing SR class attributes are governed by MSRP. The end user has complete control over child policies which contain Non-SR class attributes and can modify only the child policies.

AVB HQoS child policies are user modifiable and NVGENed to preserve the configuration if user saves the configuration to the startup-config. So, AVB HQoS child policy configurations are retained even after reload.

Information about Multiple VLAN Registration Protocol (MVRP)

Multiple VLAN Registration Protocol (MVRP) is an application based on MRP. MVRP provides a mechanism for dynamic maintenance of the contents of Dynamic VLAN Registration Entries for each vlan ids, and for propagating the information they contain to other Bridges. This information allows MVRP-aware devices to dynamically establish and update their knowledge of the set of vlan ids associated with VLANs that currently have active members, and through which Ports those members can be reached.

MVRP, from an AVB perspective, is mandatory on the talkers and the listeners. Independent of AVB, MVRP is an IEEE 802.1Q requirement on the VLAN-aware switches. However, manual configuration of VLANS on the switches is sufficient for AVB.



Note VTP should be in the disabled mode or transparent mode for MVRP to work.

Configuring the AVB Network

Configuring AVB

This section describes the various configurations available for AVB.

Enabling AVB on the switch

You can enable AVB using the below command on the switch.

SUMMARY STEPS

1. **enable**
2. **configure terminal**
3. **avb**
4. **avb strict**
5. **end**

DETAILED STEPS

	Command or Action	Purpose
Step 1	enable Example: Device> enable	Enables privileged EXEC mode. <ul style="list-style-type: none"> • Enter your password if prompted.
Step 2	configure terminal Example: Device# configure terminal	Enters global configuration mode.
Step 3	avb Example: Device(config)# avb	Enables AVB on the switch.
Step 4	avb strict Example: Device(config)# avb strict	Enables AVB on the switch. This command is used in combination with the avb command to enable AVB. Note This command will be deprecated in the future releases.
Step 5	end Example: Device(config)# end	Returns to privileged EXEC mode.

What to do next

To disable AVB on the switch, use the "no" form of the command.

Configuring AVB on the devices

You can configure the interfaces along the connectivity path for AVB devices as dot1q trunk ports by using the below commands.

SUMMARY STEPS

1. **enable**
2. **configure terminal**
3. **interface *interface-id***
4. **switchport mode trunk**
5. **exit**
6. **vlan 2**

7. `avb vlan vlan-id`
8. `avb`
9. `end`

DETAILED STEPS

	Command or Action	Purpose
Step 1	enable Example: Device> <code>enable</code>	Enables privileged EXEC mode. <ul style="list-style-type: none"> • Enter your password if prompted.
Step 2	configure terminal Example: Device# <code>configure terminal</code>	Enters global configuration mode.
Step 3	interface <i>interface-id</i> Example: Device(config)# <code>interface te1/1/1</code>	Defines the interface to be configured as a trunk, and enters interface configuration mode.
Step 4	switchport mode trunk Example: Device(config-if)# <code>switchport mode trunk</code>	Configures the port as a trunk port.
Step 5	exit Example: Device(config-if)# <code>exit</code>	Returns to global configuration mode.
Step 6	vlan 2 Example: Device(config)# <code>vlan 2</code>	Configures VLAN 2 on the switch. Note VLAN 2 is the default AVB VLAN. If you need to configure another VLAN as the default AVB VLAN, use the command in Step 7.
Step 7	avb vlan <i>vlan-id</i> Example: Device(config)# <code>avb vlan 10</code>	(Optional) Sets the specified VLAN as the default AVB VLAN on the switch. Use this command when you need to set the default AVB VLAN other than VLAN 2. The range for <i>vlan-id</i> varies from 2 to 4094.

	Command or Action	Purpose
Step 8	avb Example: Device(config-vlan)# avb	Configures AVB on the specified interface.
Step 9	end Example: Device(config)# end	Returns to privileged EXEC mode.

What to do next

To disable AVB on the switch, use the "**no**" form of the command.

Configuring gPTP

This section describes the various configurations available for gPTP.

Enabling gPTP

When AVB is enabled on the switch, gPTP for AVB also gets enabled.

You can also enable gPTP globally using the command given below:

SUMMARY STEPS

1. **enable**
2. **configure terminal**
3. **[no]ptp profile dot1as**
4. **end**

DETAILED STEPS

	Command or Action	Purpose
Step 1	enable Example: Device> enable	Enables privileged EXEC mode. <ul style="list-style-type: none"> • Enter your password if prompted.
Step 2	configure terminal Example: Device# configure terminal	Enters global configuration mode.

	Command or Action	Purpose
Step 3	[no]ptp profile dot1as Example: Device(config) # ptp profile dot1as	gPTP is enabled globally when you enable AVB. Use the no form of this command to disable gPTP on a port.
Step 4	end Example: Device(config) # end	Returns to privileged EXEC mode.

Enabling gPTP on an interface

You can also enable gPTP on an interface using the command given below:

SUMMARY STEPS

1. **enable**
2. **configure terminal**
3. **interface *interface-id***
4. **ptp enable**
5. **end**

DETAILED STEPS

	Command or Action	Purpose
Step 1	enable Example: Device> enable	Enables privileged EXEC mode. Enter your password if prompted.
Step 2	configure terminal Example: Device# configure terminal	Enters the global configuration mode.
Step 3	interface <i>interface-id</i> Example: Device(config) # interface te1/1/1	Defines the interface to be configured as a trunk, and enters interface configuration mode.
Step 4	ptp enable Example: Device(config-if) # ptp enable	Enables gPTP on the specified interface. To disable gPTP on the interface, use the no form of this command as shown below: Device(config-if) # no ptp enable
Step 5	end Example:	Returns to privileged EXEC mode.

	Command or Action	Purpose
	Device (config-if) # end	

Configuring the values of PTP clocks

You can configure the values of ptp clock priority1 and priority2 using the commands below:

SUMMARY STEPS

1. **enable**
2. **configure terminal**
3. **ptp priority1 *value***
4. **ptp priority2 *value***
5. **exit**

DETAILED STEPS

	Command or Action	Purpose
Step 1	enable Example: Device> enable	Enables privileged EXEC mode. • Enter your password if prompted.
Step 2	configure terminal Example: Device# configure terminal	Enters global configuration mode.
Step 3	ptp priority1 <i>value</i> Example: Device (config)# ptp priority1 120	Configure the values of ptp clock priority1. The range is 0 to 255. The default value is 128. Note If the value of priority1 is configured to 255, the clock cannot become as Grandmaster.
Step 4	ptp priority2 <i>value</i> Example: Device (config)# ptp priority2 120	Configure the values of ptp clock priority2. The range is 0 to 255. The default value is 128.
Step 5	exit Example: Device (config)# exit	Returns to global configuration mode.

Configuring HQoS

This section describes the various configurations available for HQoS.

Enabling HQoS

When AVB is enabled on the switch, HQoS for AVB also gets enabled.

Hierarchical QoS Policy Formats

The following example shows hierarchical remarking policy at the ingress interface:

```

policy-map AVB-Input-Child-Policy
  class VOIP-DATA-CLASS
    set dscp EF
  class MULTIMEDIA-CONF-CLASS
    set dscp AF41
  class BULK-DATA-CLASS
    set dscp AF11
  class TRANSACTIONAL-DATA-CLASS
    set dscp AF21
  class SCAVENGER-DATA-CLASS
    set dscp CS1
  class SIGNALING-CLASS
    set dscp CS3
  class class-default
    set dscp default

policy-map AVB-Input-Policy-Remark-AB
  class AVB-SR-A-CLASS
    set cos 0 (set 0 for boundary & SR class A PCP value for core port)
  class AVB-SR-B-CLASS
    set cos 0 (set 0 for boundary & SR class B PCP value for core port)
  class class-default
    service-policy AVB-Input-Child-Policy

policy-map AVB-Input-Policy-Remark-A
  class AVB-SR-A-CLASS
    set cos 0 (set 0 for boundary & SR class A PCP value for core port)
  class class-default
    service-policy AVB-Input-Child-Policy

policy-map AVB-Input-Policy-Remark-B
  class AVB-SR-B-CLASS
    set cos 0 (set 0 for boundary & SR class B PCP value for core port)
  class class-default
    service-policy AVB-Input-Child-Policy

policy-map AVB-Input-Policy-Remark-None
  class class-default
    service-policy AVB-Input-Child-Policy

```

The following example shows hierarchical queuing policy at the egress interface:

```

policy-map AVB-Output-Child-Policy
  class VOIP-PRIORITY-QUEUE
    bandwidth remaining percent 30
    queue-buffers ratio 10
  class MULTIMEDIA-CONFERENCING-STREAMING-QUEUE
    bandwidth remaining percent 15
    queue-limit dscp AF41 percent 80
    queue-limit dscp AF31 percent 80
    queue-limit dscp AF42 percent 90

```



```

queue-limit dscp AF32 percent 90
queue-buffers ratio 10
class TRANSACTIONAL-DATA-QUEUE
bandwidth remaining percent 15
queue-limit dscp AF21 percent 80
queue-limit dscp AF22 percent 90
queue-buffers ratio 10
class BULK-SCAVENGER-DATA-QUEUE
bandwidth remaining percent 15
queue-limit dscp AF11 percent 80
queue-limit dscp AF12 percent 90
queue-limit dscp CS1 percent 80
queue-buffers ratio 15
class class-default
bandwidth remaining percent 25
queue-buffers ratio 25

policy-map AVB-Output-Policy
class AVB-SR-A-CLASS
priority level 1 (Shaper value based on stream registration)
class AVB-SR-B-CLASS
priority level 2 (Shaper value based on stream registration)
class CONTROL-MGMT-QUEUE
priority level 3 percent 15
class class-default
bandwidth remaining percent 100
queue-buffers ratio 80
service-policy AVB-Output-Child-Policy

```

Configuring MVRP

This section describes the various configurations available for MVRP.

Enabling MVRP

You can enable MVRP on the switches in the topology to enable Vlan propagation using the below command.



Note You must change VTP mode to **transparent** or **off**, before enabling dynamic vlan creation via MVRP.

SUMMARY STEPS

1. **enable**
2. **configure terminal**
3. **mvrp global**
4. **vtp mode {transparent | off}**
5. **mvrp vlan create**

DETAILED STEPS

	Command or Action	Purpose
Step 1	enable Example:	Enables privileged EXEC mode. <ul style="list-style-type: none"> • Enter your password if prompted.

	Command or Action	Purpose
	Device> enable	
Step 2	configure terminal Example: Device# configure terminal	Enters global configuration mode.
Step 3	mvrp global Example: Device(config)# mvrp global	Enters the MVRP Global configuration mode.
Step 4	vtp mode {transparent off} Example: Device(config)# vtp mode transparent Example: Device(config)# vtp mode off	Sets the VTP to transparent or off mode.
Step 5	mvrp vlan create Example: Device(config)# mvrp vlan create	Enables MVRP on the switches.

Configuring MVRP on the switch interface

You can configure MVRP on the switch interfaces using the below commands

SUMMARY STEPS

1. **enable**
2. **configure terminal**
3. **interface *interface-id***
4. **mvrp registration {fixed | forbidden | normal}**
5. **mvrp timer {join | leave | leave-all | periodic}**
6. **exit**

DETAILED STEPS

	Command or Action	Purpose
Step 1	enable Example: Device> enable	Enables privileged EXEC mode. <ul style="list-style-type: none"> • Enter your password if prompted.
Step 2	configure terminal Example: Device# configure terminal	Enters global configuration mode.
Step 3	interface <i>interface-id</i> Example: Device(config)# interface te1/1/1	Defines the interface to be configured as a trunk, and enters interface configuration mode.
Step 4	mvrp registration { <i>fixed</i> <i>forbidden</i> <i>normal</i> } Example: Device(config-if)# mvrp registration fixed	Registers MVRP with the MAD instance. <ul style="list-style-type: none"> • fixed - Fixed registration • forbidden - Forbidden registration • normal - Normal registration
Step 5	mvrp timer { <i>join</i> <i>leave</i> <i>leave-all</i> <i>periodic</i> } Example: Device(config-if)# mvrp timer join	Configures the MVRP timer. <ul style="list-style-type: none"> • join - Timer controls the interval between transmit opportunities that are applied to the ASM • leave - The timer controls the RSM waits in the LV state before transiting to the MT state • leave-all - The timer control the frequency with which the LeaveAll SM generates LeaveAll PDUs • periodic - Periodic timer
Step 6	exit Example: Device(config-if)# exit	Returns to global configuration mode.

Monitoring the AVB Network

Monitoring AVB

To display the AVB details, use the commands in the following table:

Command	Purpose
show avb domain	Displays the AVB domain.
show avb streams	Displays the AVB stream information.

Monitoring gPTP

To display the gPTP protocol details, use the commands in the following table:

Command	Purpose
show ptp brief	Displays a brief status of ptp on the interfaces.
show ptp clock	Displays ptp clock information.
show ptp parent	Displays the parent clock information.
show ptp port	Displays the ptp port information.
show platform software fed switch active ptp if-id {interface-id}	Displays details info about ptp status on the port.

Monitoring MSRP

To display the MSRP details, use the commands in the following table:

Command	Purpose
show msrp streams	Displays MSRP stream information.
show msrp streams detailed	Displays detailed MSRP stream information.
show msrp streams brief	Displays MSRP stream information in brief.
show msrp port bandwidth	Displays MSRP port bandwidth information.

Monitoring HQoS

To display the HQoS details, use the commands in the following table:

Command	Purpose
show run	Displays all the child policy map details.
show policy-map	Displays the details of the policy map configuration.
show platform hardware fed switch active qos queue stats interface <i>interface-id</i>	Displays the QoS statistics for different queue mappings in AVB.
show platform hardware fed switch active qos queue config interface <i>interface-id</i>	Displays the QoS queue configurations.
show policy-map interface <i>interface-id</i> [input output]	Displays the AVB QoS statistics. Packet counters for ingress and bytes counters for egress are accounted for QoS Statistics.

Monitoring MVRP

To display the MVRP details, use the commands in the following table:

Command	Purpose
show mvrp summary	Displays MVRP summary information.
show mvrp interface	Displays interface MVRP information.

Examples of AVB Configurations and Monitoring

Examples for AVB

This example shows how you can view the AVB domain.

```
Device#show avb domain

AVB Class-A
  Priority Code Point      : 3
  VLAN                    : 2
  Core ports              : 1
  Boundary ports         : 67

AVB Class-B
  Priority Code Point      : 2
  VLAN                    : 2
  Core ports              : 1
  Boundary ports         : 67
```

```
Interface      State      Delay      PCP  VID  Information
```

```

-----
Tel/0/1      down    N/A      Oper state not up
Tel/0/2      down    N/A      Oper state not up
Tel/0/3      down    N/A      Oper state not up
Tel/0/4      down    N/A      Oper state not up
Tel/0/5      up      N/A      Port is not asCapable
Tel/0/6      down    N/A      Oper state not up
Tel/0/7      down    N/A      Oper state not up
Tel/0/8      down    N/A      Oper state not up
Tel/0/9      down    N/A      Oper state not up
Tel/0/10     down    N/A      Oper state not up
Tel/0/11     down    N/A      Oper state not up
Tel/0/12     down    N/A      Oper state not up
Tel/0/13     down    N/A      Oper state not up
Tel/0/14     down    N/A      Oper state not up
Tel/0/15     down    N/A      Oper state not up
Tel/0/16     down    N/A      Oper state not up
Tel/0/17     down    N/A      Oper state not up
Tel/0/18     down    N/A      Oper state not up
Tel/0/19     up      N/A      Port is not asCapable
Tel/0/20     down    N/A      Oper state not up
Tel/0/21     down    N/A      Oper state not up
Tel/0/22     down    N/A      Oper state not up
Tel/0/23     up      N/A      Port is not asCapable
Tel/0/24     down    N/A      Oper state not up
Tel/0/25     down    N/A      Oper state not up
Tel/0/26     down    N/A      Oper state not up
Tel/0/27     down    N/A      Oper state not up
Tel/0/28     down    N/A      Oper state not up
Tel/0/29     up      N/A      Port is not asCapable
Tel/0/30     down    N/A      Oper state not up
Tel/0/31     down    N/A      Oper state not up
Tel/0/32     down    N/A      Oper state not up
Tel/0/33     down    N/A      Oper state not up
Tel/0/34     down    N/A      Oper state not up
Tel/0/35     up      N/A      Port is not asCapable
Tel/0/36     down    N/A      Oper state not up
Tel/0/37     down    N/A      Oper state not up
Tel/0/38     down    N/A      Oper state not up
Tel/0/39     up      507ns
Class- A      core      3      2
Class- B      core      2      2

Tel/0/40     down    N/A      Oper state not up
Tel/0/41     down    N/A      Oper state not up
Tel/0/42     down    N/A      Oper state not up
Tel/0/43     down    N/A      Oper state not up
Tel/0/44     down    N/A      Oper state not up
Tel/0/45     down    N/A      Oper state not up
Tel/0/46     down    N/A      Oper state not up

```

```

Te1/0/47      down      N/A      Oper state not up
Te1/0/48      down      N/A      Oper state not up
Te1/1/1       down      N/A      Oper state not up
Te1/1/2       down      N/A      Oper state not up
Te1/1/3       down      N/A      Oper state not up
Te1/1/4       down      N/A      Oper state not up
Te1/1/5       down      N/A      Oper state not up
Te1/1/6       down      N/A      Oper state not up
Te1/1/7       down      N/A      Oper state not up
Te1/1/8       down      N/A      Oper state not up
Te1/1/9       down      N/A      Oper state not up
Te1/1/10      down      N/A      Oper state not up
Te1/1/11      down      N/A      Oper state not up
Te1/1/12      down      N/A      Oper state not up
Te1/1/13      down      N/A      Oper state not up
Te1/1/14      down      N/A      Oper state not up
Te1/1/15      down      N/A      Oper state not up
Te1/1/16      down      N/A      Oper state not up
Fo1/1/1       down      N/A      Oper state not up
Fo1/1/2       down      N/A      Oper state not up
Fo1/1/3       down      N/A      Oper state not up
Fo1/1/4       down      N/A      Oper state not up

```

This example shows how you can view the AVB stream information.

Device#**show avb streams**

```

Stream ID:      0011.0100.0001:1      Incoming Interface:  Te1/1/1
  Destination   : 91E0.F000.FE00
  Class         : A
  Rank          : 1
  Bandwidth     : 6400 Kbit/s

```

Outgoing Interfaces:

```

-----
Interface      State      Time of Last Update      Information
-----
Te1/1/1       Ready     Tue Apr 26 01:25:40.634

```

```

Stream ID:      0011.0100.0002:2      Incoming Interface:  Te1/1/1
  Destination   : 91E0.F000.FE01
  Class         : A
  Rank          : 1
  Bandwidth     : 6400 Kbit/s

```

Outgoing Interfaces:

```
-----
```

Interface	State	Time of Last Update	Information
Tel1/1/1	Ready	Tue Apr 26 01:25:40.634	

```
-----
```

Examples for gPTP

This command can be used to see a brief status of ptp on the interfaces.

Device#**show ptp brief**

Interface	Domain	PTP State
FortyGigabitEthernet1/1/1	0	FAULTY
FortyGigabitEthernet1/1/2	0	SLAVE
GigabitEthernet1/1/1	0	FAULTY
GigabitEthernet1/1/2	0	FAULTY
GigabitEthernet1/1/3	0	FAULTY
GigabitEthernet1/1/4	0	FAULTY
TenGigabitEthernet1/0/1	0	FAULTY
TenGigabitEthernet1/0/2	0	FAULTY
TenGigabitEthernet1/0/3	0	MASTER
TenGigabitEthernet1/0/4	0	FAULTY
TenGigabitEthernet1/0/5	0	FAULTY
TenGigabitEthernet1/0/6	0	FAULTY
TenGigabitEthernet1/0/7	0	MASTER
TenGigabitEthernet1/0/8	0	FAULTY
TenGigabitEthernet1/0/9	0	FAULTY
TenGigabitEthernet1/0/10	0	FAULTY
TenGigabitEthernet1/0/11	0	MASTER
TenGigabitEthernet1/0/12	0	FAULTY
TenGigabitEthernet1/0/13	0	FAULTY
TenGigabitEthernet1/0/14	0	FAULTY
TenGigabitEthernet1/0/15	0	FAULTY
TenGigabitEthernet1/0/16	0	FAULTY
TenGigabitEthernet1/0/17	0	FAULTY
TenGigabitEthernet1/0/18	0	FAULTY
TenGigabitEthernet1/0/19	0	MASTER
TenGigabitEthernet1/0/20	0	FAULTY
TenGigabitEthernet1/0/21	0	FAULTY
TenGigabitEthernet1/0/22	0	FAULTY
TenGigabitEthernet1/0/23	0	FAULTY
TenGigabitEthernet1/0/24	0	FAULTY
TenGigabitEthernet1/1/1	0	FAULTY
TenGigabitEthernet1/1/2	0	FAULTY
TenGigabitEthernet1/1/3	0	FAULTY
TenGigabitEthernet1/1/4	0	FAULTY


```
TenGigabitEthernet1/1/5      0      FAULTY
TenGigabitEthernet1/1/6      0      FAULTY
TenGigabitEthernet1/1/7      0      FAULTY
TenGigabitEthernet1/1/8      0      FAULTY
```

This command can be used to view ptp clock information.

```
Device#show ptp clock

PTP CLOCK INFO
  PTP Device Type: Boundary clock
  PTP Device Profile: IEEE 802/1AS Profile
  Clock Identity: 0x4:6C:9D:FF:FE:4F:95:0
  Clock Domain: 0
  Number of PTP ports: 38
  PTP Packet priority: 4
  Priority1: 128
  Priority2: 128
  Clock Quality:
    Class: 248
    Accuracy: Unknown
    Offset (log variance): 16640
  Offset From Master(ns): 0
  Mean Path Delay(ns): 0
  Steps Removed: 3
  Local clock time: 00:12:13 UTC Jan 1 1970
```

This command can be used to view the parent clock information.

```
Device#show ptp parent

PTP PARENT PROPERTIES
  Parent Clock:
  Parent Clock Identity: 0xB0:7D:47:FF:FE:9E:B6:80
  Parent Port Number: 3
  Observed Parent Offset (log variance): 16640
  Observed Parent Clock Phase Change Rate: N/A

  Grandmaster Clock:
  Grandmaster Clock Identity: 0x4:6C:9D:FF:FE:67:3A:80
  Grandmaster Clock Quality:
    Class: 248
    Accuracy: Unknown
    Offset (log variance): 16640
    Priority1: 0
    Priority2: 128
```

This command can be used to view the ptp port information.

```
Device#show ptp port
```

```
PTP PORT DATASET: FortyGigabitEthernet1/1/1
  Port identity: clock identity: 0x4:6C:9D:FF:FE:4E:3A:80
  Port identity: port number: 1
  PTP version: 2
  Port state: FAULTY
  Delay request interval(log mean): 5
  Announce receipt time out: 3
  Peer mean path delay(ns): 0
  Announce interval(log mean): 1
  Sync interval(log mean): 0
  Delay Mechanism: End to End
  Peer delay request interval(log mean): 0
  Sync fault limit: 500000000
```

```
PTP PORT DATASET: FortyGigabitEthernet1/1/2
  Port identity: clock identity: 0x4:6C:9D:FF:FE:4E:3A:80
  Port identity: port number: 2
  PTP version: 2
  Port state: FAULTY
  Delay request interval(log mean): 5
  Announce receipt time out: 3
  Peer mean path delay(ns): 0
  Announce interval(log mean): 1
--More--
```

This command can be used to view the port information for a particular interface.

```
Device#show ptp port gi1/0/26
```

```
PTP PORT DATASET: GigabitEthernet1/0/26
  Port identity: clock identity: 0x4:6C:9D:FF:FE:4E:3A:80
  Port identity: port number: 28
  PTP version: 2
  Port state: MASTER
  Delay request interval(log mean): 5
  Announce receipt time out: 3
  Peer mean path delay(ns): 0
  Announce interval(log mean): 1
  Sync interval(log mean): 0
  Delay Mechanism: Peer to Peer
  Peer delay request interval(log mean): 0
  Sync fault limit: 500000000
```

This command can be used to view the

```
Device#show platform software fed switch active ptp if-id 0x20
```

```

Displaying port data for if_id 20
=====

Port Mac Address 04:6C:9D:4E:3A:9A
Port Clock Identity 04:6C:9D:FF:FE:4E:3A:80
Port number 28
PTP Version 2
domain_value 0
dot1as_capable: FALSE
sync_recpt_timeout_time_interval 375000000 nanoseconds
sync_interval 125000000 nanoseconds
neighbor_rate_ratio 0.000000
neighbor_prop_delay 0 nanoseconds
compute_neighbor_rate_ratio: TRUE
compute_neighbor_prop_delay: TRUE
port_enabled: TRUE
ptt_port_enabled: TRUE
current_log_pdelay_req_interval 0
pdelay_req_interval 0 nanoseconds
allowed_lost_responses 3
neighbor_prop_delay_threshold 2000 nanoseconds
is_measuring_delay : FALSE
Port state: : MASTER
sync_seq_num 22023
delay_req_seq_num 23857
num sync messages transmitted 0
num sync messages received 0
num followup messages transmitted 0
num followup messages received 0
num pdelay requests transmitted 285695
num pdelay requests received 0
num pdelay responses transmitted 0
num pdelay responses received 0
num pdelay followup responses transmitted 0
num pdelay followup responses received 0

```

Examples for MSRP

This example shows how you can view the MSRP stream information.

```
Device#show msrp streams
```

```

-----
Stream ID Talker Listener
Advertise Fail Ready ReadyFail AskFail
R | D R | D R | D R | D R | D
-----
YY:YY:YY:YY:YY:YY:0001 1 | 2 0 | 0 1 | 0 0 | 1 1 | 0
ZZ:ZZ:ZZ:ZZ:ZZ:ZZ:0002 1 | 0 0 | 1 1 | 0 0 | 0 0 | 1

```

This example shows how you can view the detailed MSRP stream information.

Device#**show msrp streams detail**

```
Stream ID:          0011.0100.0001:1
  Stream Age: 01:57:46 (since Mon Apr 25 23:41:11.413)
  Create Time: Mon Apr 25 23:41:11.413
  Destination Address: 91E0.F000.FE00
  VLAN Identifier: 1
  Data Frame Priority: 3 (Class A)
  MaxFrameSize: 100
  MaxIntervalFrames: 1 frames/125us
  Stream Bandwidth: 6400 Kbit/s
  Rank: 1
  Received Accumulated Latency: 20
  Stream Attributes Table:
```

```
-----
Interface          Attr State      Direction      Type
-----
  Gi1/0/1          Register        Talker         Advertise
  Attribute Age: 01:57:46 (since Mon Apr 25 23:41:11.413)
  MRP Applicant: Very Anxious Observer, send None
  MRP Registrar: In
  Accumulated Latency: 20
  ----
  Te1/1/1          Declare         Talker         Advertise
  Attribute Age: 00:19:52 (since Tue Apr 26 01:19:05.525)
  MRP Applicant: Quiet Active, send None
  MRP Registrar: In
  Accumulated Latency: 20
  ----
  Te1/1/1          Register        Listener       Ready
  Attribute Age: 00:13:17 (since Tue Apr 26 01:25:40.635)
  MRP Applicant: Very Anxious Observer, send None
  MRP Registrar: In
  ----
  Gi1/0/1          Declare         Listener       Ready
  Attribute Age: 00:13:17 (since Tue Apr 26 01:25:40.649)
  MRP Applicant: Quiet Active, send None
  MRP Registrar: In
  -----
```

This example shows how you can view the MSRP stream information in brief.

Device#**show msrp streams brief**

Legend: R = Registered, D = Declared.

Stream ID Fail	Destination Address	Bandwidth (Kbit/s)	Talkers R D	Listeners R D
0011.0100.0001:1 No	91E0.F000.FE00	6400	1 1	1 1
0011.0100.0002:2 No	91E0.F000.FE01	6400	1 1	1 1
0011.0100.0003:3 No	91E0.F000.FE02	6400	1 1	1 1
0011.0100.0004:4 No	91E0.F000.FE03	6400	1 1	1 1
0011.0100.0005:5 No	91E0.F000.FE04	6400	1 1	1 1
0011.0100.0006:6 No	91E0.F000.FE05	6400	1 1	1 1
0011.0100.0007:7 No	91E0.F000.FE06	6400	1 1	1 1
0011.0100.0008:8 No	91E0.F000.FE07	6400	1 1	1 1
0011.0100.0009:9 No	91E0.F000.FE08	6400	1 1	1 1
0011.0100.000A:10 No	91E0.F000.FE09	6400	1 1	1 1

This example shows how you can view the MSRP port bandwidth information.

Device#**show msrp port bandwidth**

Ethernet Interface	Capacity (Kbit/s)	Assigned A B	Available A B	Reserved A B
Tel1/0/1	10000000	75 0	75 75	0 0
Tel1/0/2	10000000	75 0	75 75	0 0
Tel1/0/3	1000000	75 0	75 75	0 0
Tel1/0/4	10000000	75 0	75 75	0 0
Tel1/0/5	10000000	75 0	75 75	0 0
Tel1/0/6	10000000	75 0	75 75	0 0
Tel1/0/8	10000000	75 0	75 75	0 0
Tel1/0/9	10000000	75 0	75 75	0 0
Tel1/0/10	10000000	75 0	75 75	0 0
Tel1/0/11	10000000	75 0	75 75	0 0
Tel1/0/12	10000000	75 0	75 75	0 0
Tel1/0/13	1000000	75 0	75 75	0 0
Tel1/0/14	10000000	75 0	75 75	0 0
Tel1/0/15	10000000	75 0	75 75	0 0
Tel1/0/16	10000000	75 0	75 75	0 0

Tel/0/17	10000000	75 0	75 75	0 0
Tel/0/18	10000000	75 0	75 75	0 0
Tel/0/19	1000000	75 0	75 75	0 0
Tel/0/20	10000000	75 0	75 75	0 0
Tel/0/21	10000000	75 0	75 75	0 0
Tel/0/22	10000000	75 0	75 75	0 0
Tel/0/23	10000000	75 0	75 75	0 0
Tel/0/24	10000000	75 0	75 75	0 0
Gil/1/1	1000000	75 0	75 75	0 0
Gil/1/2	1000000	75 0	75 75	0 0
Gil/1/3	1000000	75 0	75 75	0 0
Gil/1/4	1000000	75 0	75 75	0 0
Tel/1/1	10000000	75 0	75 75	0 0
Tel/1/2	10000000	75 0	75 75	0 0
Tel/1/3	10000000	75 0	75 75	0 0
Tel/1/4	10000000	75 0	75 75	0 0
Tel/1/5	10000000	75 0	75 75	0 0
Tel/1/6	10000000	75 0	75 75	0 0
Tel/1/7	10000000	75 0	75 75	0 0
Tel/1/8	10000000	75 0	75 75	0 0
Fo1/1/1	40000000	75 0	75 75	0 0
Fo1/1/2	40000000	75 0	75 75	0 0

Examples for HQoS

This example shows how you can view all the policy-map configuration details when AVB is enabled.

```
Device#show policy-map
```

```

Policy Map AVB-Input-Policy-Remark-B
  Class AVB-SR-CLASS-A
    set cos 3
  Class AVB-SR-CLASS-B
    set cos 0
  Class class-default
    service-policy AVB-Input-Child-Policy

Policy Map AVB-Input-Policy-Remark-A
  Class AVB-SR-CLASS-A
    set cos 0
  Class AVB-SR-CLASS-B
    set cos 2
  Class class-default
    service-policy AVB-Input-Child-Policy

Policy Map AVB-Output-Policy-Default
  Class AVB-SR-CLASS-A
    priority level 1 1 (%)
  Class AVB-SR-CLASS-B
    priority level 2 1 (%)
  Class AVB-CONTROL-MGMT-QUEUE

```

```
    priority level 3 15 (%)
Class class-default
    bandwidth remaining 100 (%)
    queue-buffers ratio 70
    service-policy AVB-Output-Child-Policy

Policy Map AVB-Input-Policy-Remark-AB
Class AVB-SR-CLASS-A
    set cos 0
Class AVB-SR-CLASS-B
    set cos 0
Class class-default
    service-policy AVB-Input-Child-Policy

Policy Map AVB-Input-Policy-Remark-None
Class AVB-SR-CLASS-A
    set cos 3
Class AVB-SR-CLASS-B
    set cos 2
Class class-default
    service-policy AVB-Input-Child-Policy

Policy Map AVB-Input-Child-Policy
Class AVB-VOIP-DATA-CLASS
    set dscp ef
Class AVB-MULTIMEDIA-CONF-CLASS
    set dscp af41
Class AVB-BULK-DATA-CLASS
    set dscp af11
Class AVB-TRANSACTIONAL-DATA-CLASS
    set dscp af21
Class AVB-SCAVENGER-DATA-CLASS
    set dscp cs1
Class AVB-SIGNALING-CLASS
    set dscp cs3
Class class-default
    set dscp default

Policy Map AVB-Output-Child-Policy
Class AVB-VOIP-PRIORITY-QUEUE
    bandwidth remaining 30 (%)
    queue-buffers ratio 30
Class AVB-MULTIMEDIA-CONF-STREAMING-QUEUE
    bandwidth remaining 15 (%)
    queue-limit dscp af41 percent 80
    queue-limit dscp af31 percent 80
    queue-limit dscp af42 percent 90
    queue-limit dscp af32 percent 90
    queue-buffers ratio 15
Class AVB-TRANSACTIONAL-DATA-QUEUE
    bandwidth remaining 15 (%)
```

```

queue-limit dscp af21 percent 80
queue-limit dscp af22 percent 90
queue-buffers ratio 15
Class AVB-BULK-SCAVENGER-DATA-QUEUE
bandwidth remaining 15 (%)
queue-limit dscp af11 percent 80
queue-limit dscp af12 percent 90
queue-limit dscp cs1 percent 80
queue-buffers ratio 15
Class class-default
bandwidth remaining 25 (%)
queue-buffers ratio 25

```

This example shows how you can view all the policy-map configuration details when AVB is disabled.

Device#**show policy-map**

Building configuration...

```

Current configuration : 2079 bytes
!
policy-map AVB-Input-Child-Policy
class AVB-VOIP-DATA-CLASS
  set dscp ef
class AVB-MULTIMEDIA-CONF-CLASS
  set dscp af41
class AVB-BULK-DATA-CLASS
  set dscp af11
class AVB-TRANSACTIONAL-DATA-CLASS
  set dscp af21
class AVB-SCAVENGER-DATA-CLASS
  set dscp cs1
class AVB-SIGNALING-CLASS
  set dscp cs3
class class-default
  set dscp default
policy-map AVB-Output-Child-Policy
class AVB-VOIP-PRIORITY-QUEUE
  bandwidth remaining percent 30
  queue-buffers ratio 30
class AVB-MULTIMEDIA-CONF-STREAMING-QUEUE
  bandwidth remaining percent 15
  queue-limit dscp af41 percent 80
  queue-limit dscp af31 percent 80
  queue-limit dscp af42 percent 90
  queue-limit dscp af32 percent 90
  queue-buffers ratio 15
class AVB-TRANSACTIONAL-DATA-QUEUE

```



```

bandwidth remaining percent 15
queue-limit dscp af21 percent 80
queue-limit dscp af22 percent 90
queue-buffers ratio 15
class AVB-BULK-SCAVENGER-DATA-QUEUE
bandwidth remaining percent 15
queue-limit dscp af11 percent 80
queue-limit dscp af12 percent 90
queue-limit dscp cs1 percent 80
queue-buffers ratio 15
class class-default
bandwidth remaining percent 25
queue-buffers ratio 25
!
end

```

This example shows how you can view all the class-map configuration details when AVB is enabled.

```
Device#show class-map
```

```

Class Map match-any AVB-VOIP-DATA-CLASS (id 31)
  Match dscp ef (46)
  Match cos 5

Class Map match-any AVB-BULK-DATA-CLASS (id 33)
  Match access-group name AVB-BULK-DATA-CLASS-ACL

Class Map match-any AVB-VOIP-PRIORITY-QUEUE (id 37)
  Match dscp cs4 (32) cs5 (40) ef (46)
  Match precedence 4 5
  Match cos 5

Class Map match-any AVB-MULTIMEDIA-CONF-CLASS (id 32)
  Match access-group name AVB-MULTIMEDIA-CONF-CLASS-ACL

Class Map match-any AVB-SIGNALING-CLASS (id 36)
  Match access-group name AVB-SIGNALING-CLASS-ACL

Class Map match-any AVB-MULTIMEDIA-CONF-STREAMING-QUEUE (id 38)
  Match dscp af41 (34) af42 (36) af43 (38)
  Match dscp af31 (26) af32 (28) af33 (30)
  Match cos 4

Class Map match-any AVB-BULK-SCAVENGER-DATA-QUEUE (id 40)
  Match dscp cs1 (8) af11 (10) af12 (12) af13 (14)
  Match precedence 1
  Match cos 1

```

```

Class Map match-any AVB-TRANSACTIONAL-DATA-CLASS (id 34)
  Match access-group name AVB-TRANSACTIONAL-DATA-CLASS-ACL

Class Map match-any AVB-TRANSACTIONAL-DATA-QUEUE (id 39)
  Match dscp af21 (18) af22 (20) af23 (22)

Class Map match-any AVB-SR-CLASS-B (id 42)
  Match cos 2

Class Map match-any AVB-SR-CLASS-A (id 41)
  Match cos 3

Class Map match-any AVB-SCAVENGER-DATA-CLASS (id 35)
  Match access-group name AVB-SCAVENGER-DATA-CLASS-ACL

Class Map match-any AVB-CONTROL-MGMT-QUEUE (id 43)
  Match ip dscp cs2 (16)
  Match ip dscp cs3 (24)
  Match ip dscp cs6 (48)
  Match ip dscp cs7 (56)
  Match ip precedence 6
  Match ip precedence 7
  Match ip precedence 3
  Match ip precedence 2
  Match cos 6
  Match cos 7

```

This example shows how you can view all the class-map configuration details when AVB is disabled.

```

Device#show class-map

Building configuration...

Current configuration : 2650 bytes
!
class-map match-any AVB-VOIP-DATA-CLASS
match dscp ef
  match cos 5
class-map match-any AVB-BULK-DATA-CLASS
match access-group name AVB-BULK-DATA-CLASS-ACL
class-map match-any AVB-VOIP-PRIORITY-QUEUE
match dscp cs4 cs5 ef
  match precedence 4 5
  match cos 5
class-map match-any AVB-MULTIMEDIA-CONF-CLASS
match access-group name AVB-MULTIMEDIA-CONF-CLASS-ACL
class-map match-any AVB-SIGNALING-CLASS
match access-group name AVB-SIGNALING-CLASS-ACL
class-map match-any AVB-MULTIMEDIA-CONF-STREAMING-QUEUE

```

```

match dscp af41 af42 af43
  match dscp af31 af32 af33
  match cos 4
class-map match-any AVB-BULK-SCAVENGER-DATA-QUEUE
match dscp cs1 af11 af12 af13
  match precedence 1
  match cos 1
class-map match-any AVB-TRANSACTIONAL-DATA-CLASS
match access-group name AVB-TRANSACTIONAL-DATA-CLASS-ACL
class-map match-any AVB-TRANSACTIONAL-DATA-QUEUE
match dscp af21 af22 af23
class-map match-any AVB-SCAVENGER-DATA-CLASS
match access-group name AVB-SCAVENGER-DATA-CLASS-ACL
end

```

This example shows how you can view all the AVB QoS statistics.

```
Device#show policy-map interface gigabitEthernet 1/0/15
```

```
GigabitEthernet1/0/15
```

```
Service-policy input: AVB-Input-Policy-Remark-AB
```

```
Class-map: AVB-SR-CLASS-A (match-any)
```

```
0 packets
```

```
Match: cos 3
```

```
0 packets, 0 bytes
```

```
5 minute rate 0 bps
```

```
QoS Set
```

```
cos 0
```

```
Class-map: AVB-SR-CLASS-B (match-any)
```

```
0 packets
```

```
Match: cos 2
```

```
0 packets, 0 bytes
```

```
5 minute rate 0 bps
```

```
QoS Set
```

```
cos 0
```

```
Class-map: class-default (match-any)
```

```
0 packets
```

```
Match: any
```

```
Service-policy : AVB-Input-Child-Policy
```

```
Class-map: AVB-VOIP-DATA-CLASS (match-any)
```

```
0 packets
```

```
Match: dscp ef (46)
```

```
0 packets, 0 bytes
```

```
5 minute rate 0 bps
```

```
Match: cos 5
      0 packets, 0 bytes
      5 minute rate 0 bps
QoS Set
  cos 3

Class-map: AVB-MULTIMEDIA-CONF-CLASS (match-any)
  0 packets
Match: access-group name AVB-MULTIMEDIA-CONF-CLASS-ACL
  0 packets, 0 bytes
  5 minute rate 0 bps
QoS Set
  dscp af41

Class-map: AVB-BULK-DATA-CLASS (match-any)
  0 packets
Match: access-group name AVB-BULK-DATA-CLASS-ACL
  0 packets, 0 bytes
  5 minute rate 0 bps
QoS Set
  dscp af11

Class-map: AVB-TRANSACTIONAL-DATA-CLASS (match-any)
  0 packets
Match: access-group name AVB-TRANSACTIONAL-DATA-CLASS-ACL
  0 packets, 0 bytes
  5 minute rate 0 bps
QoS Set
  dscp af21

Class-map: AVB-SCAVENGER-DATA-CLASS (match-any)
  0 packets
Match: access-group name AVB-SCAVENGER-DATA-CLASS-ACL
  0 packets, 0 bytes
  5 minute rate 0 bps
QoS Set
  dscp cs1

Class-map: AVB-SIGNALING-CLASS (match-any)
  0 packets
Match: access-group name AVB-SIGNALING-CLASS-ACL
  0 packets, 0 bytes
  5 minute rate 0 bps
QoS Set
  dscp cs3

Class-map: class-default (match-any)
  0 packets
Match: any
QoS Set
  dscp default
```

Service-policy output: AVB-Output-Policy-Default

queue stats for all priority classes:

```
Queueing
priority level 3

(total drops) 0
(bytes output) 7595
```

queue stats for all priority classes:

```
Queueing
priority level 2

(total drops) 0
(bytes output) 0
```

queue stats for all priority classes:

```
Queueing
priority level 1

(total drops) 0
(bytes output) 0
```

Class-map: AVB-SR-CLASS-A (match-any)

```
0 packets
Match: cos 3
    0 packets, 0 bytes
    5 minute rate 0 bps
Priority: 1% (10000 kbps), burst bytes 250000,

Priority Level: 1
```

Class-map: AVB-SR-CLASS-B (match-any)

```
0 packets
Match: cos 2
    0 packets, 0 bytes
    5 minute rate 0 bps
Priority: 1% (10000 kbps), burst bytes 250000,

Priority Level: 2
```

Class-map: AVB-CONTROL-MGMT-QUEUE (match-any)

```
0 packets
Match: ip dscp cs2 (16)
    0 packets, 0 bytes
    5 minute rate 0 bps
Match: ip dscp cs3 (24)
    0 packets, 0 bytes
    5 minute rate 0 bps
Match: ip dscp cs6 (48)
```

```

    0 packets, 0 bytes
    5 minute rate 0 bps
Match: ip dscp cs7 (56)
    0 packets, 0 bytes
    5 minute rate 0 bps
Match: ip precedence 6
    0 packets, 0 bytes
    5 minute rate 0 bps
Match: ip precedence 7
    0 packets, 0 bytes
    5 minute rate 0 bps
Match: ip precedence 3
    0 packets, 0 bytes
    5 minute rate 0 bps
Match: ip precedence 2
    0 packets, 0 bytes
    5 minute rate 0 bps
Match: cos 6
    0 packets, 0 bytes
    5 minute rate 0 bps
Match: cos 7
    0 packets, 0 bytes
    5 minute rate 0 bps
Priority: 15% (150000 kbps), burst bytes 3750000,

Priority Level: 3

Class-map: class-default (match-any)
  0 packets
  Match: any
  Queueing

  (total drops) 0
  (bytes output) 0
  bandwidth remaining 80%
  queue-buffers ratio 70

Service-policy : AVB-Output-Child-Policy

Class-map: AVB-VOIP-PRIORITY-QUEUE (match-any)
  0 packets
  Match: dscp cs4 (32) cs5 (40) ef (46)
    0 packets, 0 bytes
    5 minute rate 0 bps
  Match: precedence 4 5
    0 packets, 0 bytes
    5 minute rate 0 bps
  Match: cos 5
    0 packets, 0 bytes
    5 minute rate 0 bps
  Queueing

```

```
(total drops) 0
(bytes output) 0
bandwidth remaining 30%
queue-buffers ratio 30

Class-map: AVB-MULTIMEDIA-CONF-STREAMING-QUEUE (match-any)
  0 packets
  Match: dscp af41 (34) af42 (36) af43 (38)
    0 packets, 0 bytes
    5 minute rate 0 bps
  Match: dscp af31 (26) af32 (28) af33 (30)
    0 packets, 0 bytes
    5 minute rate 0 bps
  Match: cos 4
    0 packets, 0 bytes
    5 minute rate 0 bps
  Queueing

  queue-limit dscp 26 percent 80
  queue-limit dscp 28 percent 90
  queue-limit dscp 34 percent 80
  queue-limit dscp 36 percent 90
  (total drops) 0
  (bytes output) 0
  bandwidth remaining 15%

  queue-buffers ratio 15

Class-map: AVB-TRANSACTIONAL-DATA-QUEUE (match-any)
  0 packets
  Match: dscp af21 (18) af22 (20) af23 (22)
    0 packets, 0 bytes
    5 minute rate 0 bps
  Match: cos 0
    0 packets, 0 bytes
    5 minute rate 0 bps
  Queueing

  queue-limit dscp 18 percent 80
  queue-limit dscp 20 percent 90
  (total drops) 0
  (bytes output) 0
  bandwidth remaining 15%

  queue-buffers ratio 15

Class-map: AVB-BULK-SCAVENGER-DATA-QUEUE (match-any)
  0 packets
  Match: dscp cs1 (8) af11 (10) af12 (12) af13 (14)
    0 packets, 0 bytes
```

```

    5 minute rate 0 bps
Match: precedence 1
    0 packets, 0 bytes
    5 minute rate 0 bps
Match: cos 1
    0 packets, 0 bytes
    5 minute rate 0 bps
Queueing

queue-limit dscp 8 percent 80
queue-limit dscp 10 percent 80
queue-limit dscp 12 percent 90
(total drops) 0
(bytes output) 0
bandwidth remaining 15%

queue-buffers ratio 15

Class-map: class-default (match-any)
  0 packets
Match: any
Queueing

(total drops) 0
(bytes output) 0
bandwidth remaining 25%
queue-buffers ratio 25

```

The following is a sample output from the **show platform hardware fed switch active qos queue config interface interface-id** command.

```

Device#show platform hardware fed switch active qos queue config interface t1/0/11
DATA Port:2 GPN:11 AFD:Disabled QoSMap:2 HW Queues: 16 - 23
  DrainFast:Disabled PortSoftStart:1 - 3600

```

```

-----
      DTS   Hardmax   Softmax   PortSMin   GlblSMin   PortStEnd
-----
0  0  9    33    3    33    0    0    0    0    1  4800
1  0  9    33    4  2400  99   99    0    0    1  4800
2  1  6    30    4  2400  90   90    0    0    1  4800
3  1  5     0    4  2400 189  189   63   63    1  4800
4  1  5     0    4  2400  90   90   30   30    1  4800
5  1  5     0    4  2400  90   90   30   30    1  4800
6  1  5     0    4  2400  90   90   30   30    1  4800
7  1  5     0    4  2400 153  153   51   51    1  4800
Priority   Shaped/shared   weight   shaping_step
-----
0         1       Shaped       16383       163
1         2       Shaped       16383       163
2         3       Shaped        125       153
3         7       Shared        50         0

```


4	7	Shared	100	0
5	7	Shared	100	0
6	7	Shared	100	0
7	7	Shared	60	0

The following is a sample output from the **show platform hardware fed switch active qos queue stats interface interface-id** command.

```
Device#show platform hardware fed switch active qos queue stats interface t1/0/15
DATA Port:8 Enqueue Counters
```

Queue	Buffers	Enqueue-TH0	Enqueue-TH1	Enqueue-TH2
0	1	0	0	23788459506
1	0	0	0	30973507838
2	0	0	12616270	13164040
3	0	0	0	0
4	0	0	0	0
5	0	0	0	0
6	0	0	0	0
7	0	0	0	119616

```
DATA Port:8 Drop Counters
```

Queue	Drop-TH0	Drop-TH1	Drop-TH2	SBufDrop	QebDrop
0	0	0	0	0	0
1	0	0	0	0	0
2	0	0	0	0	0
3	0	0	0	0	0
4	0	0	0	0	0

Examples for MVRP

This example shows how you can view the MVRP summary information.

```
Device#show mvrp summary
```

```
MVRP global state           : enabled
MVRP VLAN creation         : enabled
VLANs created via MVRP     : 2,567
MAC learning auto provision : disabled
Learning disabled on VLANs : none
```

This example shows how you can view the interface MVRP information.

```
Device#show mvrp interface
```

Port	Status	Registrar State
------	--------	-----------------

```

Tel/0/47      on          normal
Tel/1/3       off         normal

Port          Join Timeout      Leave Timeout      Leaveall Timeout   Periodic
                                                    Timeout

Tel/0/47      20              60                1000               100
Tel/1/3       20              60                1000               100

Port          Vlans Declared
Tel/0/47      1-2,567,900
Tel/1/3       none

Port          Vlans Registered
Tel/0/47      2,567
Tel/1/3       none

Port          Vlans Registered and in Spanning Tree Forwarding State
Tel/0/47      2,567
Tel/1/3       none

```

Feature Information for AVB

The following table provides release information about the feature or features described in this module. This table lists only the software release that introduced support for a given feature in a given software release train. Unless noted otherwise, subsequent releases of that software release train also support that feature.

Use Cisco Feature Navigator to find information about platform support and Cisco software image support. To access Cisco Feature Navigator, go to www.cisco.com/go/cfn. An account on Cisco.com is not required.

Table 1: Feature Information for AVB

Releases	Modification
Cisco IOS XE Fuji 16.8.1a	This feature was introduced.