Interface and Hardware Components Configuration Guide, Cisco IOS XE 17.16.x (Catalyst 9600 Switches)

First Published: 2024-12-11

Americas Headquarters
Cisco Systems, Inc.
170 West Tasman Drive
San Jose, CA 95134-1706
USA
http://www.cisco.com
Tel: 408 526-4000
800 553-NETS (6387)
Fax: 408 527-0883

THE SPECIFICATIONS AND INFORMATION REGARDING THE PRODUCTS IN THIS MANUAL ARE SUBJECT TO CHANGE WITHOUT NOTICE. ALL STATEMENTS, INFORMATION, AND RECOMMENDATIONS IN THIS MANUAL ARE BELIEVED TO BE ACCURATE BUT ARE PRESENTED WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED. USERS MUST TAKE FULL RESPONSIBILITY FOR THEIR APPLICATION OF ANY PRODUCTS.

THE SOFTWARE LICENSE AND LIMITED WARRANTY FOR THE ACCOMPANYING PRODUCT ARE SET FORTH IN THE INFORMATION PACKET THAT SHIPPED WITH THE PRODUCT AND ARE INCORPORATED HEREIN BY THIS REFERENCE. IF YOU ARE UNABLE TO LOCATE THE SOFTWARE LICENSE OR LIMITED WARRANTY, CONTACT YOUR CISCO REPRESENTATIVE FOR A COPY.

The Cisco implementation of TCP header compression is an adaptation of a program developed by the University of California, Berkeley (UCB) as part of UCB's public domain version of the UNIX operating system. All rights reserved. Copyright © 1981, Regents of the University of California.

NOTWITHSTANDING ANY OTHER WARRANTY HEREIN, ALL DOCUMENT FILES AND SOFTWARE OF THESE SUPPLIERS ARE PROVIDED “AS IS" WITH ALL FAULTS. CISCO AND THE ABOVE-NAMED SUPPLIERS DISCLAIM ALL WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING, WITHOUT LIMITATION, THOSE OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT OR ARISING FROM A COURSE OF DEALING, USAGE, OR TRADE PRACTICE.

IN NO EVENT SHALL CISCO OR ITS SUPPLIERS BE LIABLE FOR ANY INDIRECT, SPECIAL, CONSEQUENTIAL, OR INCIDENTAL DAMAGES, INCLUDING, WITHOUT LIMITATION, LOST PROFITS OR LOSS OR DAMAGE TO DATA ARISING OUT OF THE USE OR INABILITY TO USE THIS MANUAL, EVEN IF CISCO OR ITS SUPPLIERS HAVE BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

Any Internet Protocol (IP) addresses and phone numbers used in this document are not intended to be actual addresses and phone numbers. Any examples, command display output, network topology diagrams, and other figures included in the document are shown for illustrative purposes only. Any use of actual IP addresses or phone numbers in illustrative content is unintentional and coincidental.

All printed copies and duplicate soft copies of this document are considered uncontrolled. See the current online version for the latest version.

Cisco has more than 200 offices worldwide. Addresses and phone numbers are listed on the Cisco website at www.cisco.com/go/offices.

Cisco and the Cisco logo are trademarks or registered trademarks of Cisco and/or its affiliates in the U.S. and other countries. To view a list of Cisco trademarks, go to this URL: https://www.cisco.com/c/en/us/about/legal/trademarks.html. Third-party trademarks mentioned are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (1721R)

© 2024 Cisco Systems, Inc. All rights reserved.

Preface

This preface describes the conventions of this document and information on how to obtain other documentation. It also provides information on what's new in Cisco product documentation.

- Document Conventions , on page iii
- Related Documentation, on page v
- Obtaining Documentation and Submitting a Service Request, on page v

Document Conventions

This document uses the following conventions:

Convention	Description
^ or Ctrl	Both the ^ symbol and Ctrl represent the Control (Ctrl) key on a keyboard. For example, the key combination ^**D** or **Ctrl-D** means that you hold down the Control key while you press the D key. (Keys are indicated in capital letters but are not case sensitive.)
bold font	Commands and keywords and user-entered text appear in **bold** font.
Italic font	Document titles, new or emphasized terms, and arguments for which you supply values are in *italic* font.
`Courier` font	Terminal sessions and information the system displays appear in `courier` font.
`Bold Courier` font	**`Bold Courier`** font indicates text that the user must enter.
[x]	Elements in square brackets are optional.
...	An ellipsis (three consecutive nonbolded periods without spaces) after a syntax element indicates that the element can be repeated.
|	A vertical line, called a pipe, indicates a choice within a set of keywords or arguments.
[x | y]	Optional alternative keywords are grouped in brackets and separated by vertical bars.

Convention	Description
{x | y}	Required alternative keywords are grouped in braces and separated by vertical bars.
[x {y | z}]	Nested set of square brackets or braces indicate optional or required choices within optional or required elements. Braces and a vertical bar within square brackets indicate a required choice within an optional element.
string	A nonquoted set of characters. Do not use quotation marks around the string or the string will include the quotation marks.
< >	Nonprinting characters such as passwords are in angle brackets.
[ ]	Default responses to system prompts are in square brackets.
!, #	An exclamation point (!) or a pound sign (#) at the beginning of a line of code indicates a comment line.

Reader Alert Conventions

This document may use the following conventions for reader alerts:

Note Means *reader take note*. Notes contain helpful suggestions or references to material not covered in the manual.

Tip Means *the following information will help you solve a problem.*

Caution Means *reader be careful*. In this situation, you might do something that could result in equipment damage or loss of data.

Timesaver Means *the described action saves time.* You can save time by performing the action described in the paragraph.

Take note of the following general safety warnings:

Warning IMPORTANT SAFETY INSTRUCTIONS

Before you work on any equipment, be aware of the hazards involved with electrical circuitry and be familiar with standard practices for preventing accidents. Read the installation instructions before using, installing, or connecting the system to the power source. Use the statement number at the beginning of each warning statement to locate its translation in the translated safety warnings for this device.

SAVE THESE INSTRUCTIONS

Related Documentation

Note Before installing or upgrading the device, refer to the device release notes.

- Cisco Catalyst 9600 Series Switches documentation, located at:

  https://www.cisco.com/c/en/us/products/switches/catalyst-9600-series-switches/index.html

Obtaining Documentation and Submitting a Service Request

For information on obtaining documentation, submitting a service request, and gathering additional information, see the monthly *What's New in Cisco Product Documentation*, which also lists all new and revised Cisco technical documentation, at:

http://www.cisco.com/c/en/us/td/docs/general/whatsnew/whatsnew.html

Subscribe to the *What's New in Cisco Product Documentation* as a Really Simple Syndication (RSS) feed and set content to be delivered directly to your desktop using a reader application. The RSS feeds are a free service and Cisco currently supports RSS version 2.0.

CONTENTS

PREFACE

Preface iii

Document Conventions iii

Related Documentation v

Obtaining Documentation and Submitting a Service Request v

CHAPTER 1

Configuring Interface Characteristics 1

Information About Interface Characteristics 1

Interface Types 1

Port-Based VLANs 1

Switch Ports 2

Console Ports 4

USB Mini-Type B Console Port 4

Console Port Change Logs 5

Disabling USB Ports 5

Interface Connections 5

Interface Configuration Mode 6

Breakout Interfaces 7

Limitations for Breakout Interfaces 7

Default Ethernet Interface Configuration 7

Interface Speed and Duplex Mode 8

Speed and Duplex Configuration Guidelines 9

Port Settings 9

Port Mapping and Oversubscription 10

Port Mapping on C9600-LC-24C 11

Port Mapping on C9600X-LC-56YL4C 12

Port Group Modes on C9600X-LC-32CD 13

IEEE 802.3x Flow Control 14
Layer 3 Interfaces 14
How to Configure Interface Characteristics 16
Configuring an Interface 16
Adding a Description for an Interface 17
Configuring a Range of Interfaces 18
Configuring and Using Interface Range Macros 19
Setting the Interface Speed and Duplex Parameters 20
Configuring Port Settings for an Interface 22
Configuring a Breakout Interface 24
Configuring Hundred Gigabit Ethernet Interface on C9600-LC-24C 25
Configuring TenGigabit Speed on Cisco Catalyst 9600 Series Supervisor 2 Module Inserted with Dual-rate Optics 26
Configuring Four Hundred GigabitEthernet Port Group mode on C9600X-LC-32CD 27
Configuring the IEEE 802.3x Flow Control 28
Configuring a Layer 3 Interface 29
Configuring a Logical Layer 3 GRE Tunnel Interface 30
Configuring SVI Autostate Exclude 31
Shutting Down and Restarting an Interface 32
Configuring the Console Media Type 33
Configuring USB Inactivity Timeout 34
Disabling USB Ports 35
Monitoring Interface Characteristics 36
Monitoring Interface Status 36
Clearing and Resetting Interfaces and Counters 37
Configuration Examples for Interface Characteristics 37
Example: Adding a Description to an Interface 37
Example: Configuring a Range of Interfaces 37
Example: Configuring and Using Interface Range Macros 38
Example: Setting Interface Speed and Duplex Mode 38
Example: Configuring a Layer 3 Interface 38
Example: Configuring a Breakout Interface 39
Example: Configuring the Console Media Type 39

Example: Configuring Hundred GigabitEthernet and Four Hundred GigabitEthernet Port Group Modes on C9600X-LC-32CD 39
Example: Configuring USB Inactivity Timeout 40
Additional References for Configuring Interface Characteristics 41
Feature History for Configuring Interface Characteristics 41

CHAPTER 2 **Configuring Ethernet Management Port 43**
Prerequisites for Ethernet Management Port 43
Restrictions for Ethernet Management Port 43
Ethernet Management Port Overview 43
Connecting the Ethernet Management Directly to a Device 44
Ethernet Management Port with StackWise Virtual 44
Ethernet Management Port and Routing 44
Supported Features on the Ethernet Management Port 45
How to Configure the Ethernet Management Port 46
Disabling and Enabling the Ethernet Management Port 46
Enabling the TenGigabitEthernet Management Port 47
Example for Configuring IP Address on the Ethernet Management Port 48
Monitoring the Ethernet Management Port 49
Additional References for Ethernet Management Port 49
Feature History for Ethernet Management Port 50

CHAPTER 3 **Checking Port Status and Connectivity 51**
Check Cable Status Using Time Domain Reflectometer 51
Running the TDR Test 51
TDR Guidelines 51
Feature History for Checking Port Status and Connectivity 52

CHAPTER 4 **Configuring LLDP, LLDP-MED, and Wired Location Service 53**
Restrictions for LLDP 53
Information About LLDP, LLDP-MED, and Wired Location Service 53
LLDP 53
LLDP Supported TLVs 54
LLDP-MED 54

LLDP-MED Supported TLVs 54
Wired Location Service 56
Default LLDP Configuration 57
How to Configure LLDP, LLDP-MED, and Wired Location Service 57
Enabling LLDP 57
Configuring LLDP Characteristics 58
Configuring LLDP-MED TLVs 60
Configuring Network-Policy TLV 61
Configuring Location TLV and Wired Location Service 63
Enabling Wired Location Service on the Device 65
Configuration Examples for LLDP, LLDP-MED, and Wired Location Service 66
Examples: Configuring Network-Policy TLV 66
Monitoring and Maintaining LLDP, LLDP-MED, and Wired Location Service 66
Additional References for LLDP, LLDP-MED, and Wired Location Service 67
Feature History for LLDP, LLDP-MED, and Wired Location Service 67

CHAPTER 5 **Configuring Link Debounce Timer** 69
Restrictions for Link Debounce Timer 69
Information About Link Debounce Timer 69
Configuring Link Debounce Timer 70
Configuring Link Debounce Up Timer 71
Configuring Link Debounce Down Timer 71
Example: Configuring the Link Debounce Timer 72
Feature History for Link Debounce Timer 72

CHAPTER 6 **Configuring System MTU** 75
Information About the MTU 75
System MTU Value Application 75
How to Configure MTU 75
Configuring the System MTU 75
Configuring Protocol-Specific MTU 76
Configuration Examples for System MTU 77
Example: Configuring Protocol-Specific MTU 77
Example: Configuring the System MTU 77

Additional References for System MTU 78
Feature History for System MTU 78

CHAPTER 7 Configuring Per-Port MTU 79
Restrictions for Per-Port MTU 79
Information About Per-Port MTU 79
Configuring Per-Port MTU 80
Example: Configuring Per-Port MTU 81
Example: Verifying Per-Port MTU 81
Example: Disabling Per-Port MTU 81
Feature History for Per-Port MTU 81

CHAPTER 8 Configuring an External USB Bluetooth Dongle 83
Restrictions for Configuring an External USB Bluetooth Dongle 83
Information About External USB Bluetooth Dongle 83
Supported External USB Bluetooth Dongle 83
How to Configure an External USB Bluetooth Dongle on a Switch 84
Verifying Bluetooth Settings on a Device 85
Feature History for Configuring an External Bluetooth Dongle 85

CHAPTER 9 M2 SATA Module 87
M2 SATA Module on Cisco Catalyst 9600 Series Supervisor 87
File System and Storage on M2 SATA 87
Limitations of M2 SATA 87
Self-Monitoring, Analysis and Reporting Technology System (S.M.A.R.T.) Health Monitoring 88
Accessing File System on M2 SATA 88
Formatting the M2 SATA Flash Disk 88
Operations on the SATA Module 89
Feature History and Information for M2 SATA Module 91

CHAPTER 10 Troubleshooting Interface and Hardware Components 93
Overview 93
Support Articles 93
Feedback Request 94

Disclaimer and Caution 94

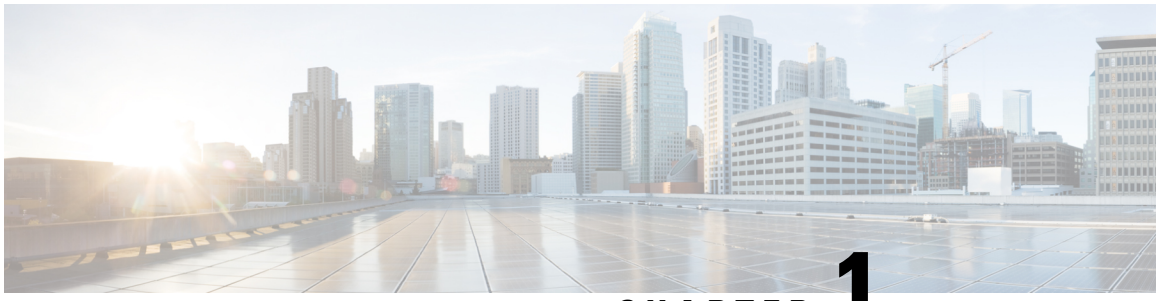

CHAPTER 1

Configuring Interface Characteristics

- Information About Interface Characteristics, on page 1
- How to Configure Interface Characteristics, on page 16
- Configuration Examples for Interface Characteristics, on page 37
- Additional References for Configuring Interface Characteristics, on page 41
- Feature History for Configuring Interface Characteristics, on page 41

Information About Interface Characteristics

The following sections provide information about interface characteristics.

Interface Types

This section describes the different types of interfaces supported by the device. The rest of the chapter describes configuration procedures for physical interface characteristics.

Port-Based VLANs

A VLAN is a switched network that is logically segmented by function, team, or application, without regard to the physical location of the users. Packets received on a port are forwarded only to ports that belong to the same VLAN as the receiving port. Network devices in different VLANs cannot communicate with one another without a Layer 3 device to route traffic between the VLANs.

VLAN partitions provide hard firewalls for traffic in the VLAN, and each VLAN has its own MAC address table. A VLAN comes into existence when a local port is configured to be associated with the VLAN, when the VLAN Trunking Protocol (VTP) learns of its existence from a neighbor on a trunk, or when a user creates a VLAN.

To configure VLANs, use the **vlan** *vlan-id* global configuration command to enter VLAN configuration mode. The VLAN configurations for normal-range VLANs (VLAN IDs 1 to 1005) are saved in the VLAN database. If VTP is version 1 or 2, to configure extended-range VLANs (VLAN IDs 1006 to 4094), you must first set VTP mode to transparent. Extended-range VLANs created in transparent mode are not added to the VLAN database but are saved in the running configuration. With VTP version 3, you can create extended-range VLANs in client or server mode in addition to transparent mode. These VLANs are saved in the VLAN database.

Add ports to a VLAN by using the **switchport** command in interface configuration mode.

- Identify the interface.
- For a trunk port, set trunk characteristics, and, if desired, define the VLANs to which it can belong.
- For an access port, set and define the VLAN to which it belongs.

Switch Ports

Switch ports are Layer 2-only interfaces associated with a physical port. Switch ports belong to one or more VLANs. A switch port can be an access port or a trunk port. You can configure a port as an access port or trunk port or let the Dynamic Trunking Protocol (DTP) operate on a per-port basis to set the switchport mode by negotiating with the port on the other end of the link. Switch ports are used for managing the physical interface and associated Layer 2 protocols and do not handle routing or bridging.

Configure switch ports by using the **switchport** interface configuration commands.

Access Ports

An access port belongs to and carries the traffic of only one VLAN (unless it is configured as a voice VLAN port). Traffic is received and sent in native formats with no VLAN tagging. Traffic arriving on an access port is assumed to belong to the VLAN assigned to the port. If an access port receives a tagged packet (Inter-Switch Link [ISL] or IEEE 802.1Q tagged), the packet is dropped, and the source address is not learned.

The types of access ports supported are:

- Static access ports are manually assigned to a VLAN (or through a RADIUS server for use with IEEE 802.1x.

You can also configure an access port with an attached Cisco IP Phone to use one VLAN for voice traffic and another VLAN for data traffic from a device attached to the phone.

Trunk Ports

A trunk port carries the traffic of multiple VLANs and by default is a member of all VLANs in the VLAN database. The IEEE 802.1Q trunk port type is supported. An IEEE 802.1Q trunk port supports simultaneous tagged and untagged traffic. An IEEE 802.1Q trunk port is assigned a default port VLAN ID (PVID), and all untagged traffic travels on the port default PVID. All untagged traffic and tagged traffic with a NULL VLAN ID are assumed to belong to the port default PVID. A packet with a VLAN ID equal to the outgoing port default PVID is sent untagged. All other traffic is sent with a VLAN tag.

Although by default, a trunk port is a member of every VLAN known to the VTP, you can limit VLAN membership by configuring an allowed list of VLANs for each trunk port. The list of allowed VLANs does not affect any other port but the associated trunk port. By default, all possible VLANs (VLAN ID 1 to 4094) are in the allowed list. A trunk port can become a member of a VLAN only if VTP knows of the VLAN and if the VLAN is in the enabled state. If VTP learns of a new, enabled VLAN and the VLAN is in the allowed list for a trunk port, the trunk port automatically becomes a member of that VLAN and traffic is forwarded to and from the trunk port for that VLAN. If VTP learns of a new, enabled VLAN that is not in the allowed list for a trunk port, the port does not become a member of the VLAN, and no traffic for the VLAN is forwarded to or from the port.

Tunnel Ports

Tunnel ports are used in IEEE 802.1Q tunneling to segregate the traffic of customers in a service-provider network from other customers who are using the same VLAN number. You configure an asymmetric link from a tunnel port on a service-provider edge switch to an IEEE 802.1Q trunk port on the customer switch.

Packets entering the tunnel port on the edge switch, already IEEE 802.1Q-tagged with the customer VLANs, are encapsulated with another layer of an IEEE 802.1Q tag (called the metro tag), containing a VLAN ID unique in the service-provider network, for each customer. The double-tagged packets go through the service-provider network keeping the original customer VLANs separate from those of other customers. At the outbound interface, also a tunnel port, the metro tag is removed, and the original VLAN numbers from the customer network are retrieved.

Tunnel ports cannot be trunk ports or access ports and must belong to a VLAN unique to each customer.

Routed Ports

A routed port is a physical port that acts like a port on a router; it does not have to be connected to a router. A routed port is not associated with a particular VLAN, as is an access port. A routed port behaves like a regular router interface. Routed ports can be configured with a Layer 3 routing protocol. A routed port is a Layer 3 interface only and does not support Layer 2 protocols, such as DTP and STP.

Configure routed ports by putting the interface into Layer 3 mode with the **no switchport** interface configuration command. Then assign an IP address to the port, enable routing, and assign routing protocol characteristics by using the **ip routing** and **router** *protocol* global configuration commands.

Note Entering a **no switchport** interface configuration command shuts down the interface and then re-enables it, which might generate messages on the device to which the interface is connected. When you put an interface that is in Layer 2 mode into Layer 3 mode, the previous configuration information related to the affected interface might be lost.

Note A port configured as a switchport does not support MAC address configuration. It does not support the **mac-address x.x.x** command.

The number of routed ports that you can configure is not limited by software. However, the interrelationship between this number and the number of other features being configured might impact CPU performance because of hardware limitations.

Switch Virtual Interfaces

A switch virtual interface (SVI) represents a VLAN of switch ports as one interface to the routing function in the system. You can associate only one SVI with a VLAN. You configure an SVI for a VLAN only to route between VLANs or to provide IP host connectivity to the device. By default, an SVI is created for the default VLAN (VLAN 1) to permit remote device administration. Additional SVIs must be explicitly configured.

Note You cannot delete interface VLAN 1.

SVIs provide IP host connectivity only to the system. SVIs are created the first time that you enter the **vlan** interface configuration command for a VLAN interface. The VLAN corresponds to the VLAN tag associated with data frames on an ISL or IEEE 802.1Q encapsulated trunk or the VLAN ID configured for an access port. Configure a VLAN interface for each VLAN for which you want to route traffic, and assign it an IP address.

You can also use the interface range command to configure existing VLAN SVIs within the range. The commands entered under the interface range command are applied to all existing VLAN SVIs within the range. You can enter the command **interface range create vlan** *x - y* to create all VLANs in the specified range that do not already exist. When the VLAN interface is created, **interface range vlan** *id* can be used to configure the VLAN interface.

Although the device supports a total of 1005 VLANs and SVIs, the interrelationship between the number of SVIs and routed ports and the number of other features being configured might impact CPU performance because of hardware limitations.

When you create an SVI, it does not become active until it is associated with a physical port.

EtherChannel Port Groups

EtherChannel port groups treat multiple switch ports as one switch port. These port groups act as a single logical port for high-bandwidth connections between devices or between devices and servers. An EtherChannel balances the traffic load across the links in the channel. If a link within the EtherChannel fails, traffic previously carried over the failed link changes to the remaining links. You can group multiple trunk ports into one logical trunk port, group multiple access ports into one logical access port, group multiple tunnel ports into one logical tunnel port, or group multiple routed ports into one logical routed port. Most protocols operate over either single ports or aggregated switch ports and do not recognize the physical ports within the port group. Exceptions are the DTP, the Cisco Discovery Protocol (CDP), and the Port Aggregation Protocol (PAgP), which operate only on physical ports.

When you configure an EtherChannel, you create a port-channel logical interface and assign an interface to the EtherChannel. For Layer 3 interfaces, you manually create the logical interface by using the **interface port-channel** global configuration command. Then you manually assign an interface to the EtherChannel by using the **channel-group** interface configuration command. For Layer 2 interfaces, use the **channel-group** interface configuration command to dynamically create the port-channel logical interface. This command binds the physical and logical ports together.

Console Ports

USB Mini-Type B Console Port

The device has the following console ports:

- USB mini-Type B console connection
- RJ-45 console port

Console output appears on devices connected to both ports, but console input is active on only one port at a time. By default, the USB connector takes precedence over the RJ-45 connector.

Note Windows PCs require a driver for the USB port. See the hardware installation guide for driver installation instructions.

Use the supplied USB Type A-to-USB mini-Type B cable to connect a PC or other device to the device. The connected device must include a terminal emulation application. When the device detects a valid USB connection to a powered-on device that supports host functionality (such as a PC), input from the RJ-45

console is immediately disabled, and input from the USB console is enabled. Removing the USB connection immediately reenables input from the RJ-45 console connection.

Console Port Change Logs

At software startup, a log shows whether the USB or the RJ-45 console is active. Every device always first displays the RJ-45 media type.

In the sample output, device 1 has a connected USB console cable. Because the bootloader did not change to the USB console, the first log from the device shows the RJ-45 console. A short time later, the console changes and the USB console log appears.

```
switch-1

*Mar  1 00:01:00.171: %USB_CONSOLE-6-MEDIA_RJ45: Console media-type is RJ45.
*Mar  1 00:01:00.431: %USB_CONSOLE-6-MEDIA_USB: Console media-type is USB.
```

When the USB cable is removed or the PC de-activates the USB connection, the hardware automatically changes to the RJ-45 console interface:

You can configure the console type to always be RJ-45, and you can configure an inactivity timeout for the USB connector.

Disabling USB Ports

From Cisco IOS XE Bengaluru 17.5.x, all the USB ports in a standalone or stacked device can be disabled using the **platform usb disable** command. To reenable the USB ports, use the **no platform usb disable** command.

When a USB port is disabled, no system messages are generated if a USB is inserted.

Note The **platform usb disable** command does not disable Bluetooth dongles connected to USB ports.

This command works on a device configured with Cisco StackWise Virtual and Quad-Supervisor with Route Processor Redundancy.

Interface Connections

Devices within a single VLAN can communicate directly through any switch. Ports in different VLANs cannot exchange data without going through a routing device. With a standard Layer 2 device, ports in different VLANs have to exchange information through a router. By using the device with routing enabled, when you configure both VLAN 20 and VLAN 30 with an SVI to which an IP address is assigned, packets can be sent from Host A to Host B directly through the device with no need for an external router.

Figure 1: Connecting VLANs with a Switch

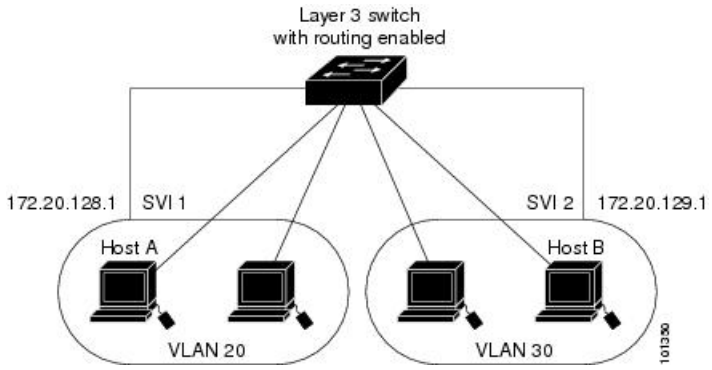

When the Network Advantage license is used on the device or the active device, the device uses the routing method to forward traffic between interfaces. If the Network Essentials license is used on the device or the active device, only basic routing (static routing and RIP) is supported. Whenever possible, to maintain high performance, forwarding is done by the device hardware. However, only IPv4 packets with Ethernet II encapsulation are routed in hardware.

The routing function can be enabled on all SVIs and routed ports. The device routes only IP traffic. When IP routing protocol parameters and address configuration are added to an SVI or routed port, any IP traffic received from these ports is routed.

Interface Configuration Mode

The device supports these interface types:

- Physical ports: Device ports and routed ports
- VLANs: Switch virtual interfaces
- Port channels: EtherChannel interfaces

You can also configure a range of interfaces. An interface on the device is represented by a 3-tuple notation that lists the module, subslot, and port.

To configure a physical interface (port), specify the interface type, module number, sub-slot number, and device port number, and enter interface configuration mode.

- Type: 10-Gigabit Ethernet (TenGigabitEthernet or te) for 10 Gbps, 25-Gigabit Ethernet (TwentyFiveGigE or twe) for 25 Gbps, 40-Gigabit Ethernet (FortyGigabitEthernet or fo) for 40 Gbps, and 100-Gigabit Ethernet (HundredGigE or hu) for 100Gbps.
- Module number: The module or slot number on the device.
- Subslot number: The subslot number is always 0.
- Port number: The interface number on the device. The port numbering starts with the far left port when facing the front of the device, for example, FortyGigabitEthernet1/0/1.

You can identify physical interfaces by physically checking the interface location on the device. You can also use the **show** privileged EXEC commands to display information about a specific interface or all the interfaces on the switch. The remainder of this chapter primarily provides physical interface configuration procedures.

Breakout Interfaces

Cisco Catalyst 9600 Series Switches support breakout cables. These cables support 4x10 G by enabling a single 40-G QSFP+ interface to be split into four 10-G SFP+ interfaces or 4x25 G by enabling a single 100-G QSFP+ interface to be split into four 25-G SFP+ interfaces.

The default port connections depend on whether you use a 40-G QSFP module, a 100-G QSFP28 module, or a breakout cable. You can use a combination of 40-G QSFP modules, 100-G QSFP28 modules, and the 4x10 G breakout cables. Breakout interface naming can be as follows:

- HundredGigabitEthernet *slot-num*/0/*port-num*/[1-4]: For a device without Cisco StackWise Virtual (standalone device).
- HundredGigabitEthernet *switch-num*/*slot-num*/0/*port-num*/[1-4]: For a device with Cisco StackWise Virtual.

Switch Models

Breakout cable support is available only on the C9600-LC-24C line card, with a few limitations.

Limitations for Breakout Interfaces

- Only the C9600-LC-24C line card supports breakout cables.
- Breakout is supported only on 12 odd-numbered 100-G QSFP28 interfaces (top row ports) of the C9600-LC-24C line card.

  Physical port numbers 1, 3, 5, 7, 9, 11, 13, 15, 17, 19, 21 and 23, that is, Hu1/0/25, Hu1/0/27, Hu1/0/29, Hu1/0/31, Hu1/0/33, Hu1/0/35, Hu1/0/37, Hu1/0/39, Hu1/0/41, Hu1/0/43, Hu1/0/45, and Hu1/0/47 support breakout.

  Physical port numbers 2, 4, 6, 8, 10, 12, 14, 16, 18, 20, 22 and 24, that is, Hu1/0/26, Hu1/0/28, Hu1/0/30, Hu1/0/32, Hu1/0/34, Hu1/0/36, Hu1/0/38, Hu1/0/40, Hu1/0/42, Hu1/0/44, Hu1/0/46, and Hu1/0/48 do not support breakout.

Default Ethernet Interface Configuration

To configure Layer 2 parameters, if the interface is in Layer 3 mode, you must enter the **switchport** interface configuration command without any parameters to put the interface into Layer 2 mode. This shuts down the interface and then re-enables it, which might generate messages on the device to which the interface is connected. When you put an interface that is in Layer 3 mode into Layer 2 mode, the previous configuration information related to the affected interface might be lost, and the interface is returned to its default configuration.

Note The interface is in Layer 2 by default.

This table shows the Ethernet interface default configuration, including some features that apply only to Layer 2 interfaces.

Table 1: Default Layer 2 Ethernet Interface Configuration

Feature	Default Setting
Operating mode	Layer 2
Allowed VLAN range	VLANs 1– 4094.
Default VLAN (for access ports)	VLAN 1 (Layer 2 interfaces only).
Native VLAN (for IEEE 802.1Q trunks)	VLAN 1 (Layer 2 interfaces only).
VLAN trunking	Switchport mode dynamic auto (supports DTP) (Layer 2 interfaces only).
Port enable state	All ports are enabled.
Port description	None defined.
Speed	Speed is determined by the type of transceiver module plugged in.
Duplex mode	Full Duplex mode supported.
Flow control	Flow control is set to **receive: onsend: off**.
EtherChannel (PAgP)	Disabled on all Ethernet ports.
Port blocking (unknown multicast and unknown unicast traffic)	Disabled (not blocked) (Layer 2 interfaces only).
Broadcast, multicast, and unicast storm control	Disabled.
Protected port	Disabled (Layer 2 interfaces only).
Port security	Disabled (Layer 2 interfaces only).
Port Fast	Disabled.
Auto-MDIX	Enabled.

Interface Speed and Duplex Mode

Switch modules include Ethernet (10/100/1000-Mbps) ports. They also include:

- Ethernet ports which support speeds up to 2.5 Gbps (100/1000/2500-Mbps), 5 Gbps (100/1000/2500/5000-Mbps) and 10 Gbps (100/1000/2500/5000/10000-Mbps)
- SFP modules that support speeds up to 1 Gbps, SFP+ modules that support speeds up to 10 Gbps, SFP28 modules that support speeds up to 25 Gbps and SFP56 modules that support speeds up to 50 Gbps

- QSFP modules that support speeds up to 40 Gbps and 100 Gbps and QSFP-DD modules that support speeds up to 400 Gbps

In full-duplex mode, two stations can send and receive traffic at the same time.

Note SFP, SFP+ and SFP28 ports support speed (auto/10/100/100) and duplex (auto/full/half) options only if the 1000Base-T SFP or the GLC-GE-100FX modules are used. This is applicable only on Cisco Catalyst 9600 Series Supervisor 1 Module.

Speed and Duplex Configuration Guidelines

When configuring an interface speed and duplex mode, note these guidelines:

- Ethernet ports operating at 10Mbps/100Mbps/1Gbps/2.5Gbps/5/Gbps/10Gbps support full duplex mode. Half duplex mode is not supported.
- If both ends of the line support autonegotiation, we highly recommend the default setting of **auto** negotiation.
- If one interface supports autonegotiation and the other end does not, configure duplex and speed on both interfaces; do not use the **auto** setting on the supported side.
- When STP is enabled and a port is reconfigured, the device can take up to 30 seconds to check for loops. The port LED is amber while STP reconfigures. As best practice, we suggest configuring the speed and duplex options on a link to auto or to fixed on both the ends. If one side of the link is configured to auto and the other side is configured to fixed, the link may or may not be up and this is expected.
- Beginning from Cisco IOS XE Cupertino 17.7.1, on a Cisco Catalyst 9600 Series Supervisor 2 Module inserted with line cards, the ports in the same port groups must be configured with the same interface speed. You can use the **show hw-module** *slot slot_number* **port-group** command to view port group information of the inserted line cards.

Caution Changing the interface speed and duplex mode configuration might shut down and re-enable the interface during the reconfiguration.

Port Settings

The **port-settings** command can simultaneously or separately configure the speed, duplex, and auto negotiation for an interface, an interface range, or a port channel interface.

When using a single command to configure multiple parameters of the port-settings command, the order must be, **speed**, **duplex**, and **autoneg**. If you specify **speed** first, you can configure **duplex** and **autoneg** for the interface. If you specify **duplex** first, you can only configure **autoneg**. And, if you specify **autoneg** first, you cannot configure **speed** or **duplex**.

If the **port-settings** command is configured, this configuration is displayed only in the output of the **show running-config yang** command. The **show running-config** command output will not display information about this command.

For more information, see the section, Configuring Port Settings for an Interface.

Comparison of Commands

The **port-settings** command can be used instead of the **speed**, **duplex**, and **negotiation auto** commands available in the interface configuration mode.

The **port-settings** , **speed**, **duplex**, and **negotiation auto** commands coexist in the CLI.

Because the same parameters for an interface can be configured through two commands, the last configured values are used by the configuration.

This table provides a one-to-one comparison of the existing and newly-added commands:

Table 2: Command Comparison

Existing Command	Newly-Added port-settings Command
speed 10	**port-settings speed 10**
speed 100	**port-settings speed 100**
speed auto	**port-settings speed auto**
speed auto 10 100	**port-settings speed auto-list 10 100**
speed nonegotiate	**port-settings autoneg disable**
duplex half	**port-settings duplex half**
duplex full	**port-settings duplex full**
negotiation auto	**port-settings autoneg enable**
no negotiation auto	**port-settings autoneg disable**

Port Mapping and Oversubscription

The Catalyst 9600 modular chassis supports up to four line cards and redundant supervisors. The supervisor has three Unified Access Data Path (UADP 3.0) ASICs connected to each other. Each UADP 3.0 ASIC provides a switching capacity of 1600Gbps full-duplex for the front panel interfaces, resulting in a total capacity of 4800 Gbps full-duplex switching capacity.

Figure 2: Three-ASIC Configuration

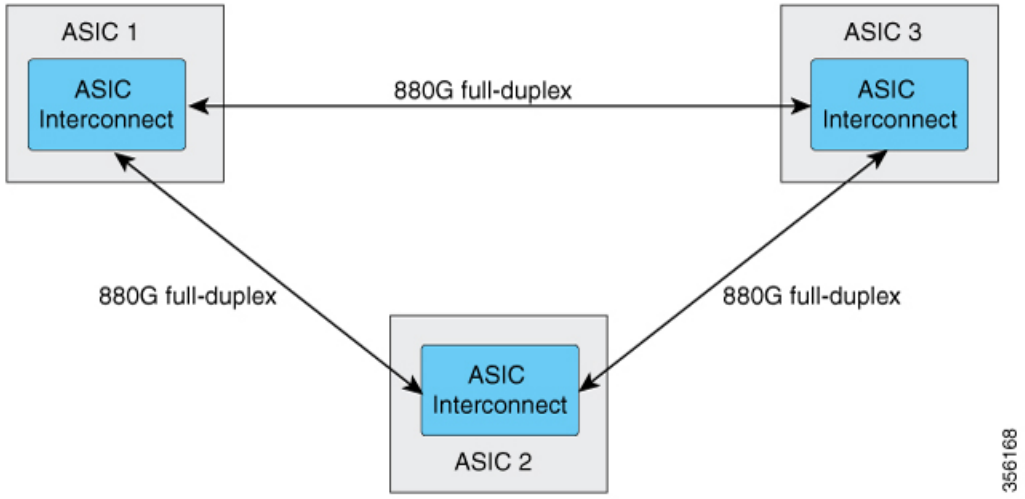

Each ASIC also provides a total of 1760 Gbps full-duplex inter-ASIC bandwidth, with 880 Gbps full-duplex to each of the other two ASICs.

The inter-ASIC connections use a broadcast network approach, to ensure that user data is available to all ASICs. In the worst-case scenario, where all traffic is inter-ASIC, the front panel bandwidth can be 2:1 oversubscribed compared to the interface-ASIC bandwidth. Most traffic scenarios (example north-to-south) will only require some traffic to be inter-ASIC.

When a Line card is installed on the chassis, one-third of its ports are connected to each ASIC. Which means, one set of ports on the line card are connected to ASIC 1, the second set to ASIC 2, and the third set of ports are connected to ASIC 3. You can view the port mapping on the line cards using the **show platform software fed active ifm mapping** command.

Port Mapping on C9600-LC-24C

By default, all the interfaces on a C9600-LC-24C line card are 40 G or 1 G enabled. You can configure the odd-numbered 40 G or 1 G interface to function as 100 G port using the **enable** command on the interface. In such a case, the corresponding even-numbered port in the port group is disabled. (A port group constitutes the top and bottom consecutive ports.)

Figure 3: Port Numbering on C9600-LC-24C

Both 40G/100G ports	1/25	3/27	5/29	7/31	9/33	11/35	13/37	15/39	17/41	19/43	21/45	23/47
Only 40G ports	2	4	6	8	10	12	14	16	18	20	22	24

Figure 4: Default Configuration on C9600-LC-24C

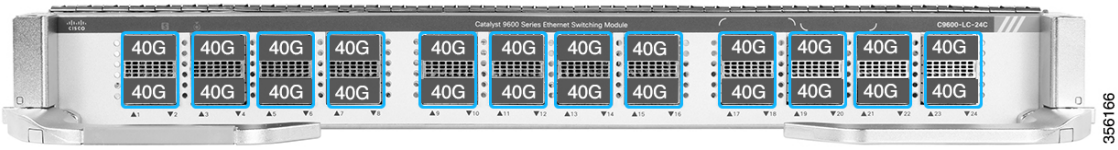

Figure 5: 100 G Configuration on C9600-LC-24C

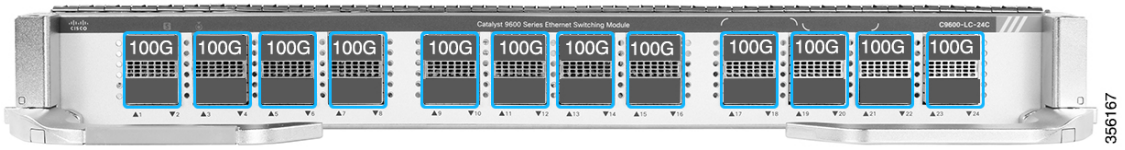

C9600-LC-24C supports CVR-QSFP-SFP10G (QSA adapter) that provides 10 G connectivity on QSFP ports by converting a 40 G or 100 G QSFP port into an SFP/SFP+ port.

C9600-LC-24C supports only the following port group configurations with CVR-QSFP-SFP10G:

- Configuring odd-numbered (top) and even-numbered (bottom) ports with the QSA adapter
- Configuring odd-numbered ports with the QSA adapter and even-numbered ports with 40 G QSFP optics

Note In a port group, if you configure the odd-numbered port with 40 G QSFP optics and the even-numbered port with the QSA adapter, the QSA adapter in the even-numbered port does not work.

Port Mapping on C9600X-LC-56YL4C

The C9600X-LC-56YL4C line card has a total of 60 physical ports. Of this, 56 SFP ports are arranged in 3 rows and can support transceiver speeds of 10/25/50 G. The other 4 QSFP ports support transceiver speeds of 40/100 G.

Figure 6: Port Numbering on C9600X-LC-56YL4C

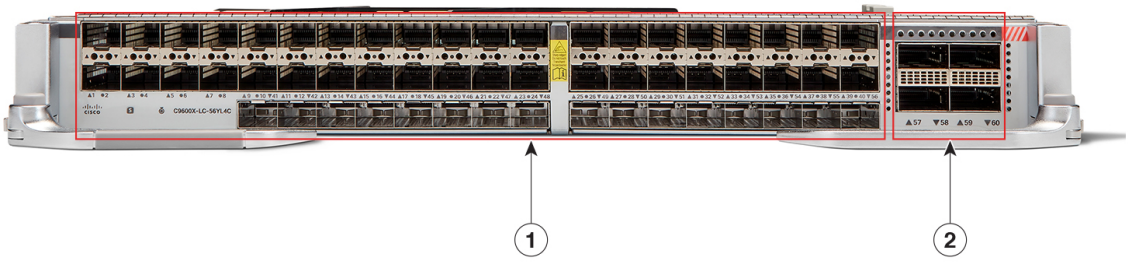

1	56 SFP ports of 50G or 25G or 10G speeds
2	4 QSFP ports of 100G or 40G speeds

The 3-row design of SFP ports on this line card poses a potential thermal cooling challenge for transceivers with max power consumption exceeding 1.5 W. To optimize cooling, we recommend using high-power SFP transceivers in ports 1 to 8. However, high-power optics (greater than 1.5 W) can also function well in ports 9 to 56, if there are no transceivers inserted in the neighboring ports. Transceivers with power consumption of 1.5 W or less can be inserted into any SFP ports without facing thermal cooling challenges. There are no thermal cooling challenges for QSFP ports.

Port Group Modes on C9600X-LC-32CD

By default all the ports on the C9600X-LC-32CD line card are 40G and 100G enabled. When the line card is inserted it comes up in the default mode with all 32 ports operating in the 100G mode. The line card can support up to two ports in the 400G mode. The line card has two port groups of which one port each is able to support the 400G mode. Port group 1 consists of ports 25, 26, 27 and 28. Of these ports, port 27 can support 400G mode. Port group 2 consists of ports 29,30,31 and 32. Of these ports, port 31 can support 400G mode. When the 400G mode is activated in a port group the other three ports of the port group become inactive. These inactive groups will not be visible in the running configuration.

The line card can work in the following three modes:

- Default mode: All 32 ports operate in the default 100G mode.
- One port 400G mode: 28 ports operate in the default 100G mode. One of the ports of the two port groups operates in the 400G mode (either port 27 or port 31).
- Two ports 400G mode: 24 ports operate in the default 100G mode. Both the ports of the two port groups operate in the 400G mode (both port 27 and port 31).

Figure 7: Port Group Modes on C9600X-LC-32CD

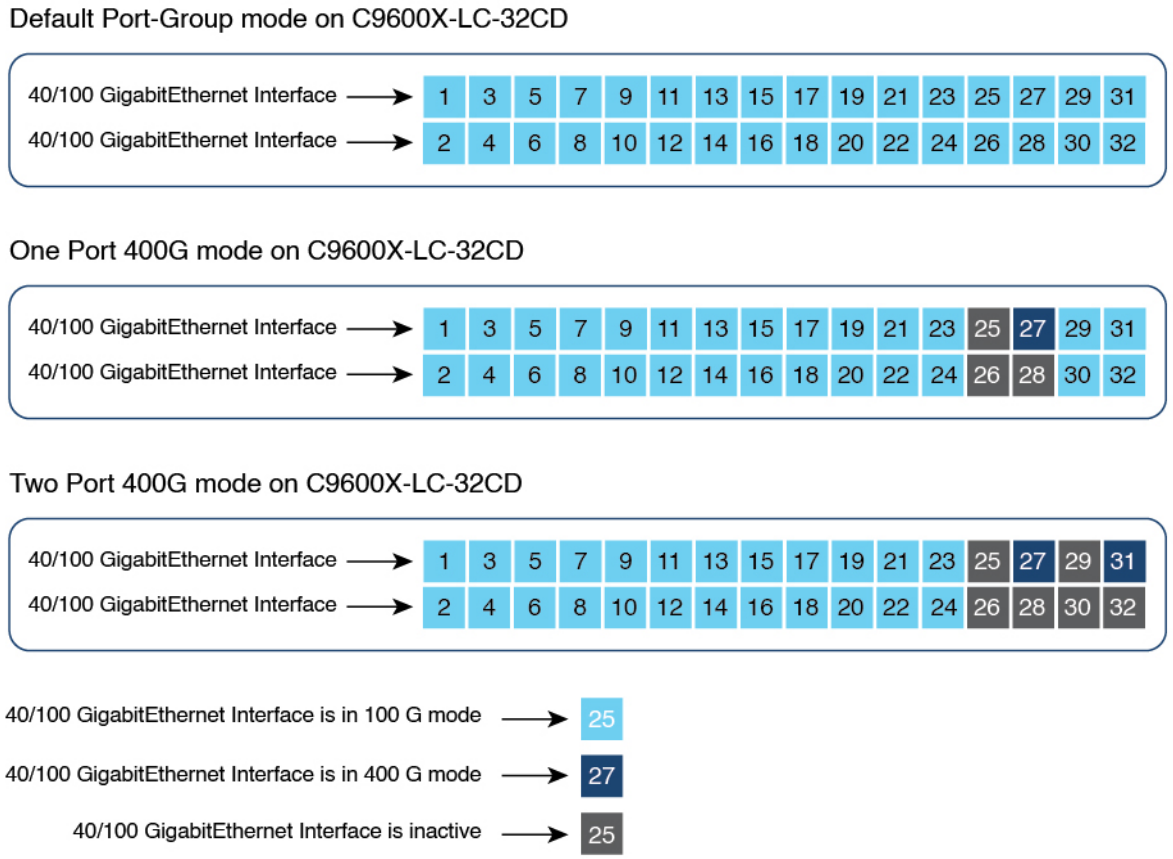

You can enable the 400G mode on the port groups by using the **hw-module slot** *slot-number* **port-group** *port-group-number* **mode 400g** command in the global configuration mode. You can enable the 400G mode

on both the 400G ports of the two port-groups by using the **hw-module slot** *slot-number* **port-group range** *1-2* **mode 400** command.

You can use the **no** form of the commands to change a port group back to the 100G mode.You can use the **show hw-module slot** *slot-number* **port-group mode** command to display the mode of operation for a port-group.

Note

- When a port group is changed from 100G to 400G mode or from 400G to 100G mode all the configurations in the interfaces will revert to default configs. In the 400G mode the configuration is locked on the inactive ports and cannot be modified.
- Copper ports, Breakout interfaces and the Cisco QSA module are not supported on the C9600X-LC-32CD line card.

IEEE 802.3x Flow Control

Flow control enables connected Ethernet ports to control traffic rates during congestion by allowing congested nodes to pause link operation at the other end. If one port experiences congestion and cannot receive any more traffic, it notifies the other port by sending a pause frame to stop sending until the condition clears. Upon receipt of a pause frame, the sending device stops sending any data packets, which prevents any loss of data packets during the congestion period.

Note The switch ports can receive, but not send, pause frames.

You use the **flowcontrol** interface configuration command to set the interface's ability to **receive** pause frames to **on**, **off**, or **desired**. The default state is **on**.

When set to **desired**, an interface can operate with an attached device that is required to send flow-control packets or with an attached device that is not required to but can send flow-control packets.

These rules apply to flow control settings on the device:

- **receive on** (or **desired**): The port cannot send pause frames but can operate with an attached device that is required to or can send pause frames; the port can receive pause frames.
- **receive off**: Flow control does not operate in either direction. In case of congestion, no indication is given to the link partner, and no pause frames are sent or received by either device.

Note For details on the command settings and the resulting flow control resolution on local and remote ports, see the **flowcontrol** interface configuration command in the command reference for this release.

Layer 3 Interfaces

The device supports these types of Layer 3 interfaces:

- SVIs: You should configure SVIs for any VLANs for which you want to route traffic. SVIs are created when you enter a VLAN ID following the **interface vlan** global configuration command. To delete an SVI, use the **no interface vlan** global configuration command. You cannot delete interface VLAN 1.

Note

- When you create an SVI, it does not become active until it is associated with a physical port.
- SVI MAC addresses do not change after a device reload. This is expected behavior.

When configuring SVIs, you can use the **switchport autostate exclude** command on a port to exclude that port from being included in determining SVI line-state. To disable autostate on the SVI, use the **no autostate** command on the SVI.

- Routed ports: Routed ports are physical ports configured to be in Layer 3 mode by using the **no switchport** interface configuration command. A routed port supports VLAN subinterfaces.

  VLAN subinterface: A 802.1Q VLAN subinterface is a virtual Cisco IOS interface that is associated with a VLAN id on a routed physical interface. The parent interface is a physical port. Subinterfaces can be created only on Layer 3 physical interfaces. A subinterface can be associated with different functionalities such as IP addressing, forwarding policies, Quality of Service (QoS) policies, and security policies. Subinterfaces divide the parent interface into two or more virtual interfaces on which you can assign unique Layer 3 parameters such as IP addresses and dynamic routing protocols. The IP address for each subinterface should be in a different subnet from any other subinterface on the parent interface.

- Layer 3 EtherChannel ports: EtherChannel interfaces made up of routed ports.

A Layer 3 device can have an IP address assigned to each routed port and SVI.

You can configure a maximum of 4000 Layer 3 interfaces. If the device is using its maximum hardware resources, attempts to create a routed port or SVI have these results:

- If you try to create a new routed port, the device generates a message that there are not enough resources to convert the interface to a routed port, and the interface remains as a switchport.
- If you try to create an extended-range VLAN, an error message is generated, and the extended-range VLAN is rejected.
- If the device is notified by VLAN Trunking Protocol (VTP) of a new VLAN, it sends a message that there are not enough hardware resources available and shuts down the VLAN. The output of the **show vlan** user EXEC command shows the VLAN in a suspended state.
- If the device attempts to boot up with a configuration that has more VLANs and routed ports than hardware can support, the VLANs are created, but the routed ports are shut down, and the device sends a message that this was due to insufficient hardware resources.

Note All Layer 3 interfaces require an IP address to route traffic. This procedure shows how to configure an interface as a Layer 3 interface and how to assign an IP address to an interface:

If the physical port is in Layer 2 mode (the default), you must enter the **no switchport** interface configuration command to put the interface into Layer 3 mode. Entering a **no switchport** command disables and then re-enables the interface, which might generate messages on the device to which the interface is connected. Furthermore, when you put an interface that is in Layer 2 mode into Layer 3 mode, the previous configuration information related to the affected interface might be lost, and the interface is returned to its default configuration.

How to Configure Interface Characteristics

The following sections provide information about the various tasks that comprise the procedure to configure interface characteristics.

Configuring an Interface

These general instructions apply to all interface configuration processes.

Procedure

	Command or Action	Purpose
Step 1	**enable** **Example:** `Device> enable`	Enables privileged EXEC mode. Enter your password, if prompted.
Step 2	**configure terminal** **Example:** `Device# configure terminal`	Enters global configuration mode.

Step 3	**interface**
	Example:
	`Device(config)# interface fortygigabitethernet1/0/1`
	`Device(config-if)#`
		Identifies the interface type, and the number of the connector.
		Note
		You do not need to add a space between the interface type and the interface number. For example, in the preceding line, you can specify either **fortygigabitethernet 1/0/1**, or **fortygigabitethernet1/0/1**.

Step 4	Follow each **interface** command with the interface configuration commands that the interface requires.	Defines the protocols and applications that will run on the interface. The commands are collected and applied to the interface when you enter another interface command or enter **end** to return to privileged EXEC mode.

	Command or Action	Purpose
Step 5	**interface range** or **interface range macro**	(Optional) Configures a range of interfaces. **Note** Interfaces configured in a range must be the same type and must be configured with the same feature options.
Step 6	**show interfaces**	Displays a list of all interfaces on or configured for the switch. A report is provided for each interface that the device supports or for the specified interface.

Adding a Description for an Interface

Follow these steps to add a description for an interface.

Procedure

	Command or Action	Purpose
Step 1	**enable** **Example:** `Device> enable`	Enables privileged EXEC mode. Enter your password, if prompted.
Step 2	**configure terminal** **Example:** `Device# configure terminal`	Enters global configuration mode.
Step 3	**interface** *interface-id* **Example:** `Device(config)# interface fortygigabitethernet1/0/2`	Specifies the interface for which you are adding a description, and enter interface configuration mode.
Step 4	**description** *string* **Example:** `Device(config-if)# description Connects to Marketing`	Adds a description for an interface.
Step 5	**end** **Example:** `Device(config-if)# end`	Returns to privileged EXEC mode.

	Command or Action	Purpose
Step 6	**show interfaces** *interface-id* **description**	Verifies your entry.
Step 7	**copy running-config startup-config** **Example:** `Device# copy running-config startup-config`	(Optional) Saves your entries in the configuration file.

Configuring a Range of Interfaces

To configure multiple interfaces with the same configuration parameters, use the **interface range** global configuration command. When you enter the interface-range configuration mode, all command parameters that you enter are attributed to all interfaces within that range until you exit this mode.

Procedure

	Command or Action	Purpose
Step 1	**enable** **Example:** `Device> enable`	Enables privileged EXEC mode. Enter your password, if prompted.
Step 2	**configure terminal** **Example:** `Device# configure terminal`	Enters global configuration mode.
Step 3	**interface range** {*port-range* | **macro** *macro_name*} **Example:** `Device(config)# interface range macro`	Specifies the range of interfaces (VLANs or physical ports) to be configured, and enter interface-range configuration mode. • You can use the **interface range** command to configure up to five port ranges or a previously defined macro. • The **macro** variable is explained in Configuring and Using Interface Range Macros. • In a comma-separated *port-range*, you must enter the interface type for each entry and enter spaces before and after the comma. • In a hyphen-separated *port-range*, you do not need to re-enter the interface type, but you must enter a space before the hyphen.

	Command or Action	Purpose
		Note Use the normal configuration commands to apply the configuration parameters to all interfaces in the range. Each command is executed as it is entered.
Step 4	**end** **Example:** `Device(config)# end`	Returns to privileged EXEC mode.
Step 5	**show interfaces** [*interface-id*] **Example:** `Device# show interfaces`	Verifies the configuration of the interfaces in the range.
Step 6	**copy running-config startup-config** **Example:** `Device# copy running-config startup-config`	(Optional) Saves your entries in the configuration file.

Configuring and Using Interface Range Macros

You can create an interface range macro to automatically select a range of interfaces for configuration. Before you can use the **macro** keyword in the **interface range macro** global configuration command string, you must use the **define interface-range** global configuration command to define the macro.

Procedure

	Command or Action	Purpose
Step 1	**enable** **Example:** `Device> enable`	Enables privileged EXEC mode. Enter your password, if prompted.
Step 2	**configure terminal** **Example:** `Device# configure terminal`	Enters global configuration mode.
Step 3	**define interface-range** *macro_name interface-range* **Example:**	Defines the interface-range macro, and saves it in NVRAM. • The *macro_name* is a 32-character maximum character string.

	Command or Action	Purpose
		• A macro can contain up to five comma-separated interface ranges. • Each *interface-range* must consist of the same port type. **Note** Before you can use the **macro** keyword in the **interface range macro** global configuration command string, you must use the **define interface-range** global configuration command to define the macro.
Step 4	**interface range macro** *macro_name* **Example:** `Device(config)# interface range macro enet_list`	Selects the interface range to be configured using the values saved in the interface-range macro called *macro_name*. You can now use the normal configuration commands to apply the configuration to all interfaces in the defined macro.
Step 5	**end** **Example:** `Device(config)# end`	Returns to privileged EXEC mode.
Step 6	**show running-config | include define** **Example:** `Device# show running-config | include define`	Shows the defined interface range macro configuration.
Step 7	**copy running-config startup-config** **Example:** `Device# copy running-config startup-config`	(Optional) Saves your entries in the configuration file.

Setting the Interface Speed and Duplex Parameters

Follow these steps to configure the interface speed and duplex parameters.

Procedure

	Command or Action	Purpose
Step 1	**enable** **Example:**	Enables privileged EXEC mode. Enter your password, if prompted.

	Command or Action	Purpose
	`Device> enable`	
Step 2	**configure terminal** **Example:** `Device# configure terminal`	Enters global configuration mode.
Step 3	**interface** *interface-id* **Example:** `Device(config)# interface fortygigabitethernet1/0/3`	Specifies the physical interface to be configured, and enters interface configuration mode.
Step 4	**speed** {**10** | **100** | **1000** | **10000** | **2500** | **5000** | **auto** [**10** | **100** | **1000** | **10000** | **2500** | **5000**]} **Example:** `Device(config-if)# speed 10`	Enters the appropriate speed parameter for the interface: • Enter **10**, **100**, **1000**, **10000**, **2500**, or **5000** to set a specific speed for the interface. • Enter **auto** to enable the interface to autonegotiate speed with the connected device. If you specify a speed and also set the **auto** keyword, the port autonegotiates only at the specified speeds.
Step 5	**duplex** {**auto** | **full**} **Example:** `Device(config-if)# duplex full`	Enters the duplex parameter for the interface. You can configure the duplex setting when the speed is set to **auto**.
Step 6	**end** **Example:** `Device(config-if)# end`	Returns to privileged EXEC mode.
Step 7	**show interfaces** *interface-id* **Example:** `Device# show interfaces fortygigabitethernet1/0/3`	Displays the interface speed and duplex mode configuration.
Step 8	**copy running-config startup-config** **Example:** `Device# copy running-config startup-config`	(Optional) Saves your entries in the configuration file.

Configuring Port Settings for an Interface

Use the **port-settings** command to simultaneously or separately configure the speed, duplex, and auto negotiation for an interface.

Procedure

	Command or Action	Purpose
Step 1	**enable**	Enables privileged EXEC mode. • Enter your password, if prompted.
Step 2	**configure terminal**	Enters global configuration mode.
Step 3	**interface** *interface-name interface-ID*	Configures an interface, and enters interface configuration mode.
Step 4	**port-settings speed** {**10** | **100** | **1000** | **auto** | **auto-list**}	Enters the appropriate speed parameter for the interface.
Step 5	**port-settings duplex** {**auto** | **full** | **half**}	Configures duplex operation on an interface.
Step 6	**port-settings autoneg** {**enable** | **disable**}	Configures duplex operation on an interface.
Step 7	**port-settings speed 1000 duplex full autoneg enable**	Configures port settings for an interface. • When configuring all port-setting parameters in a single command, the order must be **speed**, **duplex**, and **autoneg**.
Step 8	**end**	Exits interface configuration mode and returns to privileged EXEC mode.
Step 9	**show running-config yang**	Displays the YANG-specific configurations on the device. • The configured **port-settings** for the interface is displayed only in the output of the **show running-config yang** command.

Example

This example shows how to set the port settings for an interface.

```
Device# enable
Device# configure terminal
Device(config)# interface gigabitethernet 0/0
Device(config-if)# port-settings speed 1000
Device(config-if)# port-setting duplex full
Device(config-if)# port-setting autoneg enable
Device(config-if)# end
```

This example shows how to set all port setting parameters for an interface in a single command.

```
Device# enable
Device# configure terminal
Device(config)# interface gigabitethernet 0/0
Device(config-if)# port-settings speed 1000 duplex full autoneg enable
Device(config-if)# end
```

This sample output from the **show running-config yang** command, displays port settings configured for an interface.

```
Device# show running-config yang

Device# show running-config yang
Building configuration...
Current configuration : 19884 bytes
!!
Last configuration change at 23:53:04 UTC Tue Jun 11 2024 by platform
!
version 17.15
service timestamps debug datetime msec
service timestamps log datetime msec
!
hostname Device
!! vrf definition Mgmt-vrf
!
address-family ipv4
exit-address-family
!
address-family ipv6
exit-address-family
!
aaa new-model
!
aaa authentication login default local
aaa authorization exec default local
!
!
!
login on-success log
vtp domain GOV
vtp mode transparent
!!!!!!!
stackwise-virtual
 domain 1
!
crypto pki trustpoint SLA-TrustPoint
 enrollment pkcs12
 revocation-check crl
 hash sha256
!
!
!
interface Port-channel1
no shutdown
port-settings speed 1000 duplex full
!
interface GigabitEthernet0/0
vrf forwarding Mgmt-vrf
ip address 192.0.2.1 255.255.255.0
no shutdown
port-settings autoneg enable
!
```

```
interface GigabitEthernet1/1/0/1
no shutdown
!
line vty 0 4
exec-timeout 0 0
transport input ssh
line vty 5 15
transport input ssh
!
netconf-yang
end
Device#
```

Configuring a Breakout Interface

Follow these steps to configure a breakout interface.

Procedure

	Command or Action	Purpose
Step 1	**enable** **Example:** `Device> enable`	Enables privileged EXEC mode. Enter your password, if prompted.
Step 2	**configure terminal** **Example:** `Device# configure terminal`	Enters global configuration mode.
Step 3	**hw-module breakout-enable** **Example:** `Device(config)# hw-module breakout-enable`	Enables the Breakout feature.
Step 4	**exit** **Example:** `Device(config)# exit`	Exits global configuration mode.
Step 5	**reload** **Example:** `Device# reload`	Reloads the system. After the system has reloaded, enter the global configuration mode and perform the steps below to configure breakout interfaces.
Step 6	**interface** *interface-id* **Example:**	Specifies the interface to be configured, and enters interface configuration mode.

	Command or Action	Purpose
	`Device(config)# interface HundredGigabitEthernet1/0/25`	
Step 7	**enable** **Example:** `Device(config-if)# enable`	Enables breakout on an interface.
Step 8	**exit** **Example:** `Device(config-if)# exit`	Exits interface configuration mode and returns to global configuration mode.

Step 9	Run one of the following commands:
	• **hw-module slot** *slot-num* **breakout** *port-num*
	• **hw-module switch** *switch-num* **slot** *slot-num* **breakout** *port-num*
	Example:
	`Device(config)# hw-module slot 1 breakout 25`
	Example:
	`Device(config)# hw-module switch 1 slot 1 breakout 25`
		Enables breakout on the specified port.
		• Use this command on a device without Cisco StackWise Virtual (standalone mode).
		• Use this command on a device with Cisco StackWise Virtual.
		Note
		To enable breakout on a range of ports, use the **breakout range** *port-range* command.

Step 10	**end** **Example:** `Device(config)# end`	Exits global configuration mode and returns to privileged EXEC mode.
Step 11	**show interface status** **Example:** `Device# show interface status`	(Optional) Verifies the configuration.

Configuring Hundred Gigabit Ethernet Interface on C9600-LC-24C

By default, 40G is enabled on all ports of C9600-LC-24C linecard. You can enable 100 G on the odd-numbered ports (ports 25, 27, 29, 31, 33, 35, 37, 39, 41, 43, 45, and 47) of the linecard. When 100 G is enabled, 40 G is disabled on the corresponding port and the port below it.

Follow these steps to enable 100 G on the ports:

Procedure

	Command or Action	Purpose
Step 1	**enable** **Example:** `Device> enable`	Enables privileged EXEC mode. • Enter your password if prompted.
Step 2	**configure terminal** **Example:** `Device# configure terminal`	Enters global configuration mode.
Step 3	**interface** *interface-type interface-id* **Example:** `Device(config)# interface HundredGigabitEthernet1/0/27`	Specifies the interface that is to be configured.
Step 4	**enable** **Example:** `Device(config-if)# enable`	Enables the hundred gigabit ethernet interface. Use **no enable** command to disable the hundred gigabit ethernet interface.

Configuring TenGigabit Speed on Cisco Catalyst 9600 Series Supervisor 2 Module Inserted with Dual-rate Optics

By default, 25G is enabled when dual-rate (25G/10G) optics are inserted on adjacent ports of the C9600-LC-48YL or the C9600-LC-40YL4CD line cards.

Follow these steps to enable 10 G on the ports:

Before you begin

This task is optional.

Procedure

	Command or Action	Purpose
Step 1	**enable** **Example:** `Device> enable`	Enables privileged EXEC mode. Enter your password if prompted.
Step 2	**configure terminal** **Example:** `Device# configure terminal`	Enters global configuration mode.

	Command or Action	Purpose
Step 3	**interface** *interface-type interface-id* **Example:** `Device(config)# interface TenGigabitEthernet1/0/27`	Specifies the interface that is to be configured.
Step 4	**shutdown** **Example:** `Device(config-if)# shutdown`	Disables the interface.
Step 5	**speed 10000** **Example:** `Device(config-if)# speed 10000`	Specified 10G as the speed for the interface..
Step 6	**no shutdown** **Example:** `Device(config-if)# no shutdown`	Disables the interface.
Step 7	Repeat Step 4, on page 27 and Step 6, on page 27 to bring the interface up to *linkup* state from *err-disabled* state.	

Configuring Four Hundred GigabitEthernet Port Group mode on C9600X-LC-32CD

To convert a port group from 100G mode to 400G mode on the C9600-LC-32CD, perform the following procedure.

Procedure

	Command or Action	Purpose
Step 1	**enable** **Example:** `Device> enable`	Enables privileged EXEC mode. Enter your password, if prompted.
Step 2	**configure terminal** **Example:** `Device# configure terminal`	Enters global configuration mode.
Step 3	**hw-module slot** *slot-number* **port-group** *port-group-number* **mode 400** **Example:** `Device(config)# hw-module slot 1 port-group 1 mode 400G`	Enables the 400G mode on a port group. To default to the 100G mode on a port group, use the **no** form of the command.

Configuring the IEEE 802.3x Flow Control

Follow these steps to configure the IEEE 802.3x flow control.

Procedure

	Command or Action	Purpose
Step 1	**enable** **Example:** `Device> enable`	Enables privileged EXEC mode. Enter your password, if prompted.
Step 2	**configure terminal** **Example:** `Device# configure terminal`	Enters global configuration mode
Step 3	**interface** *interface-id* **Example:** `Device(config)# interface fortygigabitethernet1/0/1`	Specifies the physical interface to be configured, and enters interface configuration mode.
Step 4	**flowcontrol** {**receive**} {**on** | **off** | **desired**} **Example:** `Device(config-if)# flowcontrol receive on`	Configures the flow control mode for the port.
Step 5	**end** **Example:** `Device(config-if)# end`	Returns to privileged EXEC mode.
Step 6	**show flowcontrol interface** *interface-id* **Example:** `Device# show flowcontrol interface GigabitEthernet1/0/1`	Verifies the specified interface flow control settings.
Step 7	**show flowcontrol module** *slot* **Example:** `Device# show flowcontrol module 1`	Verifies the interface flow control settings on the module.
Step 8	**copy running-config startup-config** **Example:**	(Optional) Saves your entries in the configuration file.

	Command or Action	Purpose
	`Device# copy running-config startup-config`	

Configuring a Layer 3 Interface

Follow these steps to configure a layer 3 interface.

Procedure

	Command or Action	Purpose
Step 1	**enable** **Example:** `Device> enable`	Enables privileged EXEC mode. Enter your password, if prompted.
Step 2	**configure terminal** **Example:** `Device# configure terminal`	Enters global configuration mode.
Step 3	**interface** {**fortygigabitethernet** *interface-id*} | {**vlan** *vlan-id*} | {**port-channel** *port-channel-number*} **Example:** `Device(config)# interface fortygigabitethernet1/0/2`	Specifies the interface to be configured as a Layer 3 interface, and enters interface configuration mode.
Step 4	**no switchport** **Example:** `Device(config-if)# no switchport`	(For physical ports only) Enters Layer 3 mode.
Step 5	**ip address** *ip_address subnet_mask* **Example:** `Device(config-if)# ip address 192.20.135.21 255.255.255.0`	Configures the IP address and IP subnet.
Step 6	**no shutdown** **Example:** `Device(config-if)# no shutdown`	Enables the interface.

	Command or Action	Purpose
Step 7	**end** **Example:** `Device(config-if)# end`	Returns to privileged EXEC mode.
Step 8	**show interfaces** [*interface-id*]	Verifies the configuration.
Step 9	**copy running-config startup-config** **Example:** `Device# copy running-config startup-config`	(Optional) Saves your entries in the configuration file.

Configuring a Logical Layer 3 GRE Tunnel Interface

Before you begin

Generic Routing Encapsulation (GRE) is a tunneling protocol used to encapsulate network layer protocols inside virtual point-to-point links. A GRE tunnel only provides encapsulation and not encryption.

Note

- GRE tunnels are supported on the hardware on Cisco Catalyst 9000 switches. When GRE is configured without tunnel options, packets are hardware-switched. When GRE is configured with tunnel options (such as key, checksum, and so on), packets are switched in the software. A maximum of 900 GRE tunnels are supported.
- Other features such as Access Control Lists (ACL) and Quality of Service (QoS) are not supported for the GRE tunnels.
- The **tunnel path-mtu-discovery** command is not supported for GRE tunnels. To avoid fragmentation, you can set the maximum transmission unit (MTU) of both ends of the GRE tunnel to the lowest value by using the **ip mtu 256** command.

To configure a GRE tunnel, perform this task:

Procedure

	Command or Action	Purpose
Step 1	**enable** **Example:** `Device> enable`	Enables privileged EXEC mode. Enter your password, if prompted.
Step 2	**configure terminal** **Example:** `Device# configure terminal`	Enters global configuration mode.

	Command or Action	Purpose
Step 3	**interface tunnel** *number* **Example:** `Device(config)# interface tunnel 2`	Enables tunneling on the interface.
Step 4	**ip address** *ip_address subnet_mask* **Example:** `Device(config)# ip address 100.1.1.1 255.255.255.0`	Configures the IP address and IP subnet.
Step 5	**tunnel source** {*ip_address* | *type_number*} **Example:** `Device(config)# tunnel source 10.10.10.1`	Configures the tunnel source.
Step 6	**tunnel destination** {*host_name* | *ip_address*} **Example:** `Device(config)# tunnel destination 10.10.10.2`	Configures the tunnel destination.
Step 7	**tunnel mode gre ip** **Example:** `Device(config)# tunnel mode gre ip`	Configures the tunnel mode.
Step 8	**end** **Example:** `Device(config)# end`	Exits configuration mode.

Configuring SVI Autostate Exclude

Follow these steps to exclude SVI autostate.

Procedure

	Command or Action	Purpose
Step 1	**enable** **Example:** `Device> enable`	Enables privileged EXEC mode. Enter your password, if prompted.
Step 2	**configure terminal** **Example:** `Device# configure terminal`	Enters global configuration mode.

	Command or Action	Purpose
Step 3	**interface** *interface-id* **Example:** `Device(config)# interface fortygigabitethernet1/0/2`	Specifies a Layer 2 interface (physical port or port channel), and enters interface configuration mode.
Step 4	**switchport autostate exclude** **Example:** `Device(config-if)# switchport autostate exclude`	Excludes the access or trunk port when defining the status of an SVI line state (up or down)
Step 5	**end** **Example:** `Device(config-if)# end`	Returns to privileged EXEC mode.
Step 6	**show running config interface** *interface-id* **Example:** `Device# show running config interface fortygigabitethernet1/0/2`	(Optional) Shows the running configuration. Verifies the configuration.
Step 7	**copy running-config startup-config** **Example:** `Device# copy running-config startup-config`	(Optional) Saves your entries in the configuration file.

Shutting Down and Restarting an Interface

Shutting down an interface disables all functions on the specified interface and marks the interface as unavailable on all monitoring command displays. This information is communicated to other network servers through all dynamic routing protocols. The interface is not mentioned in any routing updates.

Procedure

	Command or Action	Purpose
Step 1	**enable** **Example:** `Device> enable`	Enables privileged EXEC mode. Enter your password, if prompted.
Step 2	**configure terminal** **Example:**	Enters global configuration mode.

	Command or Action	Purpose
	`Device# configure terminal`	
Step 3	**interface** {**vlan** *vlan-id*} | { **fortygigabitethernet** *interface-id*} | {**port-channel** *port-channel-number*} **Example:** `Device(config)# interface fortygigabitethernet1/0/2`	Selects the interface to be configured.
Step 4	**shutdown** **Example:** `Device(config-if)# shutdown`	Shuts down an interface.
Step 5	**no shutdown** **Example:** `Device(config-if)# no shutdown`	Restarts an interface.
Step 6	**end** **Example:** `Device(config-if)# end`	Returns to privileged EXEC mode.
Step 7	**show running-config** **Example:** `Device# show running-config`	Verifies your entries.

Configuring the Console Media Type

Follow these steps to set the console media type to RJ-45. If you configure the console as RJ-45, USB console operation is disabled, and input comes only through the RJ-45 connector.

Procedure

	Command or Action	Purpose
Step 1	**enable** **Example:** `Device> enable`	Enables privileged EXEC mode. Enter your password, if prompted.
Step 2	**configure terminal** **Example:**	Enters global configuration mode.

	Command or Action	Purpose
	`Device# configure terminal`	
Step 3	**line console 0** **Example:** `Device(config)# line console 0`	Configures the console and enters line configuration mode.
Step 4	**media-type rj45 switch** *switch_number* **Example:** `Device(config-line)# media-type rj45 switch 1`	Configures the console media type to be only RJ-45 port. If you do not enter this command and both types are connected, the USB port is used by default.
Step 5	**end** **Example:** `Device(config)# end`	Returns to privileged EXEC mode.
Step 6	**copy running-config startup-config** **Example:** `Device# copy running-config startup-config`	(Optional) Saves your entries in the configuration file.

Configuring USB Inactivity Timeout

The configurable inactivity timeout reactivates the RJ-45 console port if the USB console port is activated but no input activity occurs on it for a specified time period. When the USB console port is deactivated due to a timeout, you can restore its operation by disconnecting and reconnecting the USB cable.

Procedure

	Command or Action	Purpose
Step 1	**enable** **Example:** `Device> enable`	Enables privileged EXEC mode. Enter your password, if prompted.
Step 2	**configure terminal** **Example:** `Device# configure terminal`	Enters global configuration mode.
Step 3	**line console 0** **Example:**	Configures the console and enters line configuration mode.

	Command or Action	Purpose
	`Device(config)# line console 0`	
Step 4	**usb-inactivity-timeout switch** *switch_number timeout-minutes* **Example:** `Device(config-line)# usb-inactivity-timeout switch 1 30`	Specifies an inactivity timeout for the console port. The range is 1 to 240 minutes. The default is to have no timeout configured.
Step 5	**copy running-config startup-config** **Example:** `Device# copy running-config startup-config`	(Optional) Saves your entries in the configuration file.

Disabling USB Ports

To disable all USB ports, peform this procedure.

Procedure

	Command or Action	Purpose
Step 1	**enable** **Example:** `Device> enable`	Enables privileged EXEC mode. Enter your password, if prompted.
Step 2	**configure terminal** **Example:** `Device# configure terminal`	Enters global configuration mode.
Step 3	[**no**] **platform usb disable** **Example:** `Device(config)# platform usb disable`	Disables all the USB ports on the device. Use the **no platform usb disable** command to reenable the USB ports.
Step 4	**exit** **Example:** `Device(config)# exit`	Exits to privileged EXEC mode.
Step 5	**copy running-config startup-config** **Example:**	(Optional) Saves your entries in the configuration file.

	Command or Action	Purpose
	`Device# copy running-config startup-config`	

Monitoring Interface Characteristics

The following sections provide information about monitoring interface characteristics.

Monitoring Interface Status

Commands entered at the privileged EXEC prompt display information about the interface, including the versions of the software and the hardware, the configuration, and statistics about the interfaces.

Table 3: show Commands for Interfaces

Command	Purpose
show interfaces *interface-id* **status** [**err-disabled**]	Displays interface status or a list of interfaces in the error-disabled state.
show interfaces [*interface-id*] **switchport**	Displays administrative and operational status of switching (nonrouting) ports. You can use this command to find out if a port is in routing or in switching mode.
show interfaces [*interface-id*] **description**	Displays the description configured on an interface or all interfaces and the interface status.
show ip interface [*interface-id*]	Displays the usability status of all interfaces configured for IP routing or the specified interface.
show interface [*interface-id*] **stats**	Displays the input and output packets by the switching path for the interface.
show interface [*interface-id*] **link**[**module** *number*]	Displays the up time and down time of an interface or all interfaces.
show interfaces *interface-id*	(Optional) Displays speed and duplex on the interface.
show interfaces transceiver dom-supported-list	(Optional) Displays Digital Optical Monitoring (DOM) status on the connect SFP modules.
show interfaces transceiver properties	(Optional) Displays temperature, voltage, or amount of current on the interface.
show interfaces [*interface-id*] [{**transceiver properties** | **detail**}] *module number*]	Displays physical and operational status about an SFP module.
show running-config interface [*interface-id*]	Displays the running configuration in RAM for the interface.
show version	Displays the hardware configuration, software version, the names and sources of configuration files, and the boot images.

Command	Purpose
show controllers ethernet-controller *interface-id* **phy**	Displays the operational state of the auto-MDIX feature on the interface.

Clearing and Resetting Interfaces and Counters

Table 4: clear Commands for Interfaces

Command	Purpose
clear counters [*interface-id*]	Clears interface counters.
clear interface *interface-id*	Resets the hardware logic on an interface.
clear line [*number* | **console 0** | **vty** *number*]	Resets the hardware logic on an asynchronous serial line.

Note The **clear counters** privileged EXEC command does not clear counters retrieved by using Simple Network Management Protocol (SNMP), but only those seen with the **show interface** privileged EXEC command.

Configuration Examples for Interface Characteristics

The following sections provide examples of interface characteristics configurations.

Example: Adding a Description to an Interface

The following example shows how to add a description to an interface:

```
Device# configure terminal
Enter configuration commands, one per line. End with CNTRL/Z.
Device(config)# interface fortygigabitethernet1/0/2
Device(config-if)# description Connects to Marketing
Device(config-if)# end
Device# show interfaces fortygigabitethernet1/0/2 description

Interface Status    Protocol Description
Fo1/0/1   down      down      Connects to Marketing
```

Example: Configuring a Range of Interfaces

The following example shows how to use the **interface range** global configuration command to shut down ports 1 to 2 on switch 1:

```
Device# configure terminal
Device(config)# interface range fortyGigabitEthernet 1/0/1-2
Device(config-if-range)# shut
```

Note If you enter multiple configuration commands while you are in interface-range mode, each command is executed as it is entered. The commands are not batched and executed after you exit interface-range mode. If you exit interface-range configuration mode while the commands are being executed, some commands might not be executed on all interfaces in the range. Wait until the command prompt reappears before exiting interface-range configuration mode.

Example: Configuring and Using Interface Range Macros

The following example shows how to enter interface-range configuration mode for the interface-range macro *enet_list*:

```
Device# configure terminal
Device(config)# interface range macro enet_list
Device(config-if-range)#
```

The following example shows how to delete the interface-range macro *enet_list* and to verify that it was deleted:

```
Device# configure terminal
Device(config)# no define interface-range enet_list
Device(config)# end
Device# show run | include define
Device#
```

Example: Setting Interface Speed and Duplex Mode

The following example shows how to set the interface speed to 10 Mbps and the duplex mode to full, on a 10/100/1000 Mbps port:

```
Device# configure terminal
Device(config)# interface fortygigabitethernet1/0/3
Device(config-if)# speed 10
Device(config-if)# duplex full
```

The following example shows how to set the interface speed to 100 Mbps on a 10/100/1000 Mbps port:

```
Device# configure terminal
Device(config)# interface fortygigabitethernet1/0/2
Device(config-if)# speed 100
```

Example: Configuring a Layer 3 Interface

The following example shows how to configure a Layer 3 interface:

```
Device# configure terminal
Enter configuration commands, one per line.  End with CNTL/Z.
Device(config)# interface fortygigabitethernet1/0/2
Device(config-if)# no switchport
Device(config-if)# ip address 192.20.135.21 255.255.255.0
```

```
Device(config-if)# no shutdown
```

Example: Configuring a Breakout Interface

The following example shows a sample output of the **show interface status** command for a specified interface:

```
Device# show interface status | include 1/0/25

Hu1/0/25            inactive     1            full    40G unknown
Hu1/0/25/1          connected    101          full    10G QSFP 4X10G AC10M SFP
Hu1/0/25/2          connected    102          full    10G QSFP 4X10G AC10M SFP
Hu1/0/25/3          connected    103          full    10G QSFP 4X10G AC10M SFP
Hu1/0/25/4          connected    104          full    10G QSFP 4X10G AC10M SFP
```

The following example shows a sample output of the running configuration for the Breakout feature on the device:

```
Device# show running-config | include breakout

hw-module  slot 1 breakout 25
hw-module breakout-enable
```

Example: Configuring the Console Media Type

The following example shows how to disable the USB console media type and enable the RJ-45 console media type:

```
Device# configure terminal
Device(config)# line console 0
Device(config-line)# media-type rj45 switch 1
```

The following example shows how to reverse the previous configuration and immediately activate any USB console that is connected:

```
Device# configure terminal
Device(config)# line console 0
Device(config-line)# no media-type rj45 switch 1
```

Example: Configuring Hundred GigabitEthernet and Four Hundred GigabitEthernet Port Group Modes on C9600X-LC-32CD

The following example shows how to enable the 400G mode on a port group of the C9600-LC-32CD.

```
Device> enable
Device# configure terminal
Device (config)# hw-module slot 1 port-group 1 mode 400G
400G mode is enabled on slot 1 port-group 1 successfully

Warning: Ports Hu1/0/25, Hu1/0/26, Hu1/0/28 will be brought down
```

The following example shows how to disable the 400G mode on a port group of the C9600-LC-32CD.

```
Device> enable
Device# configure terminal
```

```
Device (config)# no hw-module slot 1 port-group 1 mode 400G
400G mode is disabled on slot 1 port-group 1 successfully
```

The following example shows how to display the port group mode on the C9600-LC-32CD.

```
Device> enable
Device# show hw-module slot 1 port-group mode
Slot  Port-group      Ports         Mode
-------------------------------------------------
             1             0             Hu1/0/25    inactive
                                         Hu1/0/26    inactive
                                         Hu1/0/27    400G
                                         Hu1/0/28    inactive
             1             1             Hu1/0/29    inactive
                                         Hu1/0/30    inactive
                                         Hu1/0/31    400G
                                         Hu1/0/32    inactive
```

The following example shows that the incative interfaces in a port-group will be locked and their configurations cannot be modified in the 400G mode.

```
Device(config)# interface hundredGigE 6/0/25
% This interface cannot be modified
Device(config)#interface hundredGigE 6/0/26
% This interface cannot be modified
Device(config)#interface hundredGigE 6/0/28
% This interface cannot be modified
```

Example: Configuring USB Inactivity Timeout

The following example shows how to configure the inactivity timeout to 30 minutes:

```
Device# configure terminal
Device(config)# line console 0
Device(config-line)# usb-inactivity-timeout switch 1 30
```

The following example shows how to disable the configuration:

```
Device# configure terminal
Device(config)# line console 0
Device(config-line)# no usb-inactivity-timeout switch 1
```

If there is no (input) activity on a USB console port for the configured number of minutes, the inactivity timeout setting applies to the RJ-45 port, and a log shows this occurrence:

```
*Mar  1 00:47:25.625: %USB_CONSOLE-6-INACTIVITY_DISABLE: Console media-type USB disabled
due to inactivity, media-type reverted to RJ45.
```

At this point, the only way to reactivate the USB console port is to disconnect and reconnect the cable.

When the USB cable on a switch is disconnected and reconnected, a log, which is similar to this, appears:

```
*Mar  1 00:48:28.640: %USB_CONSOLE-6-MEDIA_USB: Console media-type is USB.
```

Additional References for Configuring Interface Characteristics

Related Documents

Related Topic	Document Title
For complete syntax and usage information for the commands used in this chapter.	See the "Interface and Hardware Commands" section in the *Command Reference (Catalyst 9600 Series Switches)* .

Feature History for Configuring Interface Characteristics

This table provides release and related information for the features explained in this module.

These features are available in all the releases subsequent to the one they were introduced in, unless noted otherwise.

Release	Feature	Feature Information
Cisco IOS XE Gibraltar 16.11.1	Interface Characteristics	Interface Characteristics includes interface types, connections, configuration modes, speed, and other aspects of configuring a physical interface on a device.
Cisco IOS XE Amsterdam 17.1.1	Ethernet and Multi-Gigabit Ethernet Interfaces	Support for Ethernet and Multi-Gigabit Ethernet ports operating at 10 Mbps, 100 Mbps, 1000 Mbps, 2.5 Gbps, 5 Gbps, and 10 Gbps was introduced on all models of the series.
Cisco IOS XE Amsterdam 17.2.1	Breakout interfaces	Support for breakout configuration was introduced only on the 12 ports of the top row (odd numbers) of C9600-LC-24C line card.
Cisco IOS XE Bengaluru 17.5.1	Disabling USB interfaces	Support to disable all USB ports on a standalone or stacked device was introduced.
Cisco IOS XE Cupertino 17.7.1	Interface Characteristics	This feature was implemented on the Cisco Catalyst 9600 Series Supervisor 2 Module (C9600X-SUP-2).

Use the Cisco Feature Navigator to find information about platform and software image support. To access Cisco Feature Navigator, go to https://cfnng.cisco.com/.

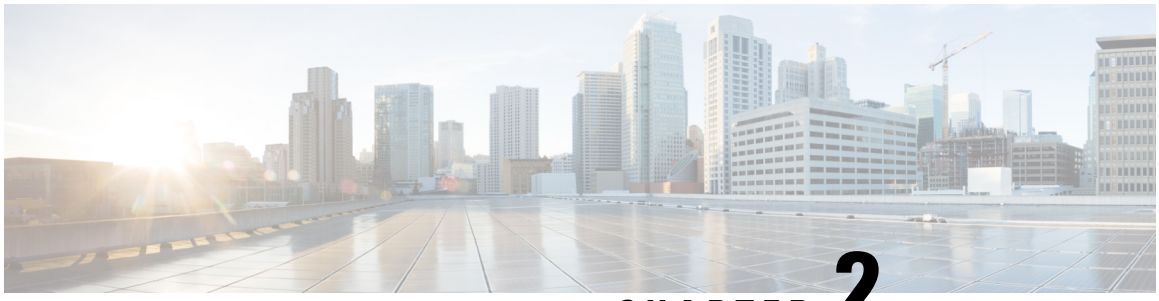

CHAPTER 2

Configuring Ethernet Management Port

The Ethernet management port functions as a Layer 3 host port dedicated to network management. It enables direct PC connections to the switch for management activities, offering an alternative to the console port. This module describes how to enable the Ethernet management port.

- Prerequisites for Ethernet Management Port, on page 43
- Restrictions for Ethernet Management Port, on page 43
- Ethernet Management Port Overview, on page 43
- How to Configure the Ethernet Management Port, on page 46
- Example for Configuring IP Address on the Ethernet Management Port, on page 48
- Monitoring the Ethernet Management Port, on page 49
- Additional References for Ethernet Management Port, on page 49
- Feature History for Ethernet Management Port, on page 50

Prerequisites for Ethernet Management Port

Assign an IP address to the Ethernet management port, before connecting a PC to the port.

Restrictions for Ethernet Management Port

- For Cisco IOS XE 17.12.4, entries learned on the active Ethernet management port will not be synchronized to the standby unit, and statefulness is not maintained during Stateful Switchover (SSO)
- The ethernet management port relay is not supported on the Cisco Catalyst 9600 Series Supervisor 1 Module and Cisco Catalyst 9600 Series Supervisor 2 Module.

Ethernet Management Port Overview

The Ethernet management port, known as the Gi0/0 or GigabitEthernet0/0 port, serves as a virtual routing and forwarding (VRF) interface to connect a PC. This port can be utilized for network management tasks as an alternative to the device console port.

When managing a device stack, connect the PC to the Ethernet management port on a stack member.

The Cisco Catalyst 9600 Series Switches also feature an additional Ethernet management port, TenGigabitEthernet0/1, which is an SFP+ interface that provides pluggable connectivity to the management network. This interface supports both 10G and 1G transceivers.

By default, *GigabitEthernet0/0* is enabled. You can disable *GigabitEthernet0/0* and enable *TenGigabitEthernet0/1* by doing either of these methods:

- Execute the **platform management-interface TenGigabitEthernet0/1** command and restart the device. To switch back to the default management port, execute the **no platform management-interface TenGigabitEthernet0/1** command and restart the device.
- Set the environment variable ETHER_PORT to 1 in the ROMMON mode and restart the device. To switch back to the default management port, set the ETHER_PORT variable to 2 in ROMMON mode and restart the device.

Connecting the Ethernet Management Directly to a Device

Figure 8: Connecting a Device to a PC

This figure displays the connection between the Ethernet management port and a PC for a device or a standalone device.

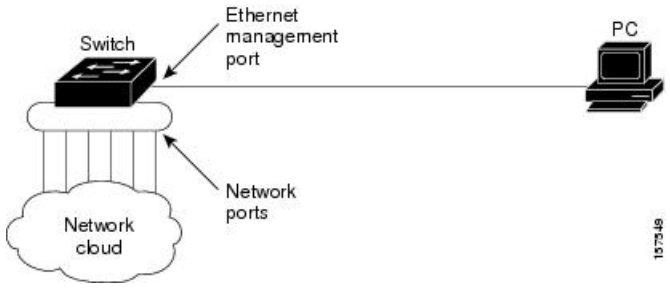

Ethernet Management Port with StackWise Virtual

To utilize the Ethernet management port with StackWise Virtual, connect the Ethernet management ports from both the active and standby devices to the uplink switch. In a Cisco StackWise Virtual configuration, a single management plane is used, allowing the same IP address to be used for both active and standby devices. During a stateful switchover (SSO), the Ethernet Management port on the device that becomes active (previously standby), will establish connectivity and maintain management functionalities.

Note Any SSH, SCP, or Telnet sessions established by clients over the Ethernet management port IP address before the stateful switchover will be terminated. You must initiate a new session after the switchover to the new active device in StackWise Virtual.

Ethernet Management Port and Routing

Typically, a device cannot route packets between the Ethernet management port and network ports. Network ports provide physical connections for devices such as computers, printers, and other network equipments, and these ports are available on switches, routers, and other networking devices.

Although the Ethernet management port does not inherently support routing, you may need to enable routing protocols on the port.

Figure 9: Network Example with Routing Protocols Enabled

Enable routing protocols on the Ethernet management port if the PC is multiple hops away from the device and packets must traverse multiple Layer 3 devices to reach the PC.

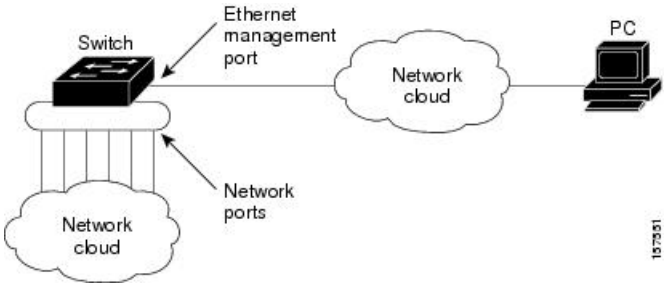

If the Ethernet management port and the network ports are associated with the same routing process

- routes from the Ethernet management port are propagated through the network ports to the network, and
- routes from the network ports are propagated through the Ethernet management port to the network.

However, since routing is not supported between the Ethernet management port and the network ports, traffic between these ports cannot be transmitted or received. This scenario can lead to data packet loops between the ports, which disrupt the device and network operation. To prevent such loops, configure route filters to block routes between the Ethernet management port and the network ports.

Supported Features on the Ethernet Management Port

The Ethernet management port supports

- Cisco Discovery Protocol,
- express setup (only in device stacks),
- DHCP-based autoconfiguration,
- DHCP relay agent,
- interface features, such as,
  - speed: 10 Mb/s, 100 Mb/s, 1000 Mb/s, and autonegotiation (default),
  - duplex mode: full, half, and autonegotiation, and
  - loopback detection.
- IP ping,
- network assistant,
- Telnet with passwords,
- TFTP,
- Secure Shell (SSH), and

- SNMP (only ENTITY-MIB and IF-MIB).

Caution Before enabling a feature on the Ethernet management port, verify if it is supported. Configuring an unsupported feature may result in improper functionality or device failure.

How to Configure the Ethernet Management Port

This section outlines the procedures for configuring the Ethernet management port, including disabling and enabling the port.

Disabling and Enabling the Ethernet Management Port

By default, the Ethernet management port is enabled.

Procedure

	Command or Action	Purpose
Step 1	**enable** **Example:** `Device> enable`	Enables privileged EXEC mode. • Enter your password if prompted.
Step 2	**configure terminal** **Example:** `Device# configure terminal`	Enters global configuration mode.
Step 3	**interface gigabitethernet0/0** **Example:** `Device(config)# interface gigabitethernet0/0`	Configures the Ethernet management port, and enters interface configuration mode.
Step 4	**shutdown** **Example:** `Device(config-if)# shutdown`	Disables the Ethernet management port.
Step 5	**no shutdown** **Example:** `Device(config-if)# no shutdown`	Enables the Ethernet management port.
Step 6	**end** **Example:** `Device(config-if)# end`	Exits interface configuration mode and returns to privileged EXEC mode.
Step 7	**show interfaces gigabitethernet0/0**	Displays the link status.

	Command or Action	Purpose
	Example: `Device# show interfaces gigabitethernet0/0`	To determine the link status to the PC, monitor the Ethernet management port LED. When the link is active, the LED will be green, and when the link is down, the LED will be off . An amber LED indicates a POST failure.

What to do next

Proceed to manage or configure your device using the Ethernet management port.

Enabling the TenGigabitEthernet Management Port

Follow these steps to enable the SFP+ interface that provides pluggable connectivity from the device to the management interface. Enabling the TenGigabitEthernet management port on the Supervisor disables the GigabitEthernet management port.

Procedure

	Command or Action	Purpose
Step 1	**enable** **Example:** `Device> enable`	Enables privileged EXEC mode. • Enter your password if prompted.
Step 2	**configure terminal** **Example:** `Device# configure terminal`	Enters global configuration mode.
Step 3	**platform management-interface TenGigabitEthernet0/1** **Example:** `Device(config)# platform management-interface TenGigabitEthernet0/1`	Changes the default management port from GigabitEthernet0/0 to TenGigabitEthernet0/1. • Restart the device for the changes to take effect. • To switch back to the default management port, use the **no** form of this command, and restart the device.
Step 4	**end** **Example:** `Device(config)# end`	Exits the global configuration mode and enters privileged EXEC mode.
Step 5	**show platform management-interface** **Example:** `Device# show platform management-interface`	(Optional) Displays information about the active and configured management port.

	Command or Action	Purpose
Step 6	**reload** **Example:** `Device# reload`	Reloads the device.

Example for Configuring IP Address on the Ethernet Management Port

This example shows how to configure an IP address on the GigabitEthernet0/0 management port.

```
Device> enable
Device# configure terminal
Device(config)# interface gigabitethernet0/0
Device(config-if)# vrf forwarding Mgmt-vrf
Device(config-if)# ip address 192.168.247.10 255.255.0.0
Device(config-if)# end


Device# show running-config interface gigabitethernet0/0

Building configuration...

Current configuration : 118 bytes
!
interface GigabitEthernet0/0
vrf forwarding Mgmt-vrf
ip address 192.168.247.10 255.255.0.0
negotiation auto
end
```

This example shows how to configure an IP address on the TenGigabitEthernet0/1 management interface.

```
Device> enable
Device# configure terminal
Device(config)# interface TenGigabitEthernet0/1
Device(config-if)# vrf forwarding Mgmt-vrf
Device(config-if)# ip address 192.168.247.20 255.255.0.0
Device(config-if)# negotiation auto
Device(config-if)# end


Device# show running-config interface TenGigabitEthernet0/1

Building configuration...

Current configuration : 118 bytes
!
interface TenGigabitEthernet0/1
 vrf forwarding Mgmt-vrf
 ip address 192.168.247.20 255.255.0.0
 negotiation auto
end
```

Monitoring the Ethernet Management Port

These commands display information about the management port, including the list of transceivers that are supported on the pluggable management port.

Table 5: show Commands for Ethernet Management Port

Command	Purpose
show platform management-interface	Displays the active management port.
show interfaces transceiver supported-list | b management interface	Displays the list of transceivers that are supported on the pluggable management port.

This sample output from the **show platform management-interface** command displays the active management port.

```
Device# show platform management-interface

Management interface is GigabitEthernet0/0
```

This sample output from the **show interfaces transceiver supported-list | b management interface** command displays all the transceivers that are supported on the pluggable management port.

```
Device# show interfaces transceiver supported-list | b management interface

Transceivers supported on management interface TenGigabitEthernet0/1:
   GLC-SX-MM                NONE
   GLC-SX-MMD               ALL
   SFP-10G-LR               ALL
   SFP-10G-LR-S             ALL
   SFP-10G-SR               ALL
   SFP-10G-SR-S             ALL
   SFP-H10GB-CU1M           NONE
   SFP-H10GB-CU3M           NONE
   SFP-H10GB-CU5M           NONE
```

Additional References for Ethernet Management Port

Related Documents

Related Topic	Document Title
Bootloader configuration	See the Performing Device Setup chapter of the *System Management Configuration Guide*.
Bootloader commands	See the *System Management Commands* section of the *Command Reference (Catalyst 9600 Series Switches)*.

Feature History for Ethernet Management Port

This table provides release and related information for features explained in this module.

These features are available on all releases subsequent to the one they were introduced in, unless noted otherwise.

Release	Feature	Feature Information
Cisco IOS XE Gibraltar 16.11.1	Ethernet Management Port	The Ethernet management port is a VRF interface to which you can connect a PC. You can use the Ethernet management port instead of the device console port for network management.
Cisco IOS XE Gibraltar 16.12.x	Changing Ethernet Management Port	The **platform management-interface** command was introduced to change the default management port.

Use Cisco Feature Navigator to find information about platform and software image support. To access Cisco Feature Navigator, go to https://cfnng.cisco.com/.

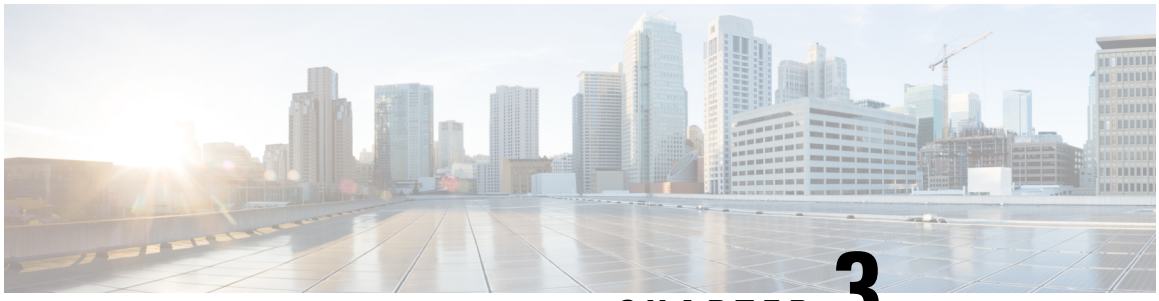

CHAPTER 3

Checking Port Status and Connectivity

- Check Cable Status Using Time Domain Reflectometer, on page 51
- Feature History for Checking Port Status and Connectivity, on page 52

Check Cable Status Using Time Domain Reflectometer

The Time Domain Reflectometer (TDR) feature allows you to determine if a cable is OPEN or SHORT when it is at fault.

Running the TDR Test

To start the TDR test, perform this task:

Procedure

	Command or Action	Purpose
Step 1	**test cable-diagnostics tdr** {**interface** { *interface-number* }}	Starts the TDR test.
Step 2	**show cable-diagnostics tdr** {**interface** *interface-number*}	Displays the TDR test counter information.

TDR Guidelines

The following guidelines apply to the use of TDR:

- Do not change the port configuration while the TDR test is running.
- If you connect a port undergoing a TDR test to an Auto-MDIX enabled port, the TDR result might be invalid.
- If you connect a port undergoing a TDR test to a 100BASE-T port such as that on the device, the unused pairs (4-5 and 7-8) are reported as faulty because the remote end does not terminate these pairs.
- Due to cable characteristics, you should run the TDR test multiple times to get accurate results.

- Do not change port status (for example, remove the cable at the near or far end) because the results might be inaccurate.
- TDR works best if the test cable is disconnected from the remote port. Otherwise, it might be difficult for you to interpret results correctly.
- TDR operates across four wires. Depending on the cable conditions, the status might show that one pair is OPEN or SHORT while all other wire pairs display as faulty. This operation is acceptable because you should declare a cable faulty provided one pair of wires is either OPEN or SHORT.
- TDR intent is to determine how poorly a cable is functioning rather than to locate a faulty cable.
- When TDR locates a faulty cable, you should still use an offline cable diagnosis tool to better diagnose the problem.

Feature History for Checking Port Status and Connectivity

This table provides release and related information for features explained in this module.

These features are available on all releases subsequent to the one they were introduced in, unless noted otherwise.

Release	Feature	Feature Information
Cisco IOS XE Gibraltar 16.11.1	Time Domain Reflectometer (TDR)	TDR allows you to determine if a cable is OPEN or SHORT when it is at fault.

Use Cisco Feature Navigator to find information about platform and software image support. To access Cisco Feature Navigator, go to Cisco Feature Navigator.

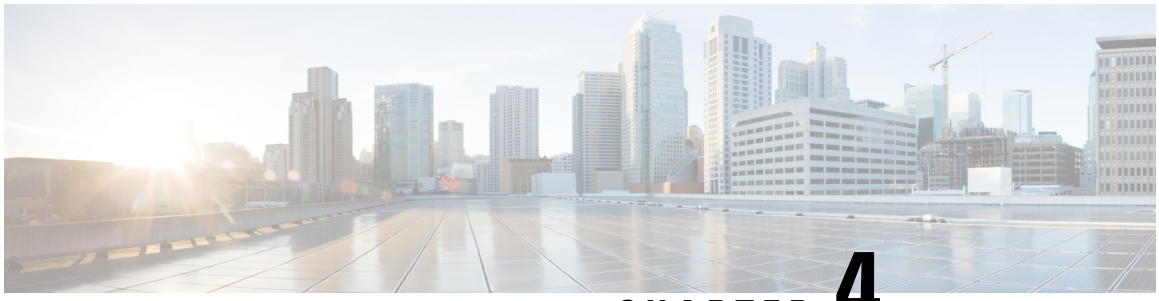

CHAPTER 4

Configuring LLDP, LLDP-MED, and Wired Location Service

- Restrictions for LLDP, on page 53
- Information About LLDP, LLDP-MED, and Wired Location Service, on page 53
- How to Configure LLDP, LLDP-MED, and Wired Location Service, on page 57
- Configuration Examples for LLDP, LLDP-MED, and Wired Location Service, on page 66
- Monitoring and Maintaining LLDP, LLDP-MED, and Wired Location Service, on page 66
- Additional References for LLDP, LLDP-MED, and Wired Location Service, on page 67
- Feature History for LLDP, LLDP-MED, and Wired Location Service, on page 67

Restrictions for LLDP

- If the interface is configured as a tunnel port, LLDP is automatically disabled.
- If you first configure a network-policy profile on an interface, you cannot apply the **switchport voice vlan** command on the interface. If the **switchport voice vlan** *vlan-id* is already configured on an interface, you can apply a network-policy profile on the interface. This way the interface has the voice or voice-signaling VLAN network-policy profile applied on the interface.
- You cannot configure static secure MAC addresses on an interface that has a network-policy profile.
- When Cisco Discovery Protocol and LLDP are both in use within the same switch, it is necessary to disable LLDP on interfaces where Cisco Discovery Protocol is in use for power negotiation. LLDP can be disabled at interface level with the commands **no lldp tlv-select power-management** or **no lldp transmit / no lldp receive**.

Information About LLDP, LLDP-MED, and Wired Location Service

This section describes about LLDP, LLDP-MED, and wired location service.

LLDP

The Cisco Discovery Protocol (CDP) is a device discovery protocol that runs over Layer 2 (the data link layer) on all Cisco-manufactured devices (routers, bridges, access servers, switches, and controllers). CDP allows

network management applications to automatically discover and learn about other Cisco devices connected to the network.

To support non-Cisco devices and to allow for interoperability between other devices, the device supports the IEEE 802.1AB Link Layer Discovery Protocol (LLDP). LLDP is a neighbor discovery protocol that is used for network devices to advertise information about themselves to other devices on the network. This protocol runs over the data-link layer, which allows two systems running different network layer protocols to learn about each other.

LLDP Supported TLVs

LLDP supports a set of attributes that it uses to discover neighbor devices. These attributes contain type, length, and value descriptions and are referred to as TLVs. LLDP supported devices can use TLVs to receive and send information to their neighbors. This protocol can advertise details such as configuration information, device capabilities, and device identity.

The switch supports these basic management TLVs. These are mandatory LLDP TLVs.

- Port description TLV
- System name TLV
- System description TLV
- System capabilities TLV
- Management address TLV

These organizationally specific LLDP TLVs are also advertised to support LLDP-MED.

- Port VLAN ID TLV (IEEE 802.1 organizationally specific TLVs)
- MAC/PHY configuration/status TLV (IEEE 802.3 organizationally specific TLVs)

LLDP-MED

LLDP for Media Endpoint Devices (LLDP-MED) is an extension to LLDP that operates between endpoint devices such as IP phones and network devices. It specifically provides support for voice over IP (VoIP) applications and provides additional TLVs for capabilities discovery, network policy, Power over Ethernet, inventory management and location information. By default, all LLDP-MED TLVs are enabled.

LLDP-MED Supported TLVs

LLDP-MED supports these TLVs:

- LLDP-MED capabilities TLV

  Allows LLDP-MED endpoints to determine the capabilities that the connected device supports and has enabled.

- Network policy TLV

  Allows both network connectivity devices and endpoints to advertise VLAN configurations and associated Layer 2 and Layer 3 attributes for the specific application on that port. For example, the switch can notify a phone of the VLAN number that it should use. The phone can connect to any device, obtain its VLAN number, and then start communicating with the call control.

By defining a network-policy profile TLV, you can create a profile for voice and voice-signaling by specifying the values for VLAN, class of service (CoS), differentiated services code point (DSCP), and tagging mode. These profile attributes are then maintained centrally on the switch and propagated to the phone.

- Power management TLV

  Enables advanced power management between LLDP-MED endpoint and network connectivity devices. Allows devices and phones to convey power information, such as how the device is powered, power priority, and how much power the device needs.

  LLDP-MED also supports an extended power TLV to advertise fine-grained power requirements, end-point power priority, and end-point and network connectivity-device power status. LLDP is enabled and power is applied to a port, the power TLV determines the actual power requirement of the endpoint device so that the system power budget can be adjusted accordingly. The device processes the requests and either grants or denies power based on the current power budget. If the request is granted, the switch updates the power budget. If the request is denied, the device turns off power to the port, generates a syslog message, and updates the power budget. If LLDP-MED is disabled or if the endpoint does not support the LLDP-MED power TLV, the initial allocation value is used throughout the duration of the connection.

  You can change power settings by entering the **power inline** {**auto** [**max** *max-wattage*] | **never** | **static** [**max** *max-wattage*] } interface configuration command. By default the PoE interface is in **auto** mode;

- Inventory management TLV

  Allows an endpoint to send detailed inventory information about itself to the device, including information hardware revision, firmware version, software version, serial number, manufacturer name, model name, and asset ID TLV.

- Location TLV

  Provides location information from the device to the endpoint device. The location TLV can send this information:

  - Civic location information

    Provides the civic address information and postal information. Examples of civic location information are street address, road name, and postal community name information.

  - ELIN location information

    Provides the location information of a caller. The location is determined by the Emergency location identifier number (ELIN), which is a phone number that routes an emergency call to the local public safety answering point (PSAP) and which the PSAP can use to call back the emergency caller.

  - Geographic location information

    Provides the geographical details of a switch location such as latitude, longitude, and altitude of a switch.

  - custom location

    Provides customized name and value of a switch location.

Wired Location Service

The device uses the location service feature to send location and attachment tracking information for its connected devices to a Cisco Mobility Services Engine (MSE). The tracked device can be a wireless endpoint, a wired endpoint, or a wired device or controller. The device notifies the MSE of device link up and link down events through the Network Mobility Services Protocol (NMSP) location and attachment notifications.

The MSE starts the NMSP connection to the device, which opens a server port. When the MSE connects to the device there are a set of message exchanges to establish version compatibility and service exchange information followed by location information synchronization. After connection, the device periodically sends location and attachment notifications to the MSE. Any link up or link down events detected during an interval are aggregated and sent at the end of the interval.

When the device determines the presence or absence of a device on a link-up or link-down event, it obtains the client-specific information such as the MAC address, IP address, and username. If the client is LLDP-MED- or CDP-capable, the device obtains the serial number and UDI through the LLDP-MED location TLV or CDP.

Depending on the device capabilities, the device obtains this client information at link up:

- Slot and port specified in port connection
- MAC address specified in the client MAC address
- IP address specified in port connection
- 802.1X username if applicable
- Device category is specified as a *wired station*
- State is specified as *new*
- Serial number, UDI
- Model number
- Time in seconds since the device detected the association

Depending on the device capabilities, the device obtains this client information at link down:

- Slot and port that was disconnected
- MAC address
- IP address
- 802.1X username if applicable
- Device category is specified as a *wired station*
- State is specified as *delete*
- Serial number, UDI
- Time in seconds since the device detected the disassociation

When the device shuts down, it sends an attachment notification with the state *delete* and the IP address before closing the NMSP connection to the MSE. The MSE interprets this notification as disassociation for all the wired clients associated with the device.

If you change a location address on the device, the device sends an NMSP location notification message that identifies the affected ports and the changed address information.

Default LLDP Configuration

Table 6: Default LLDP Configuration

Feature	Default Setting
LLDP global state	Disabled
LLDP holdtime (before discarding)	120 seconds
LLDP timer (packet update frequency)	30 seconds
LLDP reinitialization delay	2 seconds
LLDP tlv-select	Disabled to send and receive all TLVs
LLDP interface state	Disabled
LLDP receive	Disabled
LLDP transmit	Disabled
LLDP med-tlv-select	Disabled to send all LLDP-MED TLVs. When LLDP is glob LLDP-MED-TLV is also enabled.

How to Configure LLDP, LLDP-MED, and Wired Location Service

This section provides the procedures to configure LLDP, LLDP-MED, and wired location service.

Enabling LLDP

Procedure

	Command or Action	Purpose
Step 1	**enable** **Example:** `Device> enable`	Enables privileged EXEC mode. Enter your password, if prompted.
Step 2	**configure terminal** **Example:** `Device# configure terminal`	Enters global configuration mode.
Step 3	**lldp run** **Example:**	Enables LLDP globally on the device.

	Command or Action	Purpose
	`Device(config)# lldp run`	
Step 4	**interface** *interface-id* **Example:** `Device(config)# interface gigabitethernet2/0/1`	Specifies the interface on which you are enabling LLDP, and enters interface configuration mode.
Step 5	**lldp transmit** **Example:** `Device(config-if)# lldp transmit`	Enables the interface to send LLDP packets.
Step 6	**lldp receive** **Example:** `Device(config-if)# lldp receive`	Enables the interface to receive LLDP packets.
Step 7	**end** **Example:** `Device(config-if)# end`	Exits interface configuration mode, and returns to privileged EXEC mode.
Step 8	**show lldp** **Example:** `Device# show lldp`	Verifies the configuration.
Step 9	**copy running-config startup-config** **Example:** `Device# copy running-config startup-config`	(Optional) Saves your entries in the configuration file.

Configuring LLDP Characteristics

You can configure the frequency of LLDP updates, the amount of time to hold the information before discarding it, and the initialization delay time. You can also select the LLDP and LLDP-MED TLVs to send and receive.

Note Steps 3 through 6 are optional and can be performed in any order.

Procedure

	Command or Action	Purpose
Step 1	**enable** **Example:** `Device> enable`	Enables privileged EXEC mode. Enter your password, if prompted.

	Command or Action	Purpose
Step 2	**configure terminal** **Example:** `Device# configure terminal`	Enters global configuration mode.
Step 3	**lldp holdtime** *seconds* **Example:** `Device(config)# lldp holdtime 120`	(Optional) Specifies the amount of time a receiving device should hold the information from your device before discarding it. The range is 0 to 65535 seconds; the default is 120 seconds.
Step 4	**lldp reinit** *delay* **Example:** `Device(config)# lldp reinit 2`	(Optional) Specifies the delay time in seconds for LLDP to initialize on an interface. The range is 2 to 5 seconds; the default is 2 seconds.
Step 5	**lldp timer** *rate* **Example:** `Device(config)# lldp timer 30`	(Optional) Sets the sending frequency of LLDP updates in seconds. The range is 5 to 65534 seconds; the default is 30 seconds.
Step 6	**lldp tlv-select** **Example:** `Device(config)# tlv-select`	(Optional) Specifies the LLDP TLVs to send or receive.
Step 7	**interface** *interface-id* **Example:** `Device(config)# interface gigabitethernet2/0/1`	Specifies the interface on which you are enabling LLDP, and enters interface configuration mode.
Step 8	**lldp med-tlv-select** **Example:** `Device(config-if)# lldp med-tlv-select inventory management`	(Optional) Specifies the LLDP-MED TLVs to send or receive.
Step 9	**end** **Example:** `Device(config-if)# end`	Exits interface configuration mode, and returns to privileged EXEC mode.
Step 10	**show lldp** **Example:** `Device# show lldp`	Verifies the configuration.
Step 11	**copy running-config startup-config** **Example:** `Device# copy running-config startup-config`	(Optional) Saves your entries in the configuration file.

Configuring LLDP-MED TLVs

By default, the device only sends LLDP packets until it receives LLDP-MED packets from the end device. It then sends LLDP packets with MED TLVs, as well. When the LLDP-MED entry has been aged out, it again only sends LLDP packets.

By using the **lldp** interface configuration command, you can configure the interface not to send the TLVs listed in the following table.

Table 7: LLDP-MED TLVs

LLDP-MED TLV	Description
inventory-management	LLDP-MED inventory management TLV
location	LLDP-MED location TLV
network-policy	LLDP-MED network policy TLV
power-management	LLDP-MED power management TLV

Follow these steps to enable a TLV on an interface:

Procedure

	Command or Action	Purpose
Step 1	**enable** **Example:** `Device> enable`	Enables privileged EXEC mode. Enter your password, if prompted.
Step 2	**configure terminal** **Example:** `Device# configure terminal`	Enters global configuration mode.
Step 3	**interface** *interface-id* **Example:** `Device(config)# interface gigabitethernet2/0/1`	Specifies the interface on which you are enabling LLDP, and enters interface configuration mode.
Step 4	**lldp med-tlv-select** **Example:** `Device(config-if)# lldp med-tlv-select inventory management`	Specifies the TLV to enable.
Step 5	**end** **Example:** `Device(config-if)# end`	Exits global configuration mode, and returns to privileged EXEC mode.

	Command or Action	Purpose
Step 6	**copy running-config startup-config** **Example:** `Device# copy running-config startup-config`	(Optional) Saves your entries in the configuration file.

Configuring Network-Policy TLV

Procedure

	Command or Action	Purpose
Step 1	**enable** **Example:** `Device> enable`	Enables privileged EXEC mode. Enter your password, if prompted.
Step 2	**configure terminal** **Example:** `Device# configure terminal`	Enters global configuration mode.
Step 3	**network-policy profile** *profile number* **Example:** `Device(config)# network-policy profile 1`	Specifies the network-policy profile number, and enters network-policy configuration mode. The range is 1 to 4294967295.
Step 4	{**voice** | **voice-signaling**} **vlan** [*vlan-id* {**cos** *cvalue* | **dscp** *dvalue*}] | [[**dot1p** {**cos** *cvalue* | **dscp** *dvalue*}] | **none** | **untagged**] **Example:** `Device(config-network-policy)# voice vlan 100 cos 4`	Configures the policy attributes: • **voice**: Specifies the voice application type. • **voice-signaling**: Specifies the voice-signaling application type. • **vlan**: Specifies the native VLAN for voice traffic. • *vlan-id*: (Optional) Specifies the VLAN for voice traffic. The range is 1 to 4094. • **cos** *cvalue*: (Optional) Specifies the Layer 2 priority class of service (CoS) for the configured VLAN. The range is 0 to 7; the default is 5. • **dscp** *dvalue*: (Optional) Specifies the differentiated services code point (DSCP) value for the configured VLAN. The range is 0 to 63; the default is 46.

	Command or Action	Purpose
		• **dot1p**: (Optional) Configures the telephone to use IEEE 802.1p priority tagging and use VLAN 0 (the native VLAN). • **none**: (Optional) Do not instruct the IP telephone about the voice VLAN. The telephone uses the configuration from the telephone key pad. • **untagged**: (Optional) Configures the telephone to send untagged voice traffic. This is the default for the telephone.
Step 5	**exit** **Example:** `Device(config)# exit`	Returns to global configuration mode.
Step 6	**interface** *interface-id* **Example:** `Device(config)# interface gigabitethernet2/0/1`	Specifies the interface on which you are configuring a network-policy profile, and enters interface configuration mode.
Step 7	**network-policy** *profile number* **Example:** `Device(config-if)# network-policy 1`	Specifies the network-policy profile number.
Step 8	**lldp med-tlv-select network-policy** **Example:** `Device(config-if)# lldp med-tlv-select network-policy`	Specifies the network-policy TLV.
Step 9	**end** **Example:** `Device(config)# end`	Returns to privileged EXEC mode.
Step 10	**show network-policy profile** **Example:** `Device# show network-policy profile`	Verifies the configuration.
Step 11	**copy running-config startup-config** **Example:** `Device# copy running-config startup-config`	(Optional) Saves your entries in the configuration file.

Configuring Location TLV and Wired Location Service

Beginning in privileged EXEC mode, follow these steps to configure location information for an endpoint and to apply it to an interface.

Procedure

	Command or Action	Purpose
Step 1	**configure terminal** **Example:** `Device# configure terminal`	Enters global configuration mode.

Step 2	**location** {**admin-tag** *string* | **civic-location identifier** {*id* | **host**} | **elin-location** *string* **identifier** *id* | **custom-location identifier** {*id* | **host**} | **geo-location identifier** {*id* | **host**}}
	Example:
	`Device(config)# location civic-location identifier 1`
	`Device(config-civic)# number 3550`
	`Device(config-civic)# primary-road-name "Cisco Way"`
	`Device(config-civic)# city "San Jose"`
	`Device(config-civic)# state CA`
	`Device(config-civic)# building 19`
	`Device(config-civic)# room C6`
	`Device(config-civic)# county "Santa Clara"`
	`Device(config-civic)# country US`
		Specifies the location information for an endpoint.
		• **admin-tag**: Specifies an administrative tag or site information.
		• **civic-location**: Specifies civic location information.
		• **elin-location**: Specifies emergency location information (ELIN).
		• **custom-location**: Specifies custom location information.
		• **geo-location**: Specifies geo-spatial location information.
		• **identifier** *id*: Specifies the ID for the civic, ELIN, custom, or geo location.
		• **host**: Specifies the host civic, custom, or geo location.
		• *string*: Specifies the site or location information in alphanumeric format.

Step 3	**exit** **Example:** `Device(config-civic)# exit`	Returns to global configuration mode.
Step 4	**interface** *interface-id* **Example:**	Specifies the interface on which you are configuring the location information, and enters interface configuration mode.
Step 5	**location** {**additional-location-information** *word* | **civic-location-id** {*id* | **host**} | **elin-location-id** *id* | **custom-location-id** {*id* | **host**} | **geo-location-id** {*id* | **host**} }	Enters location information for an interface: • **additional-location-information**: Specifies additional information for a location or place.

	Command or Action	Purpose
	Example: `Device(config-if)# location elin-location-id 1`	• **civic-location-id**: Specifies global civic location information for an interface. • **elin-location-id**: Specifies emergency location information for an interface. • **custom-location-id**: Specifies custom location information for an interface. • **geo-location-id**: Specifies geo-spatial location information for an interface. • **host**: Specifies the host location identifier. • *word*: Specifies a word or phrase with additional location information. • *id*: Specifies the ID for the civic, ELIN, custom, or geo location. The ID range is 1 to 4095.
Step 6	**end** **Example:** `Device(config-if)# end`	Exits interface configuration mode, and returns to privileged EXEC mode.

Step 7	Use one of the following:
	• **show location admin-tag** *string*
	• **show location civic-location identifier** *id*
	• **show location elin-location identifier** *id*
	Example:
	`Device# show location admin-tag`
	or
	`Device# show location civic-location identifier`
	or
	`Device# show location elin-location identifier`
		Verifies the configuration.

Step 8	**copy running-config startup-config** **Example:** `Device# copy running-config startup-config`	(Optional) Saves your entries in the configuration file.

Enabling Wired Location Service on the Device

Before you begin

For wired location to function, you must first enter the **ip device tracking** global configuration command.

Procedure

	Command or Action	Purpose
Step 1	**enable** **Example:** `Device> enable`	Enables privileged EXEC mode. Enter your password, if prompted.
Step 2	**configure terminal** **Example:** `Device# configure terminal`	Enters global configuration mode.
Step 3	**nmsp notification interval** {**attachment** | **location**} *interval-seconds* **Example:** `Device(config)# nmsp notification interval location 10`	Specifies the NMSP notification interval. **attachment**: Specifies the attachment notification interval. **location**: Specifies the location notification interval. *interval-seconds*: Duration in seconds before the device sends the MSE the location or attachment updates. The range is 1 to 30; the default is 30.
Step 4	**end** **Example:** `Device(config)# end`	Exits global configuration mode, and returns to privileged EXEC mode.
Step 5	**show network-policy profile** **Example:** `Device# show network-policy profile`	Verifies the configuration.
Step 6	**copy running-config startup-config** **Example:** `Device# copy running-config startup-config`	(Optional) Saves your entries in the configuration file.

Configuration Examples for LLDP, LLDP-MED, and Wired Location Service

This section provides configuration examples for LLDP, LLDP-MED, and wired location service.

Examples: Configuring Network-Policy TLV

This example shows how to configure VLAN 100 for voice application with CoS and to enable the network-policy profile and network-policy TLV on an interface:

```
Device# configure terminal
Device(config)# network-policy 1
Device(config-network-policy)# voice vlan 100 cos 4
Device(config-network-policy)# exit
Device(config)# interface gigabitethernet1/0/1
Device(config-if)# network-policy profile 1
Device(config-if)# lldp med-tlv-select network-policy
```

This example shows how to configure the voice application type for the native VLAN with priority tagging:

```
Device-config-network-policy)# voice vlan dot1p cos 4
Device-config-network-policy)# voice vlan dot1p dscp 34
```

Monitoring and Maintaining LLDP, LLDP-MED, and Wired Location Service

Use the following commands for monitoring and maintaining LLDP, LLDP-MED, and wired location service.

Command	Description
clear lldp counters	Resets the traffic counters to zero.
clear lldp table	Deletes the LLDP neighbor information table.
clear nmsp statistics	Clears the NMSP statistic counters.
show lldp	Displays global information, such as frequency of transmissions, the holdtime for packets being sent, and the delay time before LLDP initializes on an interface.
show lldp entry *entry-name*	Displays information about a specific neighbor. You can enter an asterisk (*) to display all neighbors, or you can enter the neighbor name.

Command	Description
show lldp interface [*interface-id*]	Displays information about interfaces with LLDP enabled. You can limit the display to a specific interface.
show lldp neighbors [*interface-id*] [**detail**]	Displays information about neighbors, including device type, interface type and number, holdtime settings, capabilities, and port ID. You can limit the display to neighbors of a specific interface or expand the display for more detailed information.
show lldp traffic	Displays LLDP counters, including the number of packets sent and received, number of packets discarded, and number of unrecognized TLVs.
show location admin-tag *string*	Displays the location information for the specified administrative tag or site.
show location civic-location identifier *id*	Displays the location information for a specific global civic location.
show location elin-location identifier *id*	Displays the location information for an emergency location
show network-policy profile	Displays the configured network-policy profiles.
show nmsp	Displays the NMSP information

Additional References for LLDP, LLDP-MED, and Wired Location Service

Related Documents

Related Topic	Document Title
For complete syntax and usage information for the commands used in this chapter.	See the *Interface and Hardware Commands* section in the *Command Reference (Catalyst 9600 Series Switches)*

Feature History for LLDP, LLDP-MED, and Wired Location Service

This table provides release and related information for features explained in this module.

These features are available on all releases subsequent to the one they were introduced in, unless noted otherwise.

Release	Feature	Feature Information
Cisco IOS XE Gibraltar 16.11.1	Link Layer Discovery Protocol (LLDP), LLDP-MED, Wired Location Service	LLDP is a neighbor discovery protocol that is used for network devices to advertise information about themselves to other devices on the network. This protocol runs over the data-link layer, which allows two systems running different network layer protocols to learn about each other. LLDP-MED operates between endpoints and network devices. Wired Location Service lets you send tracking information of the connected devices to a Cisco Mobility Services Engine (MSE).

Use Cisco Feature Navigator to find information about platform and software image support. To access Cisco Feature Navigator, go to https://cfnng.cisco.com/.

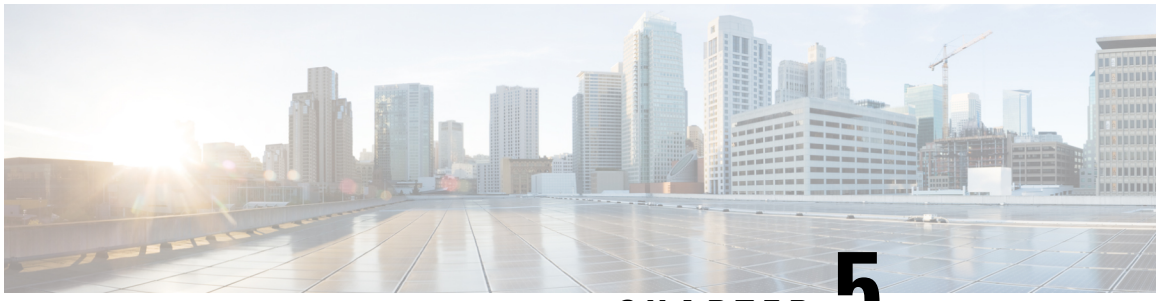

CHAPTER 5

Configuring Link Debounce Timer

- Restrictions for Link Debounce Timer, on page 69
- Information About Link Debounce Timer, on page 69
- Configuring Link Debounce Timer, on page 70
- Configuring Link Debounce Up Timer, on page 71
- Configuring Link Debounce Down Timer, on page 71
- Example: Configuring the Link Debounce Timer, on page 72
- Feature History for Link Debounce Timer, on page 72

Restrictions for Link Debounce Timer

The following are restrictions for configuring link debounce timer:

- On Cisco Catalyst 9600 Series Switches, link debounce configuration is supported at port level.
- On Cisco Catalyst 9600 Series Supervisor 2 Module, link debounce configuration is supported only on the global level, port level configuration is not supported.
- If you have configured StackWise Virtual Link (SVL) and Dual-Active Detection (DAD) on an interface, then configuring link debounce globally can cause instability in SVL and DAD links.

Information About Link Debounce Timer

The Link Debounce Timer delays notification of a link up or down status change. Delayed notification of a link status change can decrease traffic loss due to network reconfiguration when network ethernet port experiences minor faults in the link.

If the status of a link changes quickly from up to down and then back to up, the Link Debounce Timer suppresses the link down status notification. If the link transitions from up to down, but does not come back up, the Link Debounce Timer delays the link down status notification until the debounce timer expires.

Delayed link status notification allows a quick port status change and recovery without triggering any of the changes that are necessary when a port status changes (up or down). The normal operation of Dense Wavelength Division Multiplexing (DWDM) links includes quick port status changes and recovery during DWDM network reconvergence. Delayed link status notification can also be used to mitigate link flaps because of bad cabling.

Note Enabling the port debounce timer causes link up or down detections to be delayed, resulting in loss of traffic during the debouncing period. This situation might affect the convergence and reconvergence of some Layer 2 and Layer 3 protocols.

Configuring Link Debounce Timer

To configure Link Debounce Timer on Cisco Catalyst 9600 Series Supervisor 1 Module port, perform this task:

Procedure

	Command or Action	Purpose
Step 1	**enable** **Example:** `Device> enable`	Enables privileged EXEC mode. Enter your password, if prompted.
Step 2	**configure terminal** **Example:** `Device# configure terminal`	Enters global configuration mode.
Step 3	**interface** *interface interface-id* **Example:** `Device(config)# interface fortygigabitEthernet 1/0/10`	Enters interface configuration mode and selects the link to configure.
Step 4	**link debounce** [**time** *debounce-time*] **Example:** `Device(config-if)# link debounce time 360`	Configures the debounce timer in milli seconds. Maximum allowed timer is 1200 ms.
Step 5	**end** **Example:** `Device(config-if)# end`	Returns to privileged EXEC mode.
Step 6	**show interface** *interface-id* **debounce** or **show interface debounce** **Example:** `Device# show interface debounce`	Verifies the configuration.

Configuring Link Debounce Up Timer

To configure Link Debounce Up Timer for Cisco Catalyst 9600 Series Switches Supervisor 2 Module globally, perform this task:

Procedure

	Command or Action	Purpose
Step 1	**enable** **Example:** `Device> enable`	Enables privileged EXEC mode. Enter your password, if prompted.
Step 2	**configure terminal** **Example:** `Device# configure terminal`	Enters global configuration mode.
Step 3	**system debounce link-up** *debounce-time* **Example:** `Device(config)# system debounce link-up 360`	Enables and configures the debounce up timer in milli seconds. The timer range is from 120ms to 10000ms. **Note** Link debounce up timer is disabled by default.

Configuring Link Debounce Down Timer

To configure Link Debounce Down Timer for Cisco Catalyst 9600 Series Supervisor 2 Module globally, perform this task:

Procedure

	Command or Action	Purpose
Step 1	**enable** **Example:** `Device> enable`	Enables privileged EXEC mode. Enter your password, if prompted.
Step 2	**configure terminal** **Example:** `Device# configure terminal`	Enters global configuration mode.
Step 3	**system debounce link-down** *debounce-time*] **Example:** `Device(config)# system debounce link-down 360`	Enables and configures the debounce down timer in milli seconds. The timer range is from 120ms to 10000ms. **Note**

	Command or Action	Purpose
		Link debounce down timer is disabled by default.

Example: Configuring the Link Debounce Timer

The following example shows how to enable Link Debounce Timer on a FortygigabitEthernet port for Cisco Catalyst 9600 Series Supervisor 1 Module.

```
Device(config)# interface fortygigabitEthernet 1/0/10
Device(config-if)# link debounce time 360
Warning: Enabling debounce feature causes link down detection to be delayed
```

The following examples show how to verify the Link Debounce Timer configuration for Cisco Catalyst 9600 Series Supervisor 1 Module.

```
Device# show interface fortygigabitEthernet 1/0/10 debounce

Port         Debounce time   Value(ms)
Fo1/0/10     enable               360


Device# show interfaces debounce

Port         Debounce time   Value(ms)
Fo1/0/1      disable
Fo1/0/2      disable
Fo1/0/3      enable          1200
Fo1/0/4      disable
Fo1/0/5      disable
Fo1/0/6      disable
Fo1/0/7      disable
Fo1/0/8      disable
Fo1/0/9      disable
Fo1/0/10     enable          360
Fo1/0/11     disable
Fo1/0/12     enable          240
Fo1/0/13     disable
```

Feature History for Link Debounce Timer

This table provides release and related information for the features explained in this module.

These features are available in all the releases subsequent to the one they were introduced in, unless noted otherwise.

Release	Feature	Feature Information
Cisco IOS XE Amsterdam 17.3.3	Link Debounce Timer	The Link Debounce Timer feature delays notification of a link down status change. Delayed notification of a linkdown status change can decrease traffic loss due to network reconfiguration when network ethernet portexperiences minor faults in the link.
Cisco IOS XE Dublin 17.12.4	Link Debounce Up/Down Timer	The Link Debounce Up/Down Timer feature delays notification of a link from down to up status change. Delayed notification of a linkdown status change can decrease traffic loss due to network reconfiguration when network ethernet portexperiences minor faults in the link. Support for this feature was introduced only on Cisco Catalyst 9600 Series Supervisor 2 Module in global configuration mode.
Cisco IOS XE 17.15.1	Link Debounce Up/Down Timer	The Link Debounce Up/Down Timer feature delays notification of a link from down to up status change. Delayed notification of a linkdown status change can decrease traffic loss due to network reconfiguration when network ethernet portexperiences minor faults in the link. Support for this feature was introduced only on Cisco Catalyst 9600 Series Supervisor 2 Module in global configuration mode.

Use the Cisco Feature Navigator to find information about platform and software image support. To access Cisco Feature Navigator, go to Cisco Feature Navigator.

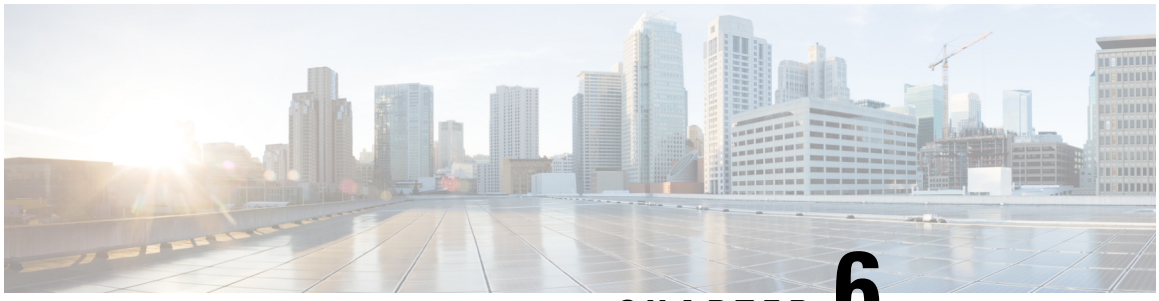

CHAPTER 6

Configuring System MTU

- Information About the MTU, on page 75
- How to Configure MTU , on page 75
- Configuration Examples for System MTU, on page 77
- Additional References for System MTU, on page 78
- Feature History for System MTU, on page 78

Information About the MTU

The default maximum transmission unit (MTU) size for payload received in Ethernet frame and sent on all device interfaces is 1500 bytes. The maximum value of System MTU is 9216 bytes.

System MTU Value Application

The upper limit of the IP or IPv6 MTU value is based on the switch configuration and refers to the currently applied system MTU value. For more information about setting the MTU sizes, see the **system mtu** global configuration command in the command reference for this release.

Beginning from Cisco IOS XE Amsterdam 17.3.x, the minimum IPv6 system MTU is fixed at 1280 as per RFC 8200.

How to Configure MTU

The following tasks describe how you can configure MTU.

Configuring the System MTU

Follow these steps to change the MTU size for switched packets:

Procedure

	Command or Action	Purpose
Step 1	**enable**	Enables privileged EXEC mode.

	Command or Action	Purpose
	Example: `Device> enable`	Enter your password, if prompted.
Step 2	**configure terminal** **Example:** `Device# configure terminal`	Enters global configuration mode.
Step 3	**system mtu** *bytes* **Example:** `Device(config)# system mtu 1900`	(Optional) Changes the MTU size for all interfaces.
Step 4	**end** **Example:** `Device(config)# end`	Enters global configuration mode, and returns to privileged EXEC mode.
Step 5	**copy running-config startup-config** **Example:** `Device# copy running-config startup-config`	Saves your entries in the configuration file.
Step 6	**show system mtu** **Example:** `Device# show system mtu`	Verifies your settings.

Configuring Protocol-Specific MTU

To override system MTU values on routed interfaces, configure protocol-specific MTU under each routed interface. To change the MTU size for routed ports, perform this procedure.

Procedure

	Command or Action	Purpose
Step 1	**configure terminal** **Example:** `Device# configure terminal`	Enters global configuration mode.
Step 2	**interface** *interface* **Example:** `Device(config)# interface gigabitethernet0/0`	Enters interface configuration mode.
Step 3	**ip mtu** *bytes* **Example:** `Device(config-if)# ip mtu 68`	Changes the IPv4 MTU size

	Command or Action	Purpose
Step 4	**ipv6 mtu** *bytes* **Example:** `Device(config-if)# ipv6 mtu 1280`	(Optional) Changes the IPv6 MTU size.
Step 5	**end** **Example:** `Device(config-if)# end`	Exits interface configuration mode, and returns to privileged EXEC mode.
Step 6	**copy running-config startup-config** **Example:** `Device# copy running-config startup-config`	Saves your entries in the configuration file.
Step 7	**show system mtu** **Example:** `Device# show system mtu`	Verifies your settings.

Configuration Examples for System MTU

Example: Configuring Protocol-Specific MTU

This example shows how you can configure protocol-specific MTU:

```
Device# configure terminal
Device(config)# interface gigabitethernet 0/1
Device(config-if)# ip mtu 900
Device(config-if)# ipv6 mtu 1286
Device(config-if)# end
```

Example: Configuring the System MTU

This example shows how you can configure the system MTU:

```
Device# configure terminal
Device(config)# system mtu 1600
Device(config)# exit
```

Additional References for System MTU

Related Documents

Related Topic	Document Title
For complete syntax and usage information for the commands used in this chapter.	See the *Interface and Hardware Commands* section in the *Command Reference (Catalyst 9600 Series Switches)*

Standards and RFCs

Standard/RFC	Title
RFC 8200	*Internet Protocol, Version 6 (IPv6) Specification*

Feature History for System MTU

This table provides release and related information for features explained in this module.

These features are available on all releases subsequent to the one they were introduced in, unless noted otherwise.

Release	Feature	Feature Information
Cisco IOS XE Gibraltar 16.11.1	System MTU	System MTU defines the maximum transmission unit size for frames transmitted on all interfaces of a switch.
Cisco IOS XE Cupertino 17.7.1	System MTU	This feature was implemented on the Cisco Catalyst 9600 Series Supervisor 2 Module (C9600X-SUP-2).

Use Cisco Feature Navigator to find information about platform and software image support. To access Cisco Feature Navigator, go to https://cfnng.cisco.com/.

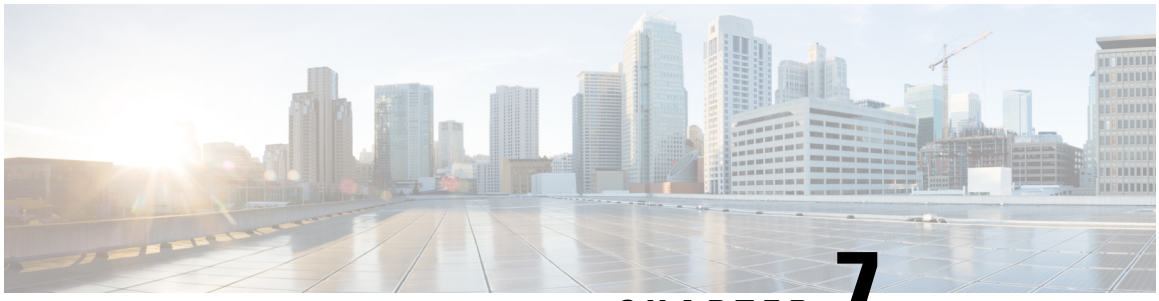

CHAPTER 7

Configuring Per-Port MTU

- Restrictions for Per-Port MTU, on page 79
- Information About Per-Port MTU, on page 79
- Configuring Per-Port MTU, on page 80
- Example: Configuring Per-Port MTU, on page 81
- Example: Verifying Per-Port MTU, on page 81
- Example: Disabling Per-Port MTU, on page 81
- Feature History for Per-Port MTU, on page 81

Restrictions for Per-Port MTU

- Per-Port MTU cannot be configured on the management port.
- Per-Port MTU cannot be configured on SVL links.
- Members of a port channel cannot be configured with Per-Port MTU, they derive their MTU from the port-channel MTU configuration.

On Cisco Catalyst 9600 Series Supervisor 2 Module, the following restrictions are applicable:

- If no protocol-specific MTU configuration is present, Per-Port MTU is used as protocol-specific MTU. In case Per-Port MTU is not configured, System MTU is used as protocol-specific MTU.
- Ingress and egress Layer 2 MTU is derived from Per-Port MTU. If Per-Port MTU is not configured, System MTU is used
- On ingress ports configured with Layer 2 MTU, if packets exceed the configured MTU size, then the packets are dropped.
- Layer 2 MTU configurations are not enforced for egress frames.

Information About Per-Port MTU

You can configure the MTU size for all interfaces on a device at the same time using the **system mtu** command. The default maximum transmission unit (MTU) size for frames received and transmitted on all interfaces is 1500 bytes. The **system mtu** command is a global command and does not allow MTU to be configured at a port level. Starting with Cisco IOS XE 17.1.1, you can configure Per-Port MTU. Per-Port MTU will support

port level and port channel level MTU configuration. With Per-Port MTU you can set different MTU values for different interfaces as well as different port channel interfaces.

Per-port MTU can be configured in the range of 1500-9216 bytes.

Once the Per-Port MTU value has been configured on a port, the protocol-specific MTU for that port is also changed to the Per-Port MTU value. When Per-Port MTU is configured on a port, you can still configure protocol-specific MTU on the interface in the range from 256 to Per-Port MTU value.

If the Per-Port MTU is disabled, the MTU for the port will revert to the system MTU value.

You can view the Per-Port MTU configurations on an interface using the **show interface mtu** command.

You can disable Per-Port MTU by using the **no** form of the **mtu***bytes* command in the interface configuration mode.

Configuring Per-Port MTU

Follow these steps to change the MTU size for switched packets on a particular port of an interface:

Procedure

	Command or Action	Purpose
Step 1	**enable** **Example:** `Device> enable`	Enables privileged EXEC mode. Enter your password, if prompted.
Step 2	**configure terminal** **Example:** `Device# configure terminal`	Enters global configuration mode.
Step 3	**interface***typeswitch-number/slot-number/port-number* **Example:** `Device(config)# int FortyGigabitEthernet2/5/0/20`	Configures the interface and enters interface configuration mode.
Step 4	**mtu***bytes* **Example:** `Device(config-if)# mtu 6666`	Configures the MTU size for a particular port on the interface.
Step 5	**end** **Example:** `Device(config-if)# end`	Exits interface configuration mode, and returns to privileged EXEC mode.

Example: Configuring Per-Port MTU

This example shows how to configure Per-Port MTU on an interface:

```
Device# configure terminal
Device(config)# interface FortyGigabitEthernet2/5/0/20
Device(config-if)# mtu 6666
Device(config-if)# end
```

Example: Verifying Per-Port MTU

This example shows how to verify Per-Port MTU on an interface using the **show interface mtu** command:

```
Device# show interface mtu

Port           Name               MTU
Fo2/5/0/19                        1500
Fo2/5/0/20                        6666
Fo2/5/0/21      ixia_7_21         1500
```

Example: Disabling Per-Port MTU

This example shows how to disable Per-Port MTU on an interface:

```
Device# configure terminal
Device(config)# interface FortyGigabitEthernet2/5/0/20
Device(config-if)# no mtu
Device(config-if)# end
```

Feature History for Per-Port MTU

This table provides release and related information for features explained in this module.

These features are available on all releases subsequent to the one they were introduced in, unless noted otherwise.

Release	Feature	Feature Information
Cisco IOS XE Amsterdam 17.1.1	Per-Port MTU	Per-Port MTU defines the maximum transmission unit size for frames received and transmitted on a particular port or port channel.

Release	Feature	Feature Information
Cisco IOS XE Dublin 17.11.1	Per-Port MTU	This feature was implemented on the Cisco Catalyst 9600 Series Supervisor 2 Module (C9600X-SUP-2).

Use Cisco Feature Navigator to find information about platform and software image support. To access Cisco Feature Navigator, go to https://cfnng.cisco.com/.

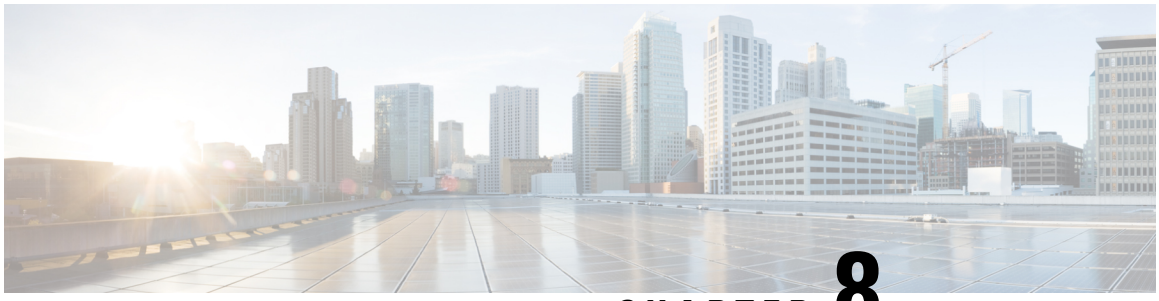

CHAPTER 8

Configuring an External USB Bluetooth Dongle

- Restrictions for Configuring an External USB Bluetooth Dongle , on page 83
- Information About External USB Bluetooth Dongle, on page 83
- How to Configure an External USB Bluetooth Dongle on a Switch, on page 84
- Verifying Bluetooth Settings on a Device, on page 85
- Feature History for Configuring an External Bluetooth Dongle, on page 85

Restrictions for Configuring an External USB Bluetooth Dongle

- Only Bluetooth version 4.0 is supported.
- External USB Bluetooth dongle is supported only on the Cisco Catalyst 9000 Series Switches that are configured within the IPv4 address range.
- In stacking mode, the external USB Bluetooth dongle needs to be enabled on an active switch.
- After a Stateful Switchover (SSO), the external USB Bluetooth dongle should be enabled on the new active switch interface.
- External USB Bluetooth dongle is not supported with the following configurations:
  - Quality of Service (QoS)
  - Access Control List (ACL)

Information About External USB Bluetooth Dongle

The connected external USB Bluetooth dongle acts as a Bluetooth host for external devices and serves as a management port on the switch. You can pair an external USB Bluetooth dongle with your Bluetooth-enabled external devices such as smart phone, laptop, or tablet.

External USB Bluetooth dongle is supported on switches that are configured both in standalone mode or in stacking mode.

Supported External USB Bluetooth Dongle

The following external USB Bluetooth dongles are supported:

- BTD-400 Bluetooth 4.0 Adapter by Kinivo
- Bluetooth 4.0 USB Adapter by Asus
- Mini Bluetooth Wireless USB 4.0 Dongle Adapter by Adnet
- Bluetooth 4.0 USB Adapter by Insignia

How to Configure an External USB Bluetooth Dongle on a Switch

To configure an external USB Bluetooth dongle on a switch, perform this procedure:

Procedure

Step 1 Connect an external USB Bluetooth dongle to the USB Type A port on the switch.

Note
You can connect the external USB Bluetooth dongle either before powering up the device or when the device is running.

Step 2 On your switch, enter the global configuration mode and verify that the external USB Bluetooth dongle is connected to the switch:

```
Device> enable
Device# show platform hardware bluetooth

Controller:0:1a:7d:da:71:13
Type:Primary
Bus:USB
State:DOWN
Name:HCI Version:
```

Step 3 Enable Bluetooth interface using the **enable** command in interface configuration mode:

```
Device# configure terminal
Device(config)# interface bluetooth 0/4
Device(config-if)# enable
```

Step 4 Enter the **no shutdown** command to restart the Bluetooth interface automatically after a device reboot:

```
Device(config-if)# no shutdown
```

Step 5 Configure the pairing pin using the **bluetooth pin** *pin* command:

```
Device(config-if)# bluetooth pin 1111
```

or

```
Device(config-if)# exit
Device(config)# bluetooth pin 1111
```

Note
Cisco recommends using **bluetooth pin** command in global configuration mode.

Step 6 Turn on the Bluetooth settings on your external device. On your external device, select the Bluetooth-enabled switch based on the hostname.

Step 7 Enable the network settings on your external device to allow it to connect to the internet.

Verifying Bluetooth Settings on a Device

This topic list the commands used to monitor bluetooth settings on a device.

Use the following commands in privileged EXEC mode to monitor Bluetooth settings.

Table 8: Commands to Monitor Bluetooth Settings on a Device

Command	Purpose
show ip interface bluetooth 0/4	Displays the usability status of a bluetooth interface.
show platform hardware bluetooth	Displays information about a bluetooth interface.
show running | include pin	Displays the current bluetooth pin.

Feature History for Configuring an External Bluetooth Dongle

This table provides release and related information for features explained in this module.

These features are available on all releases subsequent to the one they were introduced in, unless noted otherwise.

Release	Feature	Feature Information
Cisco IOS XE Amsterdam 17.1.1	Configuring an External Bluetooth Dongle	External USB Bluetooth dongle acts as a Bluetooth host for external devices and serves as a management port on the switch.

Use Cisco Feature Navigator to find information about platform and software image support. To access Cisco Feature Navigator, go to https://cfnng.cisco.com/.

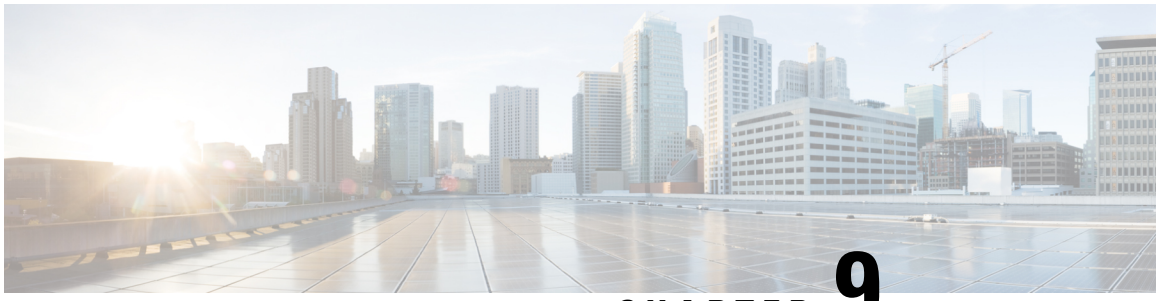

CHAPTER 9

M2 SATA Module

- M2 SATA Module on Cisco Catalyst 9600 Series Supervisor, on page 87
- File System and Storage on M2 SATA, on page 87
- Limitations of M2 SATA, on page 87
- Self-Monitoring, Analysis and Reporting Technology System (S.M.A.R.T.) Health Monitoring, on page 88
- Accessing File System on M2 SATA , on page 88
- Formatting the M2 SATA Flash Disk , on page 88
- Operations on the SATA Module , on page 89
- Feature History and Information for M2 SATA Module, on page 91

M2 SATA Module on Cisco Catalyst 9600 Series Supervisor

Cisco Catalyst 9600 is a next generation modular switch that lets you host applications for packet collection and analysis, testing, monitoring, and so on. To support the storage needs for these applications, the Cisco Catalyst 9600 Series Supervisor has an M2 connector that hosts a 22x88mm M2 SATA flash card. SATA configuration ranges from 240GB, 480GB to 960GB.

File System and Storage on M2 SATA

The default file system format of SATA is EXT4. However, SATA supports all extended file systems-EXT2, EXT3, and EXT4.

The SATA device has the following characteristics:

- Files stored on the M2 SATA partition are compatible with files stored on other devices.
- You can copy or store files between M2 SATA and other types of devices such as USB, eUSB, flash, and other IOS-XE file-system or storage.
- You can also read, write, delete, and format the SATA device.

Limitations of M2 SATA

- Non-EXT based file systems are not supported on M2 SATA.

- You cannot use M2 SATA to boot images from ROMMON.
- You cannot upgrade the firmware on the M2 SATA drive.
- The M2 SATA device is not accessible from ROMMON. Hence you cannot perform any operations on the SATA device from ROMMON mode.

Self-Monitoring, Analysis and Reporting Technology System (S.M.A.R.T.) Health Monitoring

Cisco Catalyst IOS XE Release 16.9.1 gives you the ability to monitor the health of the device through CLIs. You can monitor internal hot-spots, flash wear-outs, and hardware failure of the SATA device and alert your users about a SATA failure. These users can then backup data and obtain a new SATA device.

A linux deamon smartd starts when the SATA is inserted into the . By default, the polling interval is set to 2 days for offline test, 6 days for short test and 14 days for long test. The warnings and error messages are saved in /crashinfo/tracelogs/smart_errors.log and are also sent to the IOSd console.

The S.M.A.R.T. feature and smartd daemon are enabled by default when the SATA device is detected by the switch.

Note If the SATA is not detected after insertion, check the existing file system on the device. If it is not EXT based, SATA will not be detected. In that case, change the filesystem to EXT and reinsert the SATA.

The following CLI shows the logs from the smartd daemon:

```
Device# more crashinfo:tracelogs/smart_errors.log
%IOSXEBOOT-4-SMART_LOG: (local/local): Mon Jan 4 00:13:10 Universal 2016
INFO: Starting SMART deamon
```

You can monitor the overall health of the device through the following CLI:

```
Device# more flash:smart_overall_health.log
smartctl 6.4 2015-06-04 r4109 [x86_64-linux-4.4.131] (local build)
Copyright (C) 2002-15, Bruce Allen, Christian Franke, www.smartmontools.org

=== START OF READ SMART DATA SECTION ===
SMART overall-health self-assessment test result: PASSED
```

Accessing File System on M2 SATA

The mounted file system from the SATA flash card is accessed at disk0:. Use the **show file systems** command to view the details of each type of available file system.

Copying files to and from bootflash: or usbflash0: is supported.

Formatting the M2 SATA Flash Disk

To format a new flash disk, use the **format disk0:** command.

The format command recursively deletes all files on the device. This command fails if any file is open during its execution.

```
Device# format disk0: ?
<cr> <cr>
       ext2    ext2 filesystem type
       ext3    ext3 filesystem type
       ext4    ext4 filesystem type
       secure  Securely format the file system
<cr> <cr>
```

```
Device# format disk0:
Format operation may take a while. Continue? [confirm]
Format operation will destroy all data in "disk0:". Continue? [confirm] Format of disk0:
complete
```

Operations on the SATA Module

The following are some of the operations that you can perform on the SATA:

Command	Description
dir *filesystem*	Displays the directories on the specified file system.
copy *source-file destination-url*	Copies files from specified source to a specified destination.
delete	Deletes a specified file
format	Formats the filesystem on the disk.
show disk0:	Displays the content and details of disk0:
show file information *file-url*	Displays information about a specific file.
show file systems	Displays the available file system on your device.

Following are sample outputs of the operations:

```
Device# dir disk0:
Directory of disk0:/
        11  drwx            16384  May 11 2018 16:06:14 +00:00  lost+found
        10747905  drwx             4096  May 25 2018 13:03:43 +00:00  test
        236154740736 bytes total (224072925184 bytes free)
```

Copy a file from the disk0: to USB

```
Device# copy disk0:test.txt usbflash0:
Destination filename [test.txt]?
Copy in progress...C
17866 bytes copied in 0.096 secs (186104 bytes/sec)
```

```
Device# dir usbflash0:
Directory of usbflash0:/
   12  -rw-         33554432  Jul 28 2017 10:12:58 +00:00  nvram_config
   11  drwx            16384  Jul 28 2017 10:09:46 +00:00  lost+found
   13  -rw-            17866  Aug 11 2017 09:52:16 +00:00  test.txt
189628416 bytes total (145387520 bytes free)
```

Delete the file test.txt from disk0:

```
Device# delete disk0:test.txt
Delete filename [test.txt]?
Delete disk0:/test.txt? [confirm]

Device# dir disk0:
Directory of disk0:/
No files in directory
118148280320 bytes total (112084135936 bytes free)
```

Copy file test.txt from USB to disk0:

```
Device# copy usbflash0:test.txt disk0:
Destination filename [test.txt]?
Copy in progress...C
17866 bytes copied in 0.058 secs (308034 bytes/sec)

Device# dir disk0:
Directory of disk0:/
   11  -rw-           17866  Aug 11 2017 09:53:03 +00:00  test.txt
118148280320 bytes total (112084115456 bytes free)
```

Format the disk

To format the ext4 filesystem, use the following command:

```
Device# format disk0: ext4
```

Show commands

```
Device# show disk0:

-#- --length-- ---------date/time--------- path
  2      17866 Aug 11 2017 09:54:06.0000000000 +00:00 test.txt
112084115456 bytes available (62513152 bytes used)

Device# show file information disk0: test.txt

disk0:test.txt:
  type is image (elf64) []
  file size is 448 bytes, run size is 448 bytes
Foreign image, entry point 0x400610

Device# show file systems

File Systems:

              Size(b)       Free(b)      Type  Flags  Prefixes
-
             -
*  11250098176    9694093312      disk     rw   bootflash: flash:
    1651314688    1232220160      disk     rw   crashinfo:
  118148280320  112084115456      disk     rw   disk0:
     189628416     145387520      disk     rw   usbflash0:
    7763918848    7696850944      disk     ro   webui:
             -             -    opaque     rw   null:
             -             -    opaque     ro   tar:
             -             -   network     rw   tftp:
      33554432      33532852     nvram     rw   nvram:
             -             -    opaque     wo   syslog:
             -             -   network     rw   rcp:
             -             -   network     rw   http:
             -             -   network     rw   ftp:
             -             -   network     rw   scp:
             -             -   network     rw   https:
             -             -    opaque     ro   cns:
```

```
Device# show disk0: filesys

    Filesystem: disk0
    Filesystem Path: /vol/disk0
    Filesystem Type: ext4
    Mounted: Read/Write

Device# show inventory

NAME: "Chassis", DESCR: "Cisco Catalyst 9600 Series 6 Slot Chassis"
PID: C9606R            , VID: V00  , SN: FXS2231Q32N

NAME: "Slot 2 Linecard", DESCR: "48-Port 10GE / 25GE"
PID: C9600-LC-48YL     , VID: V00  , SN: CAT2232L0NJ

NAME: "TwentyFiveGigE2/0/1", DESCR: "10GE CU5M"
PID: QSFP-4SFP10G-CU5M   , VID: V03  , SN: MDM17350075-CH3

NAME: "TwentyFiveGigE2/0/2", DESCR: "10GE CU1M"
PID: SFP-H10GB-CU1M      , VID: V03  , SN: TED2143A0VQ

NAME: "TwentyFiveGigE2/0/3", DESCR: "10GE CU1M"
PID: SFP-H10GB-CU1M      , VID: V03  , SN: TED2143A0VQ

NAME: "TwentyFiveGigE2/0/4", DESCR: "10GE CU1M"
PID: SFP-H10GB-CU1M      , VID: V03  , SN: TED2143A0LU

NAME: "TwentyFiveGigE2/0/5", DESCR: "10GE CU1M"
PID: SFP-H10GB-CU1M      , VID: V03  , SN: TED2143A0LU

<output truncated>
```

Feature History and Information for M2 SATA Module

The following table provides release information about the feature or features described in this module. This table lists only the software release that introduced support for a given feature in a given software release train. Unless noted otherwise, subsequent releases of that software release train also support that feature.

Feature Name	Release	Feature Information
M2 SATA Module	Cisco IOS XE Gibraltar 16.11.1	The M2 SATA card addresses the storage needs of a device. It a a small form factor card and connector. For more information refer the *Hardware Installion Guide* for the device.

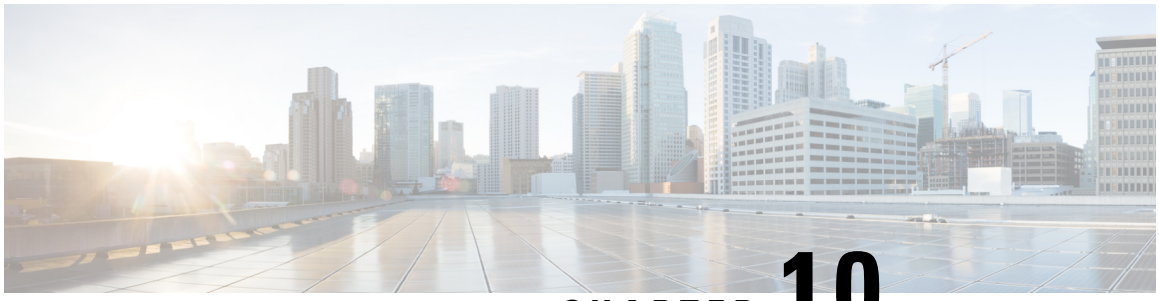

CHAPTER 10

Troubleshooting Interface and Hardware Components

- Overview, on page 93
- Support Articles, on page 93
- Feedback Request, on page 94
- Disclaimer and Caution, on page 94

Overview

This chapter provides links to documents authored by Cisco subject matter experts (SMEs). They aim to help you resolve technical issues without requiring a support ticket. If these documents are unable to resolve your issue, we recommend visiting the applicable Cisco Community. There is a wealth of information and advice available from fellow Cisco customers who may have experienced this issue already and provided a solution. If you are not able to find a resolution on the Community, it may be best that you raise a support ticket at Cisco Support. In cases where a support ticket has to be raised, these documents provide guidance about the data that should be collected and added to the support ticket. Specify the support document you referred, and TAC can create an improvement request with the document owner.

Support Articles

The documents in this section were created using specific software and hardware listed in the Components Used section of each article. However, this does not mean that they are limited to what is listed in Components Used, and generally remain relevant for later versions of software and hardware. Note that there could be some changes in the software or hardware that can cause commands to stop working, the syntax to change, or GUIs and CLIs to look different from one release to another.

The following are the support articles associated with this technology:

Document	Description
CVR-QSFP-SFP10G Adapter Usage and Limitations on C9600-LC-24C Line Card	This document describes the usage and limitations of the CVR-QSFP-SFP10G adaptor on the C9600-LC-24C line card on the Catalyst 9600 platform.

Document	Description
Troubleshoot MTU on Catalyst 9000 Series Switches	This document describes how to understand and troubleshoot MTU (Maximum Transmission Unit) on Catalyst 9000 series switches.
Understand why FCS Errors, Input Errors, or Packet Loss Can Occur when Connected to Multigigabit Ethernet Ports	This document describes why you encounter frame check sequence (FCS) errors, input errors, or packet loss with devices that connect to Multigigabit Ethernet (mGig) ports on Catalyst 9000 series switches due to interpacket gap (IPG) or interframe gap (IFG) tolerance.
Troubleshoot Port Flaps on Catalyst 9000 Series Switches	This document describes how to identify, collect useful logs, and troubleshoot problems that can occur with Port Flaps on Catalyst 9000 switches.

Feedback Request

Your input helps. A key aspect to improving these support documents is customer feedback. Note that these documents are owned and maintained by multiple teams within Cisco. If you find an issue specific to the document (unclear, confusing, information missing, etc):

- Provide feedback using the **Feedback** button located at the right panel of the corresponding article. The document owner will be notified, and will either update the article, or flag it for removal.
- Include information regarding the section, area, or issue you had with the document and what could be improved. Provide as much detail as possible.

Disclaimer and Caution

The information in this document was created from the devices in a specific lab environment. All of the devices used in this document started with a cleared (default) configuration. If your network is live, ensure that you understand the potential impact of any command.