

Nexthop Forwarding Support

- Revision History, on page 1
- Feature Description, on page 1
- How It Works, on page 1
- Configuring Nexthop Forwarding Support, on page 7
- Monitoring and Troubleshooting, on page 8

Revision History

Table 1: Revision History

Revision Details	Release
First introduced.	2022.01.0

Feature Description


In uplink direction, the UE and the GI IP can be in a different subnet. The routing path in UPF is defined to allow the uplink packet to be forwarded accordingly.

How It Works

Architecture

The following illustration provides an overview of Nexthop Forwarding feature.

Figure 1: Nexthop Forwarding

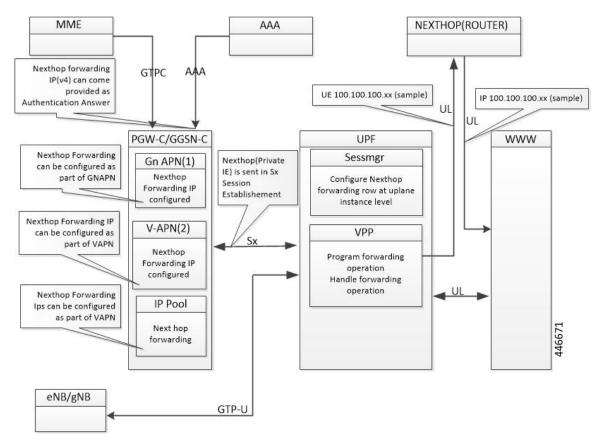

You can configure Nexthop IP address at the SMF under DNN profile or IPAM profile. During PDU Establishment, the SMF relays the IPv4/IPv6 address over the N4 interface in the NEXT HOP IP private IE in a PFCP Session Establishment Request.

You can also configure Nexthop IP address at the UPF through Charging-Action.



Note

When Nexthop address is provided by both SMF and UPF Charging-Action, the UPF Charging-Action Nexthop address takes precedence.

Configuration Priority

S. No.	Configuration	Priority
1.	UPF (Charging Action)	1
2.	DNN profile	2
3.	IP Pool	3

Configuration Use Cases

Case	IP Type	DNN	IP Pool	UPF (Charging Action)	Nexthop IP Selection		
Nexthop supplied	IPv4	209.165.201.18	Not configured	Not configured	Nexthop Address is selected from DNN:		
only in DNN	IPv6	8001::10	Not applicable	Configured	IPv4: 209.165.201.18 IPv6: 8001::10		
Nexthop supplied only in IP pool	IPv4	Not configured	209.165.201.19	Not configured	Nexthop Address is selected from IP Pool:		
only in ir poor	IPv6	Not configured	Not applicable	Configured	IPv4: 209.165.201.19		
IPv4 and IPv6 configured in DNN, and IPv4 in IP pool	IPv4	209.165.201.18	209.165.201.19	Not configured	Nexthop Address is selected from DNN: IPv4: 209.165.201.18 IPv6: 9001::3		
	IPv6	9001::3	Not applicable	Configured			
IPv6 configured in DNN, and IPv4 in IP	IPv4	Not configured	209.165.201.19	Not configured	Nexthop IPv4 is selected from IP pool: 209.165.201.19		
pool	IPv6	8001::10	Not applicable	Configured			
					Nexthop IPv6 selected from DNN: 8001::10		
IPv6 configured in DNN, IPv4 in IP	IPv4	209.165.201.18	209.165.201.19	209.165.201.20	Nexthop Address is selected from UPF		
pool, and IPv4 in UPF Charging Action	IPv6	8001::10	Not applicable	Not configured	(CA): 209.165.201.20		
IPv6 configured in DNN, IPv4 in IP pool, and IPv6 in UPF Charging Action	IPv4	209.165.201.18	209.165.201.19	Not configured	Nexthop Address is selected from UPF(CA): 9001::10		
	IPv6	8001::10	Not applicable	9001::10	011 (CA) . 300110		

Interface

The following Private IEs are introduced in Sx/N4 Session Establishment message.

2 3 8	PFCP _IE_ NEXT HOP			Sx/N Sess Estab men Requ	sion olish t	forward ing						
					BI	TS						support- IPv4
		Octets 7 6 5 4 3 2 1										/IPv6 address
		1 to 2	7 Type = 238 (decimal)									
		3 to 4			L	ength =	n					
		5 to 10	PECP IE NEXTHOP II)									
	11-14 PFCP_IE_NEXTHOP_IP											
2	PFCP				1	•			1. Ir	nside	Priv	
3	_IE_ NEXTHO	P							Crea		IE:	

2 3 9	PFCP _IE_ NEXIHOP _ID			PFCP	_IE_N	1. Inside Create FAR IE of Sx Session Establish ment Request	Private IE: UPF: nexthop forward ing support- IPv4 /IPv6					
			BITS								address	
		Octets	Octets 7 6 5 4 3 2 1								PFCP IE	
		1 to 2			Type =		NEXTHOP					
		3 to 4			L		of Sx/N4 Session					
		5 to 10								Establish ment Request		

2 4 0	PFCP_IE_ NEXTHOP _IP		PFCP_IE_NEXTHOP_IP									
				PFCP_IE_ NEXTHOP	Private IE							
		Octets	Octets 7 6 5 4 3 2 1									: UPF:
		1 to 2	1 to 2 Type = 240 (decimal)									forwarding support- IPv4/ IPv6
		3 to 4										
		5										address
		m to m+3										
		p to p+15			IP	v6 Ado	dress					

The following is a sample output of SX_SESSION_ESTABLISHMENT_REQUEST in which the SMF relays the Nexthop IP to the UPF.

```
CREATE FAR:
 Type: 3
  Value:
  FAR ID:
    Type: 108
    Value: 0x80000002
  APPLY ACTION:
    Type: 44
    Value:
      DROP: 0
       FORW: 1
      BUFF: 0
      NOCP: 0
      DUPL: 0
  FORWARDING PARAMETERS:
    Type: 4
    Value:
      DESTINATION INTERFACE:
        Type: 42
        Value: CORE (1)
       PDN INSTANCE:
         Type: 22
         Value: intershat
          INNER PACKET MARKING:
           Type: 220
           TOS/TRAFFIC CLASS: 0xB8 0xFC
   NextHop ID:
       Value: 0x0001
CREATE TRAFFIC ENDPOINT:
   Type: 127 Length: 20
   Value:
   Traffic Endpoint ID:
       Type: 131 Length: 1
       Value: 0x0004
       Hex: 0083 0001 04
```

```
Local F-TEID:
         Type: 21 Length: 1
         Value:
             CH: 1
             IPv4: 0
             IPv6: 0
             CHID: 0
         Hex: 0015 0001 04
      Bearer Info:
         Type: 225 Length: 6
         QCI: 5
         ARP: 84
         Charging ID: 5592407
         Hex: 00E1 0006 0554 0055 5557
  Hex: 007F 0014 0083 0001 0400 1500 0104 00E1
              0006 0554 0055 5557
NEXT HOP IP:
   Type: 237 Length: 14
   Value:
   NextHop ID:
        Type: 238
                   Length: 1
        Value: 0x0001
        Hex: 00EE 0001 01
   IP ADDR:
        Type: 239 Length: 5
        Value:
            IPv4: 1
            IPv6: 0
            IPv4: 209.165.202.150
            IPv6:
            Hex: 00EF 0005 020F 0F0F 0F
   Hex: 00ED 000E 00EE 0001 0100 EF00 0502 0F0F
         OFOF
```

Limitations

The following are the known limitations to this feature in this release:

- Currently, configuring Nexthop forwarding through AAA isn't supported.
- IPv6 configuration from SMF via IPAM profile isn't supported.
- Nexthop address sent on RADIUS and Diameter (Redirect information from PCF) interfaces isn't qualified.
- When you configure Nexthop forwarding in DNN profile and IPAM, next hop is only seen in Sx Establishment, and not in Create FAR IE of Sx Session Modification Request.

Configuring Nexthop Forwarding Support

Configuring Nexthop Forwarding through Charging Action

At the UPF, use the following CLI commands to configure Nexthop Forwarding through Charging Action.

NOTES:

- **charging**-action charging_action_name: Specifies the name of a charging action. charging_action_name must be an alphanumeric string of 1–63 characters and can contain punctuation characters. Each charging action must have a unique name.
- nexthop-forwarding-address ipv4_address/ipv6_address: Configures the nexthop forwarding address.

Configuring Nexthop Forwarding through DNN Profile

At the SMF, use the following CLI commands to configure Nexthop Forwarding through DNN profile.

```
configure
    profile dnn intershat
        nexthop-forwarding-address { ipv4 ipv4_address | ipv6 ipv6_address }
    end
```

NOTES:

- **nexthop-forwarding-address** { **ipv4** *ipv4_address* | **ipv6** *ipv6_address* }: Configures the Nexthop Forwarding address.
 - ipv4_address: Configures IPv4 address.
 - *ipv6_address*: Configures IPv6 address (supports colon-separated hexadecimal notation).

Configuring Nexthop Forwarding at IP Pool through IPAM Profile

At the SMF, use the following CLI command to configure Nexthop Forwarding at IP pool through IPAM profile.

```
address-range start_address end_address nexthop-forwarding-address ipv4_address
NOTES:
```

• address-range start_address end_address nexthop-forwarding-address ipv4_address: Configures the IPv4 address as Nexthop Forwarding address for this IP pool.

Monitoring and Troubleshooting

This section provides information about CLI commands available for monitoring and troubleshooting the feature.

Show Commands and Outputs

This section provides information about show commands and their outputs in support of this feature.

show subscriber user-plane-only full all

The output of this show command is enhanced to include the following fields introduced in support of this feature.

• Next Hop Ip Address - Displays the configured Nexthop IP address.



Note

Next Hop Ip Address field is displayed only if the Nexthop IP address is relayed from the SMF. This field is not displayed if Nexthop IP address is configured only at the UPF using Charging-Action.