



# インストール

- [Installation Overview, on page 1](#)
- [1GE および 10/25GE スイッチの設定に適用されます。 \(2 ページ\)](#)
- [1GE スイッチの設定に適用 \(6 ページ\)](#)
- [10/25GE スイッチの設定に適用 \(12 ページ\)](#)
- [Logging into HX Connect, on page 15](#)

## Installation Overview



**Note** If the HyperFlex cluster nodes were part of any other HyperFlex cluster before (or not factory shipped), follow the node cleanup procedure before starting the cluster deployment. For more information, see [HyperFlex Customer Cleanup Guides for FI and Edge](#).

Refer to the following table that summarizes the installation workflow for Edge deployments. The Steps 1-3 are common between 1GE and 10/25GE deployments. However, Step 4 is applicable for 1GE deployments, while the remaining Steps 5-6 are for 10/25GE deployments.

Step#	Description	Reference	Applicable for 1GE & 10/25GE, 1GE, or 10/25GE
1	Complete preinstallation checklist.	Make a selection from below based on your switch configuration:  2-Node Edge Deployments: <ul style="list-style-type: none"><li>• <a href="#">10 or 25 Gigabit Ethernet Topology</a> or,</li><li>• <a href="#">1 Gigabit Ethernet Topology</a></li></ul> 3- and 4-Node Edge Deployments: <ul style="list-style-type: none"><li>• <a href="#">10 or 25 Gigabit Ethernet Topology</a> or,</li><li>• <a href="#">1 Gigabit Ethernet Topology</a></li></ul>	1GE & 10/25GE

1GE および 10/25GE スイッチの設定に適用されます。

Step#	Description	Reference	Applicable for 1GE & 10/25GE, 1GE, or 10/25GE
2	Complete installation prerequisites.	<ul style="list-style-type: none"> <li>• <a href="#">Rack Cisco HyperFlex Nodes, on page 2</a></li> <li>• <a href="#">Cisco Integrated Management Controller Configuration</a></li> <li>• <a href="#">Verifying Firmware Versions, on page 4</a></li> </ul>	1GE & 10/25GE
3	Download and deploy Cisco HX Data Platform Installer.	<a href="#">Deploying Cisco HX Data Platform Installer, on page 5</a>	1GE & 10/25GE
4	Deploy Cisco HyperFlex Edge cluster.	<p>Complete the following steps to configure your Edge cluster and verify successful installation.</p> <ul style="list-style-type: none"> <li>• <a href="#">Configuring Your HyperFlex Cluster, on page 6</a></li> <li>• <a href="#">Verifying Cisco HX Data Platform Software Installation</a></li> </ul>	1GE only
6	Deploy Cisco HyperFlex Edge cluster.	<a href="#">(10/25GE only) Configuring Your HyperFlex Cluster, on page 12</a>	10/25GE only

## 1GE および 10/25GE スイッチの設定に適用されます。

### Rack Cisco HyperFlex Nodes

For details on installation of Cisco HX220c M5 HyperFlex Nodes or Cisco HX220c M6 HyperFlex Nodes, review the [Cisco Hardware Install Guides](#) .



#### Important

You can use a console dongle to connect the VGA monitor and keyboard for CIMC configuration. You can also directly connect to the VGA and USB ports on the rear of the server. Alternatively, you can perform a lights-out configuration of CIMC if a DHCP server is available in the network.

### Cisco Integrated Management Controller Configuration

Choose one method for CIMC network configuration: static assignment or DHCP assignment.

## Configuring CIMC: Static Assignment

To configure Cisco Integrated Management Controller (CIMC), you must enable CIMC standalone mode, configure the CIMC password and settings, and configure a static IP address manually using a KVM. This requires physical access to each server with a monitor and keyboard. Each server must be configured one at a time.

Customers may opt to use the dedicated CIMC management port for out-of-band use. Users should account for this third 1GE port when planning their upstream switch configuration. Additionally, the user should set the CIMC to dedicated mode during CIMC configuration. Follow [Cisco UCS C-series documentation](#) to configure the CIMC in dedicated NIC mode. Under **NIC properties**, set the NIC mode to **dedicated** before saving the configuration.

### Before you begin

- Ensure that all Ethernet cables are connected as described in the Physical Cabling section of this guide that applies your deployment.
- Attach the VGA dongle to the server and connect a monitor and USB keyboard.

---

**ステップ 1** Power on the server, and wait for the screen with the Cisco logo to display.

**ステップ 2** When prompted for boot options, press **F8** to enter the **Cisco IMC Configuration** utility.

**ステップ 3** In **CIMC User Details**, enter **password** for the **current CIMC password**, enter your **new CIMC password** twice, and press **Enter** to save you new password.

**Important** Systems ship with a default password of *password* that must be changed during installation. You cannot continue installation unless you specify a new user supplied password.

**ステップ 4** For **IP (Basic)**, check **IPv4**, uncheck **DHCP enabled**, and enter values for **CIMC IP**, **Prefix/Subnet** mask, and **Gateway**.

**ステップ 5** For **VLAN (Advanced)**, check **VLAN enabled**, and:

- If you are using trunk ports, set the appropriate **VLAN ID**.
- If you are using access ports, leave this field blank.

**ステップ 6** Leave the rest of the settings as default, press **F10** to save your configuration, and press **ESC** to exit the utility.

**ステップ 7** In a web browser, navigate directly to the CIMC page at **https://CIMC IP address**.

**ステップ 8** Enter the username **admin** and your new CIMC password, and click **Log In**.

**ステップ 9** Manually set the power policy to match the desired operation from **Server > Power Policies**.

Servers default to the Power Off power-restore policy set at the factory.

---

### What to do next

You can use the virtual KVM console or continue to use the physical KVM. The SD cards have ESXi preinstalled from the factory and boot automatically during installation.

## Configuring CIMC: DHCP Assignment

To configure Cisco Integrated Management Controller (CIMC), you must enable CIMC standalone mode, configure the CIMC password and settings, and configure a dynamic IP address obtained through DHCP. This requires more network setup but eases configuration by enabling a lights-out setup of HyperFlex Edge nodes. All servers lease addresses automatically and in parallel, reducing deployment time.

### Before you begin

- Ensure that all Ethernet cables are connected as described in the Physical Cabling section of this guide that applies your deployment.
- Ensure the DHCP server is properly configured and running with a valid scope.
- Ensure the DHCP server is directly listening on the management VLAN or you have an IP helper configured on your switch(es).
- Decide on inband versus out-of-band CIMC:
  - If using inband CIMC, configure the native VLAN for all HyperFlex Edge switch ports to match the correct DHCP VLAN. This is the only way to ensure that the CIMC can lease an address automatically.
  - If using out-of-band CIMC, configure the dedicated switch port for access mode on the DHCP VLAN.

---

ステップ 1 Connect power cables.

ステップ 2 Access the DHCP logs or lease table to determine the CIMC addresses obtained

ステップ 3 Search the hostnames for **C220-*<S/N>*** to find your HyperFlex servers, and make note of the addresses for required inputs into the HX Data Platform Installer.

---

### What to do next

When using DHCP, you must manually set a user defined CIMC password before beginning HyperFlex Data Platform installation. Use either the web UI or a CLI session to set a new password. The default password of **password** must be changed or installation fails.

## Verifying Firmware Versions

You need to view current BIOS, CIMC, SAS HBA, and drive firmware versions, and verify that those versions match data in the Release Notes.

---

ステップ 1 In your browser, log in to the CIMC web UI by navigating to **https://<CIMC IP>**.

ステップ 2 In the Navigation pane, click **Server**.

ステップ 3 On the **Server** page, click **Summary**.

ステップ 4 In the **Cisco Integrated Management Controller (CIMC) Information** section of the **Server Summary** page, locate and make a note of the **BIOS Version** and **CIMC Firmware Version**.

- ステップ 5** In CIMC, navigate to **Inventory > PCIe Adapters**, and locate and make a note of the **SAS HBA Version**.
- ステップ 6** In CIMC, navigate to **Storage** depending on which server type you are using, navigate to one of the following:
- For M4, **Cisco 12G Modular SAS > Physical Drive Info**, and make a note of the drive type, manufacturer, and firmware version.
  - For M5 and M6, **Cisco 12G SAS HBA > Physical Drive Info**, and make a note of the drive type, manufacturer, and firmware version.
- ステップ 7** Compare the current BIOS, CIMC, SAS HBA, and drive firmware versions with the versions listed in the Release Notes.
- ステップ 8** If the minimum versions are not met, use the Host Update Utility (HUU) Download Links in the compatibility matrix to upgrade the firmware versions running on the system, including Cisco Virtual Interface Cards (VIC), PCI Adapter, RAID controllers, and drive (HDD/SSD) firmware. You can find current and previous releases of the Cisco HUU User Guide at this location: <http://www.cisco.com/c/en/us/support/servers-unified-computing/ucs-c-series-rack-servers/products-user-guide-list.html>.
- 

## Deploying Cisco HX Data Platform Installer

HX Data Platform Installer can be deployed on an ESXi server, as well as a VMware Workstation, VMware Fusion, or Virtual Box. The HyperFlex software is distributed as a deployable virtual machine, contained in an Open Virtual Appliance (OVA) file format. Use the following procedure to deploy HX Data Platform Installer using a VMware vSphere (thick) Client.

---

- ステップ 1** Download the HX Data Platform Installer OVA from [Cisco.com](http://www.cisco.com), and save the package locally. Verify the downloaded version matches the recommended version for your deployment.
- ステップ 2** Log in to vCenter using the vSphere client.
- ステップ 3** Select **File > Deploy OVF Template**.
- ステップ 4** In the **Deploy OVF Template** wizard, on the **Source** page, specify the source location, and click **Next**.
- ステップ 5** On the **OVF Template Details** page, view the information, and click **Next**.
- ステップ 6** (Optional) On the **Name and Location** page, edit the name and location for the virtual appliance, and click **Next**.
- ステップ 7** On the **Host/Cluster** page, select the host or cluster on which you want to deploy, and click **Next**.
- ステップ 8** On the **Resource Pool** page, select the resource pool where you want to run the OVF template, and click **Next**.
- ステップ 9** On the **Storage** page, select a datastore to store the deployed OVF template, and click **Next**.
- ステップ 10** On the **Disk Format** page, select the disk format to store the virtual machine virtual disks, and click **Next**.
- ステップ 11** On the **Network Mapping** page, for each network specified in the OVF template, right-click the **Destination Network** column to select a network in your infrastructure, and click **Next**.
- ステップ 12** Provide the OVF properties for the installer VM, namely: hostname, default gateway, DNS server, IP address, and subnet mask.  
Alternatively, leave all of the OVF properties blank for a DHCP assigned address.
- ステップ 13** On the **Ready to Complete** page, select **Power On After Deployment**, and click **Finish**.
-

# 1GE スイッチの設定に適用

## Configuring Your HyperFlex Cluster

**ステップ 1** In your web browser, enter the IP address of the installer VM, and click **Accept** or **Continue** to bypass any SSL certificate errors.

**ステップ 2** Verify the HyperFlex installer **Build ID** in the lower right corner of the login screen.

**ステップ 3** Log in to Cisco HX Data Platform Installer using username **root** and password **Cisco123**.

**Important** Systems ship with a default password of *Cisco123* that must be changed during installation. The HyperFlex on-premise installer requires changing the root password as part of deployment. You cannot continue installation unless you specify a new password. Use the new password at this point in the configuration procedure.

**ステップ 4** Read the End User Licensing Agreement, check **I accept the terms and conditions**, and click **Login**.

**ステップ 5** On the **Workflow** page, click **Cluster Creation with HyperFlex Edge**.

**ステップ 6** To perform cluster creation, you can import a *JSON configuration* file with the required configuration data. The following two steps are optional if importing a JSON file, otherwise you can input data into the required fields manually.

**Note** For a first-time installation, contact your Cisco representative to procure the factory preinstallation JSON file.

- a. Click **Select a file** and choose your *JSON file* to load the configuration. Select **Use Configuration**.
- b. An **Overwrite Imported Values** dialog box displays if your imported values for Cisco UCS Manager are different. Select **Use Discovered Values**.

**ステップ 7** On the **Credentials** page, complete the following fields, and click **Continue**.

Name	Description
<b>Cisco IMC Credentials</b>	
Cisco IMC User Name	Cisco IMC username. By default, the user name is <b>admin</b> .
Password	CIMC password. By default, the password is <b>password</b> .
<b>vCenter Credentials</b>	
Configuring Your HyperFlex Cluster Server	FQDN or IP address of the vCenter server. You must use an account with vCenter root-level admin permissions.
User Name	Administrator username.
Admin Password	Administrator password.
<b>Hypervisor Credentials</b>	

Name	Description
Admin User Name	Administrator username. By default, the username is <b>root</b> .
Hypervisor Password	Default password is Cisco123. <b>Important</b> Systems ship with a default password of <i>Cisco123</i> that must be changed during installation. You cannot continue installation unless you specify a new user supplied password.

Use the following screenshot as a reference to complete the fields in this page.

**ステップ 8** On the **IP Addresses** page, enter the assigned addresses for each server.

Name	Description
Cisco IMC	IP Address of Cisco IMC
Hypervisor	Management IP for Hypervisor
Storage Controller	Management IP for Storage Controller
Cluster IP Address	Cluster management IP address
Subnet mask	Subnet mask for cluster management
Gateway	Gateway IP address for cluster management IP

Use the following screenshot as a reference to complete the fields in this page.

ステップ 9 On the **Cluster Configuration** page, complete the following fields, and click **Continue**.

**Note** Complete all the fields using your pre-install worksheet.

Name	Description
<b>Cisco HX Cluster</b>	
Cluster Name	User-supplied name for the HyperFlex storage cluster.
Replication Factor	For HXDP 3.0(x) and 4.0(x), the Replication Factor must be set to <b>2</b> for HX Edge deployments. Replication factor <b>3</b> is not supported for HX Edge deployments until HXDP release 4.5.
<b>Controller VM</b>	
Create Admin Password	There is no default password for the Controller VM. User needs to set this field
Confirm Admin Password	Confirm the Administrator password.
<b>vCenter Configuration</b>	
vCenter Datacenter Name	The name of the vCenter datacenter where the HyperFlex hosts were added.
vCenter Cluster Name	The name of the vCenter cluster where the HyperFlex hosts were added.
<b>System Services</b>	



Name	Description
DNS Server(s)	A comma-separated list of IP addresses for each DNS Server.
NTP Server(s)	A comma-separated list of IP addresses for each NTP Server. <b>Important</b> A highly reliable NTP server is required.
Time Zone	The local time zone for the controller VM.
<b>Connected Services</b>	
Enable Connected Services (Recommended)	Check to Enable Connected Services. <b>Note</b> We highly recommend enabling Connected Services to enable sending email alerts to Cisco TAC.
Send service ticket notifications to: <i>Example: admin@cisco.com</i>	Email address to receive service request notifications.
<b>Advanced Networking</b>	
Management VLAN Tag Data VLAN Tag	Enter the correct VLAN tags if you are using trunk ports. The VLAN tags must be different when using trunk mode. Enter <b>0</b> for both VLAN tags if you are using access ports. <b>Note</b> Do not enter <b>0</b> if you are using trunk ports.
Management vSwitch Data vSwitch	Do not change the auto-populated vSwitch name.
<b>Advanced Configuration</b>	
Enable Jumbo Frames on Data Network	Do not check to ensure HyperFlex Edge deployments use regularly-sized packets. You may optionally enable jumbo frames for 10/25GE deployments depending on your network configuration. For ease of deployment, it is recommended to uncheck this option.
Clean up disk partitions	Check to remove all existing data and partitions from every node in the HX storage cluster. For example, if this is not the first time installing the software on the cluster.
Optimize for VDi only deployment	Check to optimize VDI deployments. By default HyperFlex is performance optimized for Virtual Server Infrastructure (VSI). Check this box to tune the performance parameters for VDI deployments. This option has no affect on all-flash HX models and only needs to be enabled for hybrid HX clusters. If you are running mixed VDI and VSI workloads, do not select this option.
vCenter Single-Sign-On Server	Fill in this field only if instructed by Cisco TAC.

Use the following screenshot as a reference to complete the fields in this page.

Cisco HyperFlex Installer

?
?
?
?
?

Credentials
IP Addresses
Cluster Configuration

### Cisco HX Cluster

Cluster Name:       Replication Factor:

---

### Controller VM

Create Admin Password:       Confirm Admin Password:

---

### vCenter Configuration

vCenter Datacenter Name:       vCenter Cluster Name:

---

### System Services

DNS Server(s):       NTP Server(s):       DNS Domain Name:

Time Zone:

---

### Connected Services

Connected Services:  Enable Connected Services (Recommended)      Send service ticket notifications to:

---

### Advanced Networking

Management VLAN Tag:       Management vSwitch:

Data VLAN Tag:       Data vSwitch:

---

### Advanced Configuration

Enable Jumbo Frames on Data Network     
  Clean up disk partitions     
  Optimize for VDI only deployment

vCenter Single-Sign-On Server:

### Configuration

**Credentials**

vCenter Server: 10.64.53.54  
 User Name: administrator@vsphere.local  
 Cisco IMC User Name: eng-fi55.eng.com  
 Admin User name: root

**IP Addresses**

Cluster Name: EDGE\_CLUSTER  
 Management Cluster: 10.10.10.40  
 Management Subnet Mask: 255.0.0.0  
 Management Gateway: 10.10.10.1

**Server 1**

Management Cisco IMC: 10.10.10.10  
 Management Hypervisor: 10.10.10.20  
 Management Storage Controller: 10.10.10.30

**Server 2**

Management Cisco IMC: 10.10.10.11

ステップ 10 After deployment finishes, the **Summary Deployment** page displays a summary of the deployment details.

#### What to do next

Confirm HX Data Platform Plug-in installation. See [Verifying Cisco HX Data Platform Software Installation](#)

## 10/25GE スイッチの設定に適用

### (10/25GE only) Configuring Your HyperFlex Cluster

ステップ 1 In your web browser, enter the IP address of the installer VM, and click **Accept** or **Continue** to bypass any SSL certificate errors.

ステップ 2 Verify the HyperFlex installer **Build ID** in the lower right corner of the login screen.

ステップ 3 Log in to Cisco HX Data Platform Installer using username **root** and password **Cisco123**.

**Important** Systems ship with a default password of *Cisco123* that must be changed during installation. The HyperFlex on-premise installer requires changing the root password as part of deployment. You cannot continue installation unless you specify a new password. Use the new password at this point in the configuration procedure.

ステップ 4 Read the End User Licensing Agreement, check **I accept the terms and conditions**, and click **Login**.

ステップ 5 On the **Workflow** page, click **Cluster Creation with HyperFlex Edge**.

ステップ 6 On the **Credentials** page, complete the following fields, and click **Continue**.

Name	Description
<b>vCenter Credentials</b>	
vCenter Server	FQDN or IP address of the vCenter server. You must use an account with vCenter root-level admin permissions.
User Name	Administrator username.
Admin Password	Administrator password.
<b>CIMC Credentials</b>	
CIMC User Name	CIMC username. By default, the user name is <b>admin</b> .
Password	CIMC password. By default, the password is <b>password</b> .
<b>Hypervisor Credentials</b>	
Admin User Name	Administrator username. By default, the username is <b>root</b> .

Name	Description
Admin Password	Default password is Cisco123.  <b>Important</b> Systems ship with a default password of <i>Cisco123</i> that must be changed during installation. You cannot continue installation unless you specify a new user supplied password.

**ステップ 7** On the **IP Addresses** page, enter the assigned addresses for each server:

Name	Description
Cisco IMC	IP Address of Cisco IMC
Hypervisor	Management IP for Hypervisor
Storage Controller	Management IP for Storage Controller
Cluster IP Address	Cluster management IP address
Subnet mask	Subnet mask for cluster management
Gateway	Gateway IP address for cluster management IP

**ステップ 8** On the **Cluster Configuration** page, complete the following fields, and click **Continue**.

**Note** Complete all the fields using your pre-install worksheet.

Name	Description
<b>Cisco HX Cluster</b>	
Cluster Name	User-supplied name for the HyperFlex storage cluster.
Replication Factor	For HXDP 3.0(x) and 4.0(x), the Replication Factor must be set to <b>2</b> for HX Edge deployments. Replication factor <b>3</b> is not supported for HX Edge deployments until HXDP release 4.5.
<b>Controller VM</b>	
Create Admin Password	Default password is Cisco123.  <b>Important</b> Systems ship with a default password of <i>Cisco123</i> that must be changed during installation. You cannot continue installation unless you specify a new user supplied password.
Confirm Admin Password	Confirm the Administrator password.
<b>vCenter Configuration</b>	

Name	Description
vCenter Datacenter Name	The name of the vCenter datacenter where the HyperFlex hosts were added.
vCenter Cluster Name	The name of the vCenter cluster where the HyperFlex hosts were added.
<b>System Services</b>	
DNS Server(s)	A comma-separated list of IP addresses for each DNS Server.
NTP Server(s)	A comma-separated list of IP addresses for each NTP Server. <b>Important</b> A highly reliable NTP server is required.
Time Zone	The local time zone for the controller VM.
<b>Auto Support</b>	
Enable Auto Support (Recommended)	Check to enable Auto Support. <b>Note</b> We highly recommend enabling Auto Support to enable sending email alerts to Cisco TAC.
Send service tickets notifications to, for example: name@company.com	Email address to receive service request notifications.

ステップ 9 On the **Advanced Cluster Configuration** page, complete the following fields, and click **Start**.

Name	Description
<b>Advanced Networking</b>	
Uplink Switch Speed	Check the radio button for <b>10/25GE</b> . The <b>MAC Address Prefix</b> field appears. Provide the MAC Address Prefix. <b>Note</b> The MAC Address Prefix is used to assign unique MAC addresses to the virtual interfaces of the Cisco VIC. Ensure you select a unique range to avoid any overlap with existing network equipment.
Management VLAN Tag Data VLAN Tag	Enter the correct VLAN tags if you are using trunk ports. The VLAN tags must be different when using trunk mode. Enter <b>0</b> for both VLAN tags if you are using access ports. <b>Note</b> Do not enter <b>0</b> if you are using trunk ports.
Management vSwitch Data vSwitch	Do not change the auto-populated vSwitch name.
<b>Advanced Configuration</b>	

Name	Description
Enable Jumbo Frames on Data Network	Check to enable Jumbo Frames for 10/25G deployments.
Clean up disk partitions	Check to remove all existing data and partitions from every node in the HX storage cluster. For example, if this is not the first time installing the software on the cluster.
Optimize for VDi only deployment	Check to optimize VDI deployments. By default HyperFlex is performance optimized for Virtual Server Infrastructure (VSI). Check this box to tune the performance parameters for VDI deployments. This option has no affect on all-flash HX models and only needs to be enabled for hybrid HX clusters. If you are running mixed VDI and VSI workloads, do not select this option.
vCenter Single-Sign-On Server	Fill in this field only if instructed by Cisco TAC.

Review the progress for any of the cluster configuration tasks on the **Progress** page. The deployment can take anywhere between 20-45 minutes to complete.

**ステップ 10** After deployment finishes, the **Summary Deployment** page displays a summary of the deployment details.


#### What to do next

Confirm HX Data Platform Plug-in installation. See [Cisco HX Data Platform ソフトウェア インストールの確認](#)

## Logging into HX Connect

Cisco HyperFlex Connect provides an HTML5 based access to HX Storage monitoring, and replication, encryption, datastore, and virtual machine tasks. This procedure provides a summary on launching and logging into HX Connect. For the detailed procedure on logging in to HX Connect, see the [Cisco HyperFlex Data Platform Administration Guide](#).

**ステップ 1** Launch HX Connect UI from a browser of your choice from `https://Cluster_IP/` or `https://FQDN`.

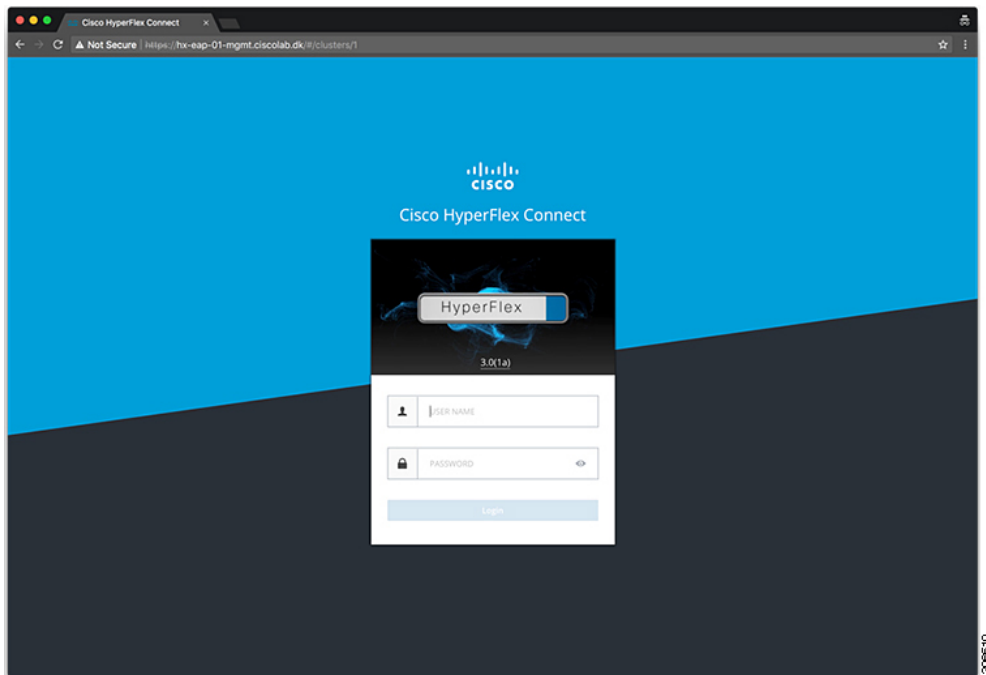

ステップ 2 Log in with the following credentials:

- **Username**—**admin**
- **Password**—Use the password set during cluster installation.

---

### What to do next

Run the post install script before the HyperFlex cluster is ready for production use. Depending on whether you are running in a 1GE or 10/25GE switch configuration, see: