

CAB-25AS-FDTE处技术规范

Contents

[Introduction](#)

[Prerequisites](#)

[Requirements](#)

[Components Used](#)

[Conventions](#)

[CAB-25AS-FDTE适配器](#)

[Related Information](#)

[Introduction](#)

本文提供技术规范和电缆要求的CAB-25AS-FDTE适配器。

[Prerequisites](#)

[Requirements](#)

There are no specific requirements for this document.

[Components Used](#)

This document is not restricted to specific software and hardware versions.



The information in this document was created from the devices in a specific lab environment. All of the devices used in this document started with a cleared (default) configuration. If your network is live, make sure that you understand the potential impact of any command.

[Conventions](#)

有关文档规则的详细信息，请参阅 [Cisco 技术提示规则](#)。

[CAB-25AS-FDTE适配器](#)

此例证显示适配器CAB-25AS-FDTE (部件号CAB-25AS-FDTE)。此适配器用于Cisco 2500系列，包括接入服务器系列(Cisco2509通过Cisco 2512)。此适配器有在一端的一台RJ-45连接器和在另一端的一阴极DB-25接头。

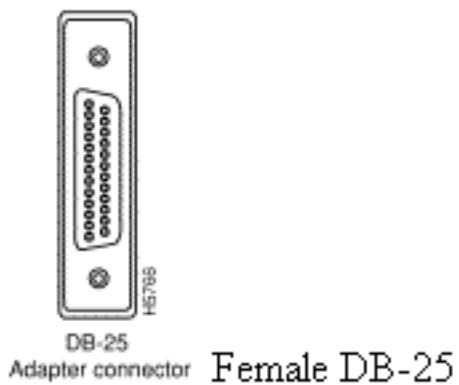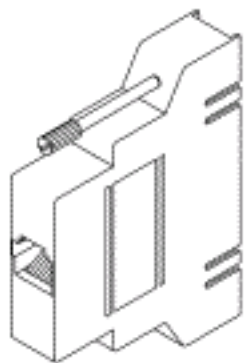

此表显示RJ-45、M/F DTE、M/F DCE和MMOD的管脚：

电缆	DB-25适配器
RJ-45管脚	M/F DTE管脚
1	4
2	20
3	2
4	7
5	7
6	3
7	6
8	5

通过Cisco是可用的FDTE适配器被标记“终端”。

[Related Information](#)

- [Technical Support - Cisco Systems](#)